

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.


Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.


1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
for Tube 6x1,0 new Line <CI>	M16x1,5	9	Hex.22	Ø15,4	21,3	30Nm (35Nm)	(19,5) Push in length <CI>
B						B	

G : recommended torque without lubrication (max. torque) respect max torque of counter part

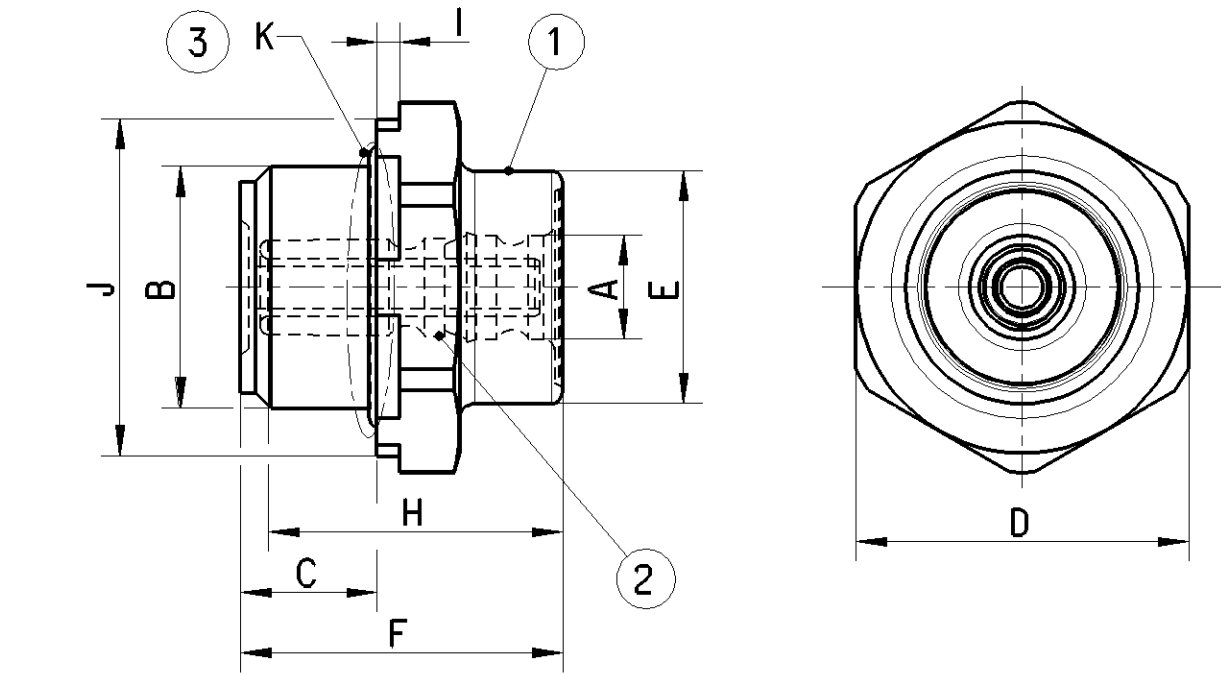

For use in application in compressed air systems in commercial vehicles :

- with Polyamind or Hytrel tubes acc. ISO7628; DIN74324, DIN73378
- with compressed air acc. JED-848
- at working conditions (consider tube spec.) :
 - -40 °C ... 100 °C
 - max. 12,5 bar



1:1

Cleanliness requirement:

Class: KOO according JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

Material:

- 1 CuZn
- 2 PA (inner components)
- 3 EPDM

General Specification : JED-762 ; JED-622 ; JED-220

Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®		WABCO Screw-in Fitting											
Further Technical Data:						Date						Signature							
Doc. Code:			Sheet:			To						Drawn							
2019-11-28			2019-12-11			Baloga						Szczulkowski							
General Tolerances JED-261						Checked						Expert							
Class 1)		Range of Nominal Dimensions (± mm)					2019-12-11		Szczulkowski										
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Szczulkowski													
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Szczulkowski													
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Szczulkowski													
Fine	X	0.5	1.0	1.5	2.0	±3°		Mass		Scale		Material No.		Date of first issue: 2012-04-18					
Medium		1.0	2.0	3.0	4.0	±3°		0.029 KG		2:1 1:1		893 800 082 2		Doc.Code		Language		Sheet	
Coarse		2.0	3.5	5.0	6.5	±3°		Size		CAD System		893 800 082 2		005		EN		1/1	
Tapped Holes acc. -						A 3		CREO				ECN-No.		Revision		Techn. Resp.		Replacement for	
1) Tolerance Class Applied Crossmarked						A 3		CREO				502571		2 x B		5790			