

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituira un evidente abuso e comportera il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeligung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.


1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
for Tube 10x1,5 new Line <CI>	M16x1,5	9	Hex.22	Ø20	36,5	30Nm (35Nm)	(24) Push in length <CI>
Ⓒ						Ⓒ	

G : recommended torque without lubrication (max. torque) respect max torque of counter part

Cleanliness requirement:

Class: K00 according JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

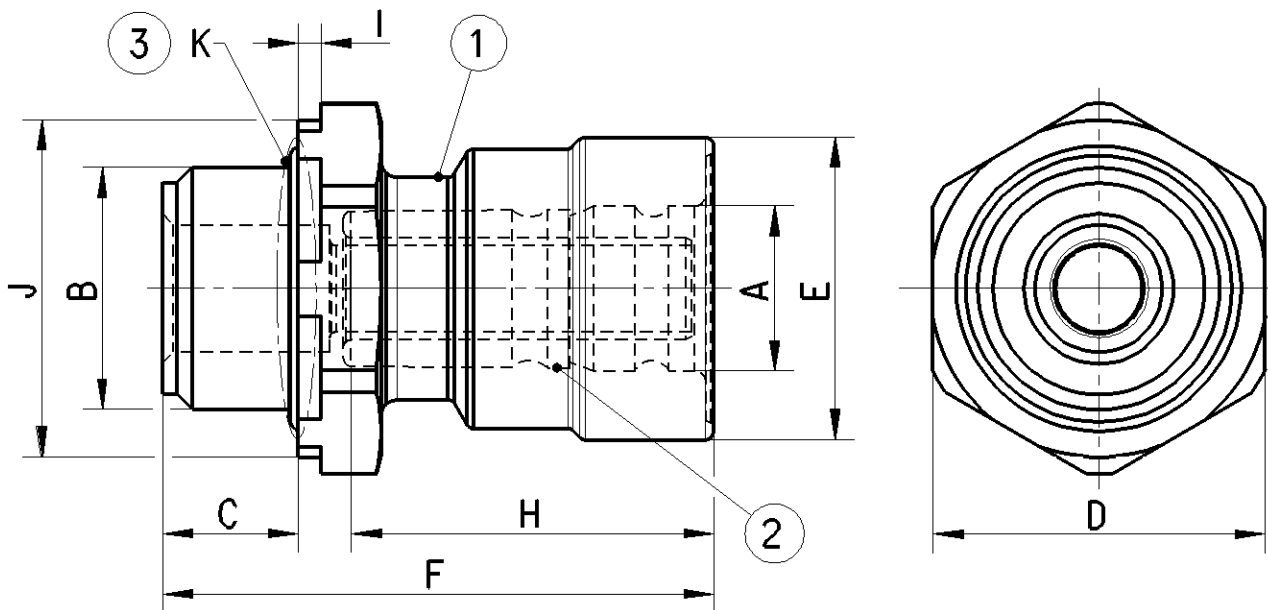

Material:


- 1 CuZn
- 2 PA (inner components)
- 3 EPDM

General Specification : JED-762 ; JED-622 ; JED-220

Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in compressed air systems in commercial vehicles :

- with Polyamind or Hytrel tubes acc. ISO7628; DIN74324, DIN73378
- with compressed air acc. JED-848
- at working conditions (consider tube spec.) :
 - -40 °C ... 100 °C
 - max. 12,5 bar



1:1

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®		WABCO Screw-in Fitting					
Further Technical Data:						Date						Signature	
Doc. Code:			Sheet:			To							
General Tolerances JED-261						2019-11-29						Balogo	
Range of Nominal Dimensions (± mm)						Checked							
Class		1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	2019-12-11		Szczulkowski				
							Expert						
							Szczulkowski						
Fine		X	0.5	1.0	1.5	2.0	Mass		Scale				
Medium			1.0	2.0	3.0	4.0	0.041 KG		1:1				
Coarse			2.0	3.5	5.0	6.5	Size		CAD System				
							A 3		CREO				
									ECN-No.				
									Revision				
									Techn. Resp.				
									Replacement for				

100mm