



Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toutre communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
for Tube $\varnothing 18 \times 2$	$\varnothing 30$	9	M22x1.5 tightening torque: 34 Nm (40 Nm)	27 Push in length	40.5	Hex.30	with O-ring

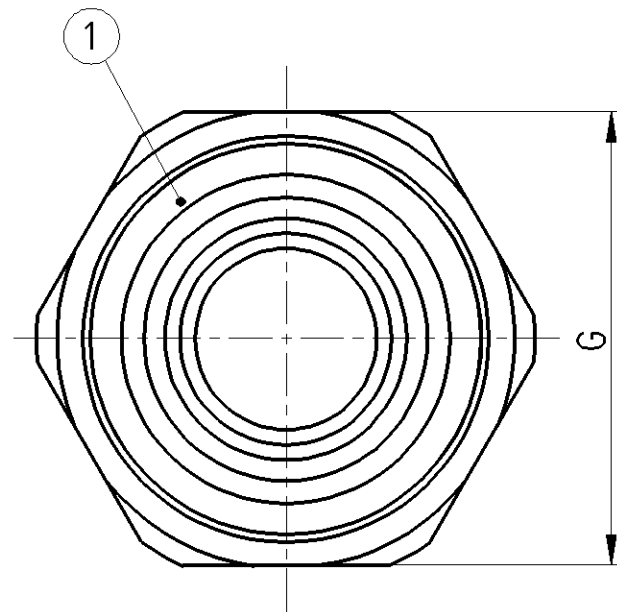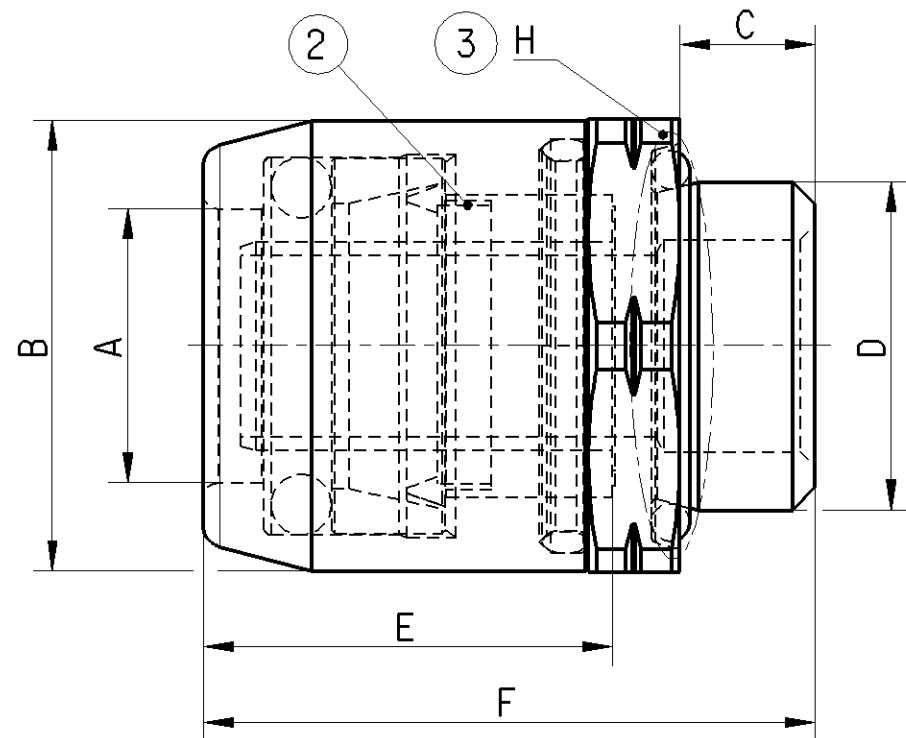

Cleanliness requirement:

No particles >1mm allowed acc. to mandatory standard:
JED-334 and JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

Material:

- 1 CuZn
- 2 CuZn/EPDM (inner components)
- 3 EPDM

General Specification : JED-762 ; JED-622 ; JED-271 ; JED-220


Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in air brake system in commercial vehicles :

- with compressed air acc. JED-848

- at working conditions:

- -40 °C ... 100 °C
- max. 12,5 bar

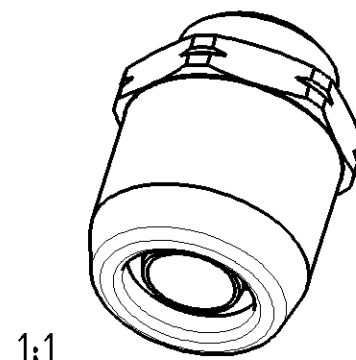

General Specification: JED-334-1, Size ISO 14405 LP										Copyright WABCO®				WABCO Push-in coupling													
Further Technical Data:										Date		Signature															
Doc. Code:				Sheet:						To		Drawn															
										2015-12-04		Szczytkowski															
General Tolerances JED-261										Checked																	
		Range of Nominal Dimensions (± mm)								2015-12-04		Kaufmann		Expert													
										Kaufmann																	
Class 1)		≤ 50		> 50 ≤ 180		> 180 ≤ 400		> 400		±3°		Mass		Scale		Material No.				Date of first issue: 2015-12-04							
Fine		X		0.5		1.0		1.5				2.0		0.120 KG		2:1 (1:1)		893 803 013 0				Doc.Code		Language		Sheet	
Medium				1.0		2.0		3.0				4.0										005		EN		1/1	
Coarse				2.0		3.5		5.0				6.5															
Tapped Holes acc. JED-152																ECN-No.		Revision		Techn. Resp.		Replacement for					
1) Tolerance Class Applied Crossmarked										A 3		CREO						-		-		5790					