


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte ruer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8	
A	B	C	D	E	F	G	H	I
FOR TUBE Ø12	M16x1,5	34	Hex 22	M18x1,5	53	11	STRAIGHT	Type ISO8434-1 SDS
		A			A	A	A	A

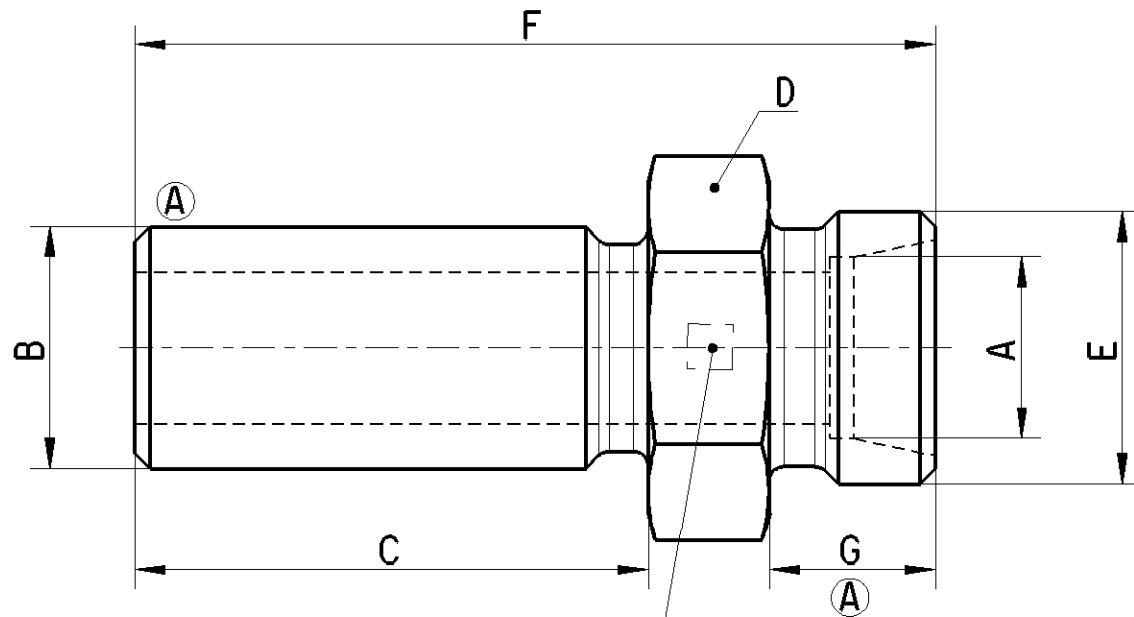


OPTIONALLY IDENTIFICATION : MANUFACTURER
WAHLWEISE KENNZEICHNUNG : HERSTELLER
FACULTATIF INDICATIONS : FABRICANT
FACULTATIVA INDICAZIONE : PRODUTTORE

FOR USE IN APPLICATION IN COMPRESSED AIR SYSTEMS IN COMMERCIAL VEHICLES :

- WITH COMPRESSED AIR ACC. JED-848
- AT WORKING CONDITIONS:

- -40 °C ... 100 °C
- MAX. 12.5 bar

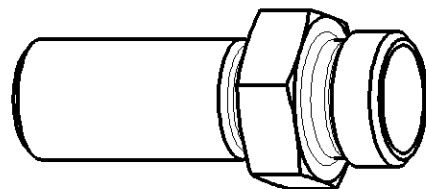

1:1

CLEANLINESS REQUIREMENT:

NO PARTICLES >1MM ALLOWED ACC. TO MANDATORY STANDARD:
JED-334 AND JED-593

AREA: FOR THE WHOLE PART (SPECIAL AGREEMENTS POSSIBLE;
TO BE AGREED WITH PRODUCT ENGINEERING)



MATERIAL : STEEL
SURFACE PROTECTION : gal Zn CrVI free

GENERAL SPECIFICATION : JED-762 ; JED-622 ; JED-220

ENGINEERING RELATED AGREEMENTS WITH SUPPLIER HAVE TO BE MENTIONED
IN THE "RELEASE OF SUPPLIER"

A

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®		WABCO									
Further Technical Data:						Date						Signature					
Doc. Code:		Sheet: To				Drawn											
		General Tolerances JED-261				2019-11-21		Balaga		Fitting Verschraubung Raccords Raccordo							
						Checked											
						2019-12-16		Szculkowski									
						Expert		Szculkowski									
Class 1)		Range of Nominal Dimensions (± mm)				Mass		Scale		Material No.							
Fine	X	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°	0.065 KG	2:1 (1:1)	893 900 015 4								
Medium		1.0	2.0	3.0	4.0		CAD System										
Coarse		2.0	3.5	5.0	6.5												
Tapped Holes acc. JED-152						A 3		CREO		ECN-No.		Revision		Techn. Resp.		Date of first issue: 2007-10-02	
1) Tolerance Class Applied Crossmarked										169270		8 x A		5790		Doc.Code	
														005		Language	
														ML		Sheet	
														1/1			
																Replacement for	



100mm