

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Tout communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8			
A	B	C	D	E	F	G	H	I	J	
Ø7	M16x1,5 *	9	Hex.22	Ø14,8	33,9	30Nm (35Nm)	1,5	Ø22,3	with O-ring	

* Shall be directly tightened into the thread: DIN 3852;ISO 6149;ISO 4039-1;ISO4039-2 and VOSS part geometry


G : recommended torque without lubrication (max. torque) respect max torque of counter part

** circular sealing edge free from scratches or damages

Cleanliness requirement:

Class: K00 according JED-593

Area: for the whole part (Special agreements possible; to be agreed with Product Engineering)

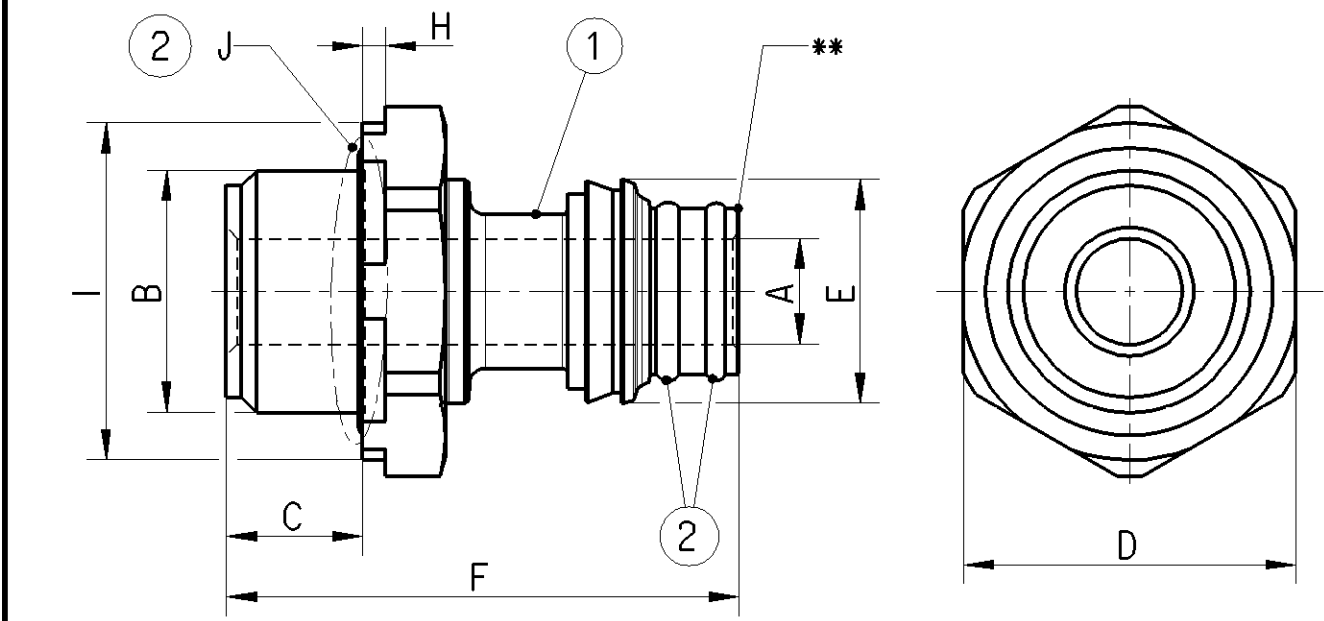



- Material:
- 1 CuZn
 - 2 EPDM

General Specification : JED-762 ; JED-622 ; JED-271 ; JED-220

Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

- For use in application in compressed air systems in commercial vehicles :
- with Polyamind or Hytrel tubes acc. ISO7628; DIN74324, DIN73378
 - with compressed air acc. JED-848
 - at working conditions (consider tube spec.) :
 - -40 °C ... 100 °C (storage 130 °C max. 2h)
 - max. 1250kPa



General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®			WABCO Quick Coupling																												
Further Technical Data:						Date		Signature																													
Doc. Code:		Sheet:		To		Drawn																															
General Tolerances JED-261						2015-02-13		Szczutkowski																													
Range of Nominal Dimensions (± mm) <table><tr><td>Class 1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td><td rowspan="4"></td></tr><tr><td>Fine</td><td>X</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td></td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td></td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td></tr></table> ±3°						Class 1)	≤ 50	> 50 ≤ 180					> 180 ≤ 400	> 400		Fine	X	0.5	1.0	1.5	2.0	Medium		1.0	2.0	3.0	4.0	Coarse		2.0	3.5	5.0	6.5	2015-02-13		Stephan	
						Class 1)	≤ 50	> 50 ≤ 180					> 180 ≤ 400	> 400																							
						Fine	X	0.5					1.0	1.5			2.0																				
Medium		1.0	2.0	3.0	4.0																																
Coarse		2.0	3.5	5.0	6.5																																
						Checked		Expert																													
						Kaufmann																															
						Mass		Scale		Material No.		Date of first issue: 2015-02-13																									
						0.037 KG		2:1 1:1		893 920 316 2		Doc.Code		Language		Sheet																					
						Size		CAD System				005		EN		1/1																					
Tapped Holes acc. -						A 3		CREO				ECN-No.		Revision		Techn. Resp.		Replacement for																			
1) Tolerance Class Applied Crossmarked												-		-		5790		893 920 329 2_053																			