


Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen öffentlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

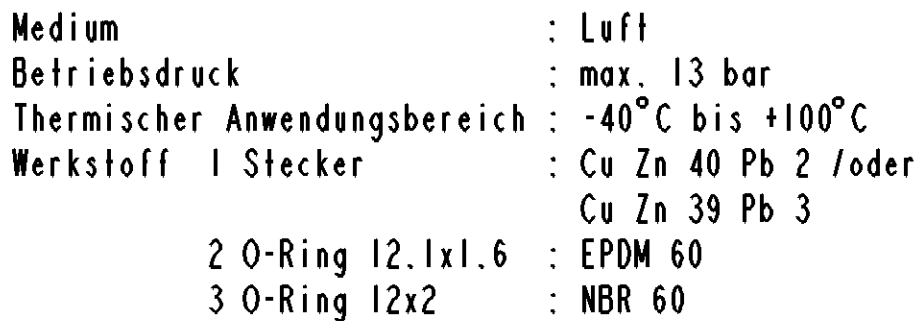

MEDIUM	:	AIR
OPERATING PRESSURE	:	MAX. 13 BAR
OPERATING TEMPERATURE RANGE	:	-40°C TO +100°C
MATERIAL 1 PLUG	:	Cu Zn 40 Pb 2 /OR Cu Zn 39 Pb 3
2 O-RING 12.1x1.6	:	EPDM 60
3 O-RING 12x2	:	NBR 60

TAKE NOTICE OF VOSS OPERATING AND ASSEMBLY INSTRUCTION B 232
SPECIFIED TEST ITEMS ARE DESCRIBED ON DOK.-NR.: 100000055925

[illegible]

MATERIAL :
1. PLUG: BRASS
2. O-RING 12.1x1.6: EPDM 60
3. O-RING 12x2: NBR 60 (RAL3005) (A)

General Specification: JED-334-1, Size ISO 14405 LP										Copyright WABCO®										WABCO														
Further Technical Data:										Date					Signature																			
Doc. Code:					Sheet:					To					Drawn					Surowiec					Fitting									
General Tolerances JED-261										Checked					2020-08-20					Szczulkowski														
Range of Nominal Dimensions (± mm)										2020-08-20					Szczulkowski					Expert														
										Szczulkowski																								
Class 1)		≤ 50		≤ 180		> 50		> 180		≤ 400		> 400		±3°		Mass		Scale		Material No.										Date of first issue: 2006-09-13				
Fine		0.5		1.0		1.5		2.0		0.001 KG		1:1				893 920 354 2										Doc.Code		Language		Sheet				
Medium		1.0		2.0		3.0		4.0		Size		CAD System														005		ML		1/1				
Coarse		2.0		3.5		5.0		6.5		A 2		CREO						ECN-No.		Revision		Techn. Resp.		Replacement for										
Tapped Holes acc. JED-152										504360		2 x A		5790		-																		
1) Tolerance Class Applied Crossmarked																																		