


THERMAL RANGE OF APPLICATION  
THERMISCHER ANWENDUNGSBEREICH  
GAMME D'APPLICATION THERMIQUE  
CAMPO TERMICO D'APPLICAZIONE } -40°C...+80°C


TWO CORE CABLE  
LEITUNG ZWEIADRIG  
CABLE A DEUX CONDUCTEURS  
CAVO A DUE CONDUTORI } PUR  
2x0.75mm<sup>2</sup>

STRAIN RELIEF CABLE  
ZUGENTLASTUNG KABEL  
ARRET DE CABLE  
SCARICO DI TRAZIONE DEL CAVO } MAX. 50N, ∅ =20°C

BEND RADIUS CABLE  
BIEGERADIUS KABEL  
RAYON DE COURBURE DU CABLE  
RAGGIO DI CURVATURA DEL CAVO } R 15 MIN, ∠ 90°

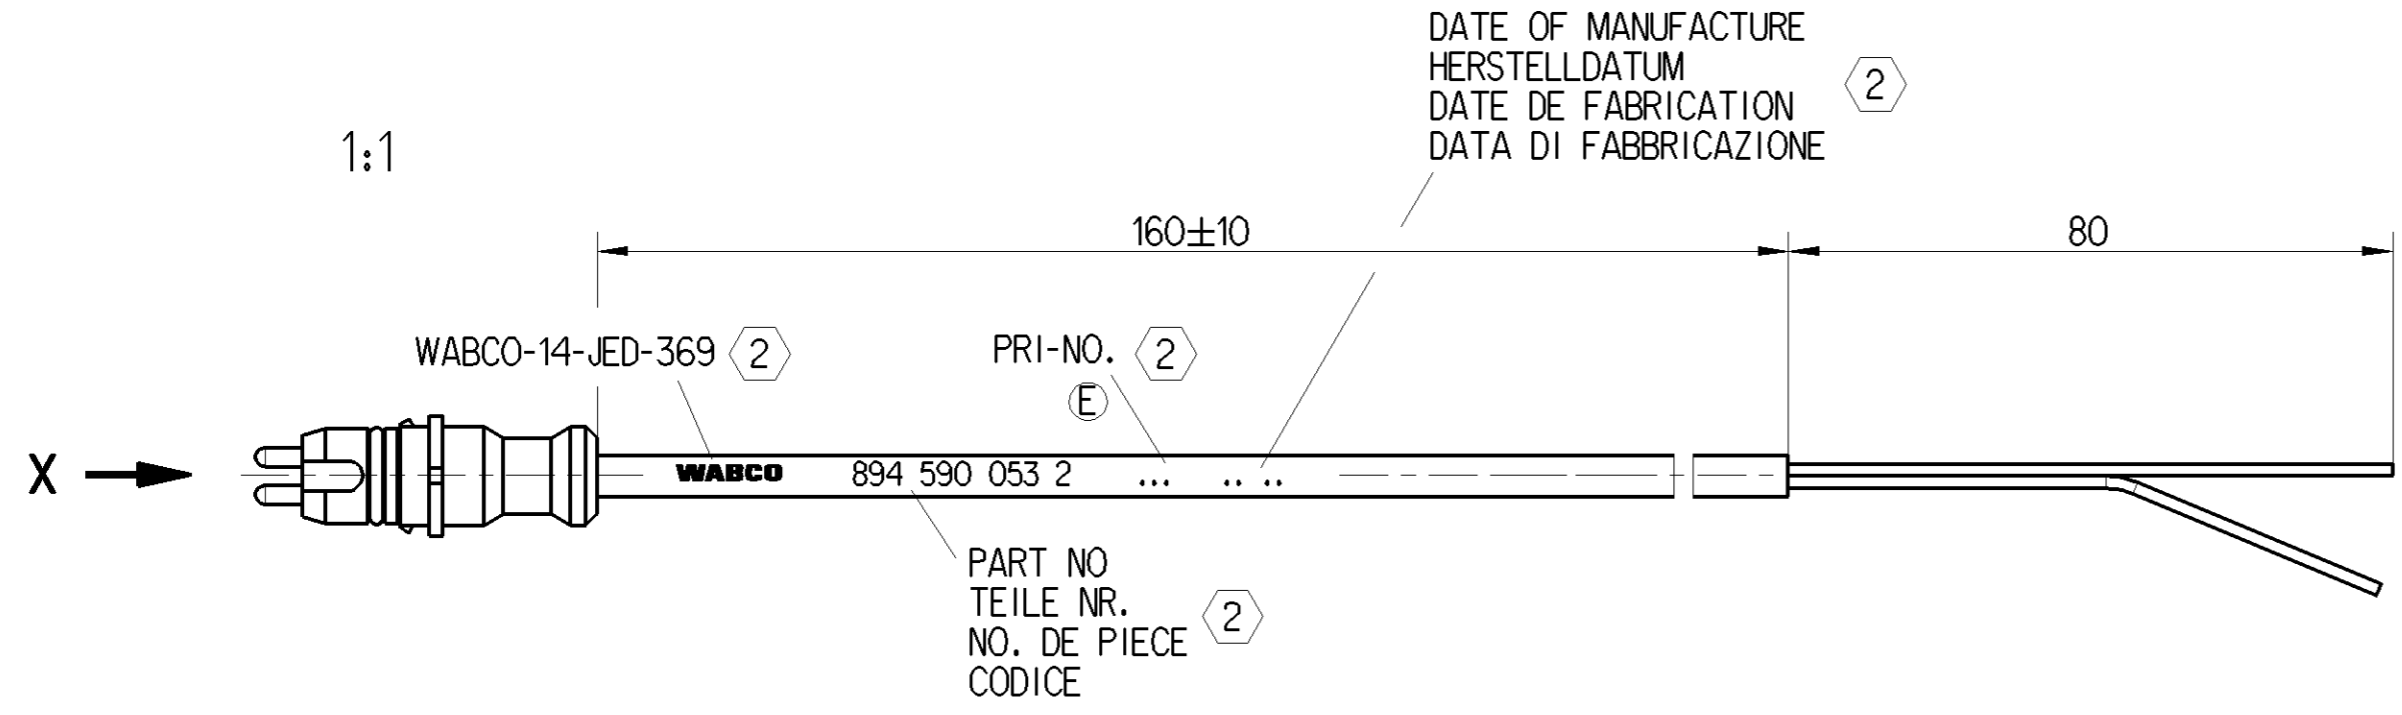

2 ABRASION RESISTANT PRINT  
ABRIEBFESTER AUFDRUCK  
IMPRESSION RESISTANCE A L' ABRASION  
E IMPRONTA RESISTENTE ALL' ABRASIONE } RAL 9001

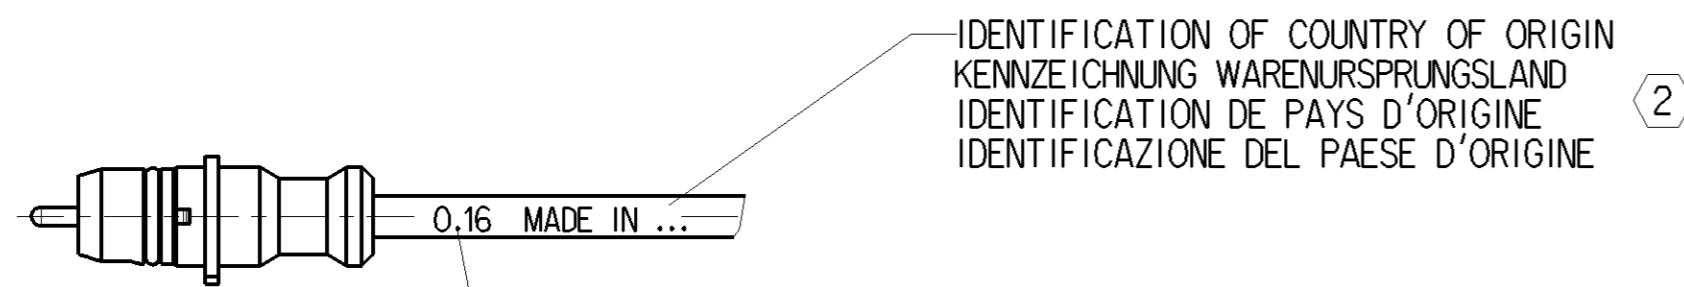

1 PARTS NUMBER OF DAF IN BRACKETS  
DAF-TEILENUMMER IN KLAMMERN  
NUMERO DE PIECE DE DAF ENTRE PARENTHESES  
NUMERO DI PEZZO DI DAF FRA PARENTESI

LENGTH OF CABLE  
KABELLAENGE  
LONGUEUR DU CABLE  
LUNGHEZZA DEL CAVO } [m] 2

RESISTANT TO  
BESTAENDIG GEGEN  
RESISTANT A  
RESISTENTE A } AIR, WATER, MINERAL OIL, PETROL, DIESELOIL, SALTSPRAY  
LUFT, WASSER, MINERALOEL, BENZIN, DIESELOEL, SALZSPRUEHNEBEL  
AIR, EAU, HUILE MINERALE, ESSENCE, GASOIL, BROUILLARD SALIN  
ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION  
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION  
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION  
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO } 894 590 010 2

DEGREE OF PROTECTION (IN CONNECTION WITH SOCKET)  
SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSDOSE)  
DEGRE DE PROTECTION (DANS CONNECTION AVEC SOCLE)  
GRADO DI PROTEZIONE (IN RELAZIONE CON CONNETTORE) } IP 68  
EN 60529/IEC 529

General Specification: JED-334-1, Size ISO 14405 LP		Copyright WABCO®		<b>WABCO</b>	
Further Technical Data:		Date	Signature	Doc. Code	
Doc. Code: Sheet: To:		2016-02-19	Osinski	2016-02-19	
General Tolerances JED-261		Checked		Expert	
Range of Nominal Dimensions ( ± mm)		Gruendker		Overhage	
Class 1)	≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400	Mass	Scale	Material No.	
Fine	±0.1	/	2:1	894 590 053 2	
Medium	±0.2	kg	(1:1)	(1265650) 1	
Coarse	±0.5	Size	CAD System	Date of first issue: 2016-02-19	
Tapped Holes acc.		A 2	CREO	ECN-No.	Revision
1) Tolerance Class Applied Crossmarked		±3°		167939	2x E
				Techn. Resp.	6390
				Replacement for	
				Doc. Code	Language
				005	ML
				Sheet	
				1/1	

Non e' permesso copiare, o terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Toute réserve de tous droits dérivant de brevets ou modèles.

Wiedergabe sowie Verleihen dieses Urteiles, Verleihen und Mitteilung des Inhalts nicht gestattet, soweit nicht ausdrücklich ansonsten, zu wiederholenden, stellen eine offensichtliche Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte hier den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.