


WABCO-NR.	L [mm]
894 590 126 2	3000±50
894 590 127 2	4000±50
894 590 128 2	5000±50
894 590 129 2	6000±50
894 590 130 2	7000±50
894 590 131 2	8000±50
894 590 132 2	9000±50
894 590 133 2	11000±75
894 590 134 2	13000±75

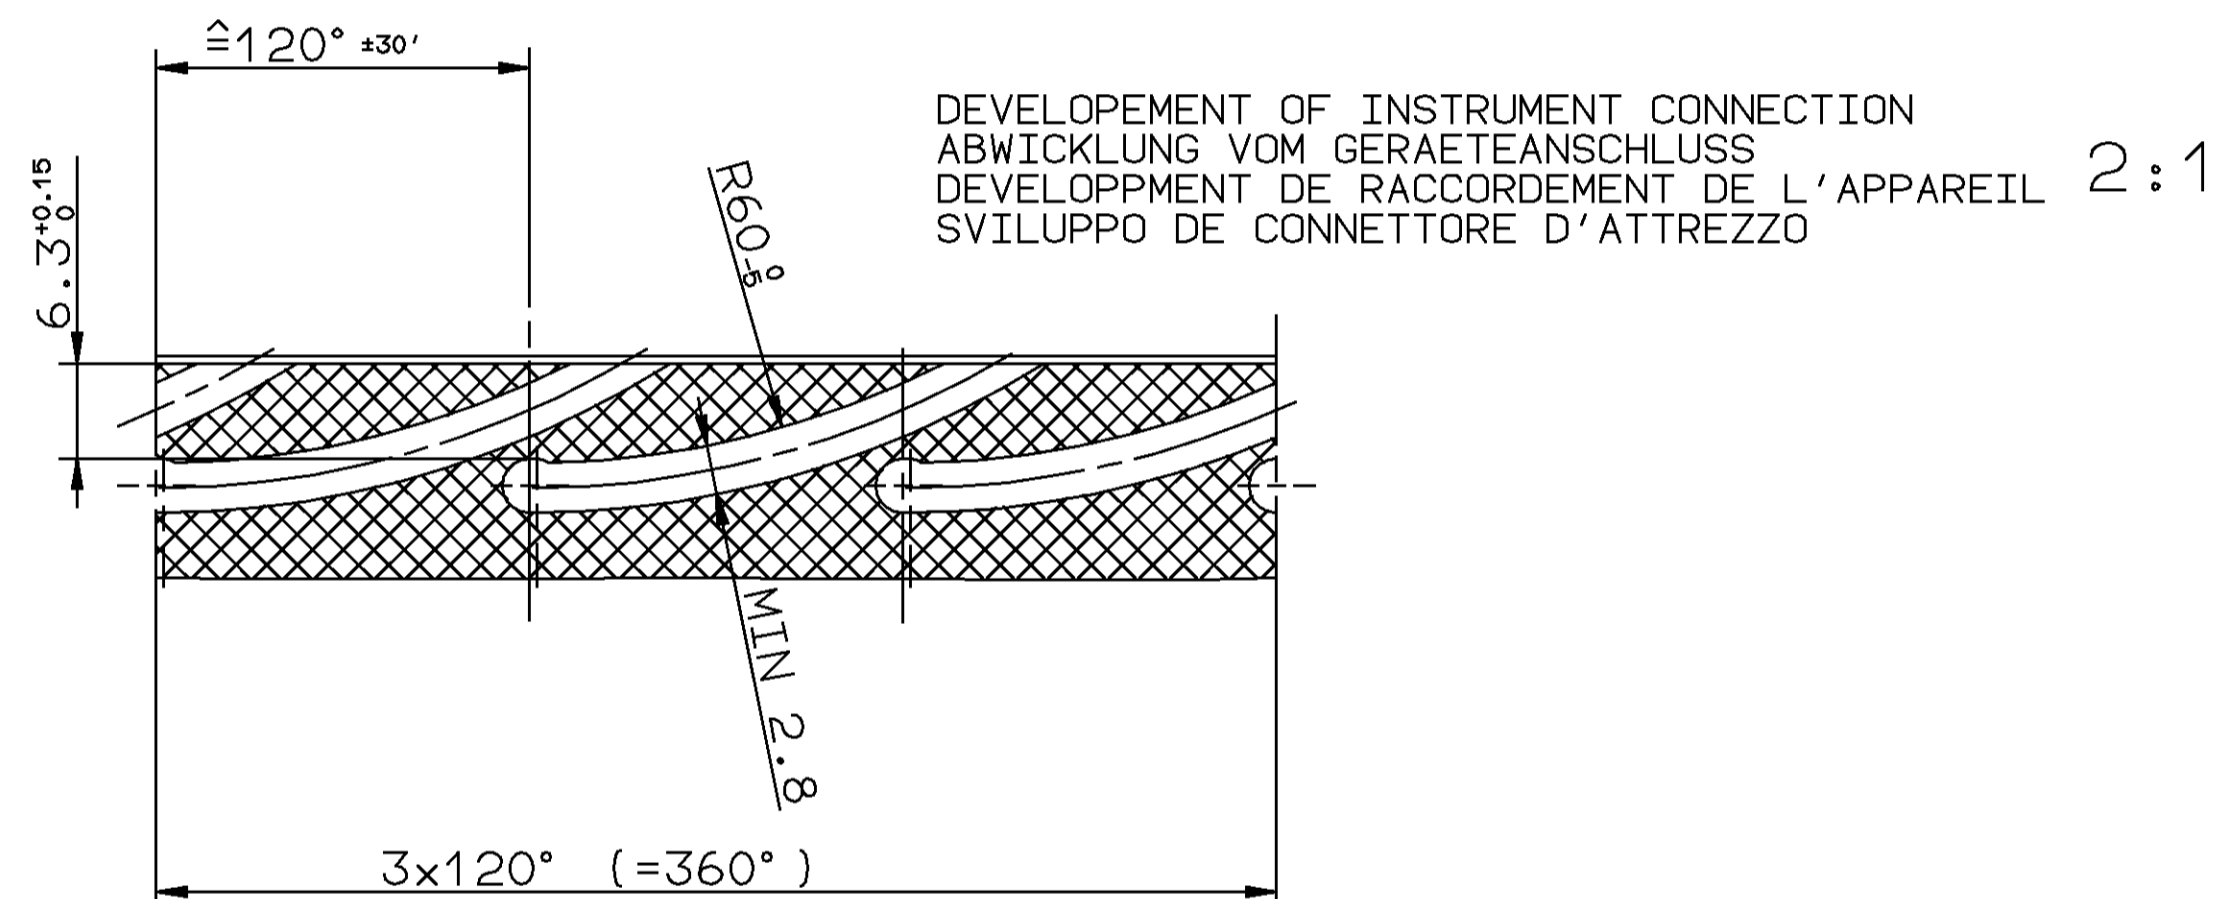

RESISTANT TO BESTÄNDIG GEGEN RESISTANT A RESISTENTE A } AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALTS PRAY LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRUEHNEBEL AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN ARIA, AQUA, OLIO, MINERALE, BENZINA, GASOLIO, NEBBIA SALINA


TYPE OF PROTECTION (IN CONNECTION WITH PLUG) SCHUTZART (IN VERBINDUNG MIT STECKER) MODE DE PROTECTION (DANS CONNECTION AVEC FICHE) TIPO DI PROTEZIONE (IN RELAZIONE CON SPINA) } IP 68 EN 60529/IEC 529

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO } 894 601 010 2

THREE CORE CABLE LEITUNG DREIADRIG CABLE A TROIS CONDUCTEURS CAVO A TRE CONDUTTORI } PUR 3x1.5mm²

STRAIN RELIEF CABLE ZUGENTLASTUNG KABEL ARRET DE CABLE SCARICO DI TRAZIONE DEL CAVO } MAX. 200 N φ=20° C

THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO DI APPLICAZIONE TERMICA } -40° C...+80° C

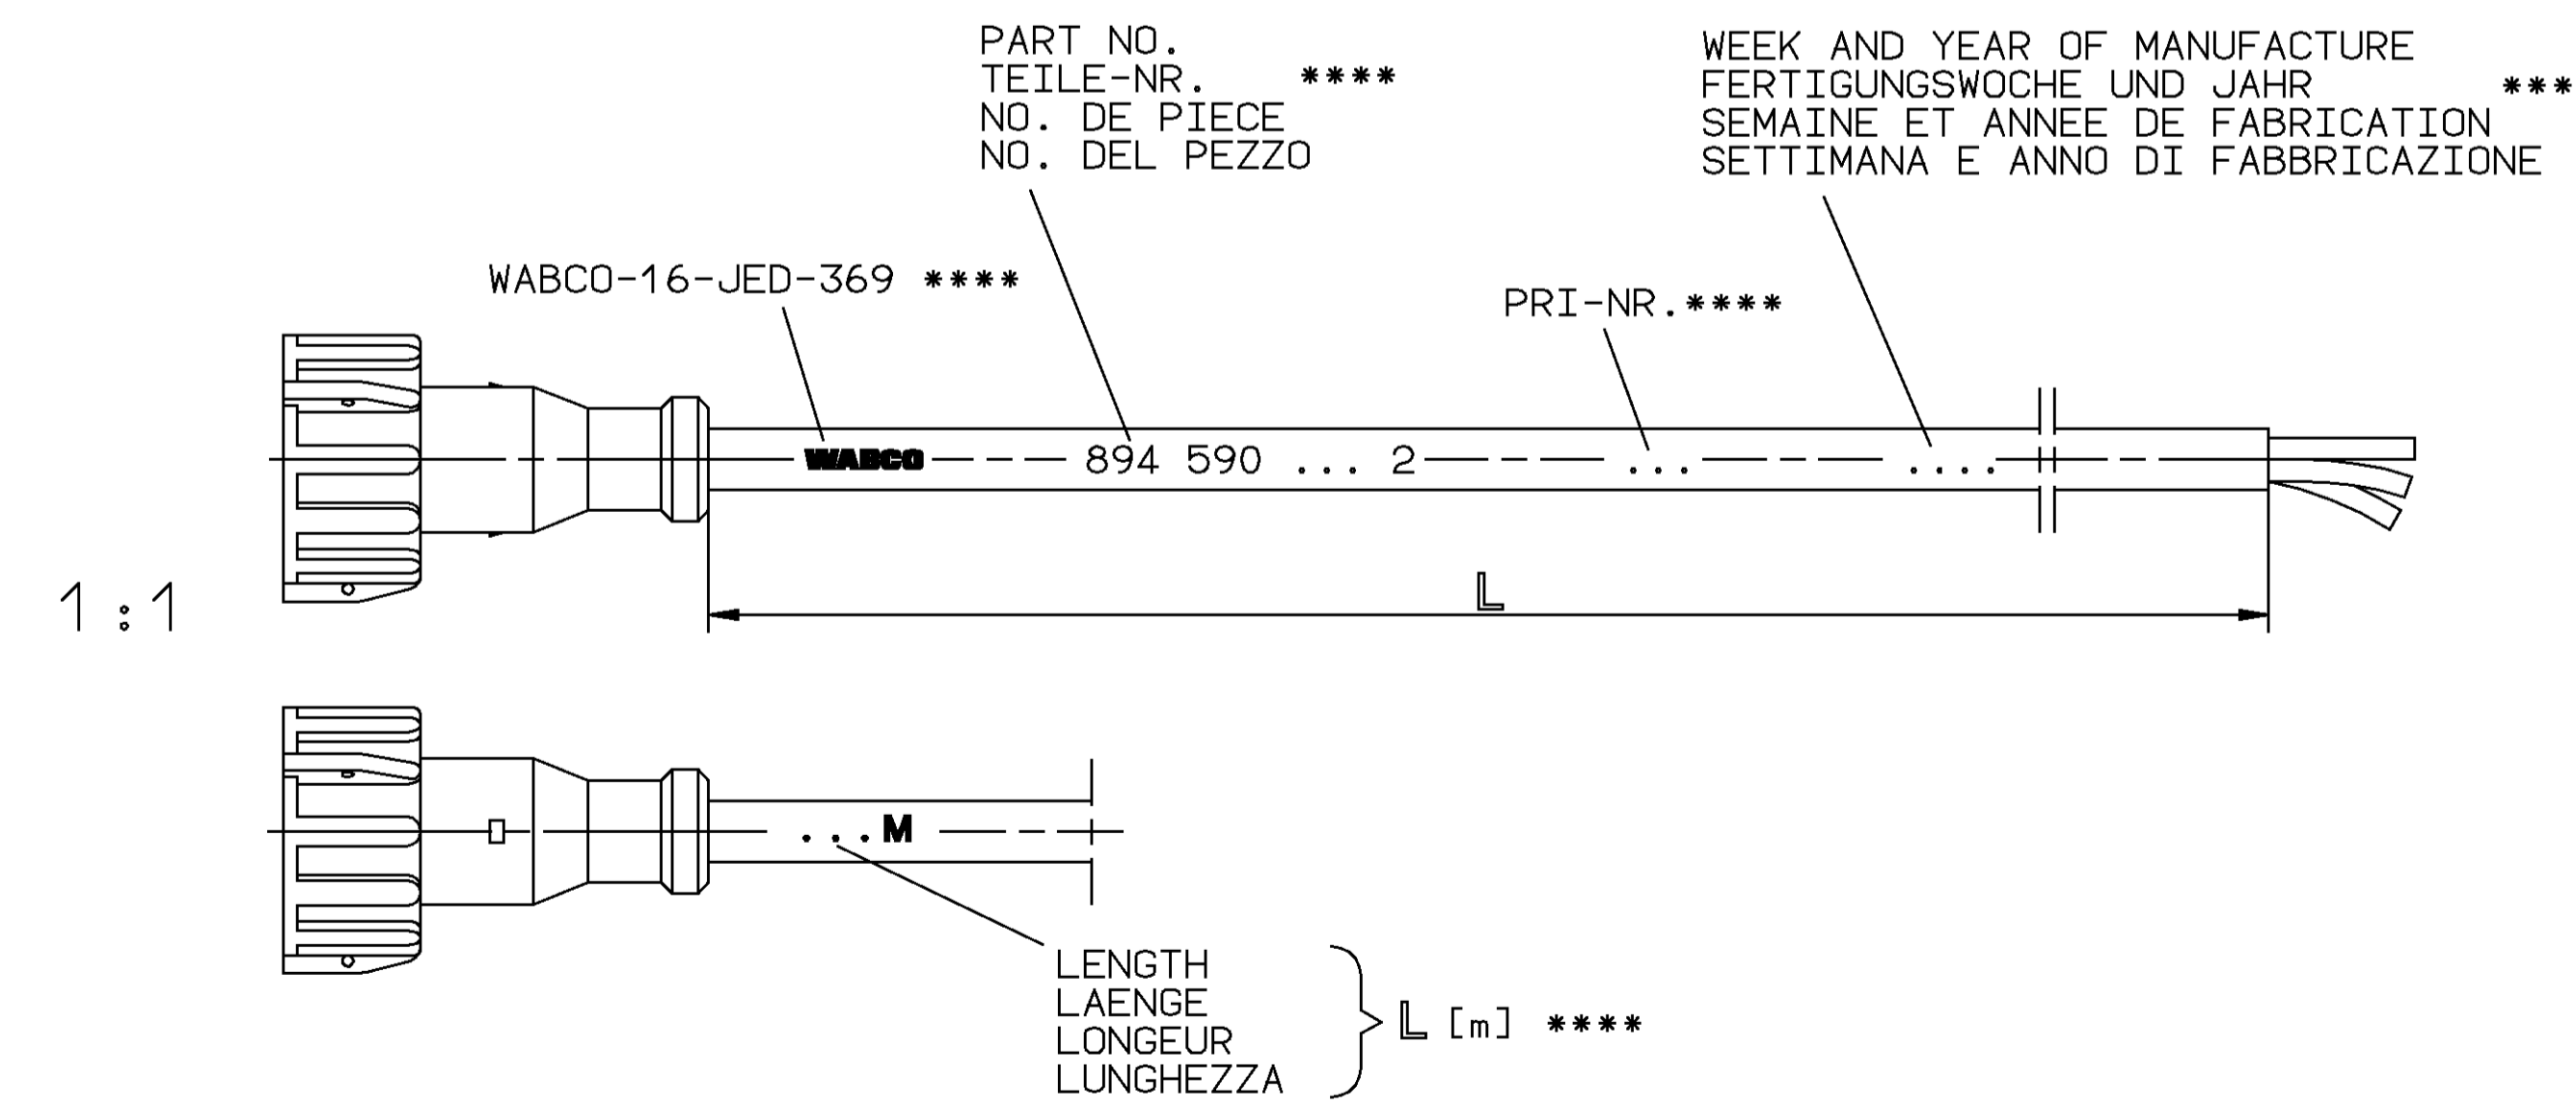

***** ABRASION RESISTANT PRINT ABRIEBFESTER AUFDRUCK IMPRESSION RESISTANT A L'ABRASION IMPRONTA RESISTENTE ALL'ABRASIONE } RAL 9001

GENERAL SPECIFICATION: JED-334 *****				CADAM-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE:	SIGNATURE:	CABLE WITH SOCKET	
DOC. CODE: SHEET: TO:				91-10-07	HARNISCHM	KABEL MIT GERÄTESTECKDOSE	
GENERAL TOLERANCES				91-10-07	HOEFLER	CABLE AVEC PRISE DE COURANT	
RANGE OF NOMINAL DIMENSIONS (± mm)				91-10-07	PANTZER	CAVO CON PRESA DI CORRENTE	
CLASS 1)	≤50	≤180	≤400	>400	PRODUCT IDENTIFICATION NO.		
FINE	0,5	1,0	1,5	2,0	057528	1x D	95-05-04
MEDIUM	1,0	2,0	3,0	4,0	054556	2x C	94-08-08
COARSE	2,0	3,5	5,0	6,5	051990	2x B	93-11-09
TAPPED HOLES ACC. ISO 4039 / JED-102				051909	2x A	92-12-08	894 590 125 2
1) TOLERANCE CLASS APPLIED CROSSHATCHED				DN-NR.	REV.	DATE	653
				A 1	141		1/1
				SHAPE CODE		REPLACEMENT FOR	
				EXPERT CODE 71610		PRODUCT TYPE 111	