
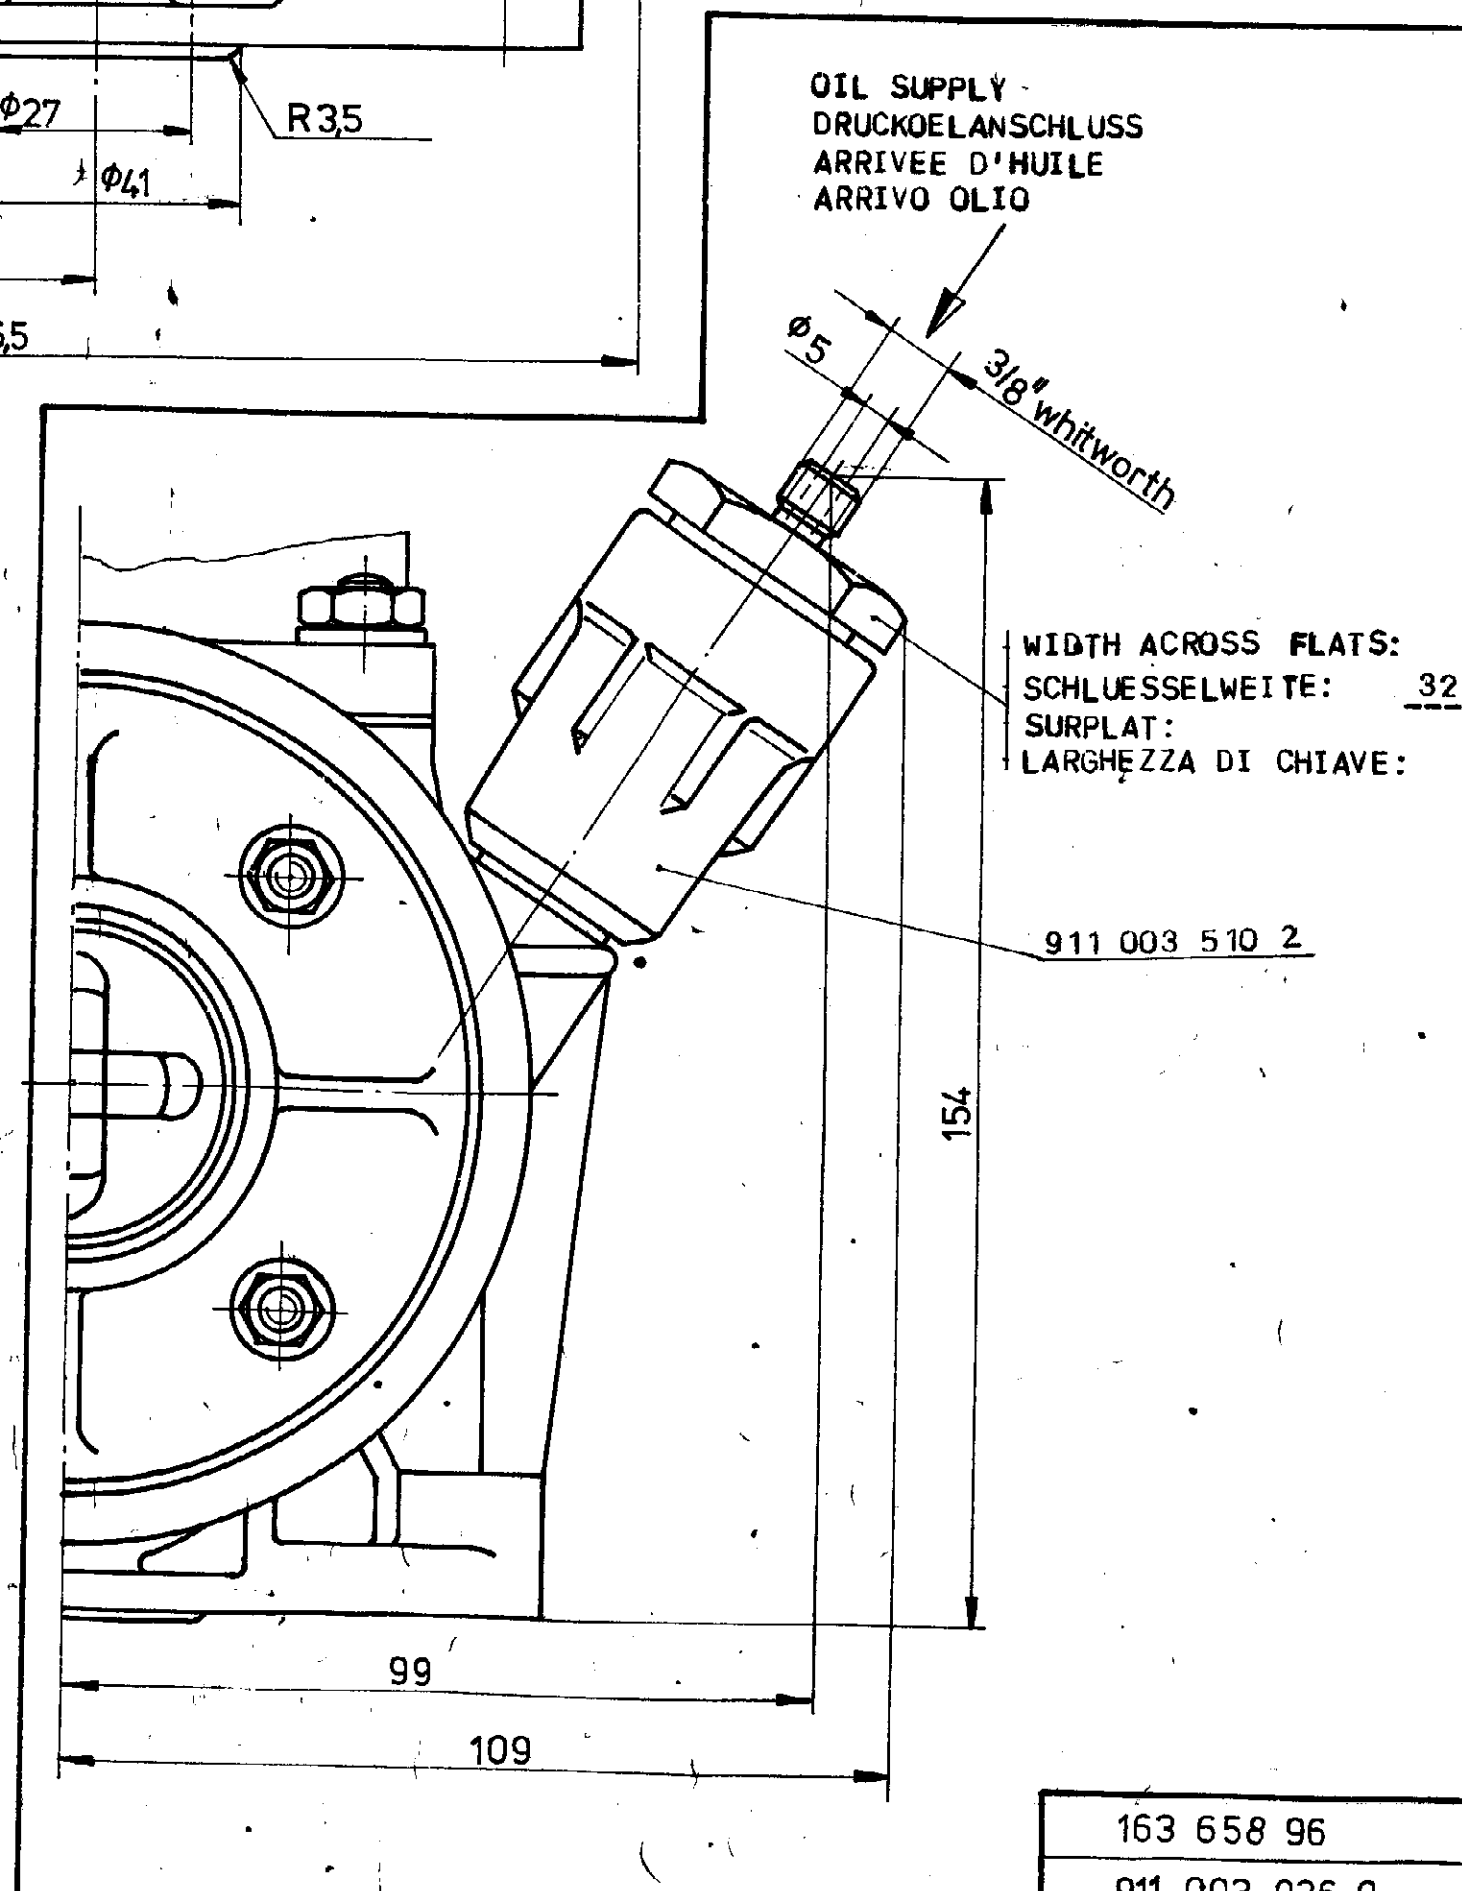
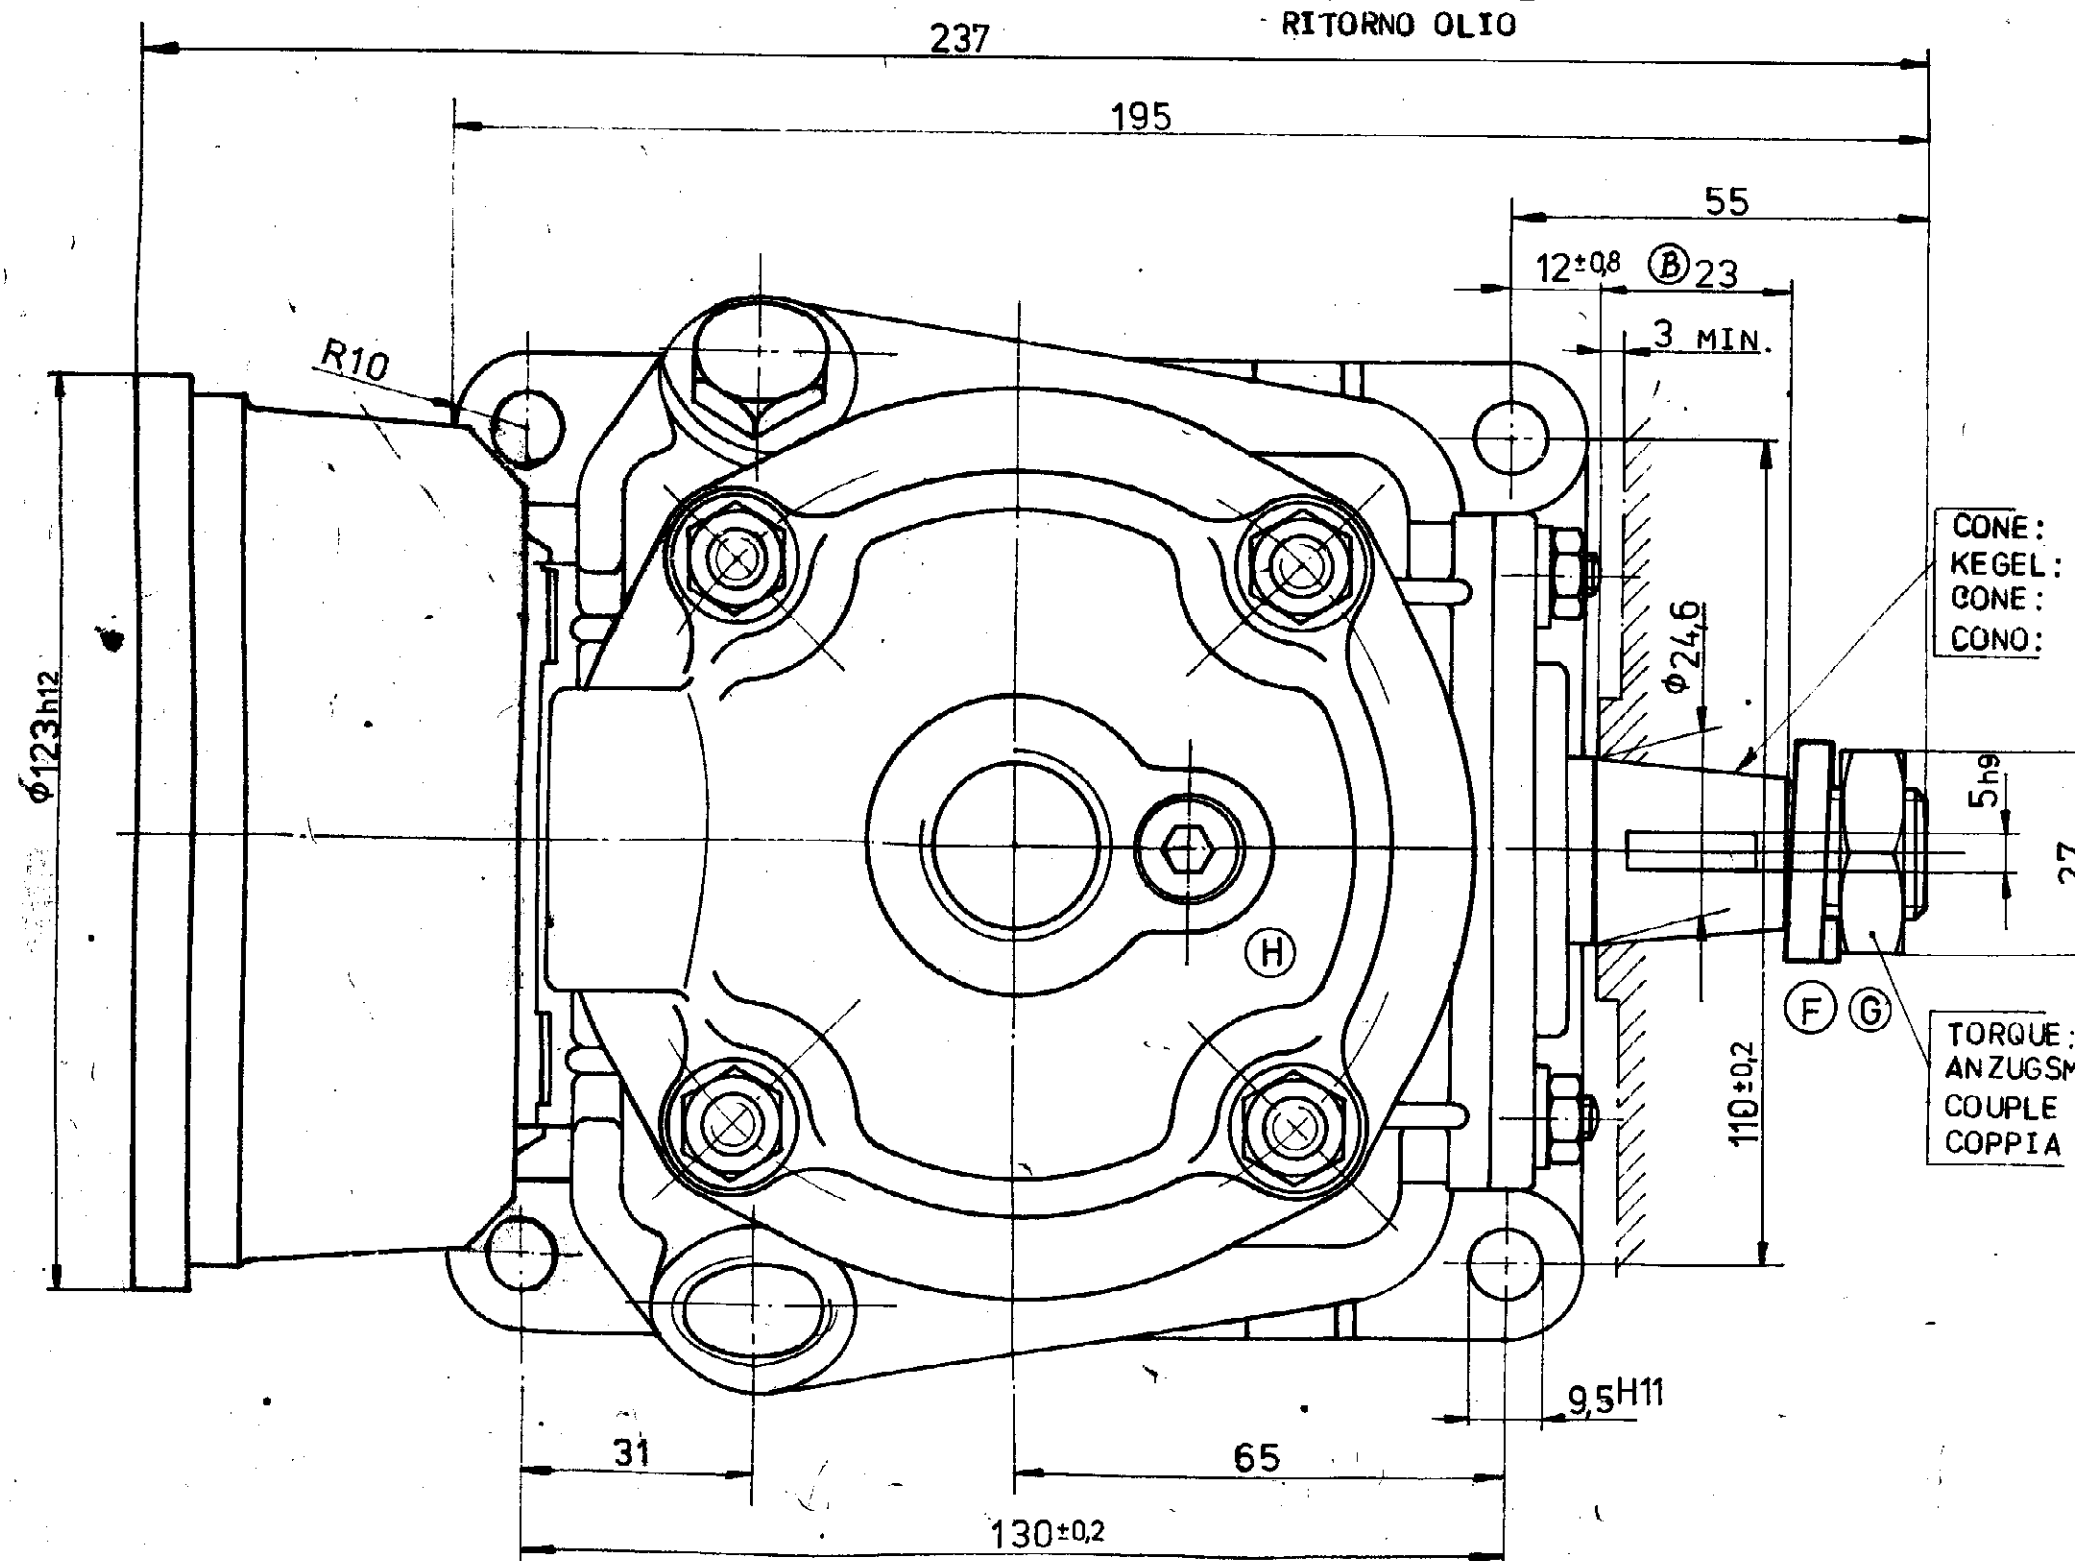
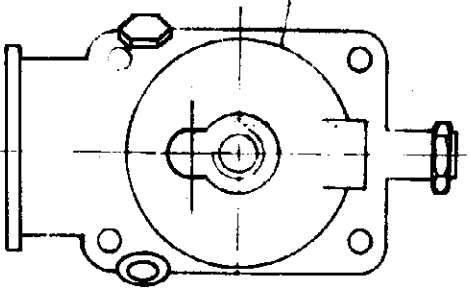
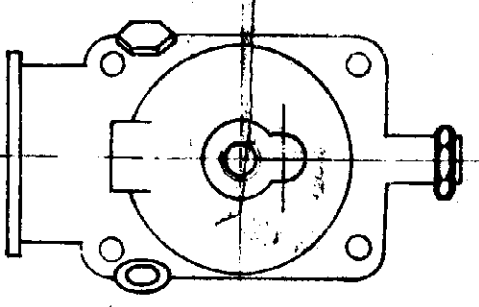
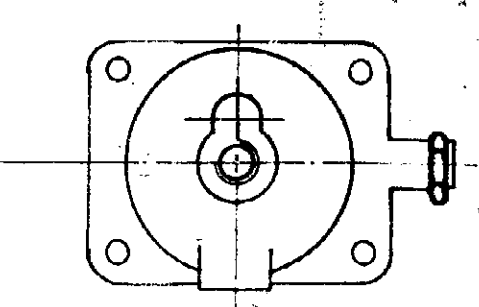
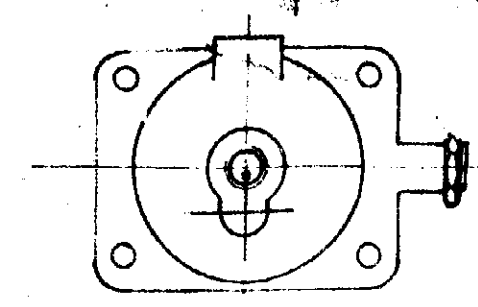
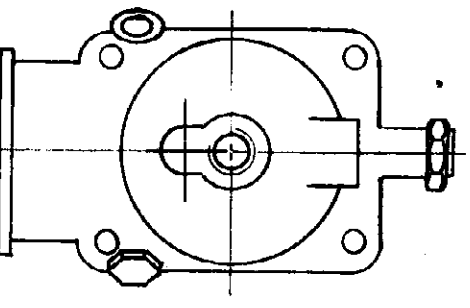
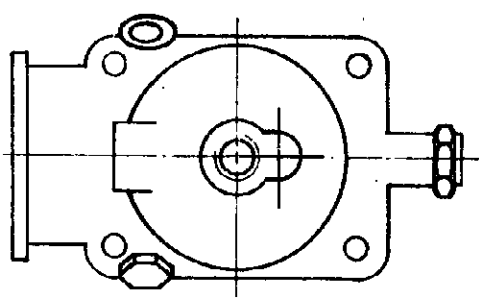
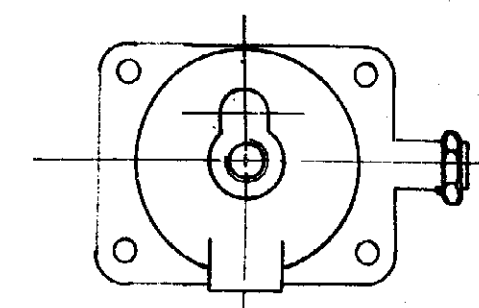
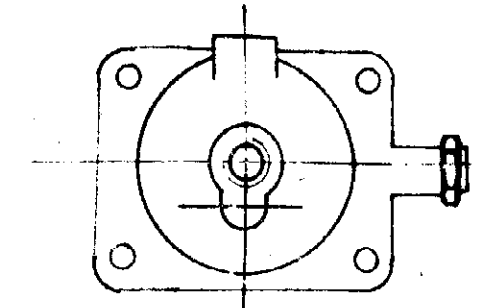

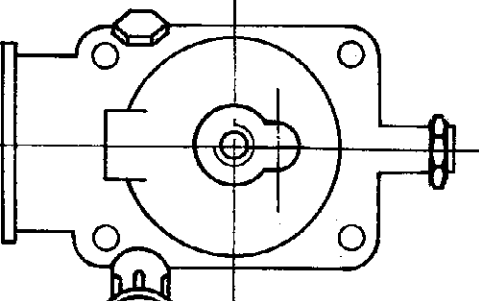
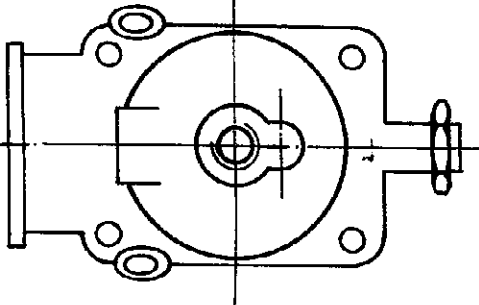
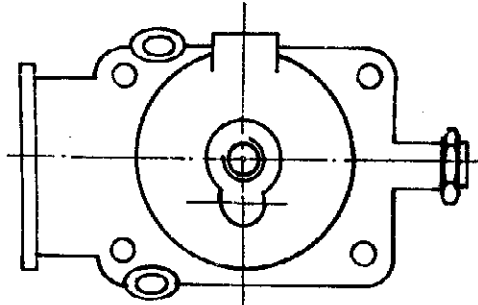


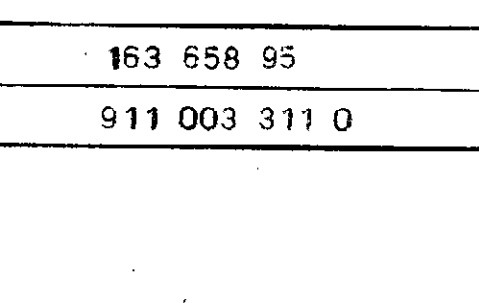

			
			
163 658 99 911 003 020 0	163 658 00 911 003 021 0		
			
163 658 97 911 003 120 0	163 658 98 911 003 121 0		
			
163 658 96 911 003 026 0			
			
163 658 95 911 003 311 0			
		163 658 94 911 003 313 0	

(A) FILL CRANKCASE WITH 125 g MINERAL OIL BEFORE OPERATING THE COMPRESSOR FOR THE FIRST TIME
 VOR ERSTER INBETRIEBNAHME 125 g MINERALÖL IN DAS KURBELGEHÄUSE EINFÜLLEN
 AVANT LA PREMIÈRE MISE EN MARCHÉ, REMPLIR LE CARTER D'UNE QUANTITÉ D'HUILE ÉGALE À 125 g
 PRIMA DELL'AVVIAMENTO INIZIALE, RIEMPIRE IL CARTER CON UNA QUANTITÀ D'OLIO MINERALE PARI A 125 g

FREE FROM ASBESTOS
ASBESTFREI
EXEMPT D'AMIANTE
ESENTE D'AMIANTO

PERFORMANCE DIAGRAM:
LEISTUNGSDIAGRAMM: D 911 003 000 0
DIAGRAMME DE PUISSANCE:-----
DIAGRAMMA DI POTENZA

[illegible]