

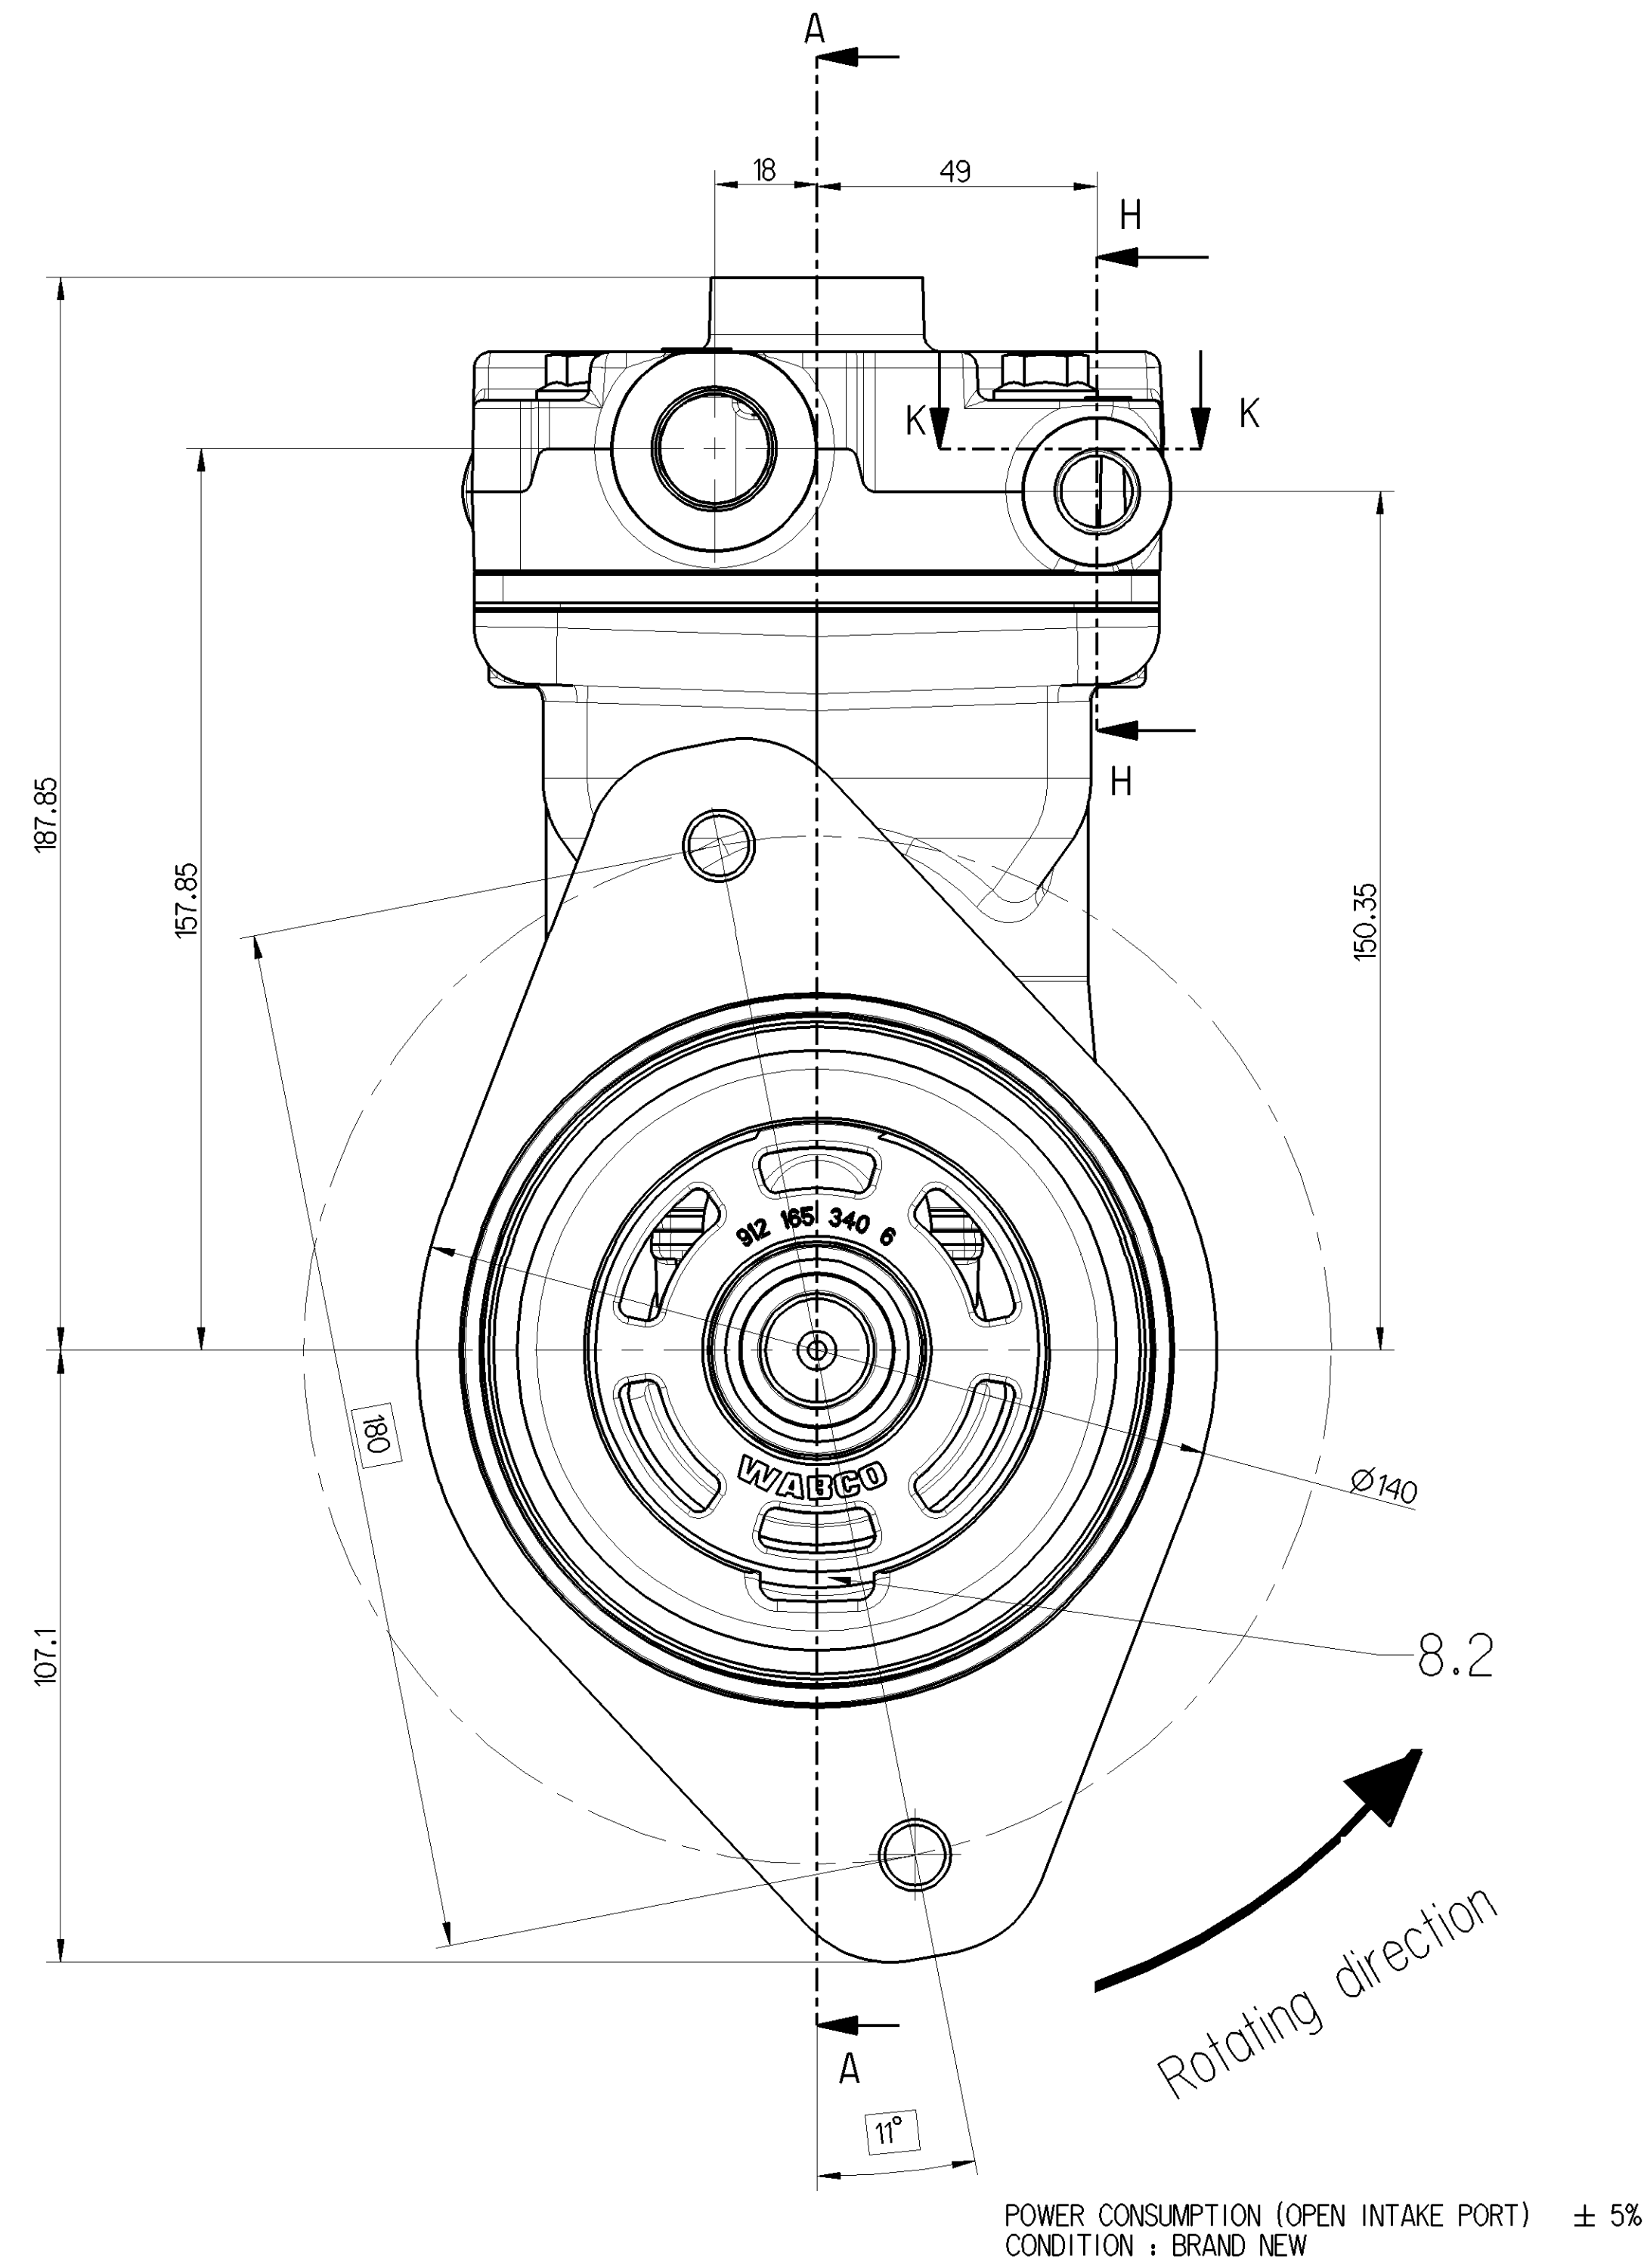
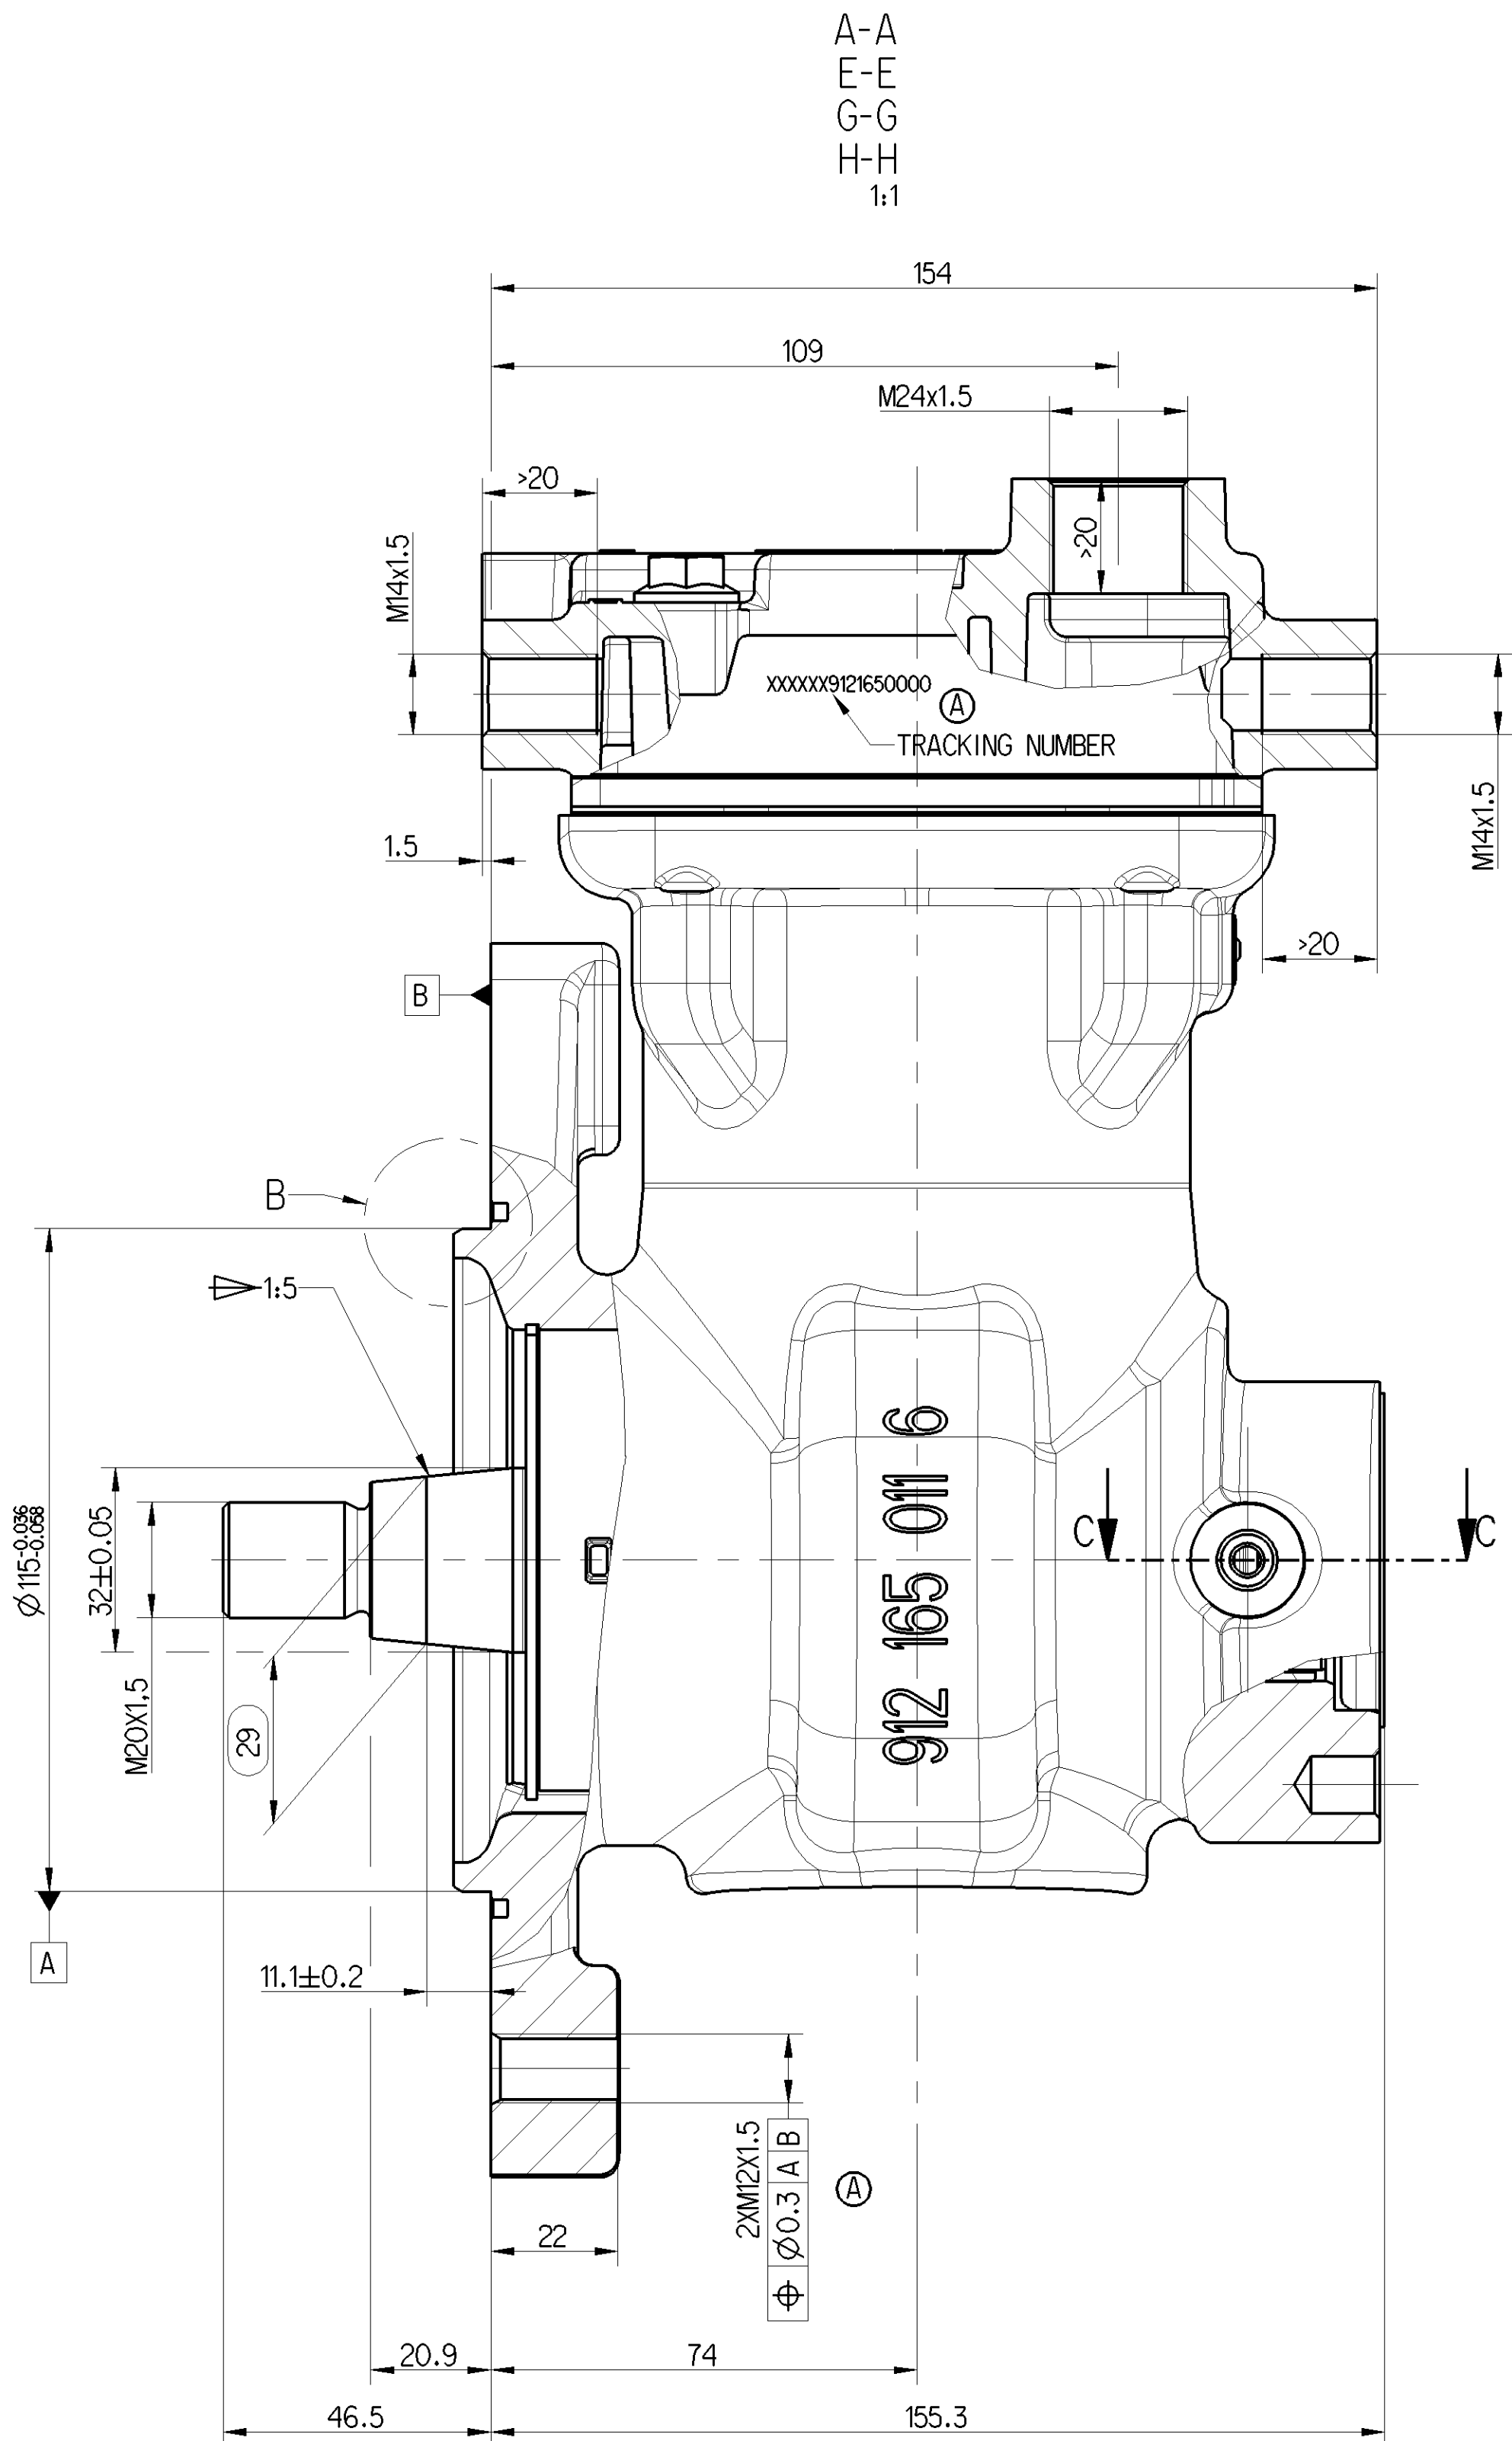


CUSTOMER NUMBER:
1025040FE030
DATE / LXXXXX(JAC CODE)
WABCO NUMBER:
912 165 000 0



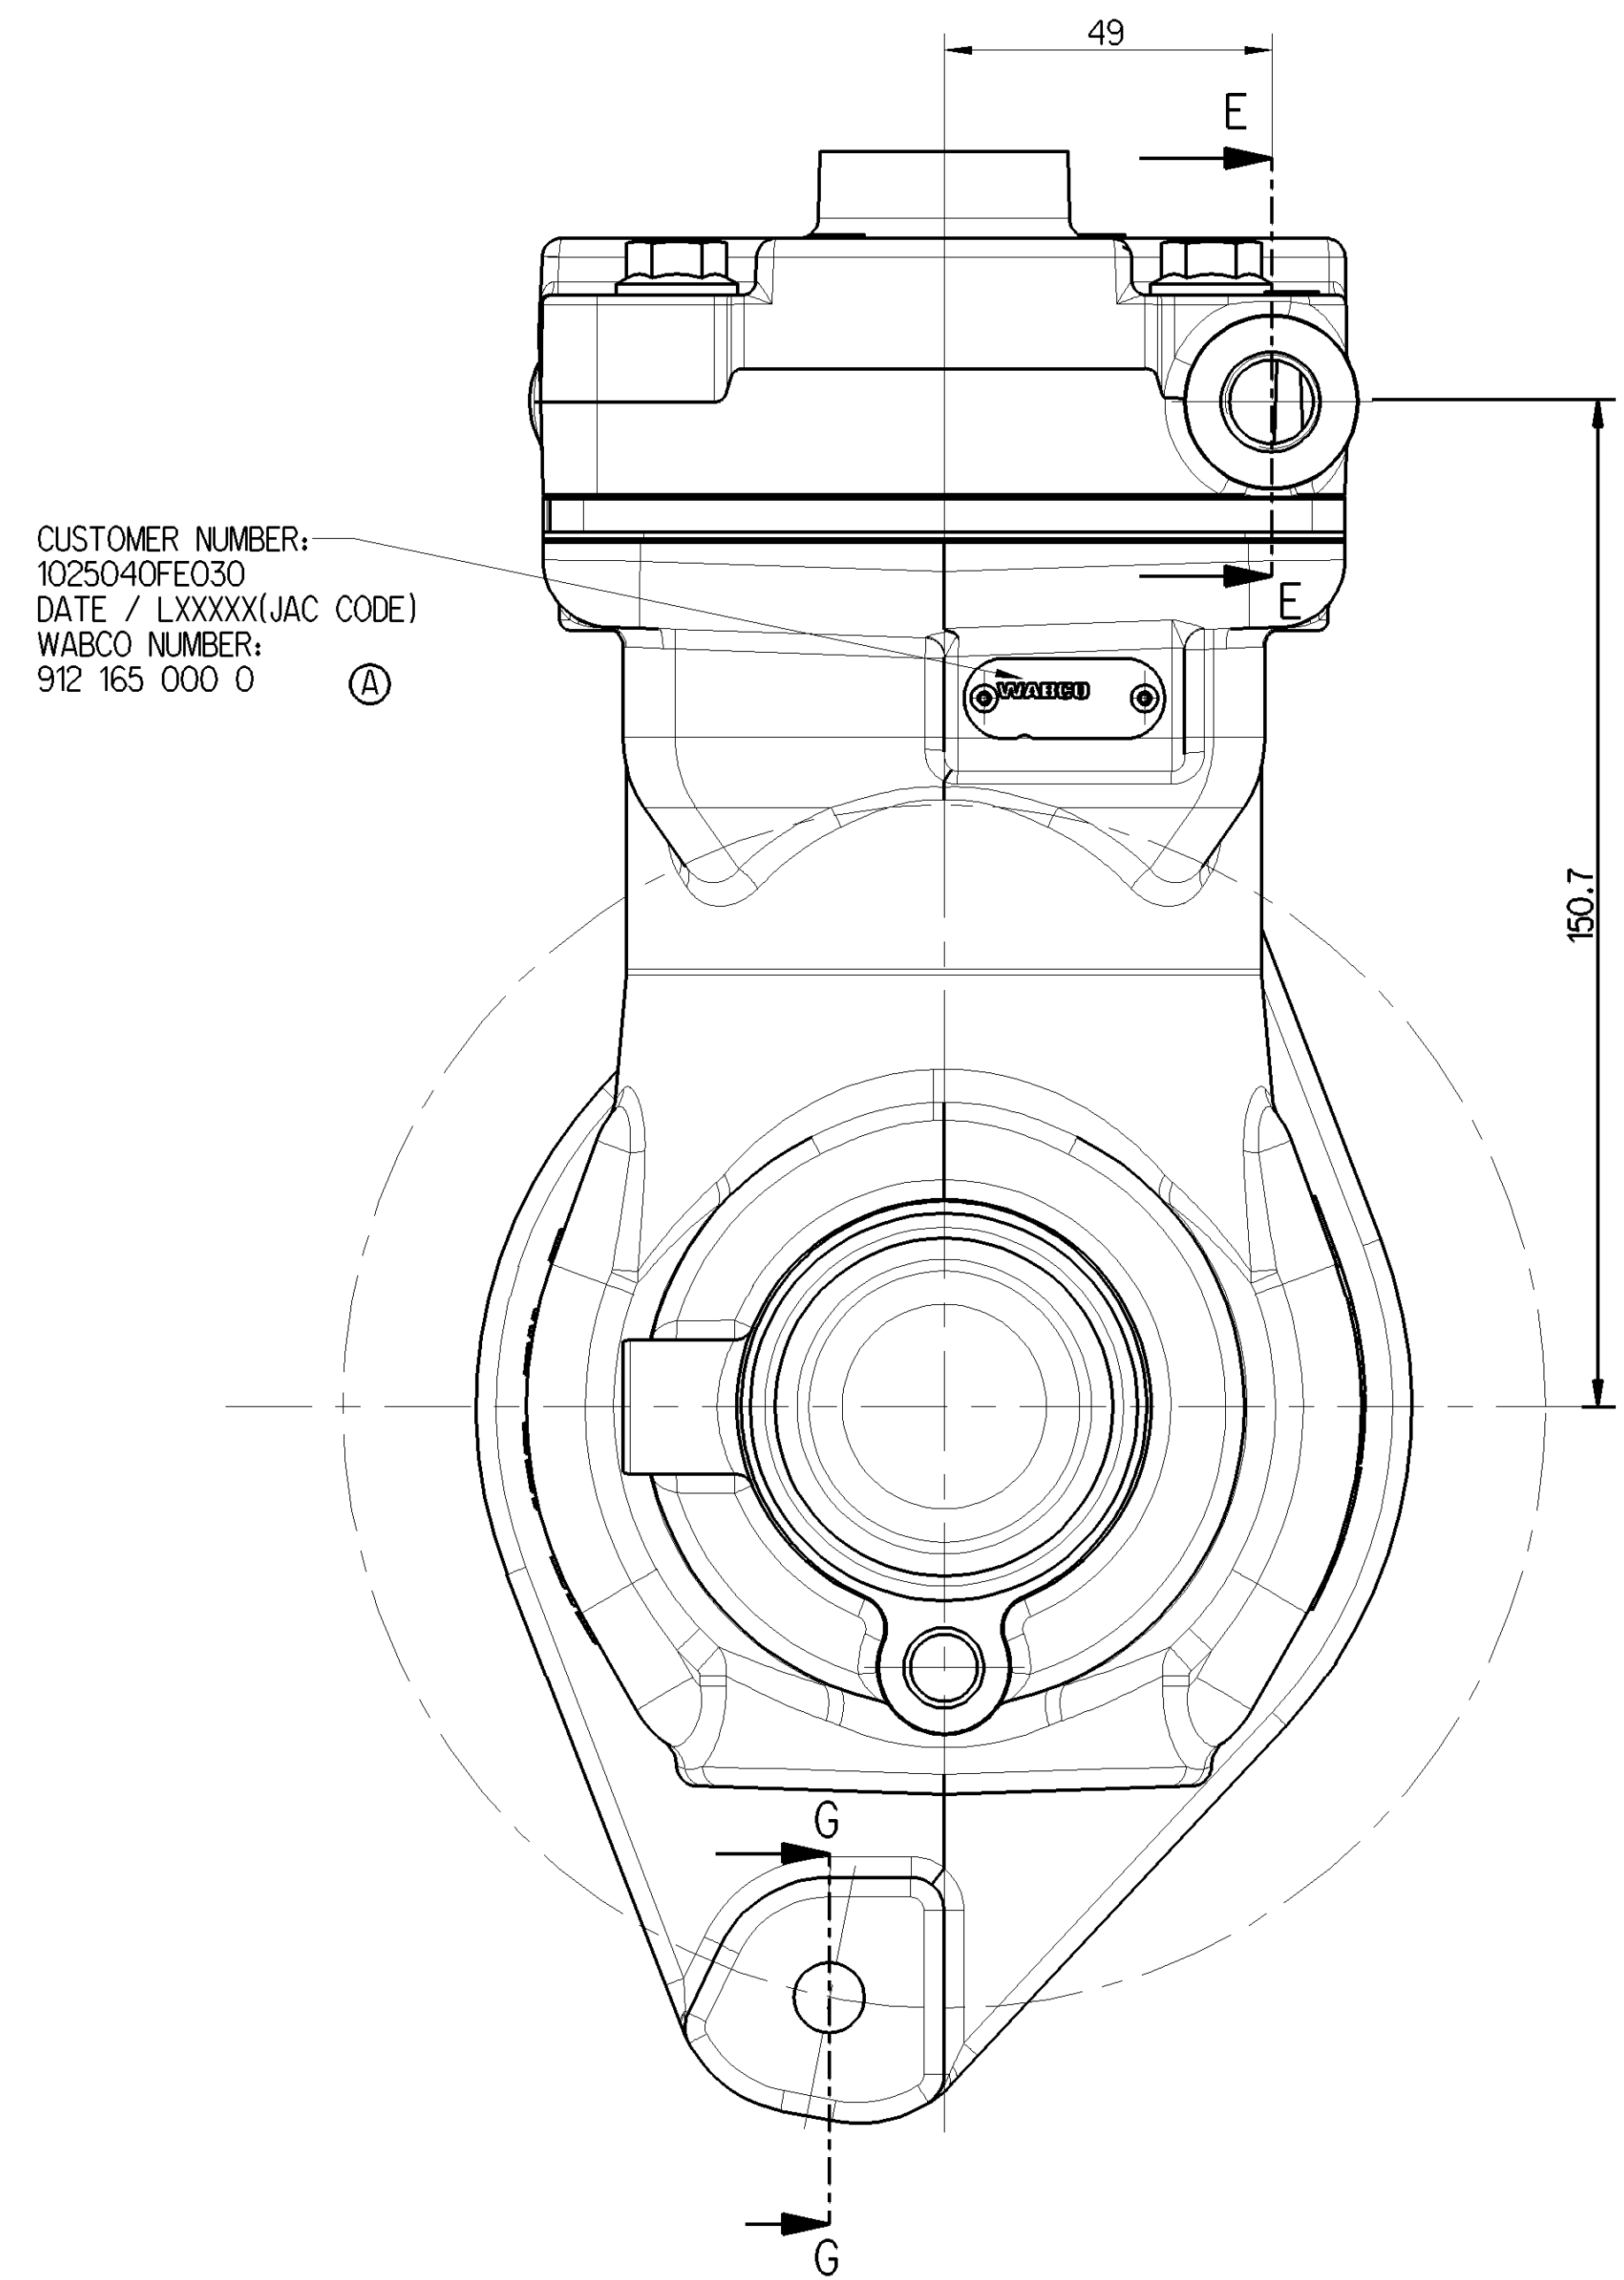


BORE: $\varnothing 85$ mm
STROKE: 42 mm
SWEEP VOLUME: 238 ccm
MAX. WORKING SPEED: $n_{max} = 3000 \text{ min}^{-1}$
OVERSPEED (TEMPORARY MAX. 4 SEC.): $n_{ue} = 1.3 \cdot n_{max}$
MAX. WORKING PRESSURE: $p = 8 \text{ bar}$
MAX PRESSURE AT DISCHARGE PORT: $p = 10 \text{ bar}$
MAX PRESSURE AT DISCHARGE PORT (TEMPORARILY $\angle 4 \text{ SEC}$): $p = 12 \text{ bar}$
WITH WATER-COOLING REQUIRED QUANTITY COOLING WATER: ①
END PLAY OF CRANKSHAFT: 0.1...0.4 mm
LUBRICATION: LUBRICATION SUPPLIED FROM ENGINE
MAX. PERMISSIBLE TILT DURING CONTINUOUS WORKING:

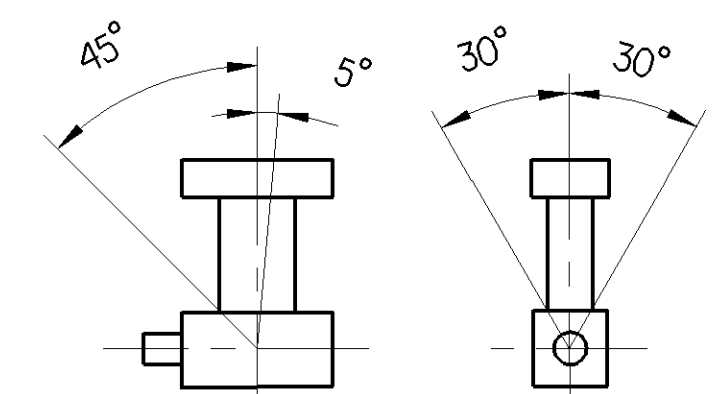

Refer to product specification/ installation and maintenance guide

AIR DELIVERY : FREE AIR (OPEN INTAKE PORT $\pm 5\%$)
CONDITION : BRAND NEW

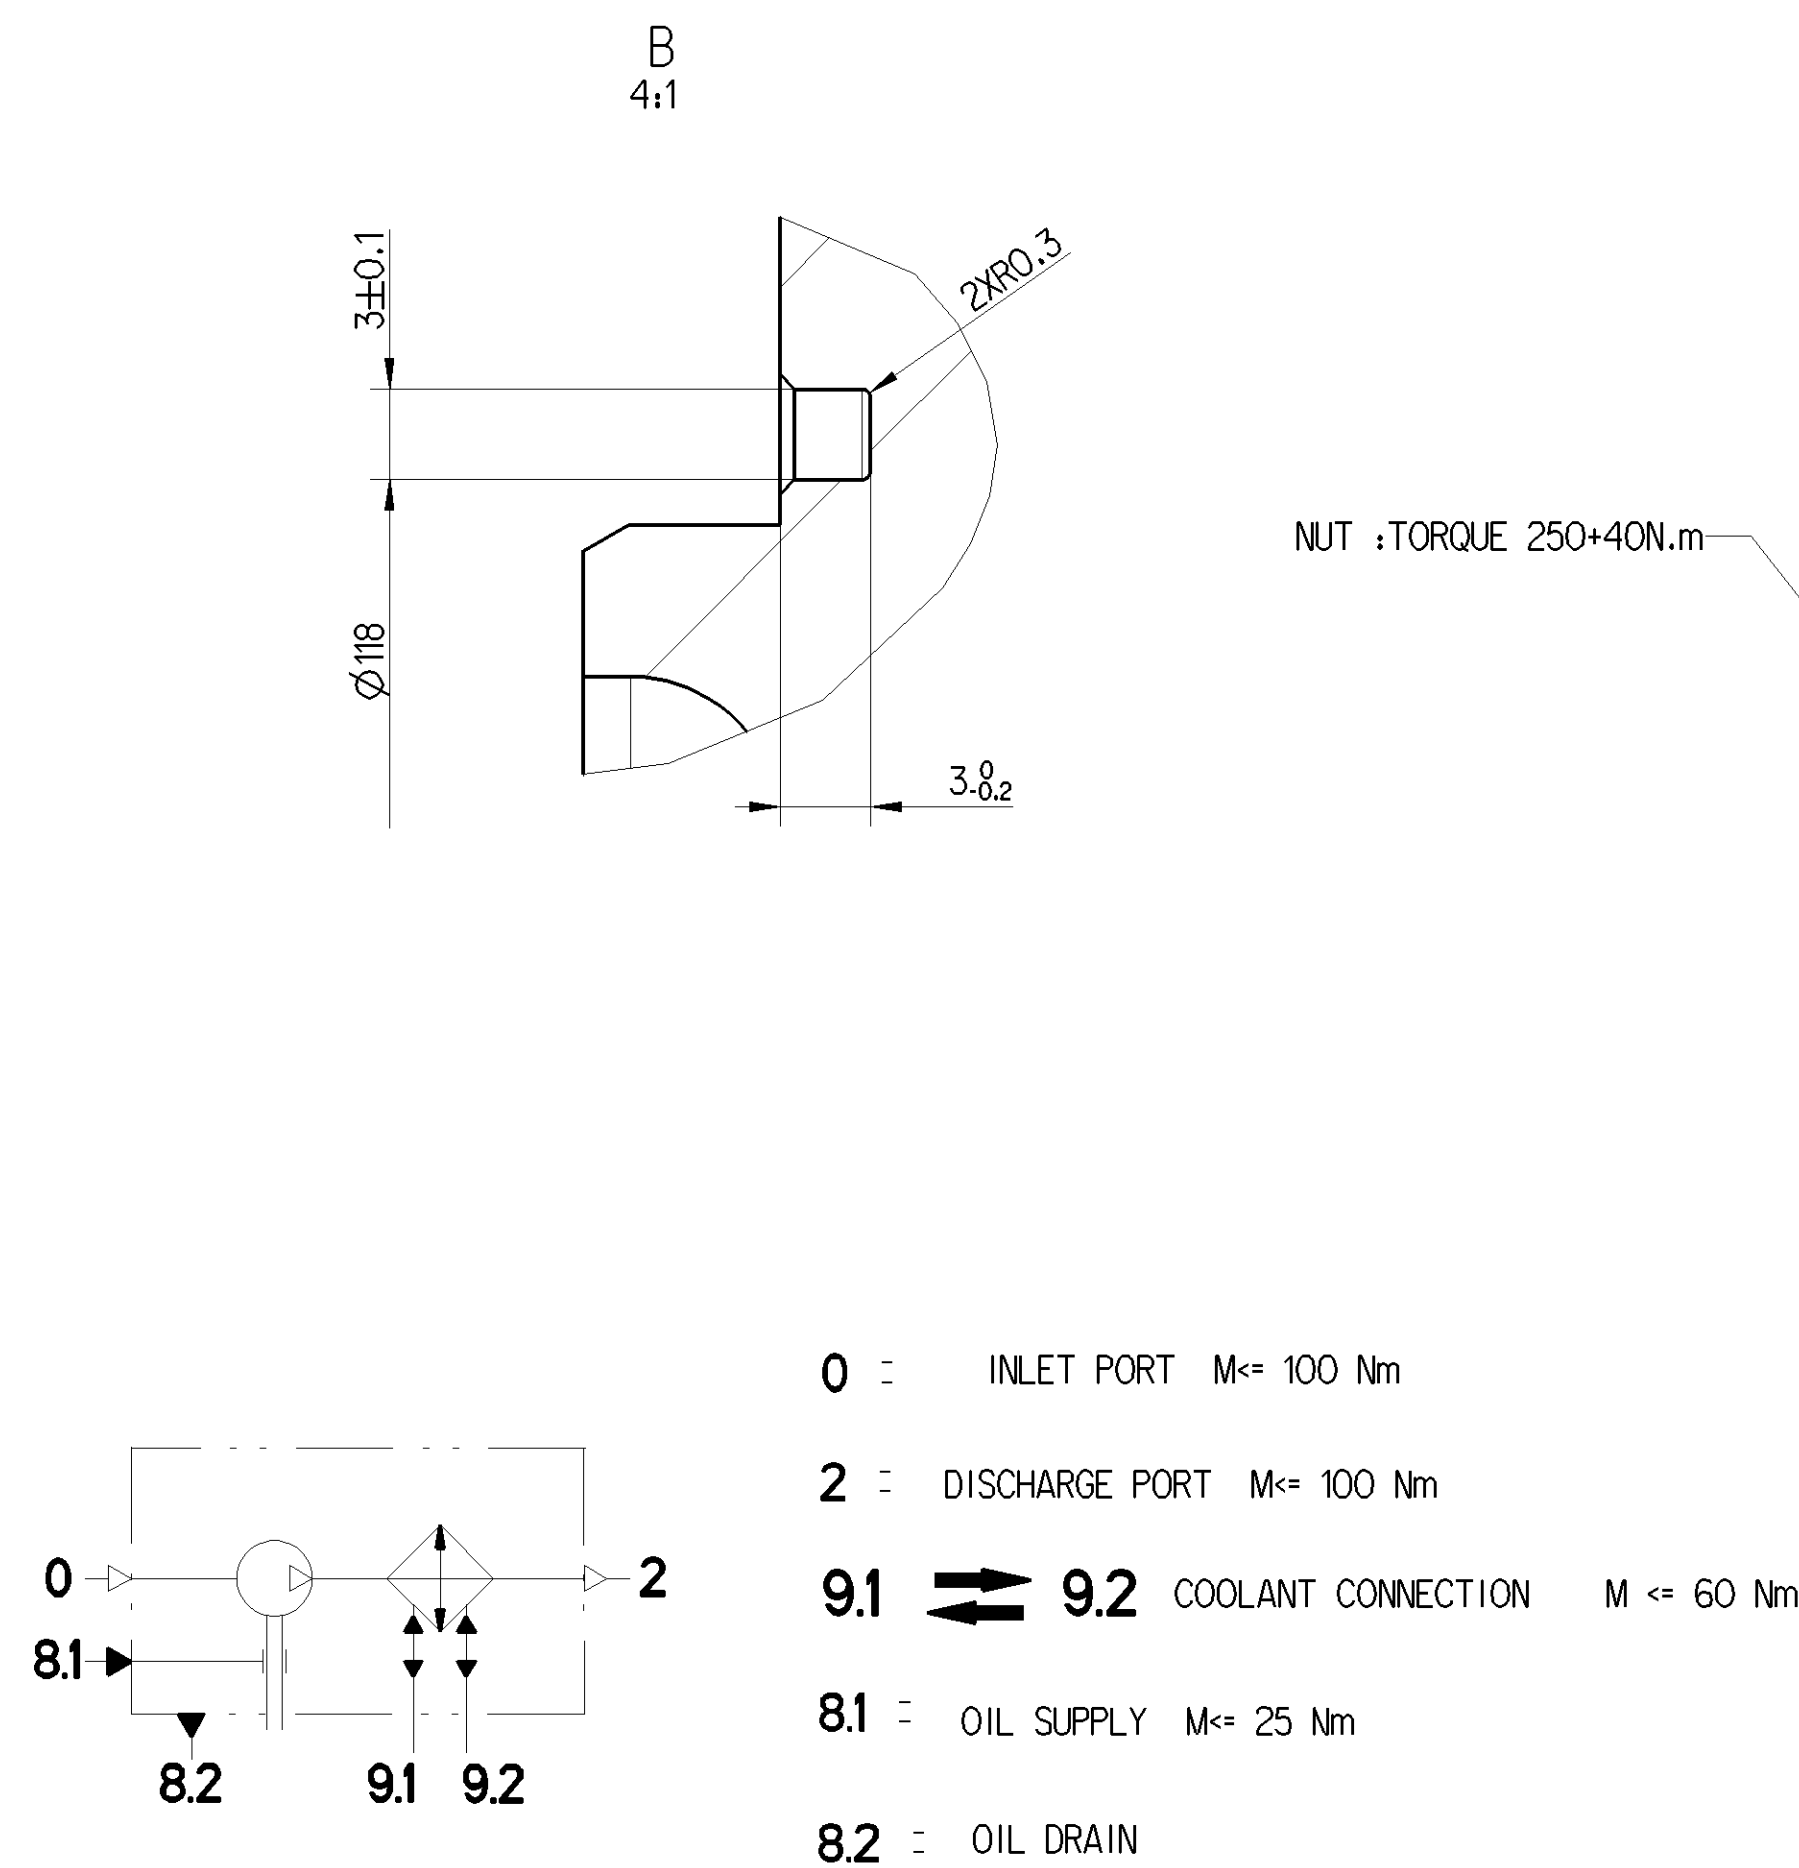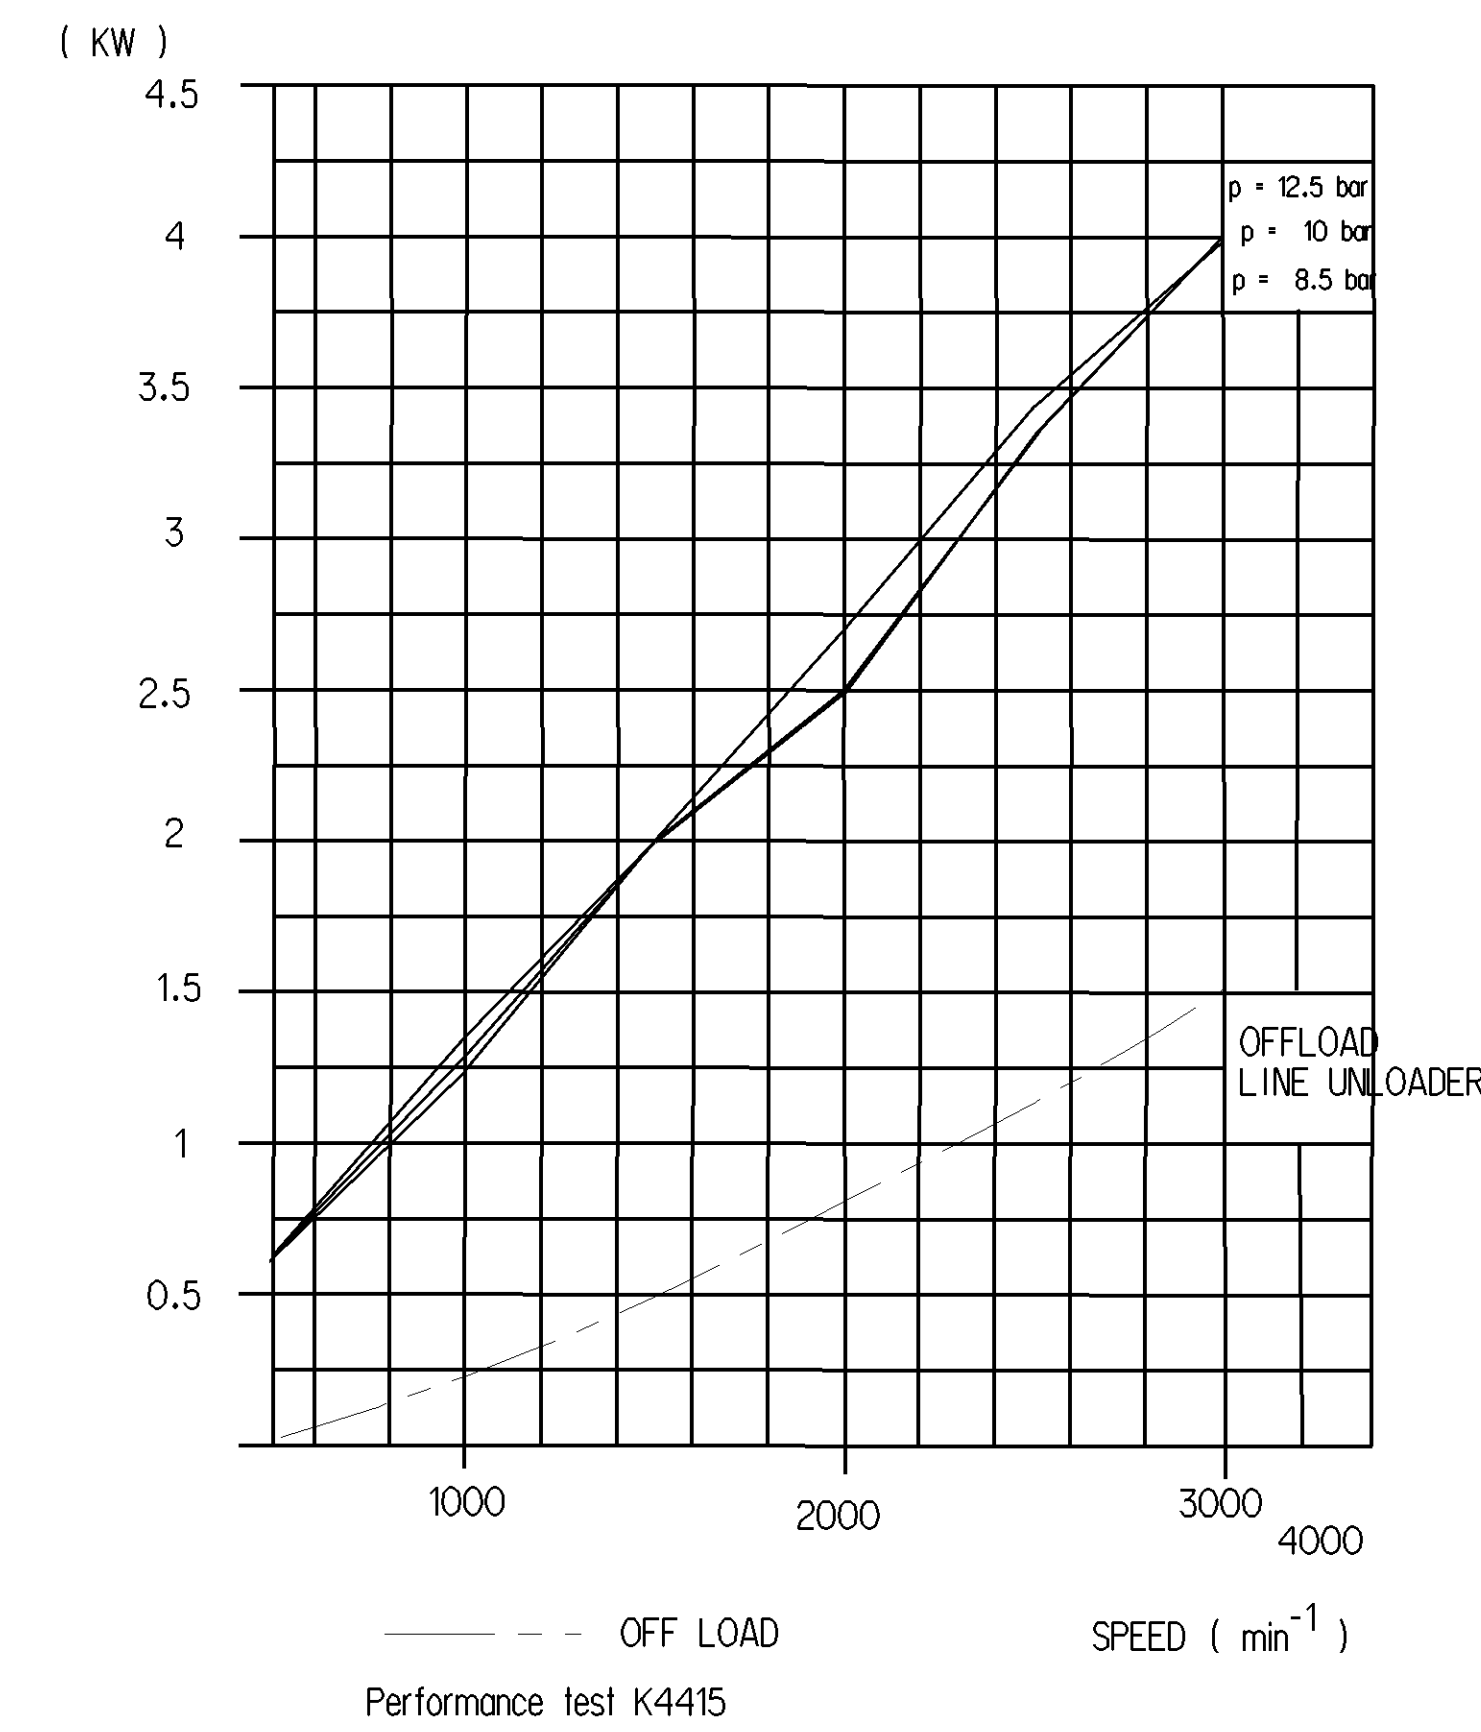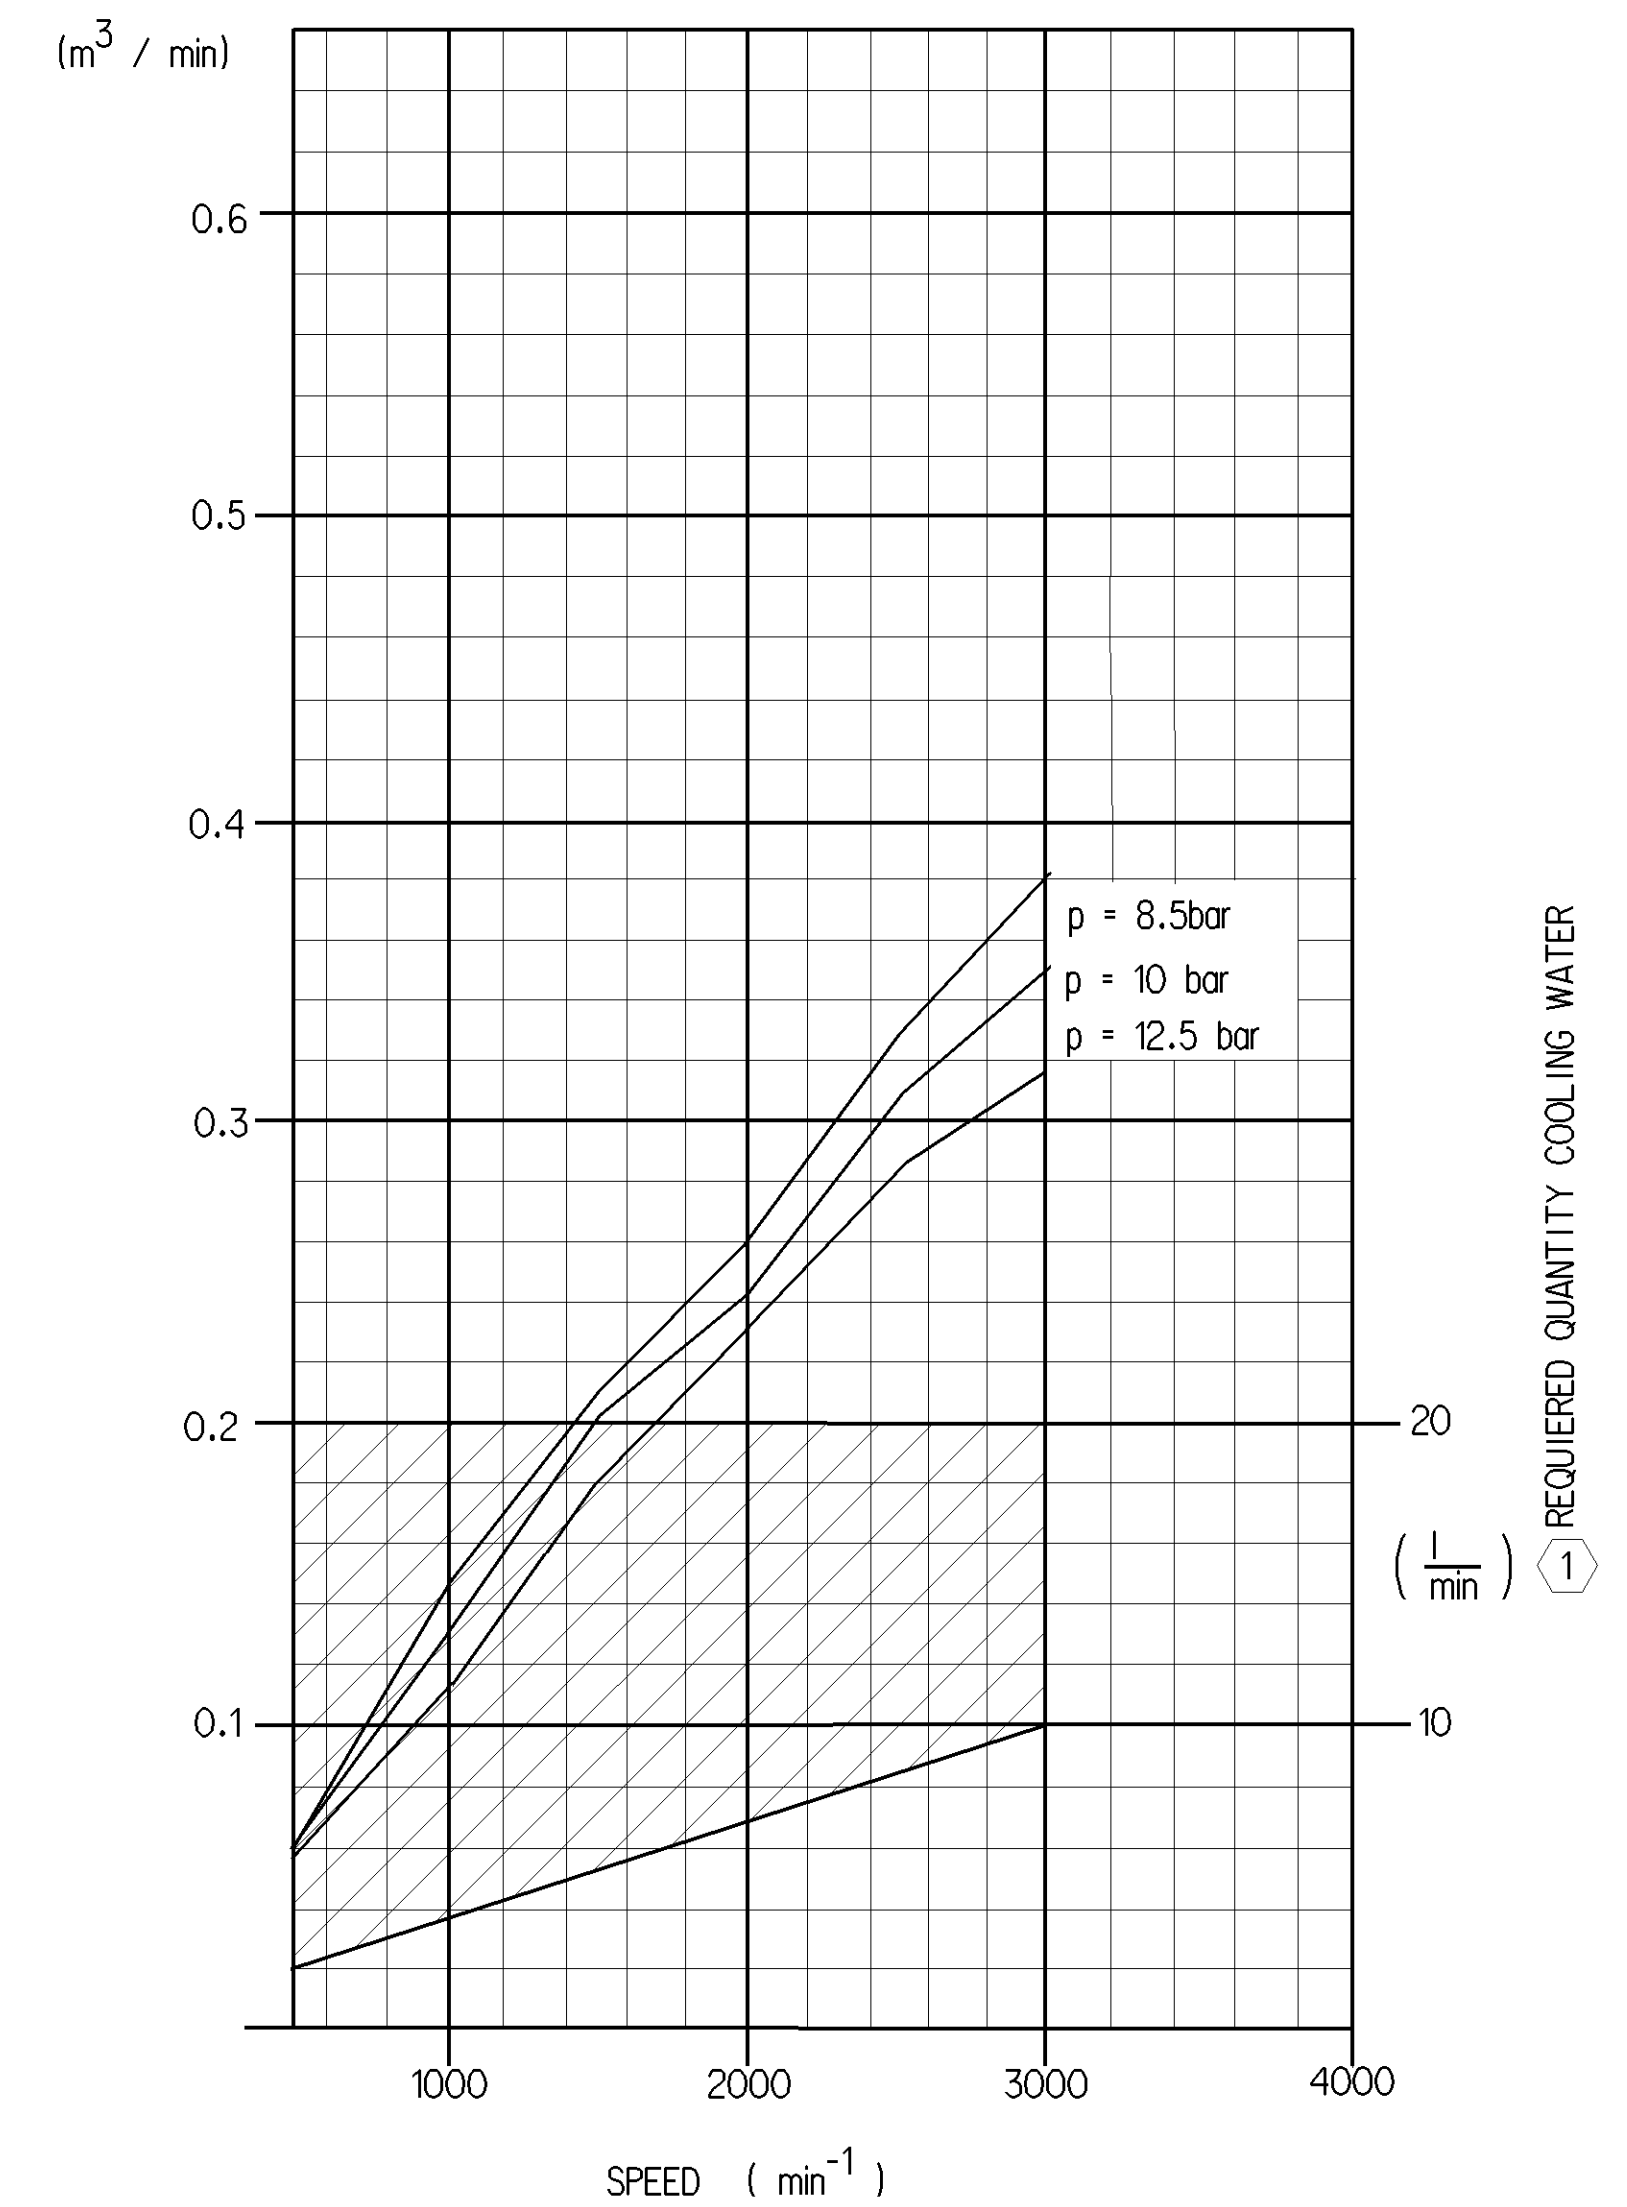

0 : INLET PORT $M \leq 100 \text{ Nm}$
2 : DISCHARGE PORT $M \leq 100 \text{ Nm}$
91 $\rightleftharpoons$ 92 COOLANT CONNECTION $M \leq 60 \text{ Nm}$
8.1 : OIL SUPPLY $M \leq 25 \text{ Nm}$
8.2 : OIL DRAIN

General Specification: 4SD-554-1, Size ISO 14400 LP		Copyright WABCO®		WABCO	
Further Technical Data:		Date: 2015-10-28		Single Cylinder Compressor	
Doc. Code:		Sheet: 1		Language: EN	
General Tolerances: 4SD-261		2015-11-09		Yuan	
Range of Nominal Dimensions (± mm)		1:2		Medium No.	
Class 11		± 0.05		Date of first issue: 2015-06-12	
Class 12		± 0.05		Doc. Code: 005	
Class 13		± 0.05		Language: EN	
Class 14		± 0.05		Sheet: 1/1	
Class 15		± 0.05		Revision: 884 009 164 0	
Class 16		± 0.05		Tolerance: 1/1	
Class 17		± 0.05		Material: 1/1	
Class 18		± 0.05		Drawing: 1/1	
Class 19		± 0.05		Drawing: 1/1	
Class 20		± 0.05		Drawing: 1/1	
Class 21		± 0.05		Drawing: 1/1	
Class 22		± 0.05		Drawing: 1/1	
Class 23		± 0.05		Drawing: 1/1	
Class 24		± 0.05		Drawing: 1/1	