
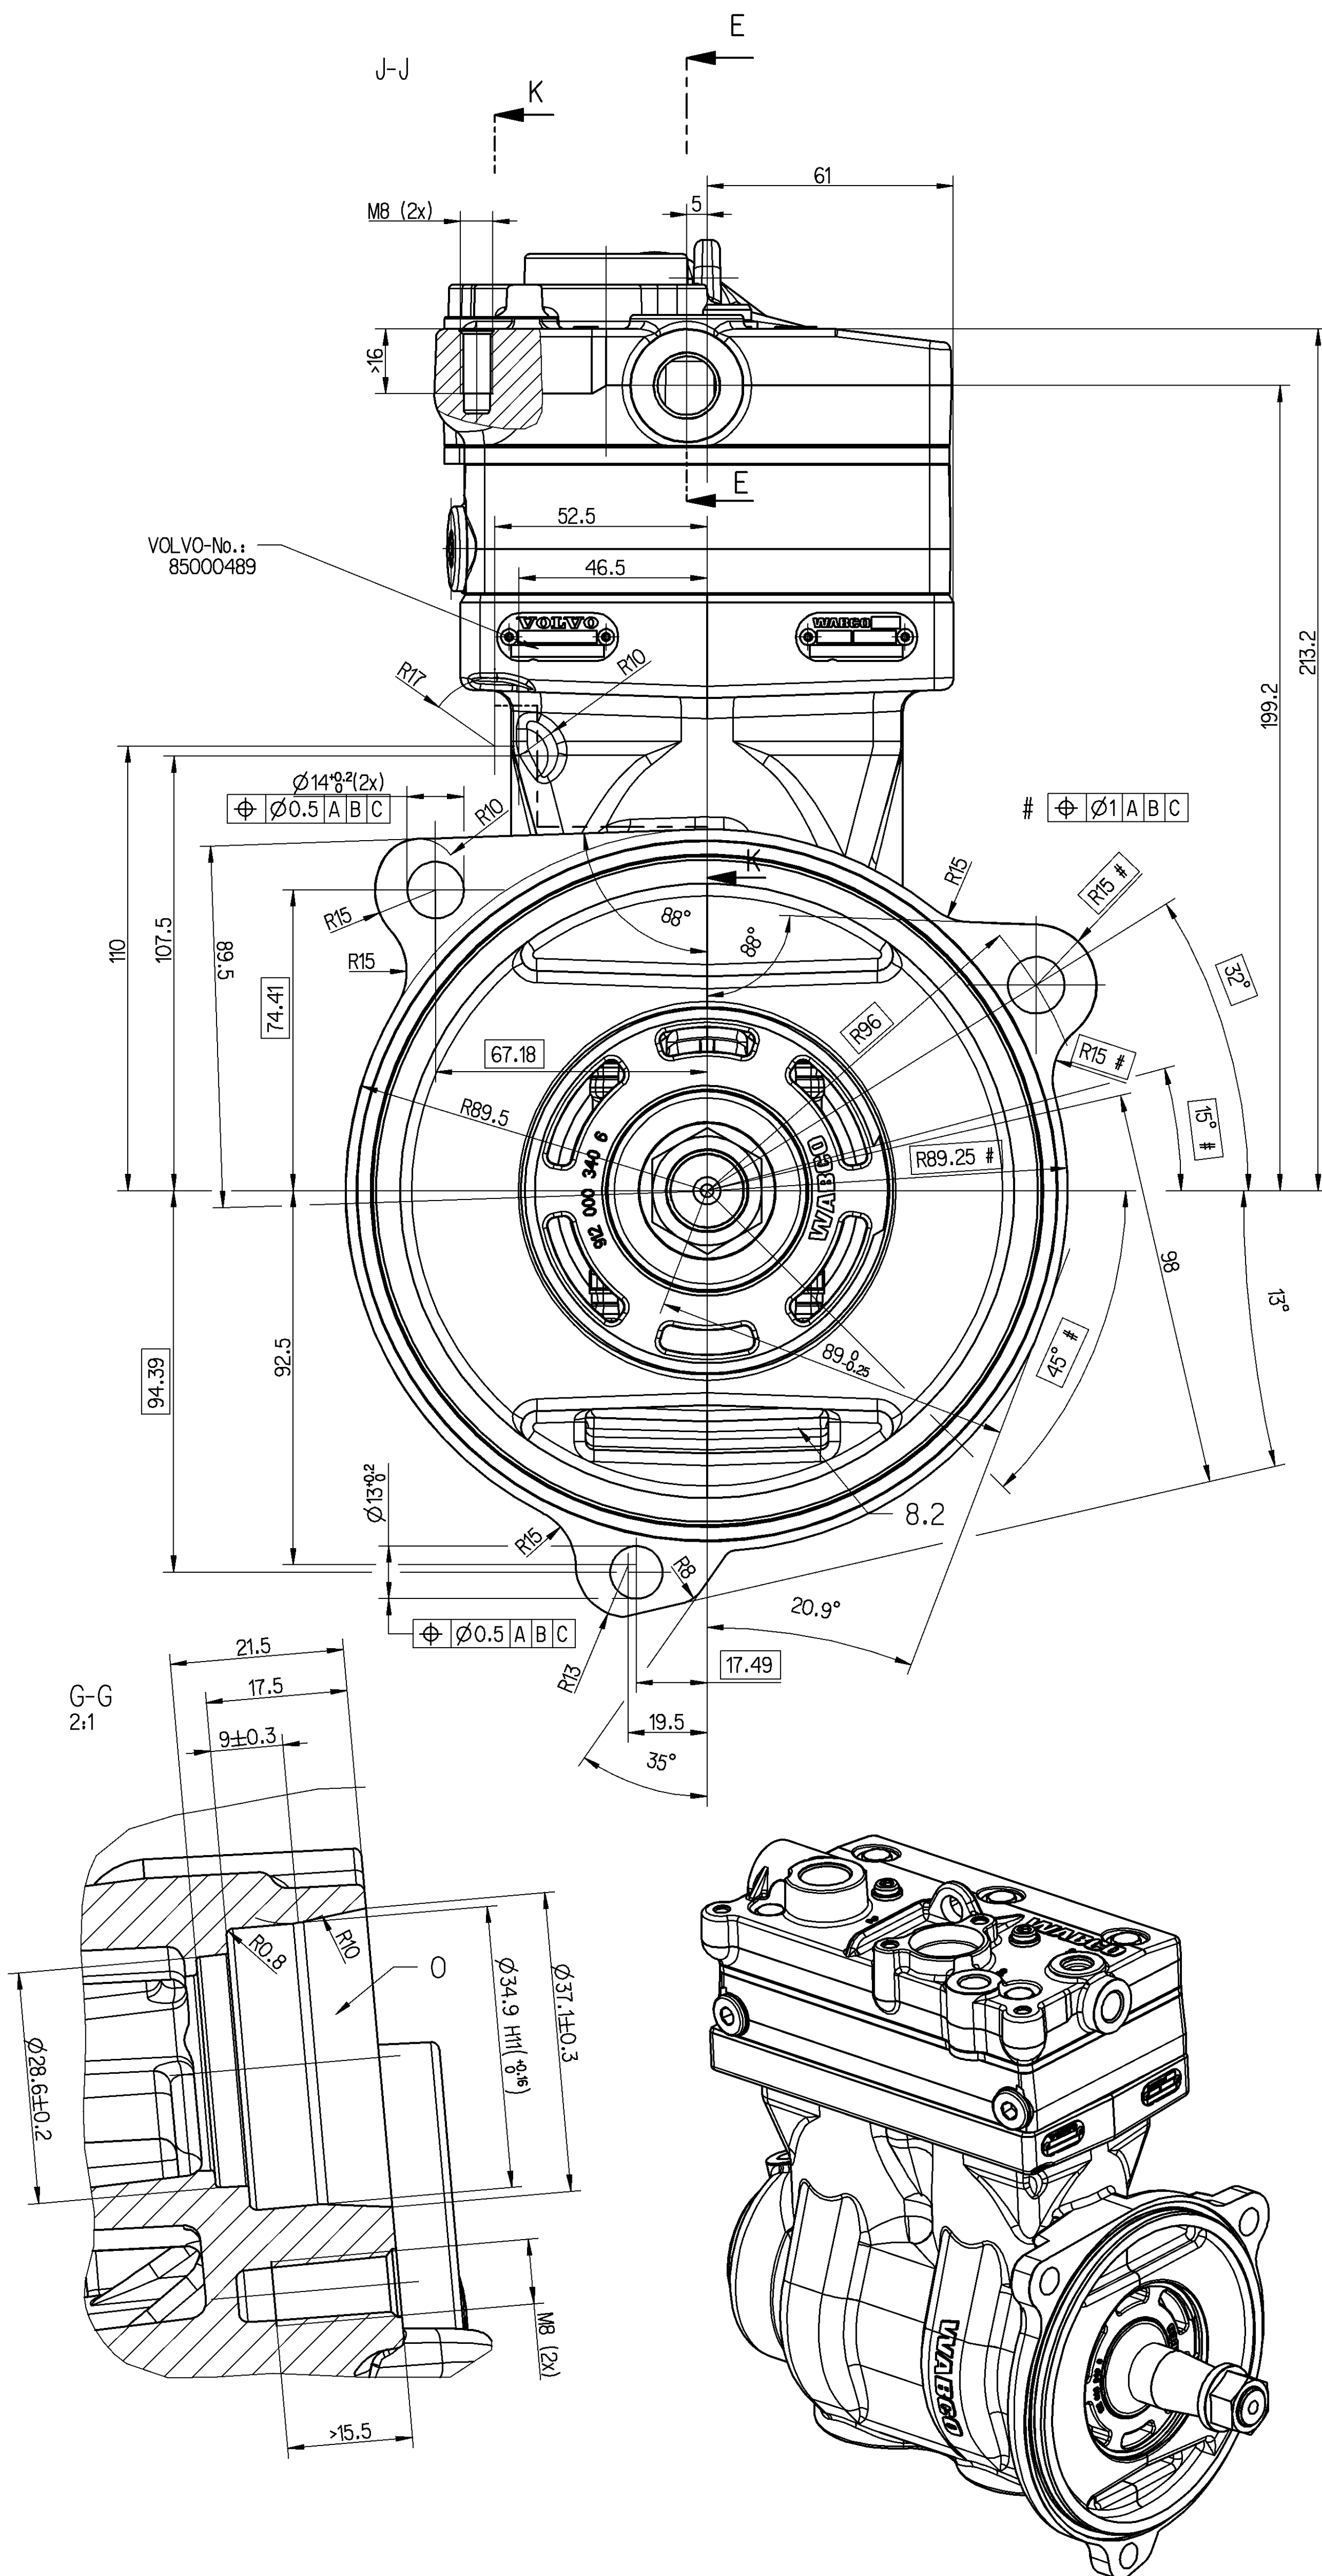
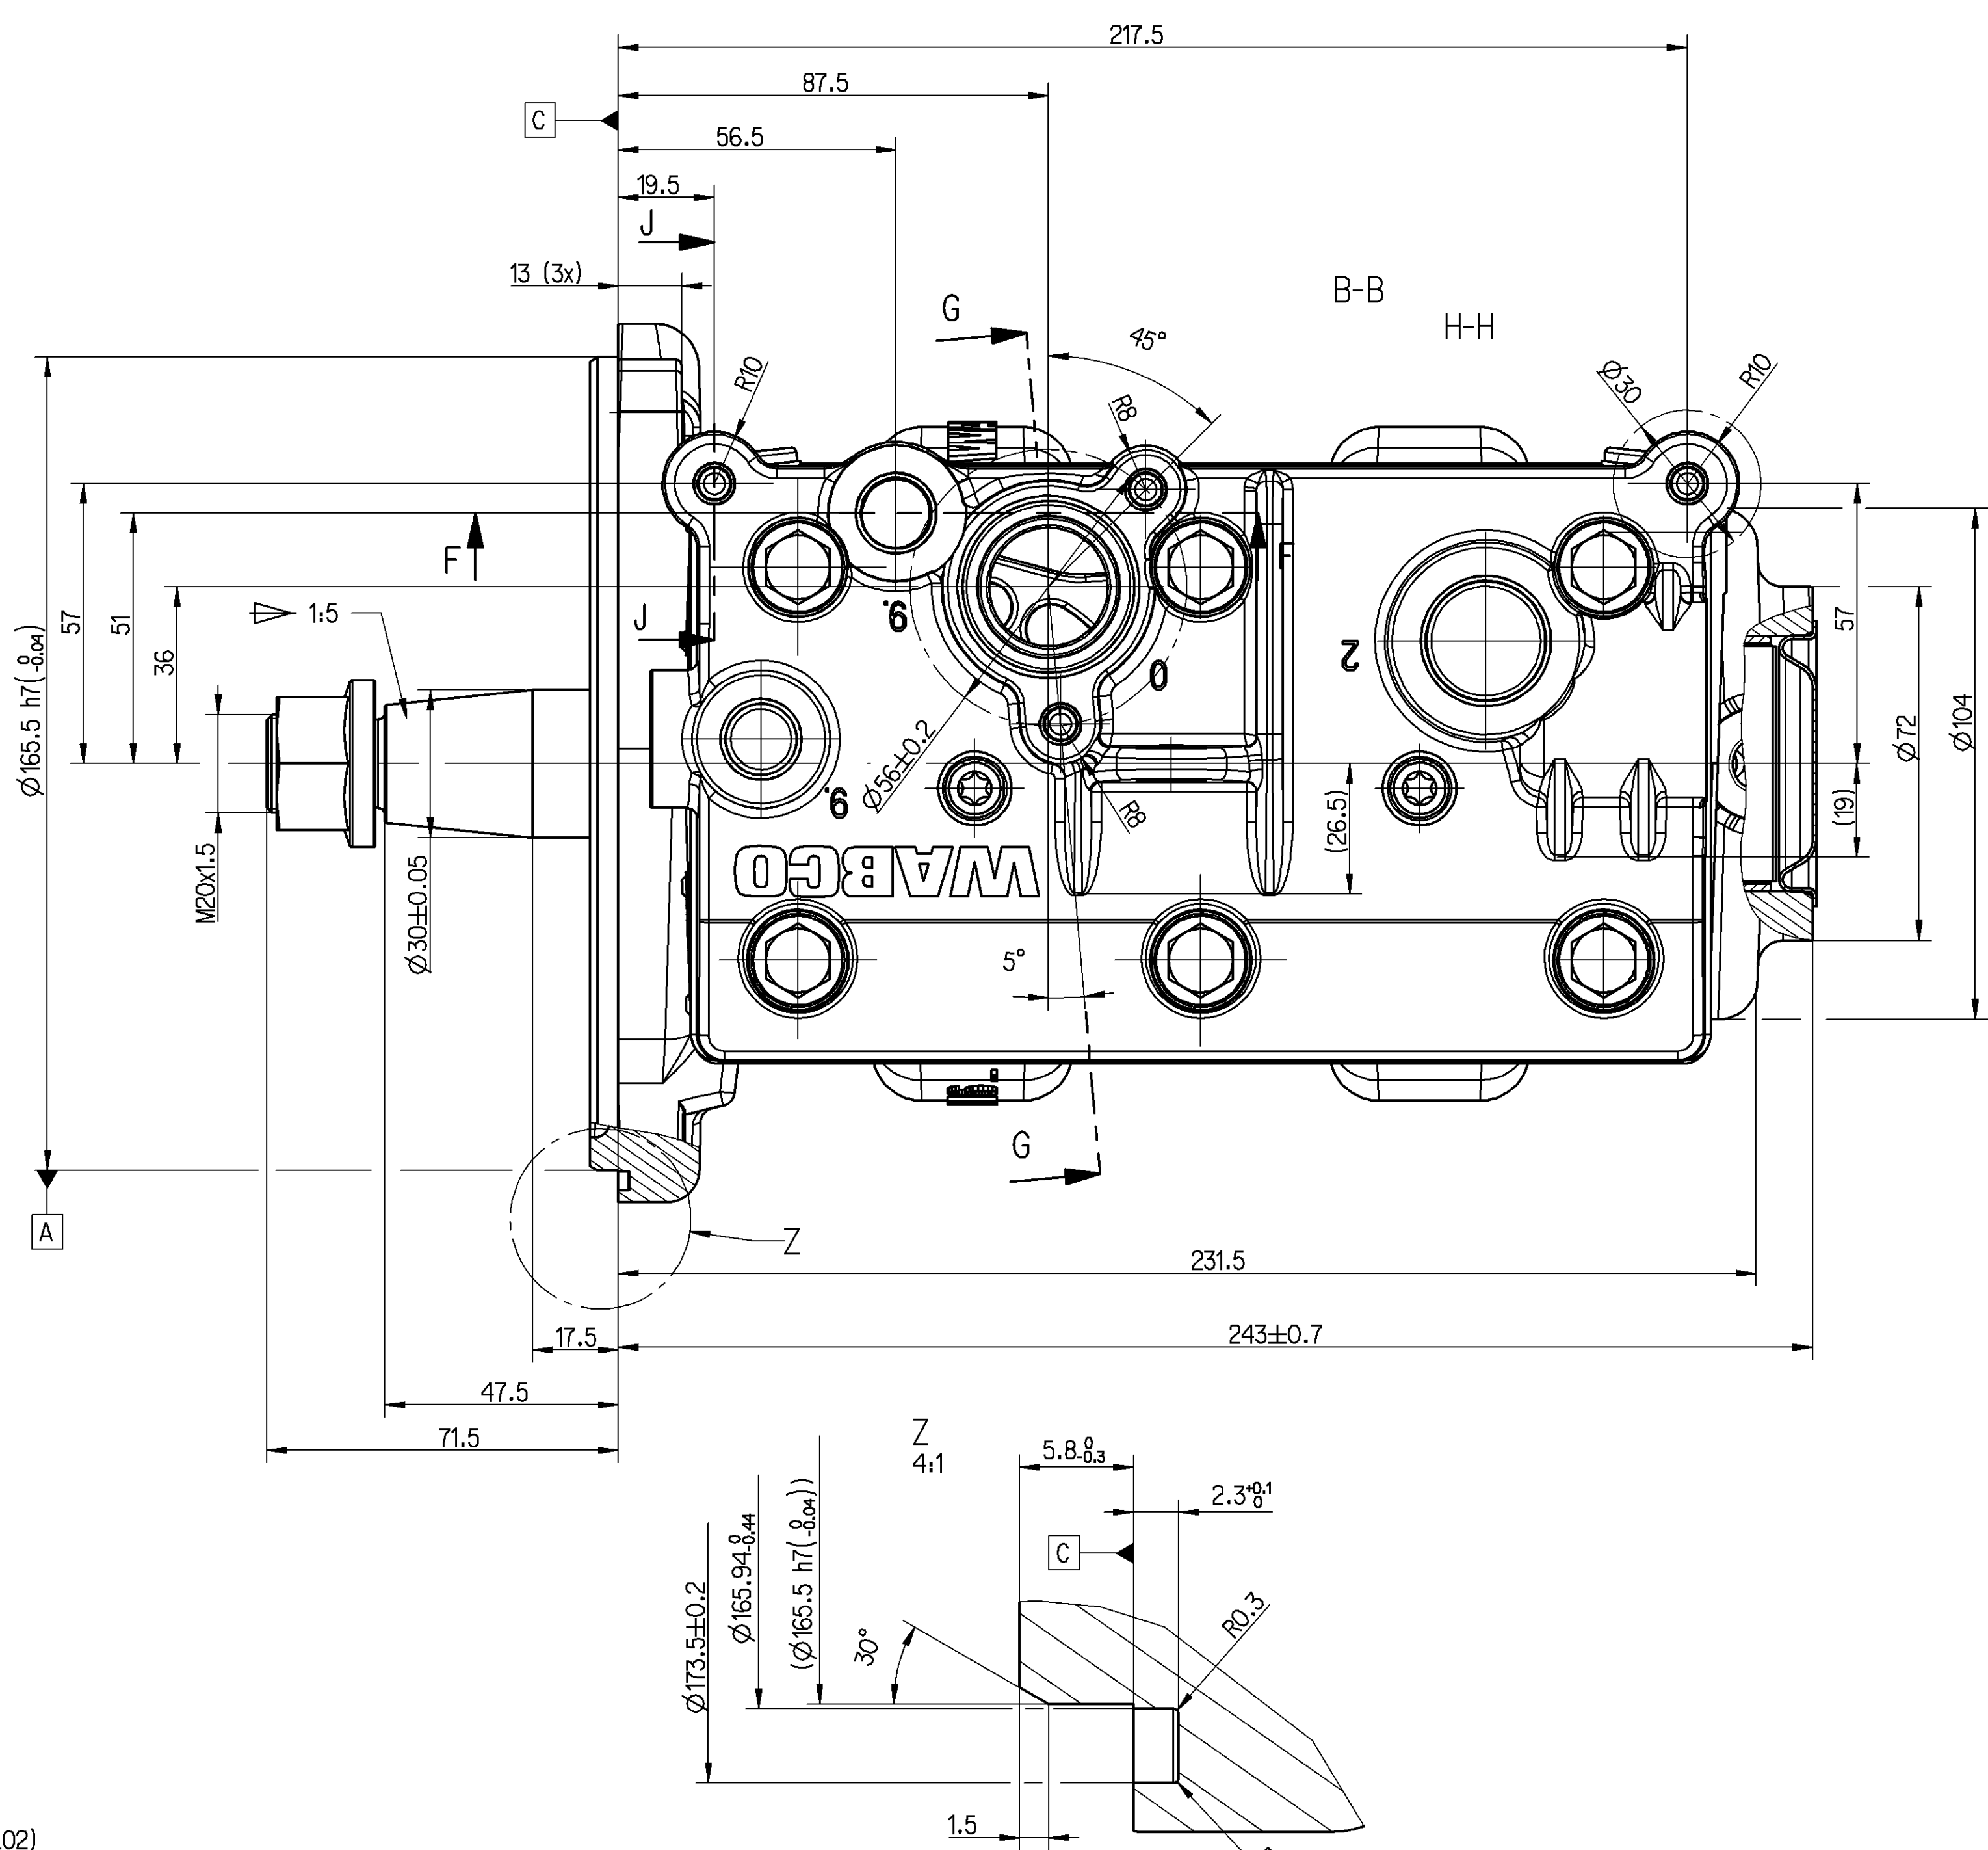
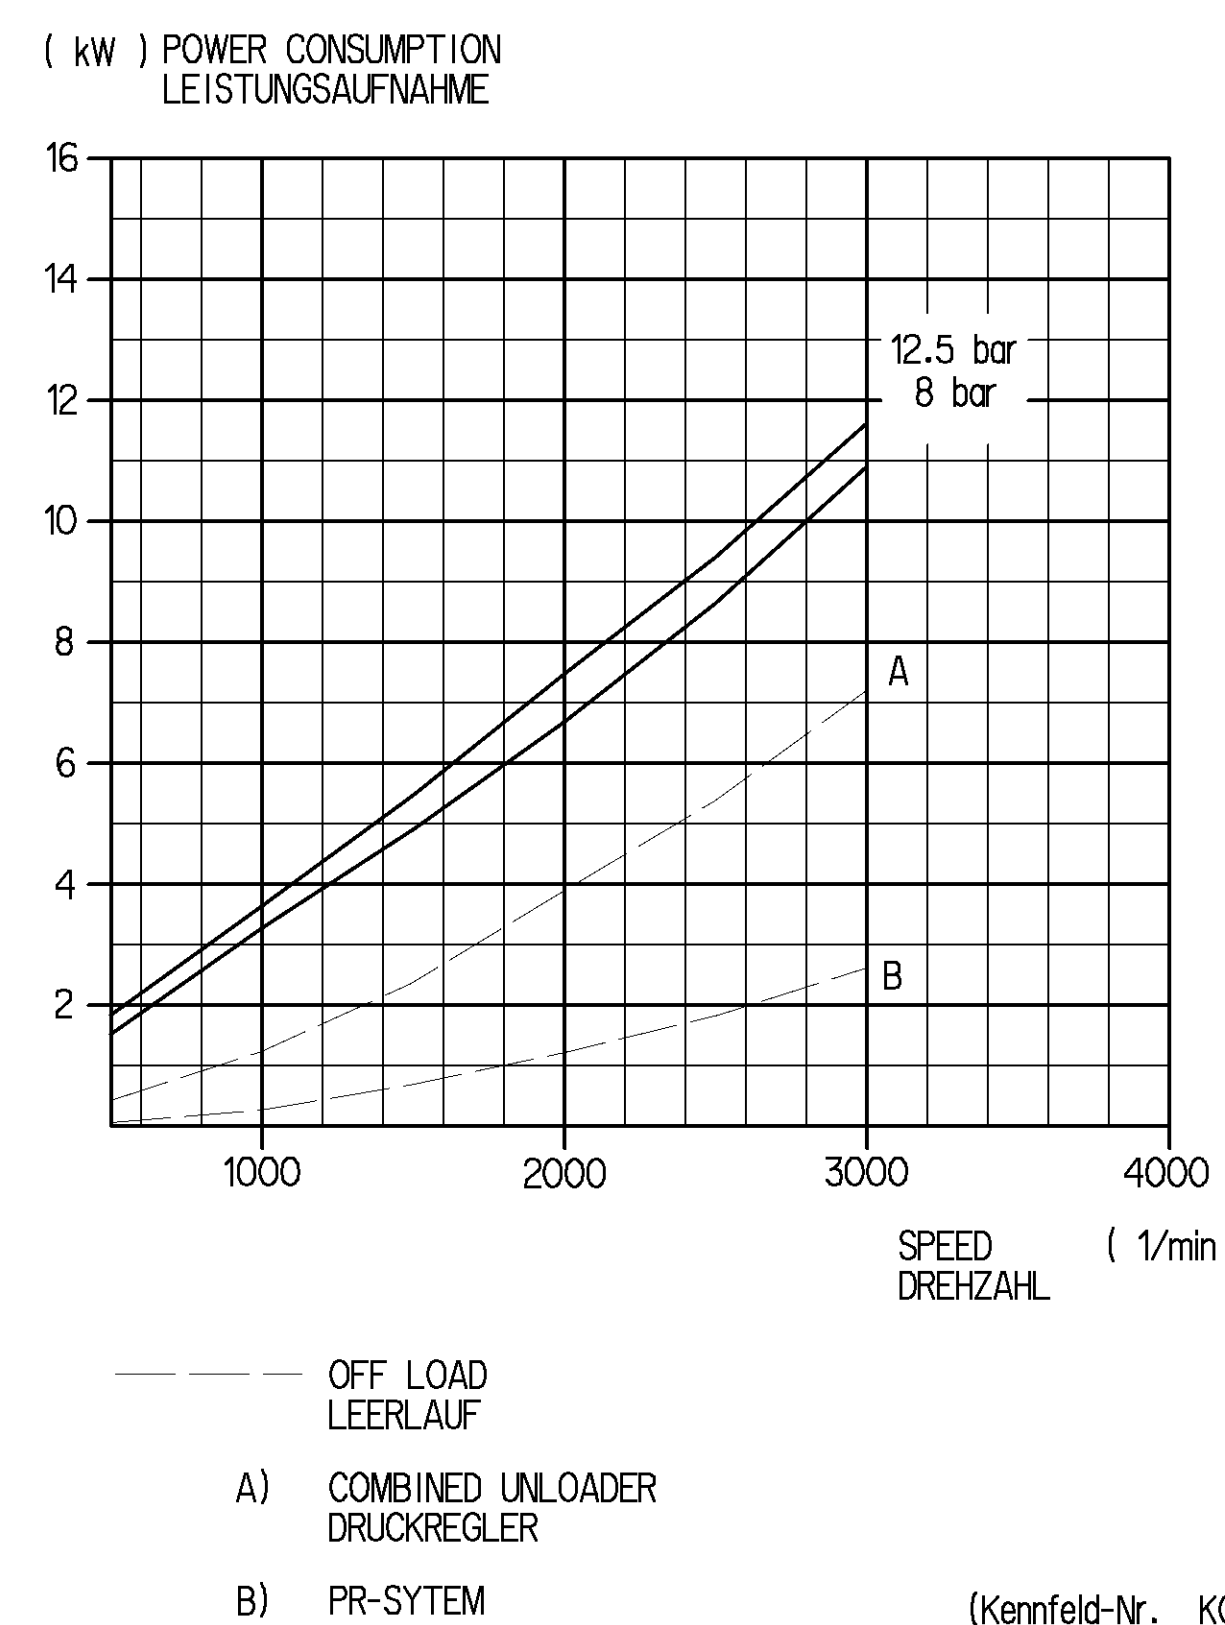


0	SUCTION PORT SAUGANSCHLUSS	
2	DISCHARGE PORT DRUCKANSCHLUSS	M <= 150 Nm
4	GOVERNOR PORT STEUERANSCHLUSS	M <= 25 Nm
8.1	OIL SUPPLY DRUCKÖLANSCHLUSS	M <= 25 Nm
8.2	OIL DRAIN ÖLRÜCKLAUF	
9	COOLANT CONNECTION KÜHLMITTELANSCHLUSS	M <= 35 Nm



General Specification: JSD-304-0		Copyright WABCO *		 TWIN CYLINDER COMPRESSOR ZWILN ZYLINDER KOMPRESSOR COMPRESSORE BICILINDRICO COMPRESSORE BICILINDRICO	
Further Technical Data: 912 512 000 0		Date: _____ Signature: _____			
Doc. Codes: 435 Sheet: 1 To 5		☐ Drawn ☒ GROSSKOPF ☐ Checked ☐ Hohlzeit			
Compressor Tolerances JSD-291		2005-04-27		2005-05-02	
Range of nominal dimensions (± mm)		Scale		Product Identification No.	
Class 1 $\begin{matrix} > 50 & > 180 \\ < 50 & < 180 \end{matrix}$ $\begin{matrix} < 400 & < 400 \end{matrix}$		Class 2 $\begin{matrix} > 50 & > 180 \\ < 50 & < 180 \end{matrix}$ $\begin{matrix} < 400 & < 400 \end{matrix}$		Class 3 $\begin{matrix} > 50 & > 180 \\ < 50 & < 180 \end{matrix}$ $\begin{matrix} < 400 & < 400 \end{matrix}$	
Fine 0.5 1.0 2.0 3.0 4.0 Medium $\times$ 0.5 1.0 2.0 3.0 Coarse 2.0 3.0 5.0 6.0 8.0		Holes 20,139 11 21		912 512 004 7 Doc. Code Language Sheet 605 en/GB 1/1	
DCH-No. Rev. Date Date of Revision		Tapped Holes: class JSD-352 1) Tolerance Class Applied Chromatized		Size 1/16 A 0 515  Function Code C&S System Prod.Type Pro.D. Replacement for 912 512 002	