
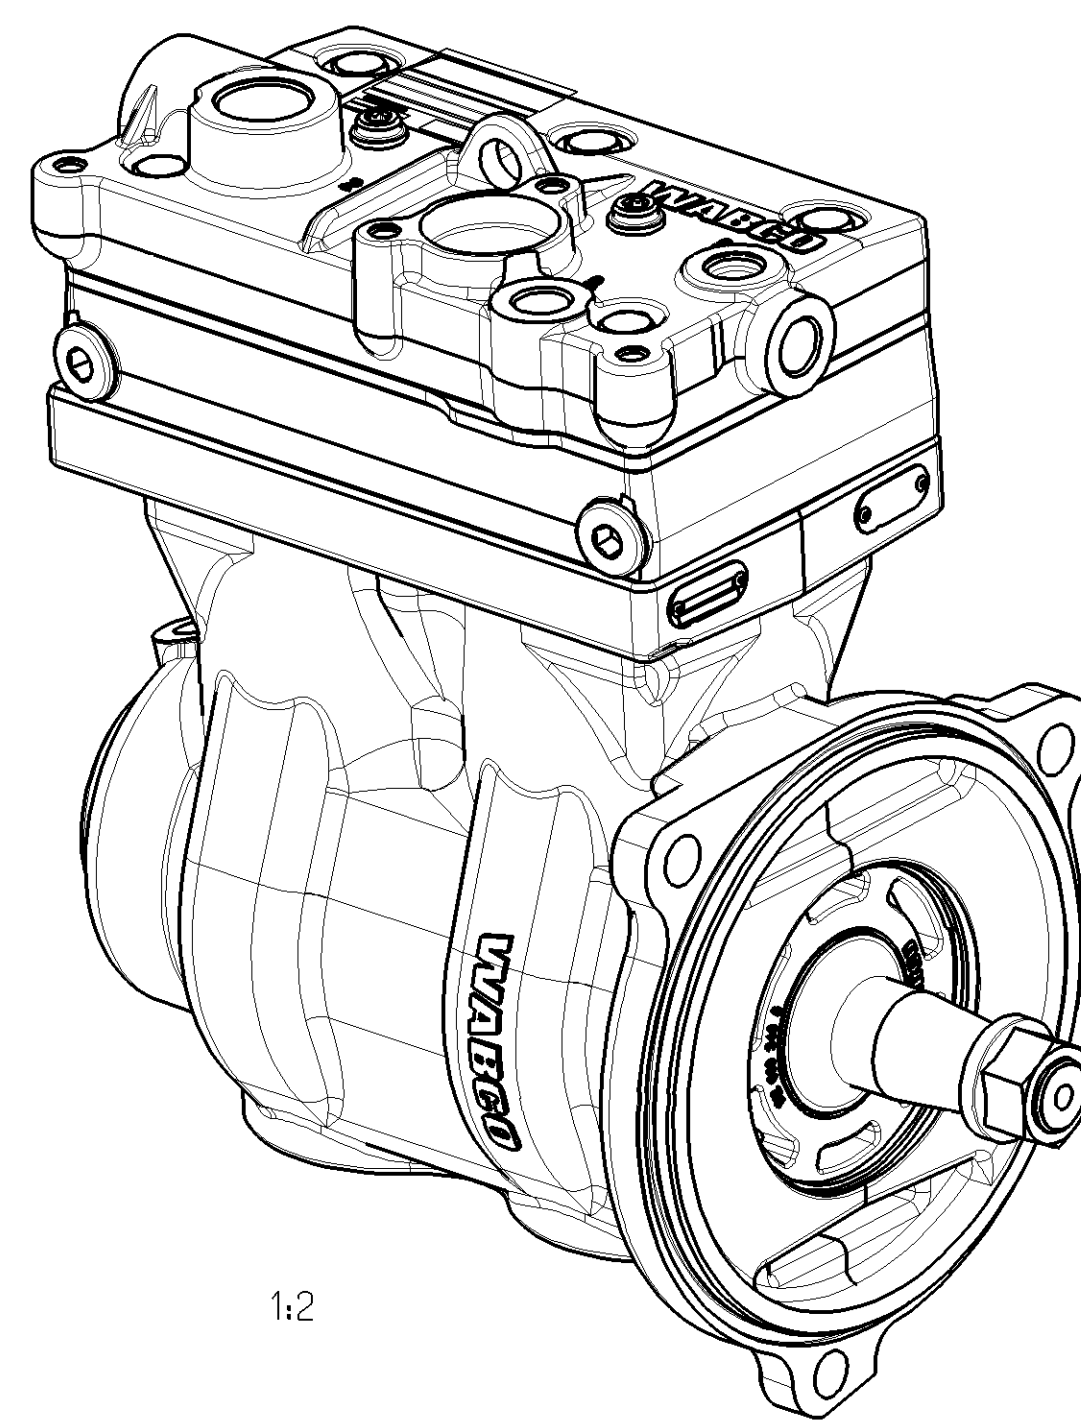
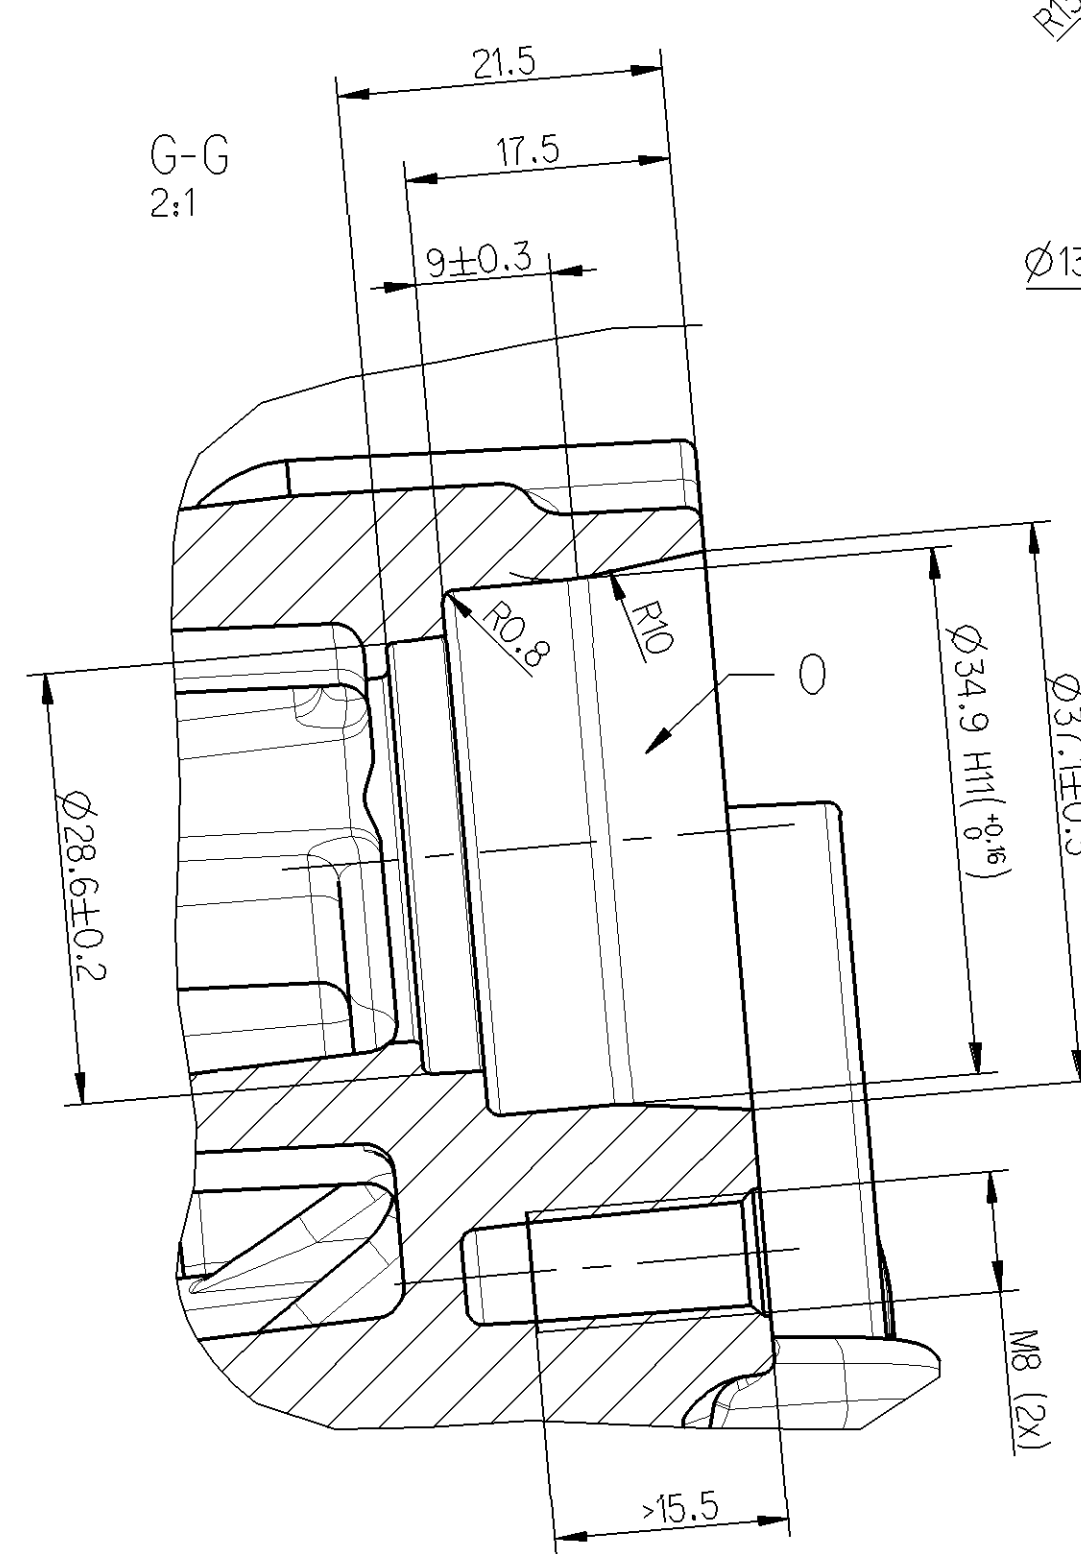
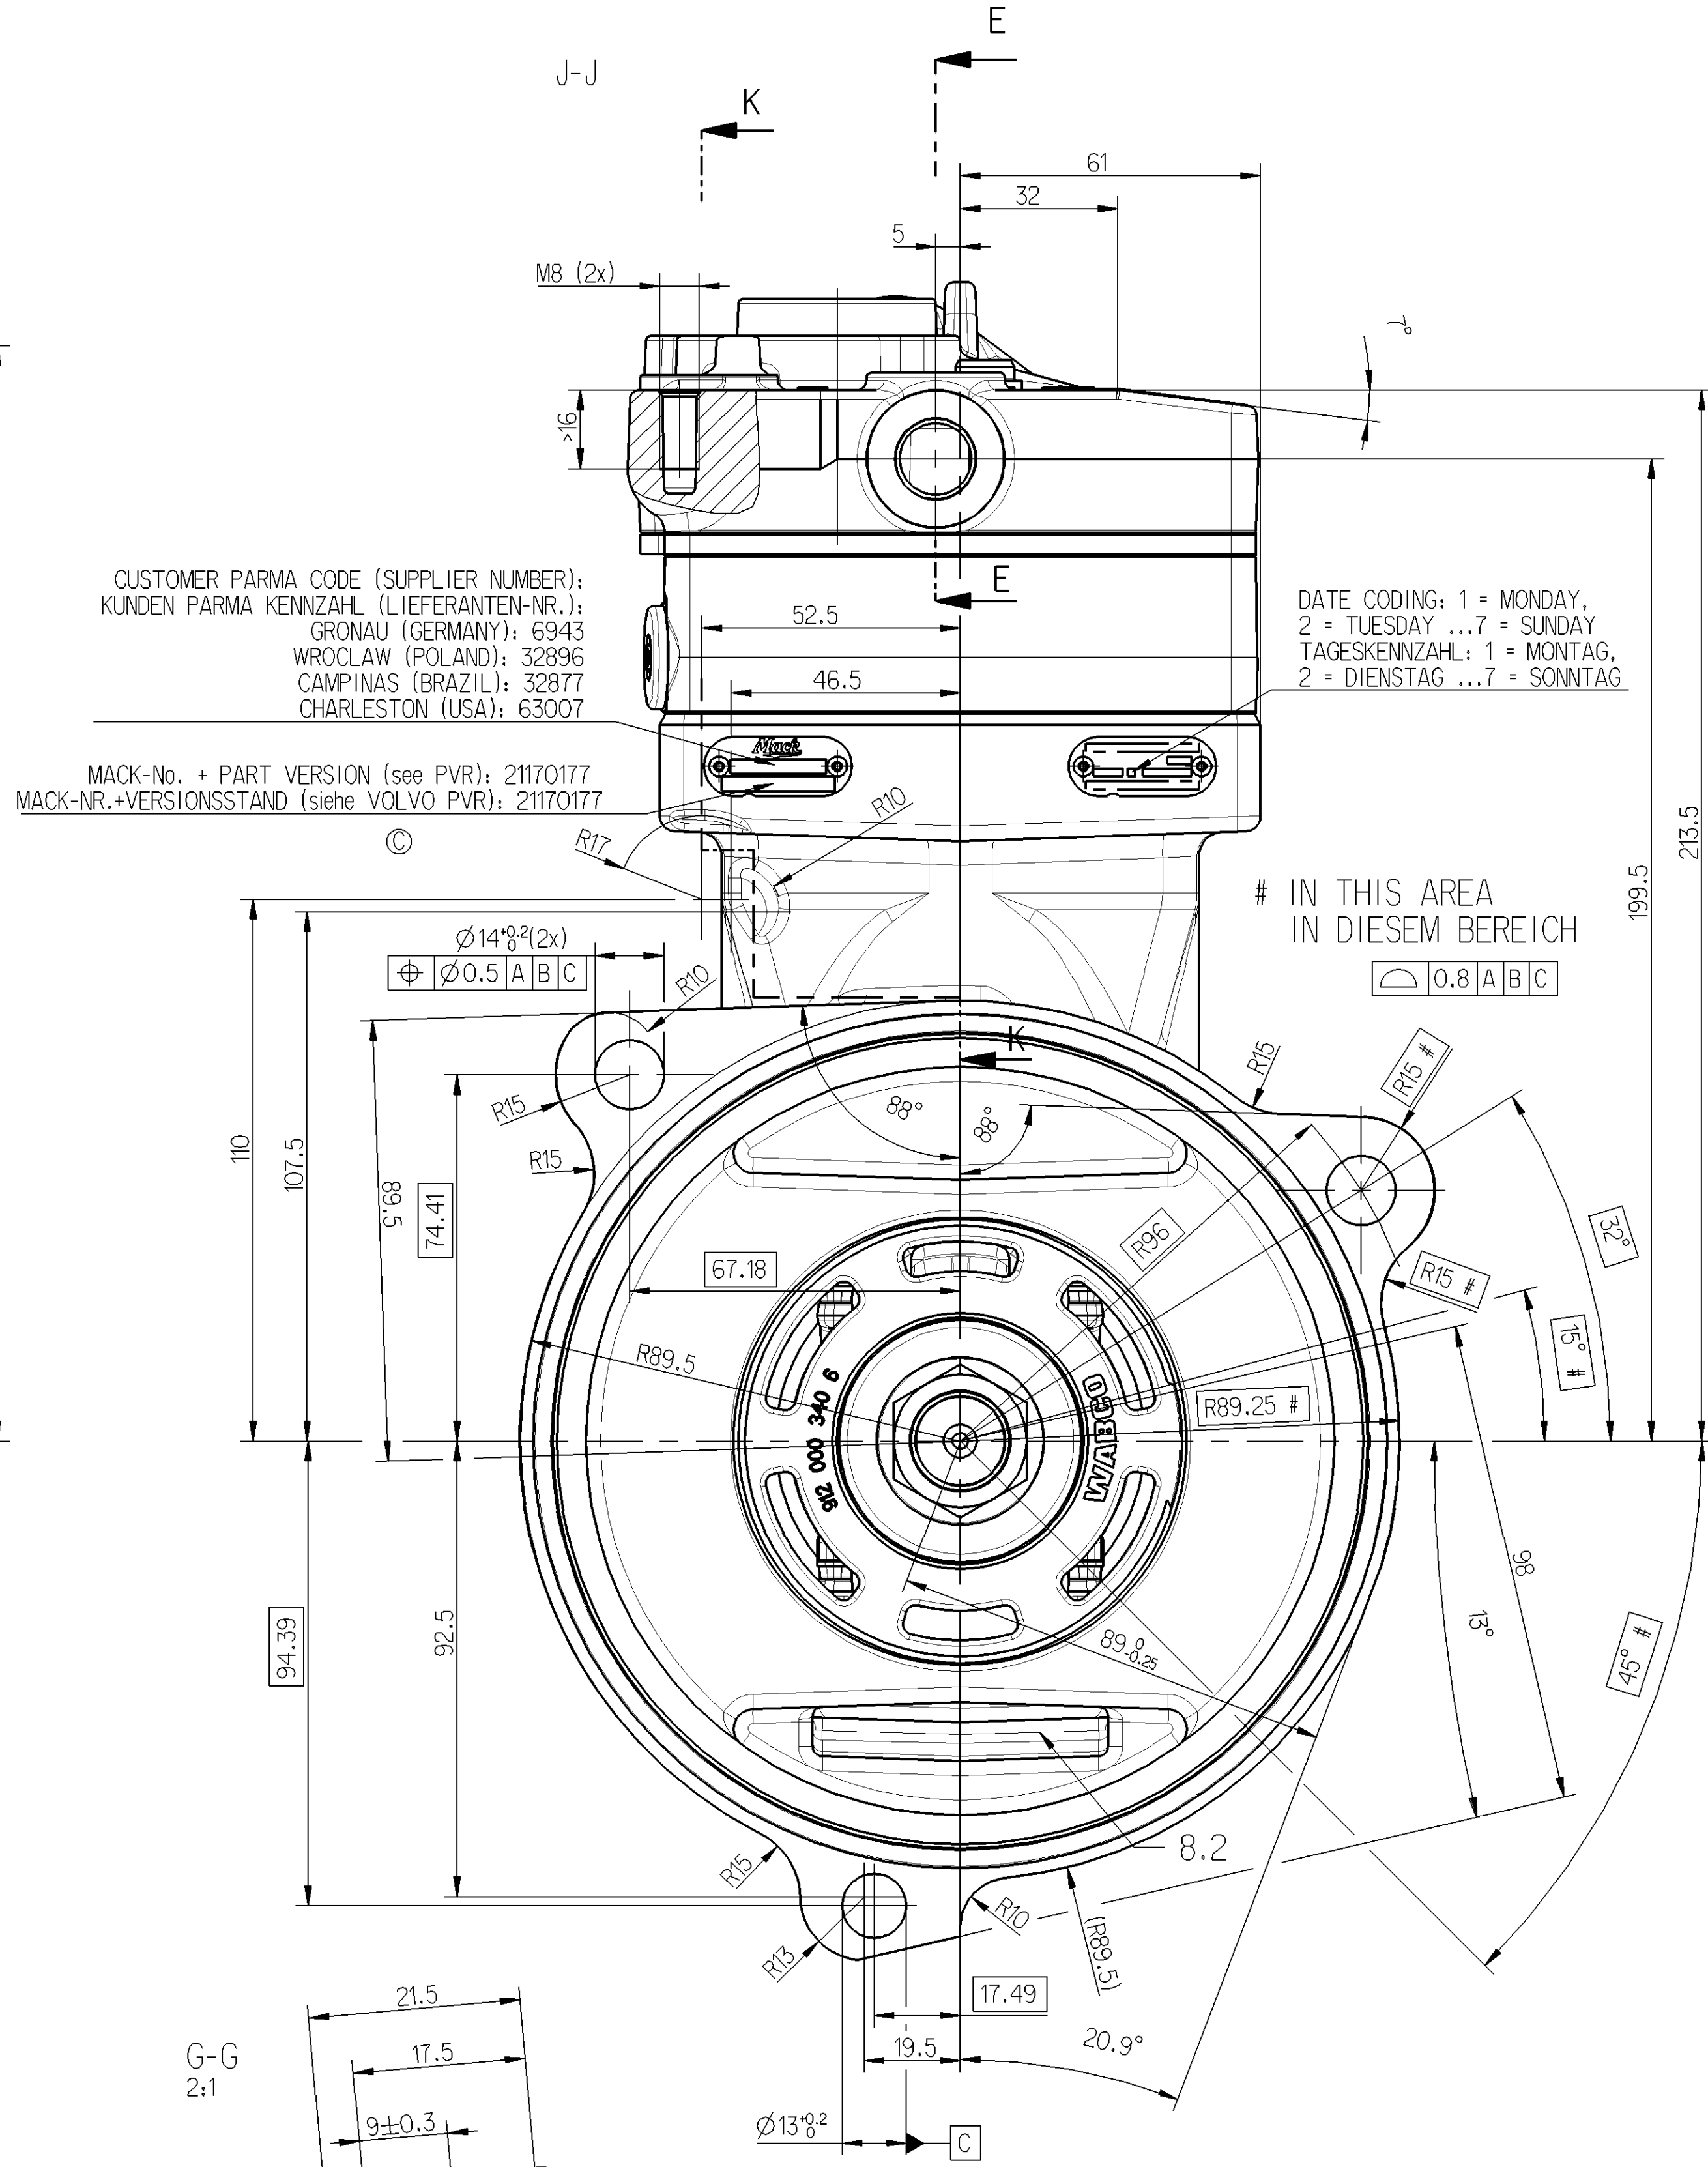
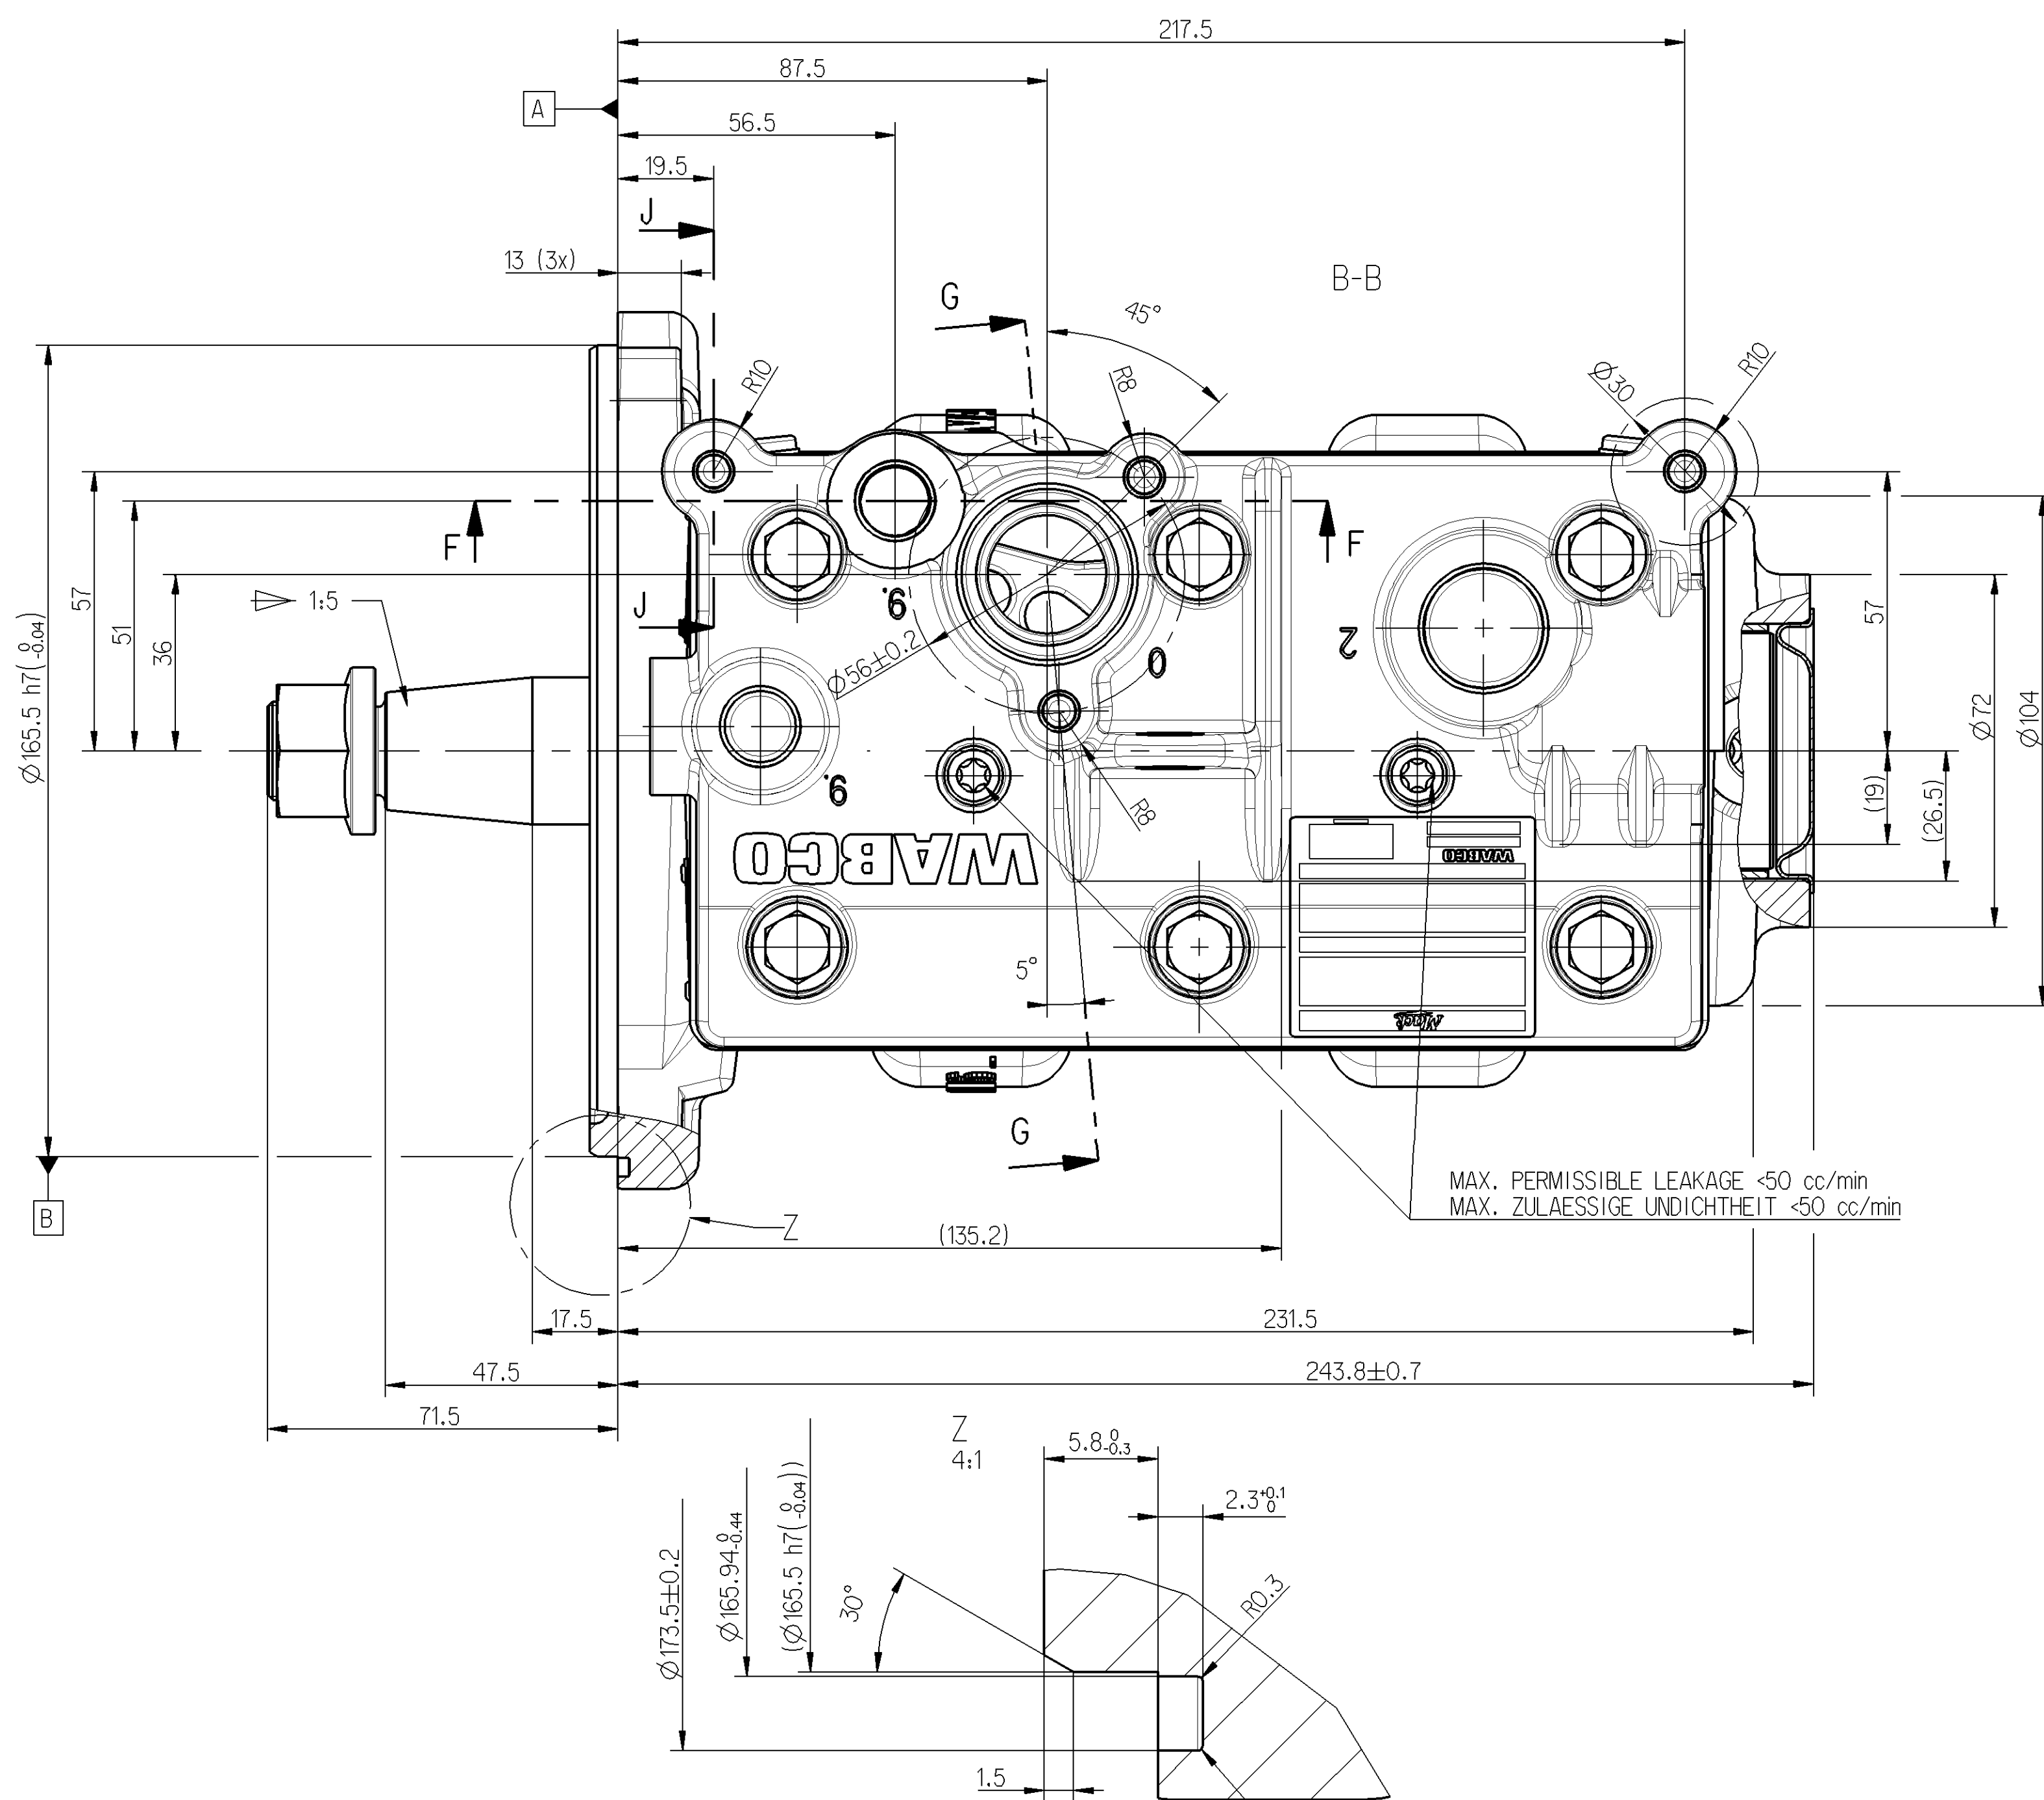
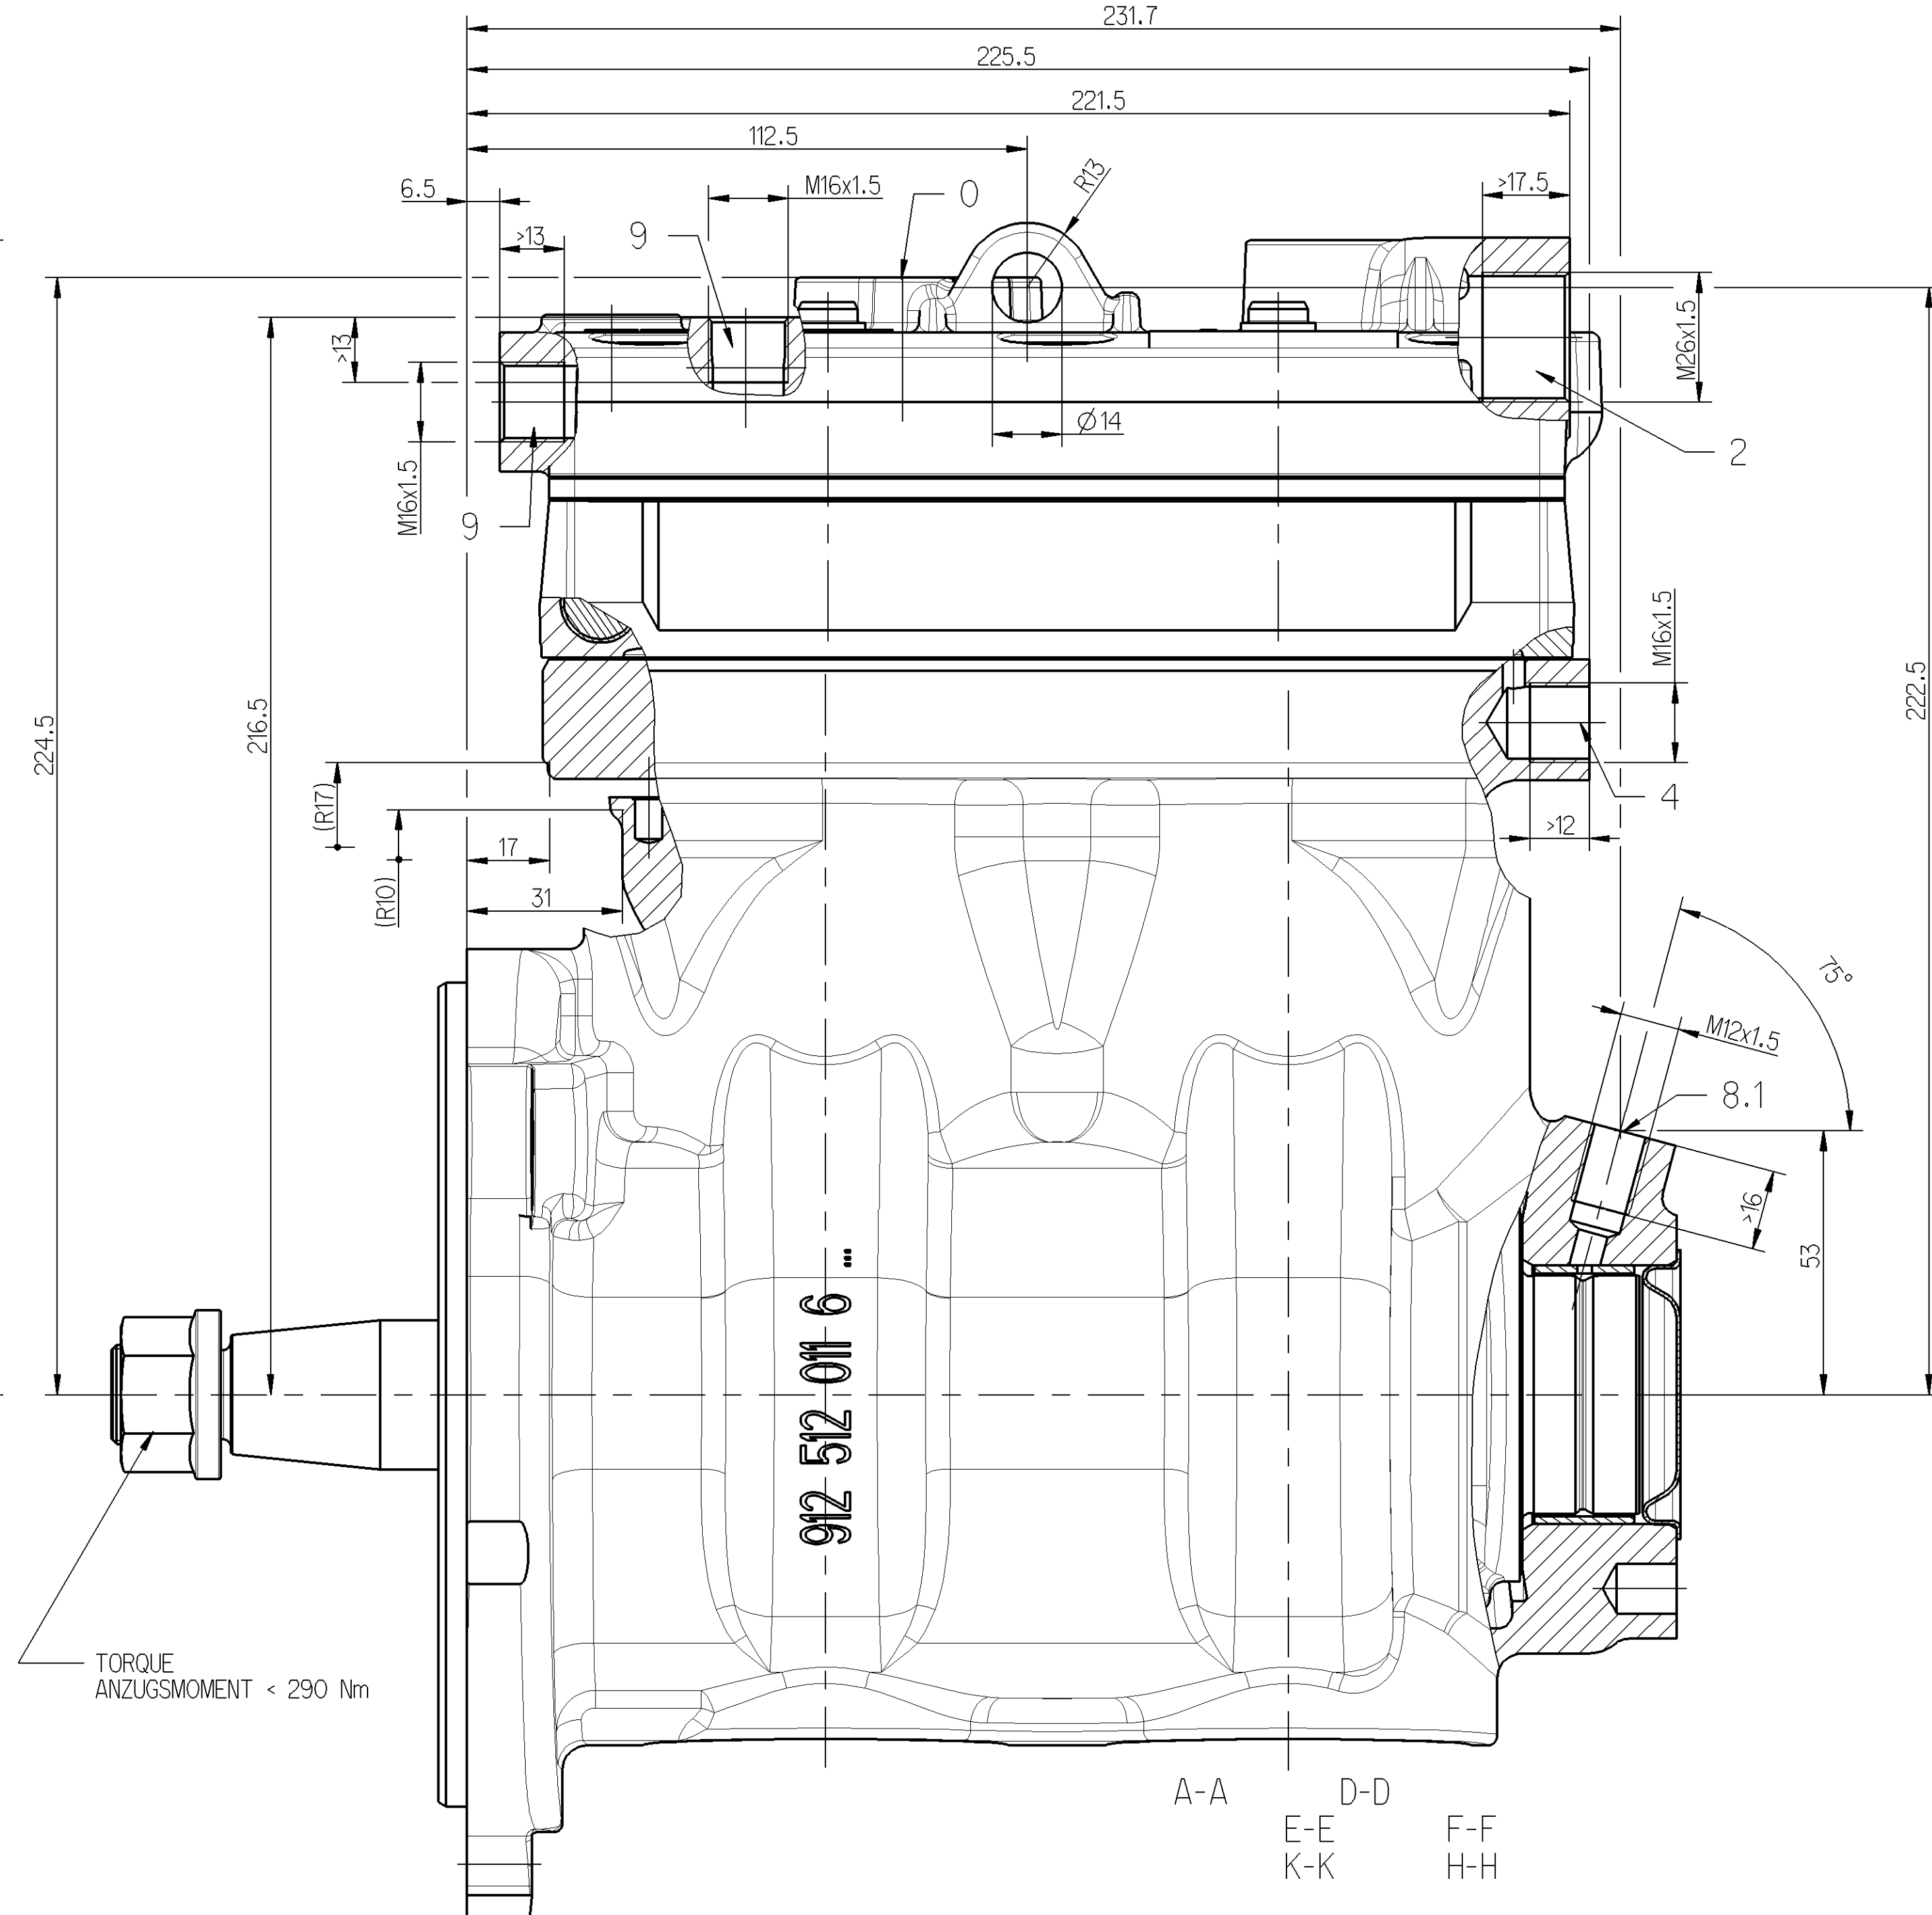
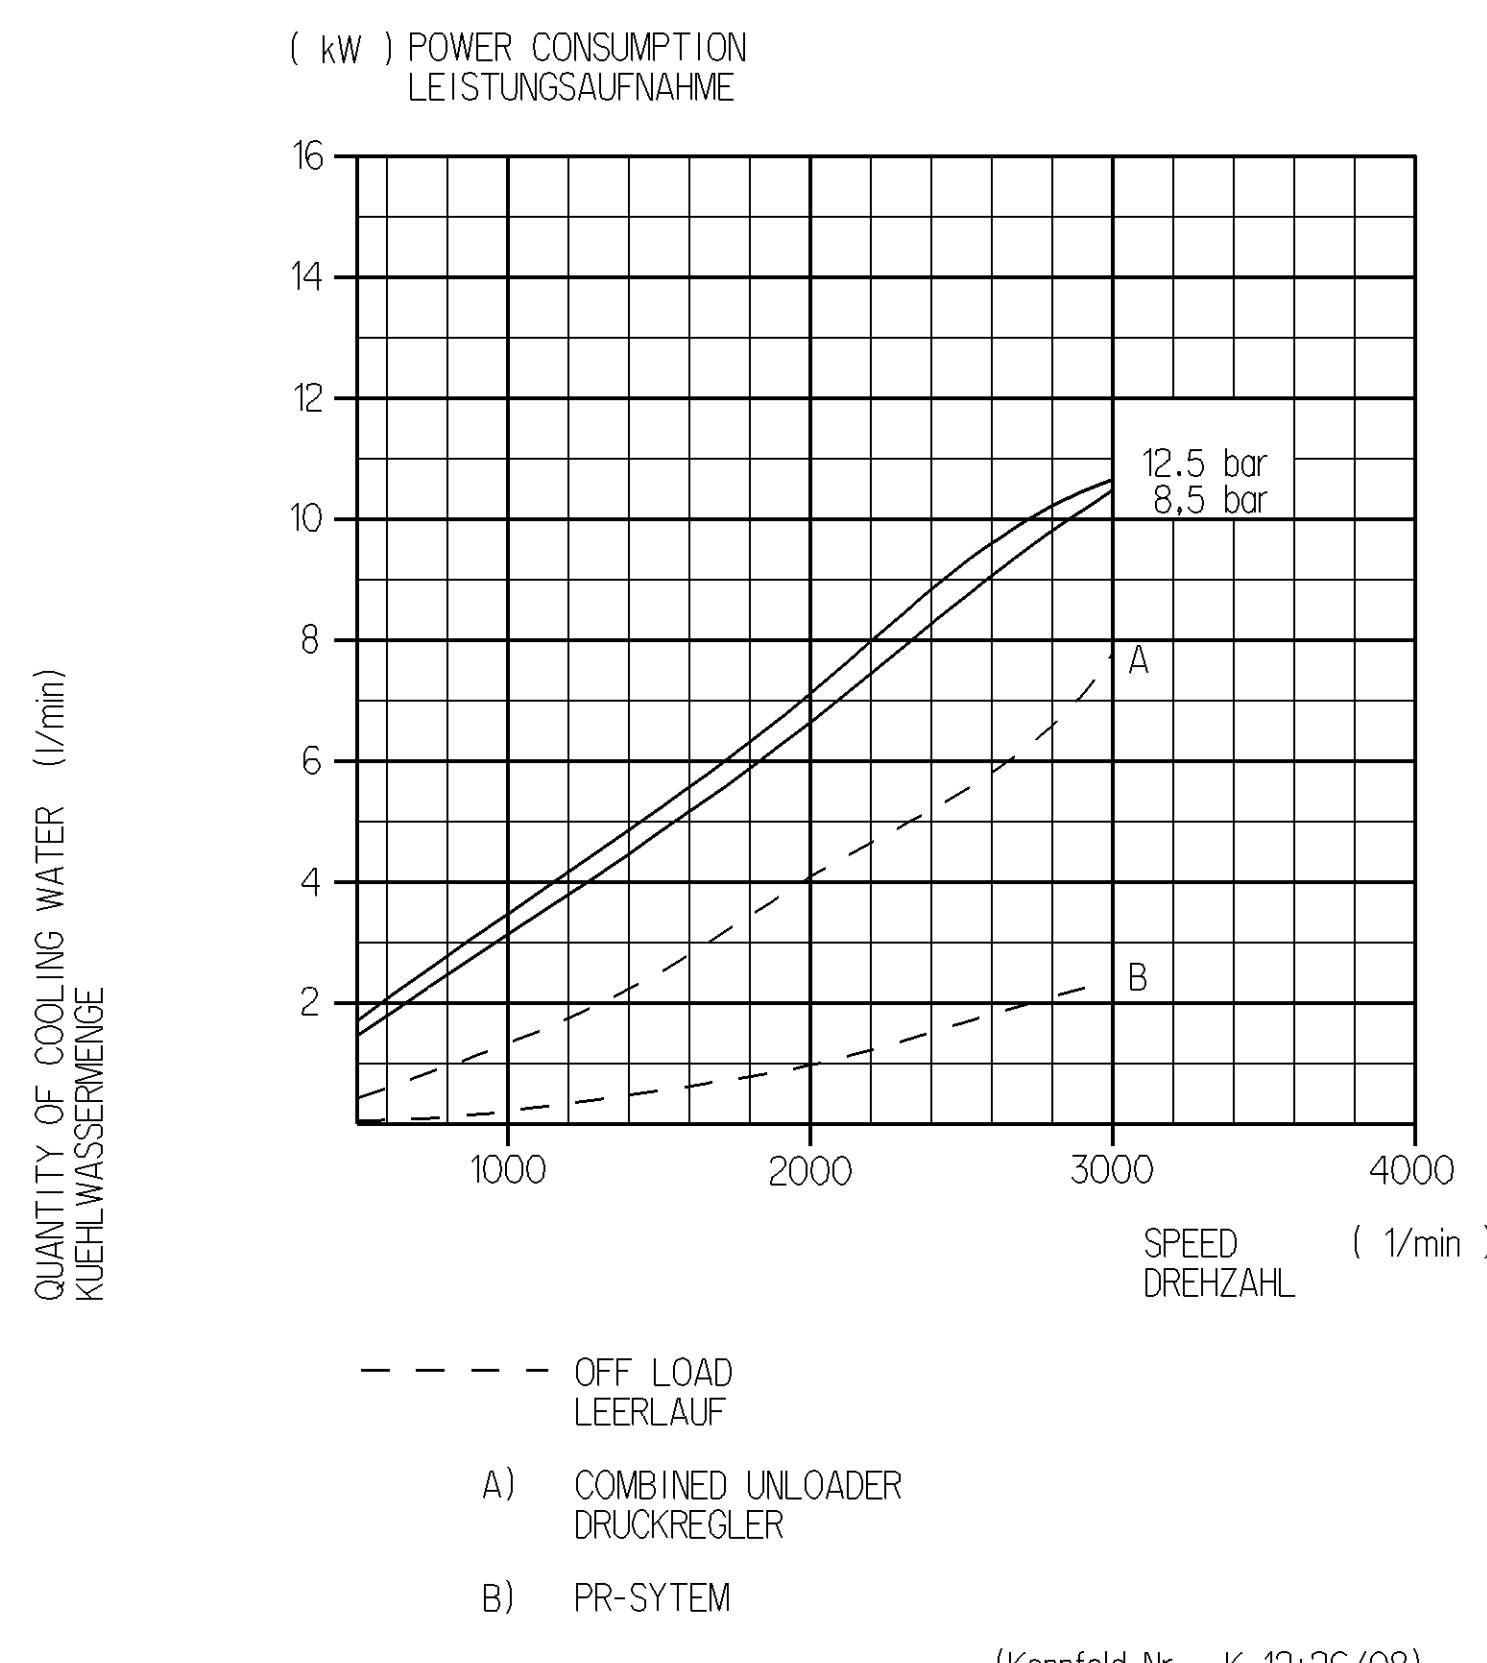



0	SUCTION PORT SAUGANSCHLUSS	
2	DISCHARGE PORT DRUCKANSCHLUSS	M <= 150 Nm
4	GOVERNOR PORT STEUERANSCHLUSS	M <= 25 Nm
8.1	OIL SUPPLY DRUCKÖLANSCHLUSS	M <= 25 Nm
8.2	OIL DRAIN ÖLÖCKLAUF	
9	COOLANT CONNECTION KÜHLMITTELANSCHLUSS	M <= 35 Nm



COMPRESSOR WITH OPTIMIZED PISTON
KOMPRESSOR MIT OPTIMIERTEN KOLBEN

General Specifications		JED-354-000		Copyright WABCO			
Former Technical Data		912 512 008 0		Date: _____ Signature: _____			
Doc. Code: 035		Sheet: _____		2009-06-04 		TWIN CYLINDER COMPRESSOR ZWEIZYLINDER KOMPRESSOR	
General Tolerances JED-201		1 To 7		2009-06-05 			
Range of Nominal Dimensions (mm)		Class 11 ± 50 ± 180 ± 150 ± 400 ± 1000 ± 4000				2009-06-05 	
Minus 0.5 1.0 1.5 2.0 2.5 Plus 0.5 1.0 2.0 3.0 4.0 5.0 6.5		$\pm 3^{\circ}$					
Tapped Holes: class JED-202 11 Tolerance Class Applied: ISO-201		20,139 ± 1.1 Size		912 542 002 0		Date of first issue: 2008-05-08 Date of change: _____	
A O		Pro/Env 		829 kg 12260		005 DE 1/1	
				Reuse C 5010		Replacement by: _____	