

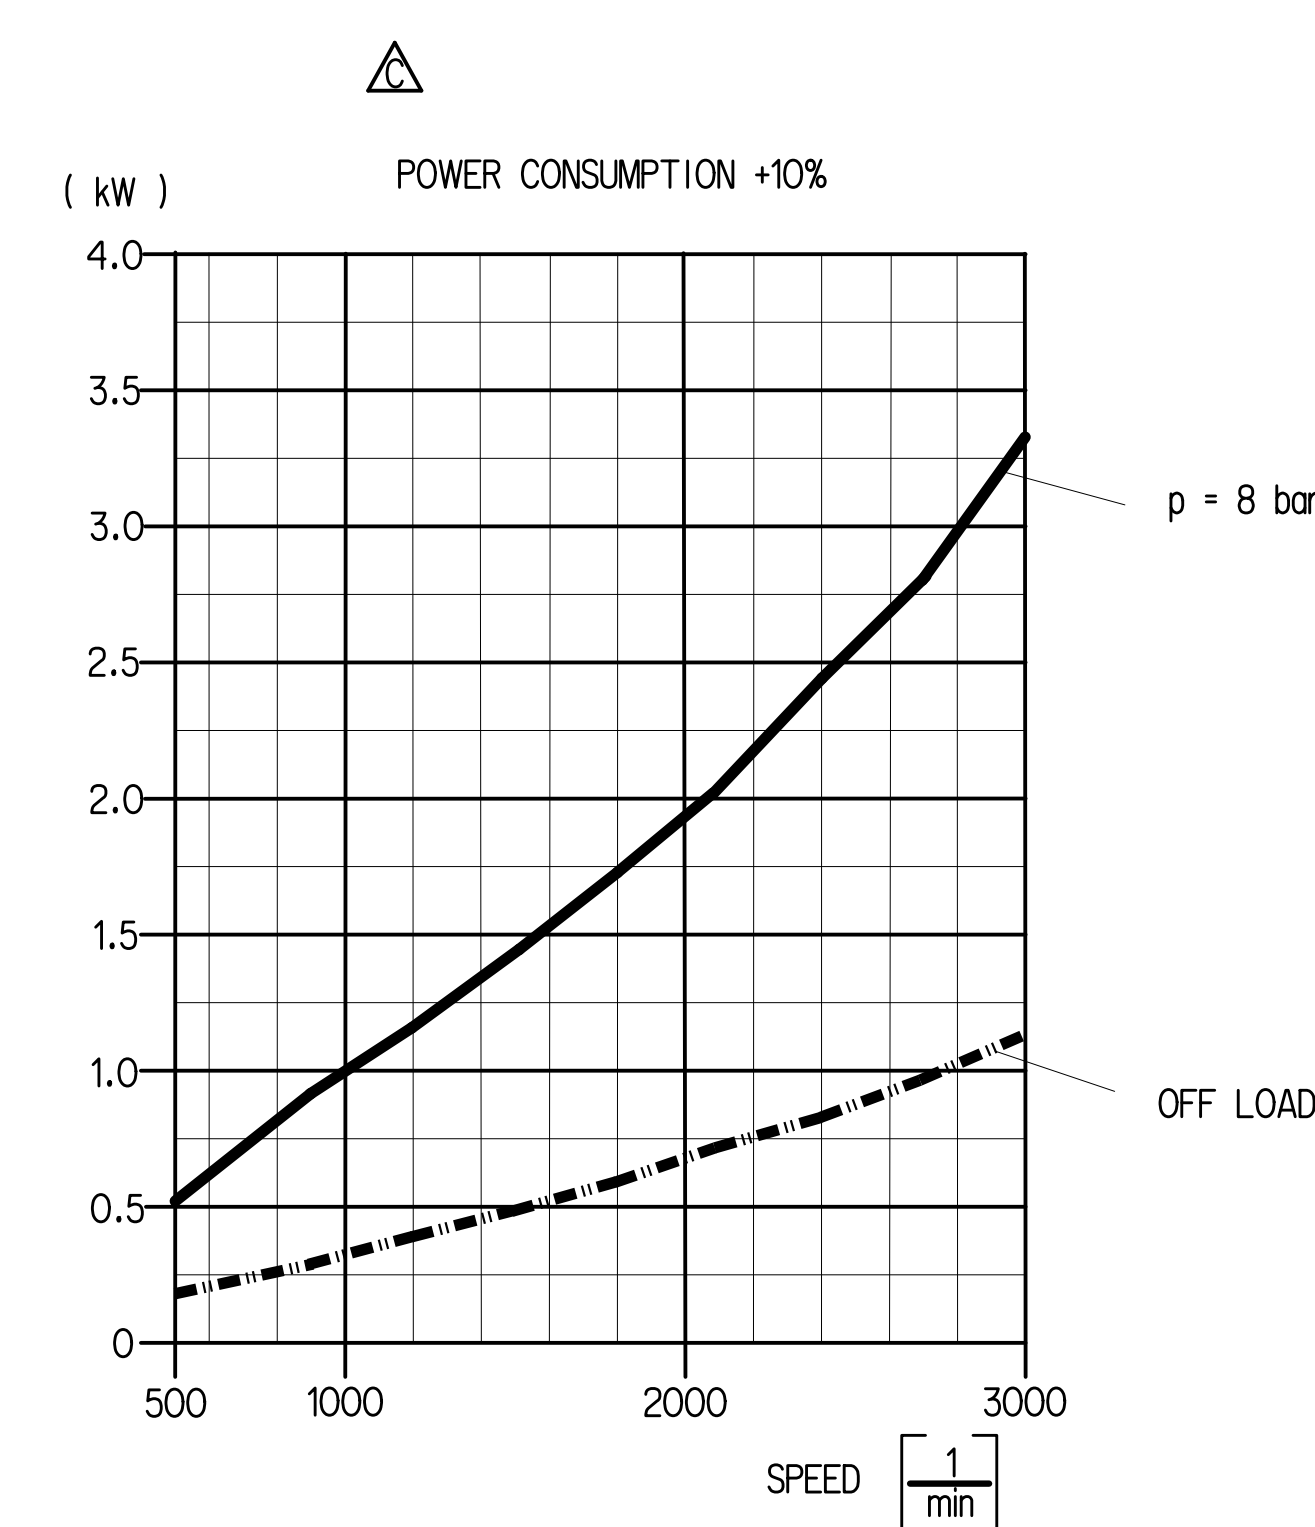
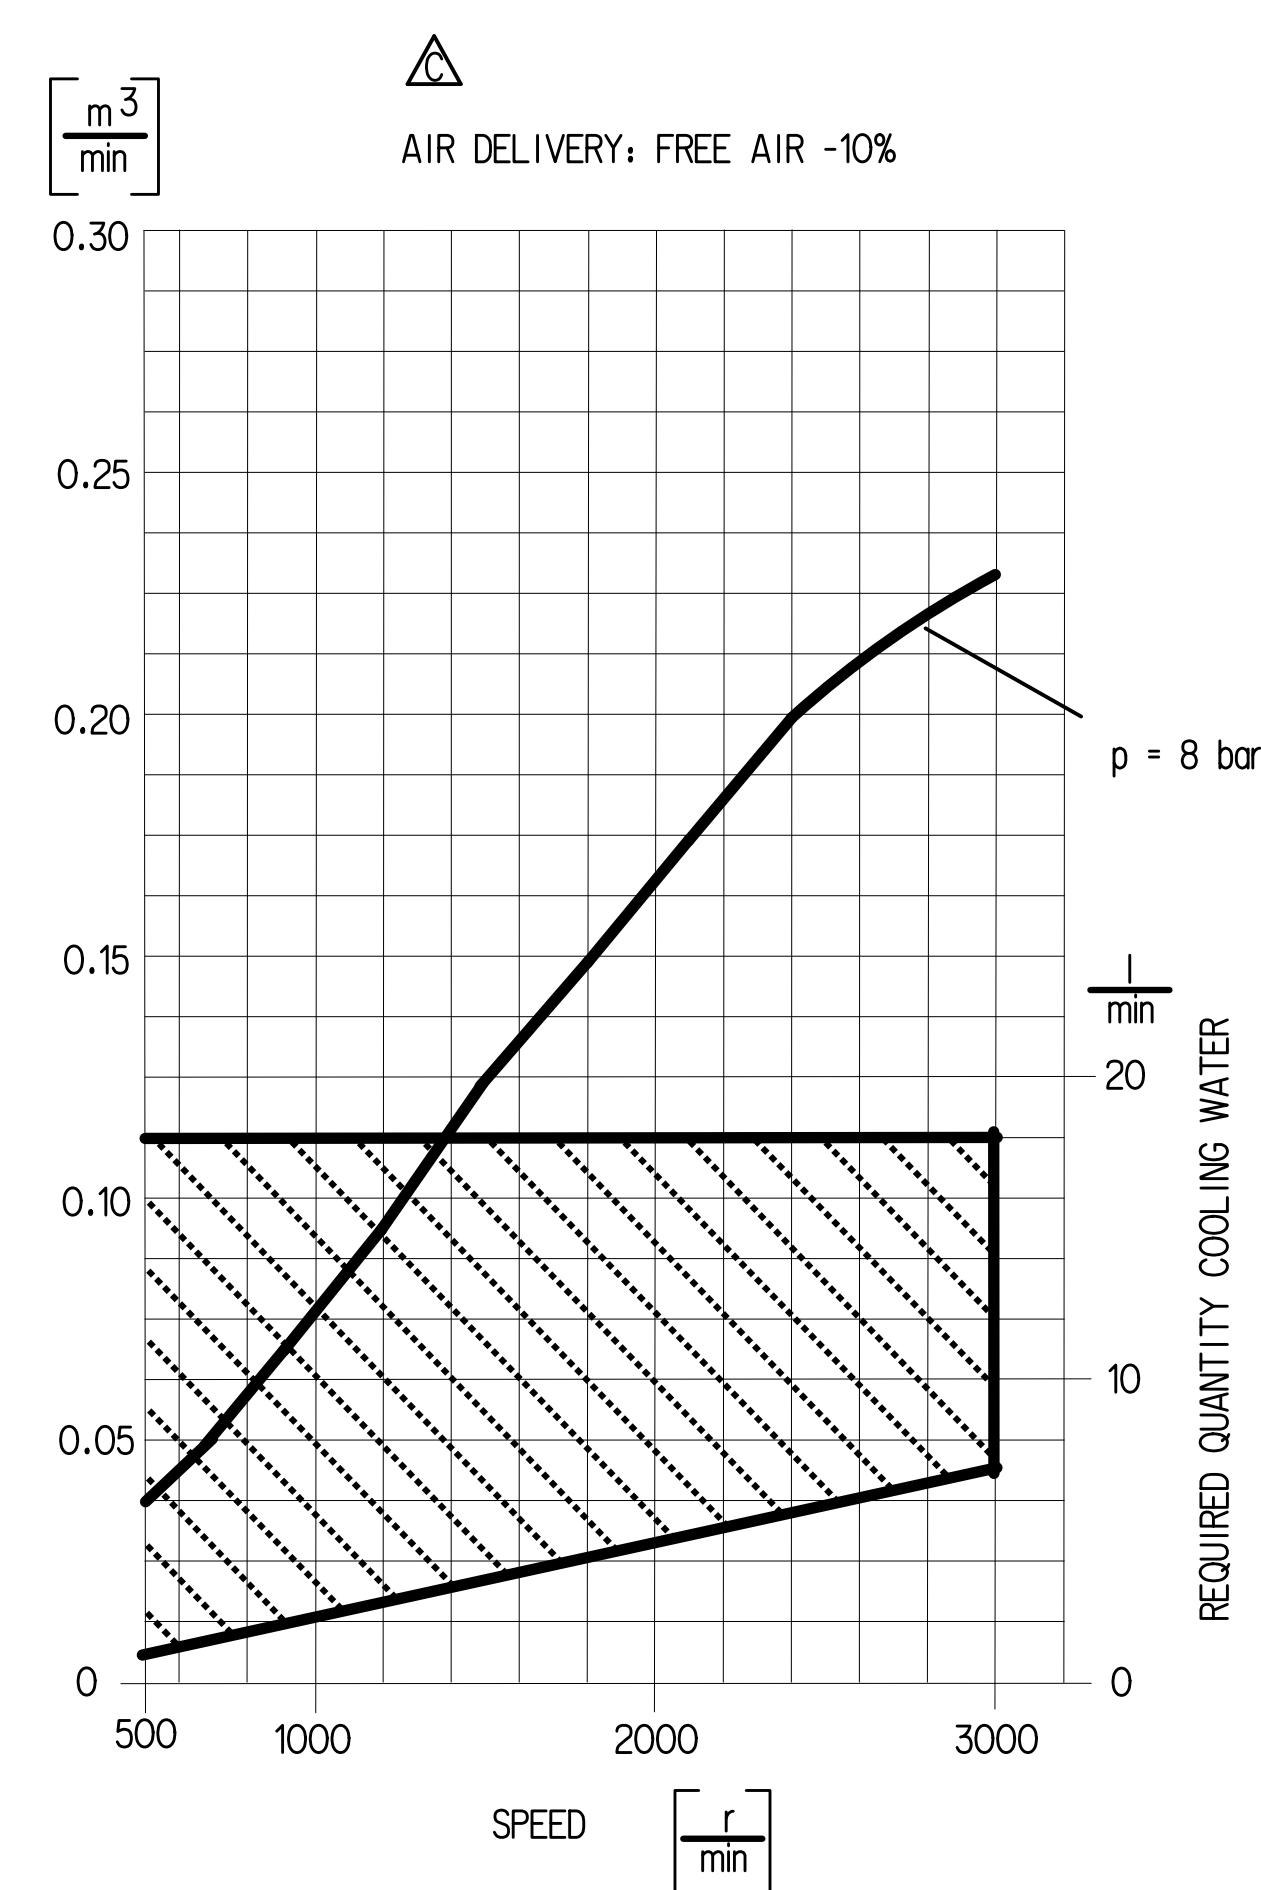
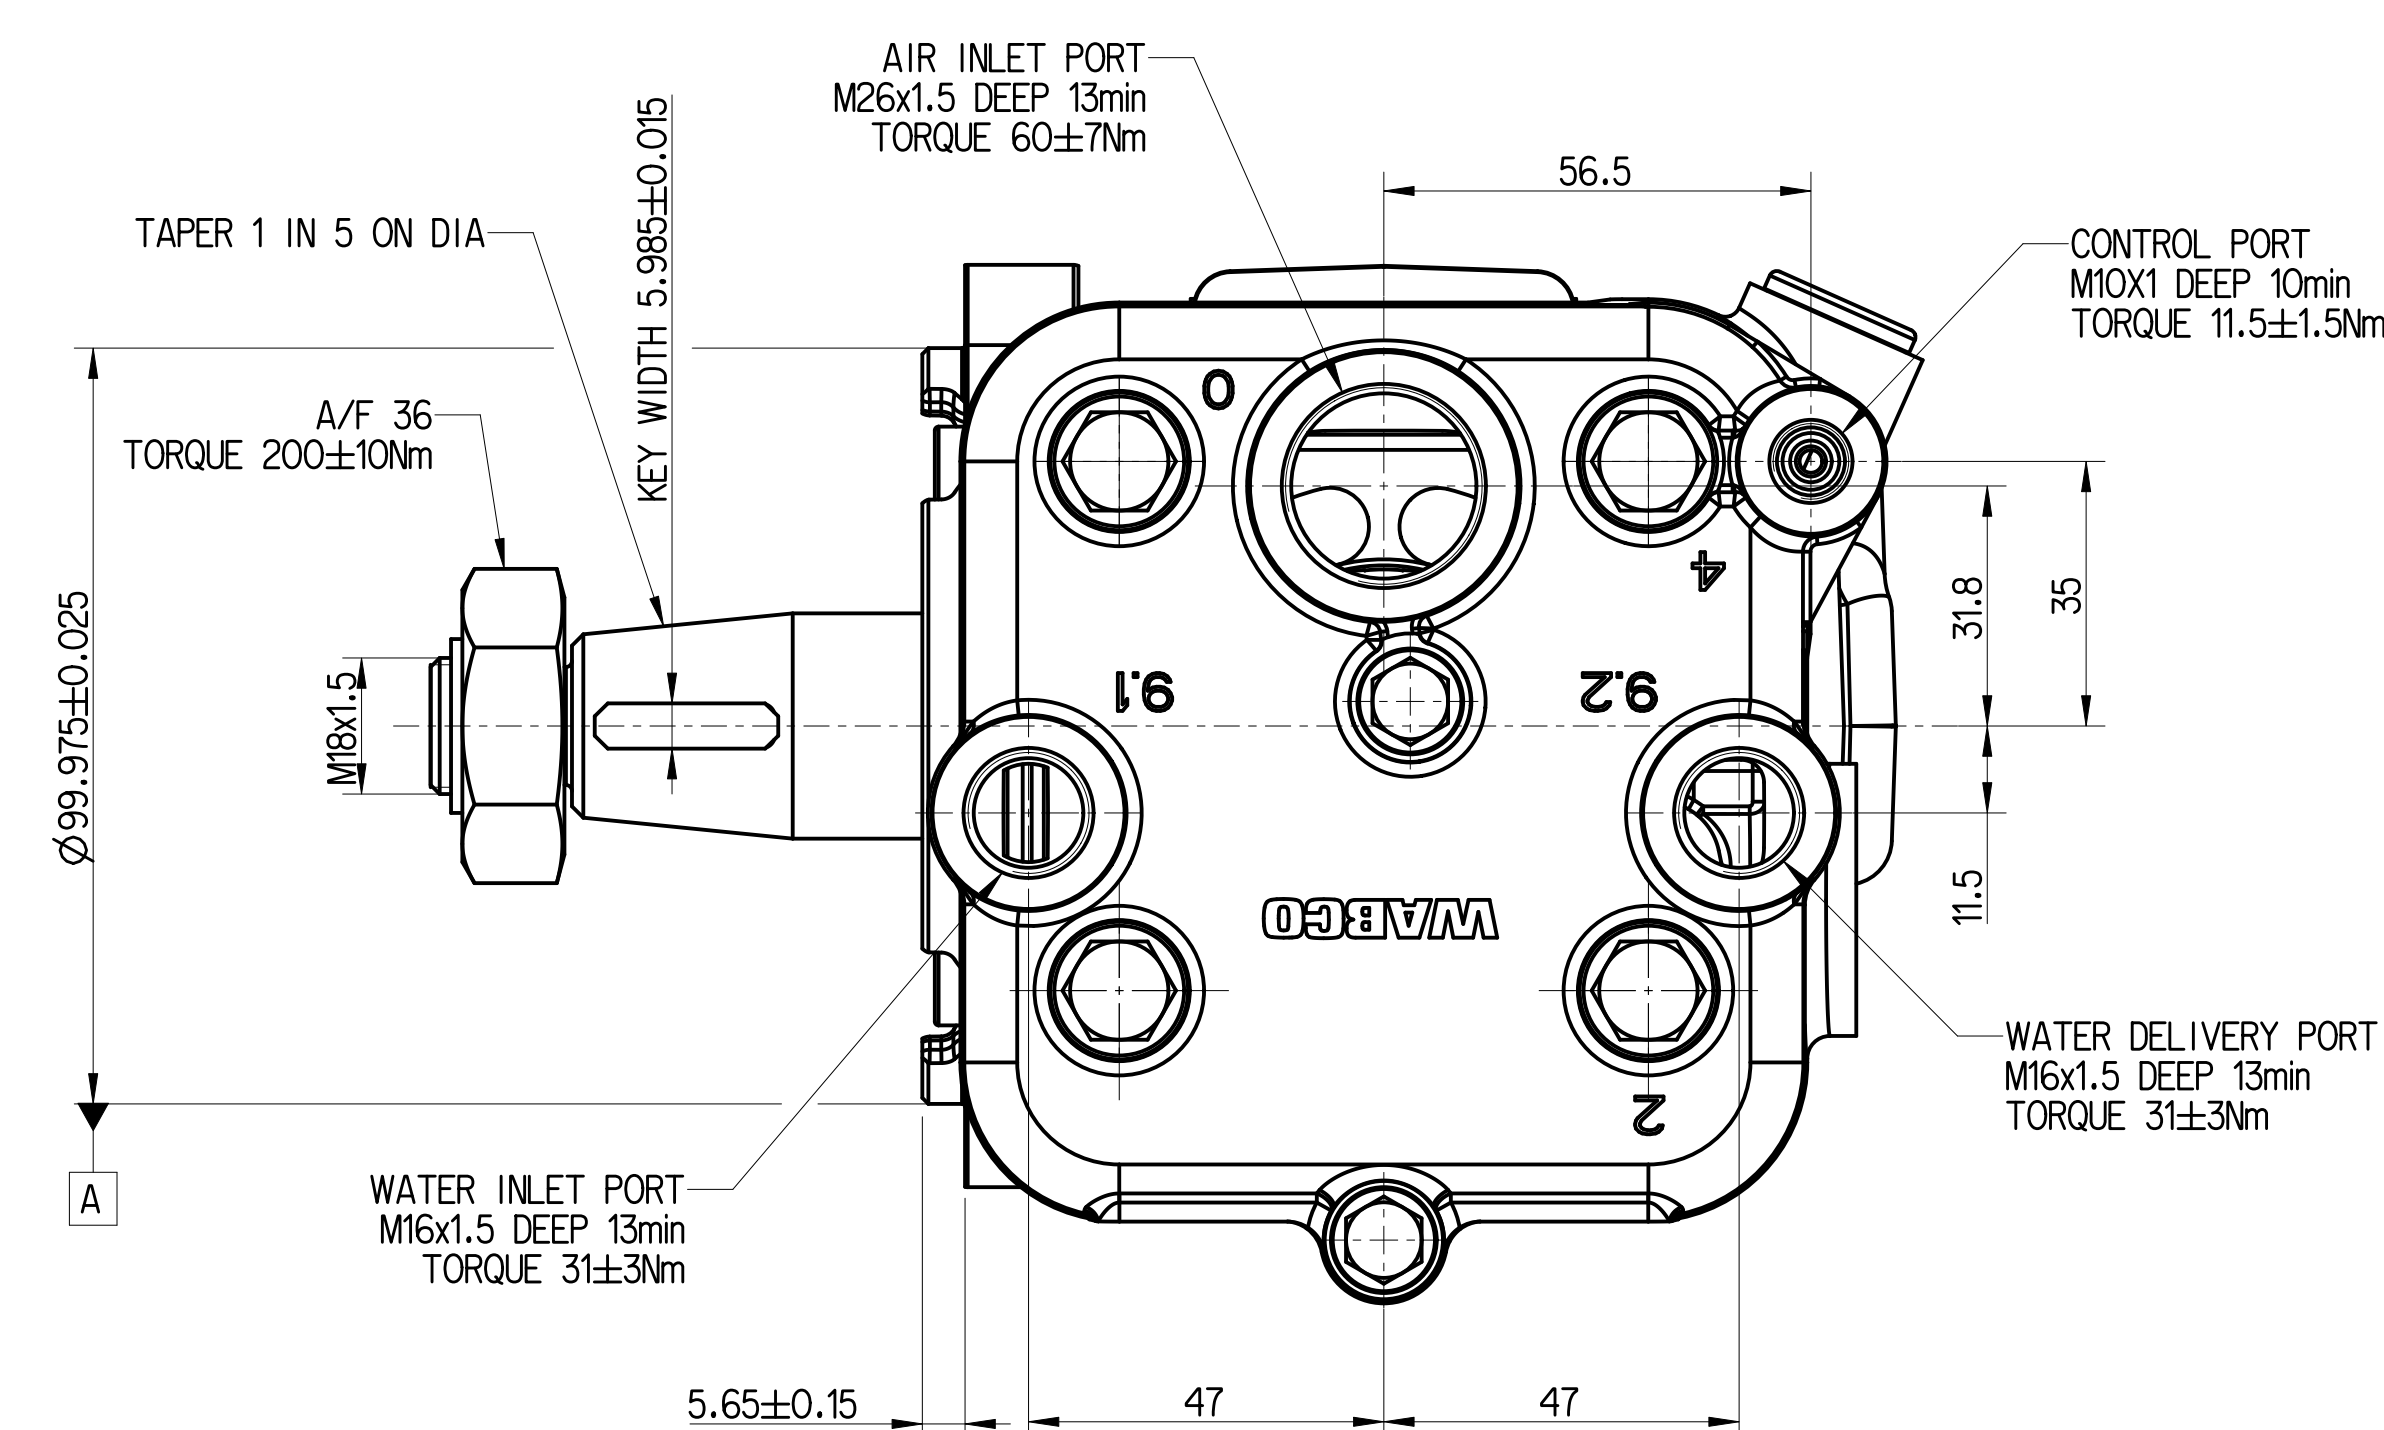
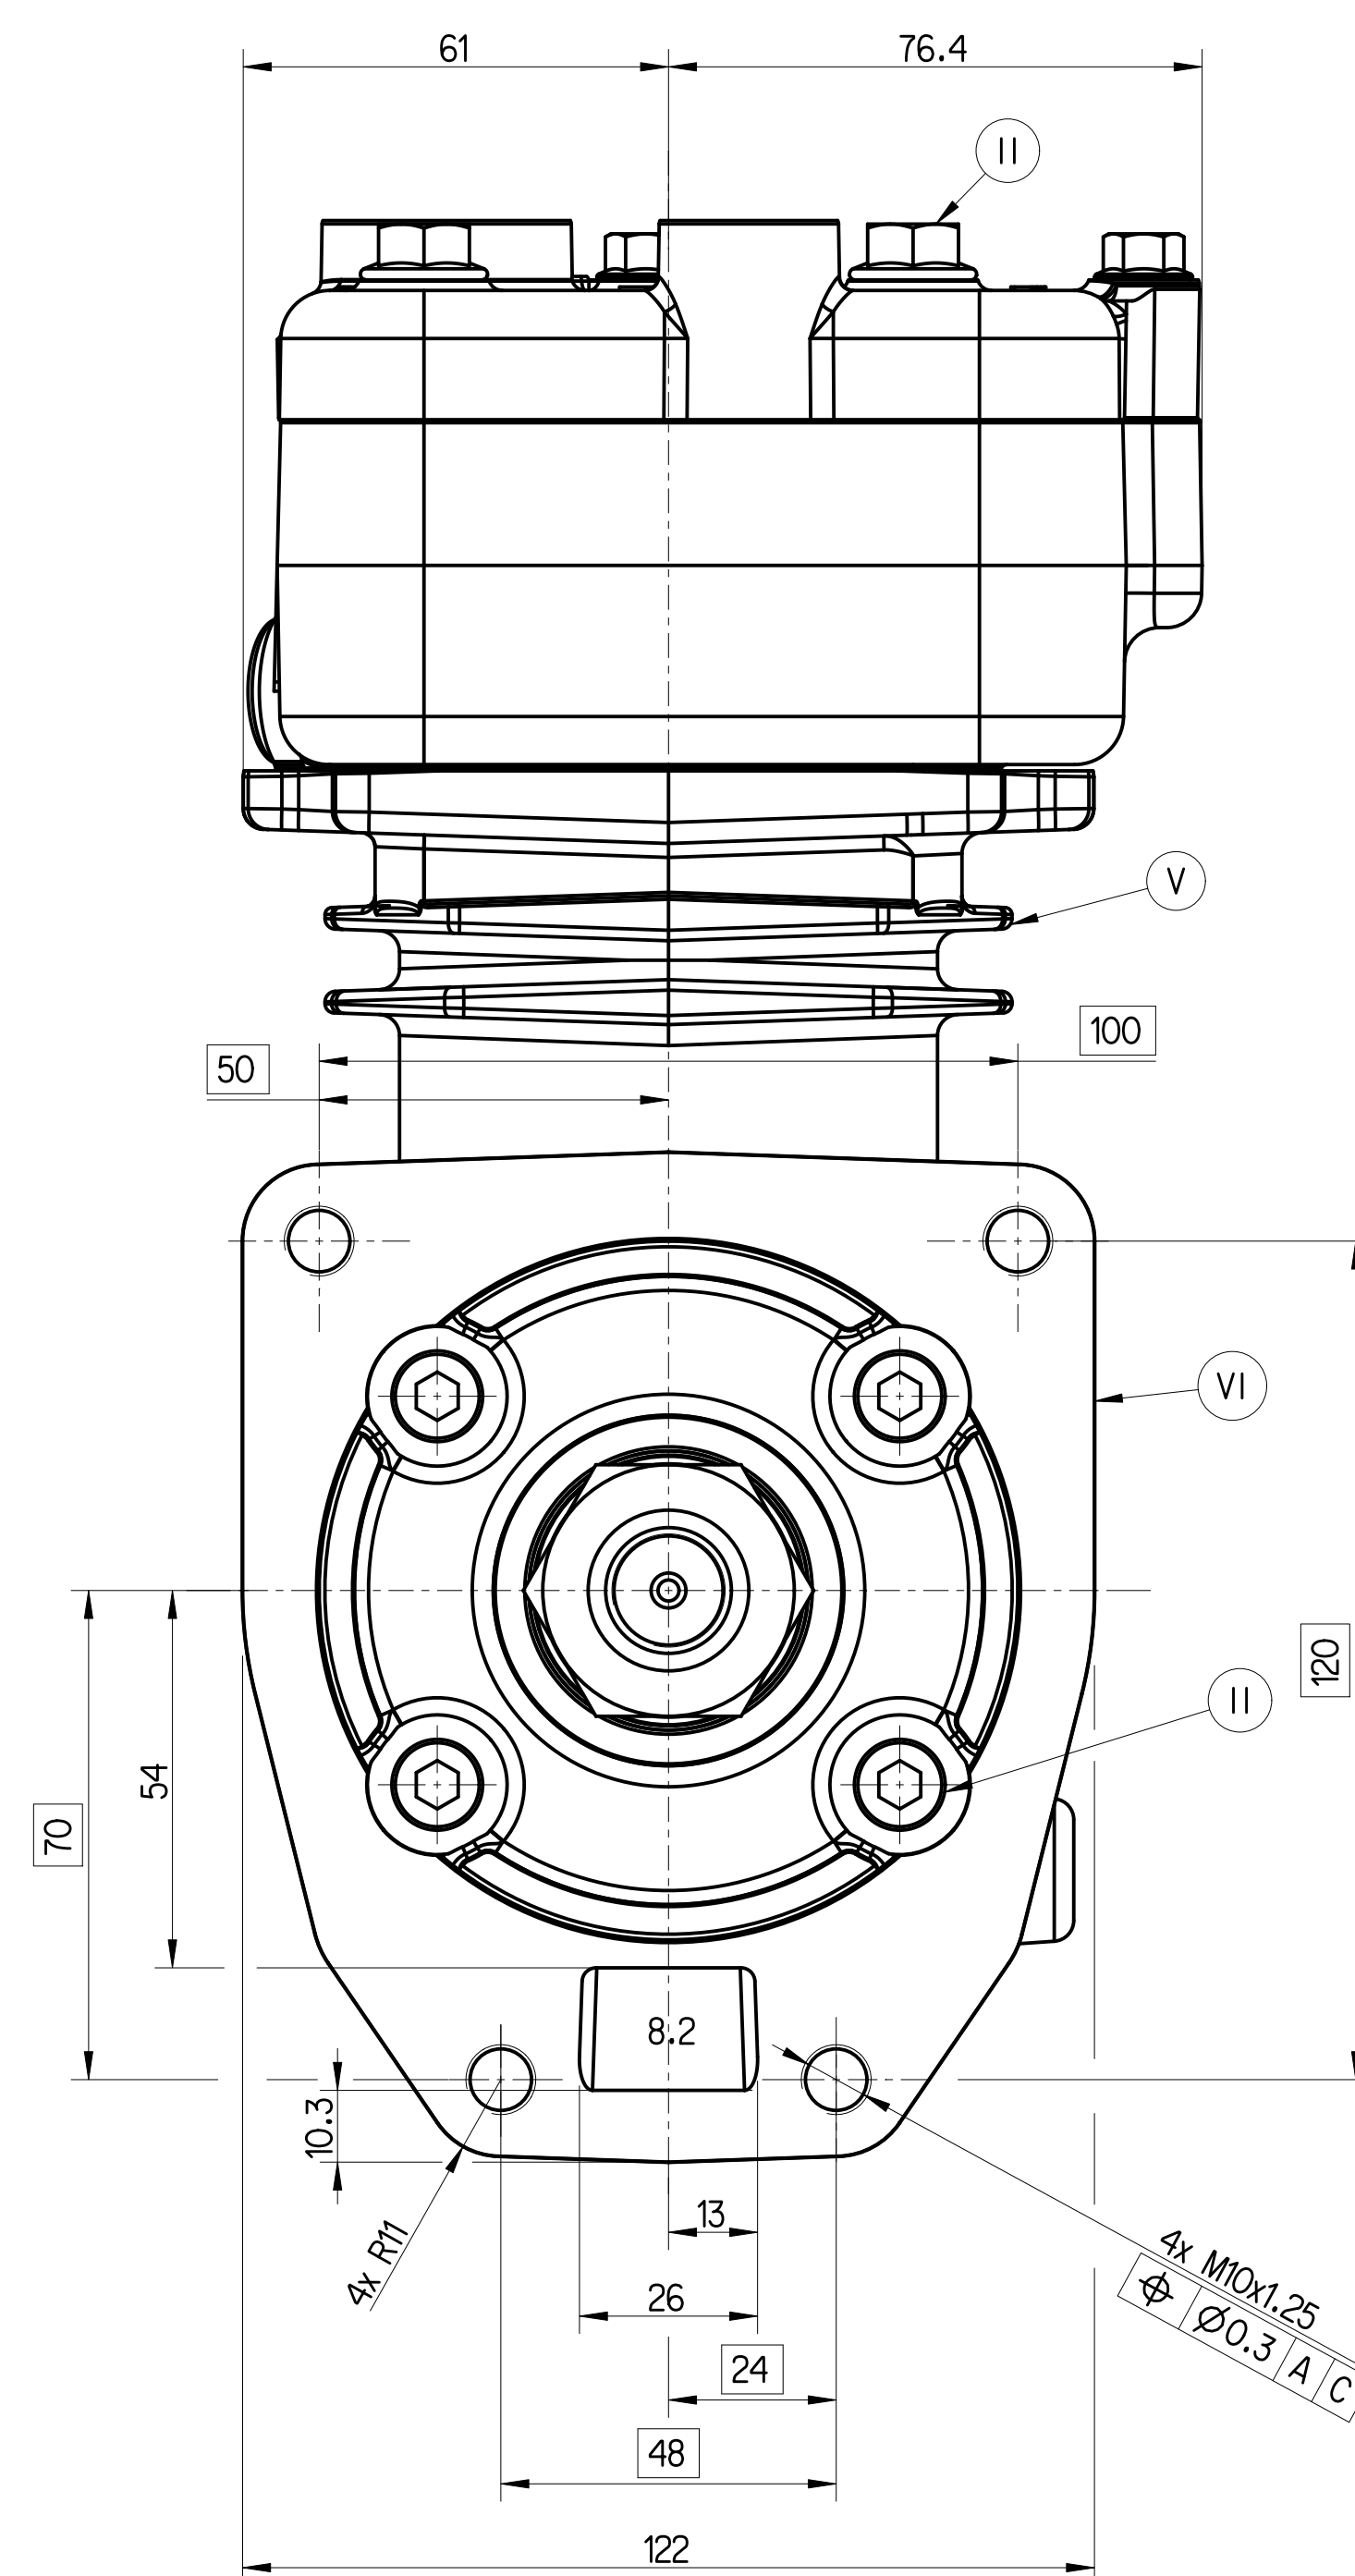


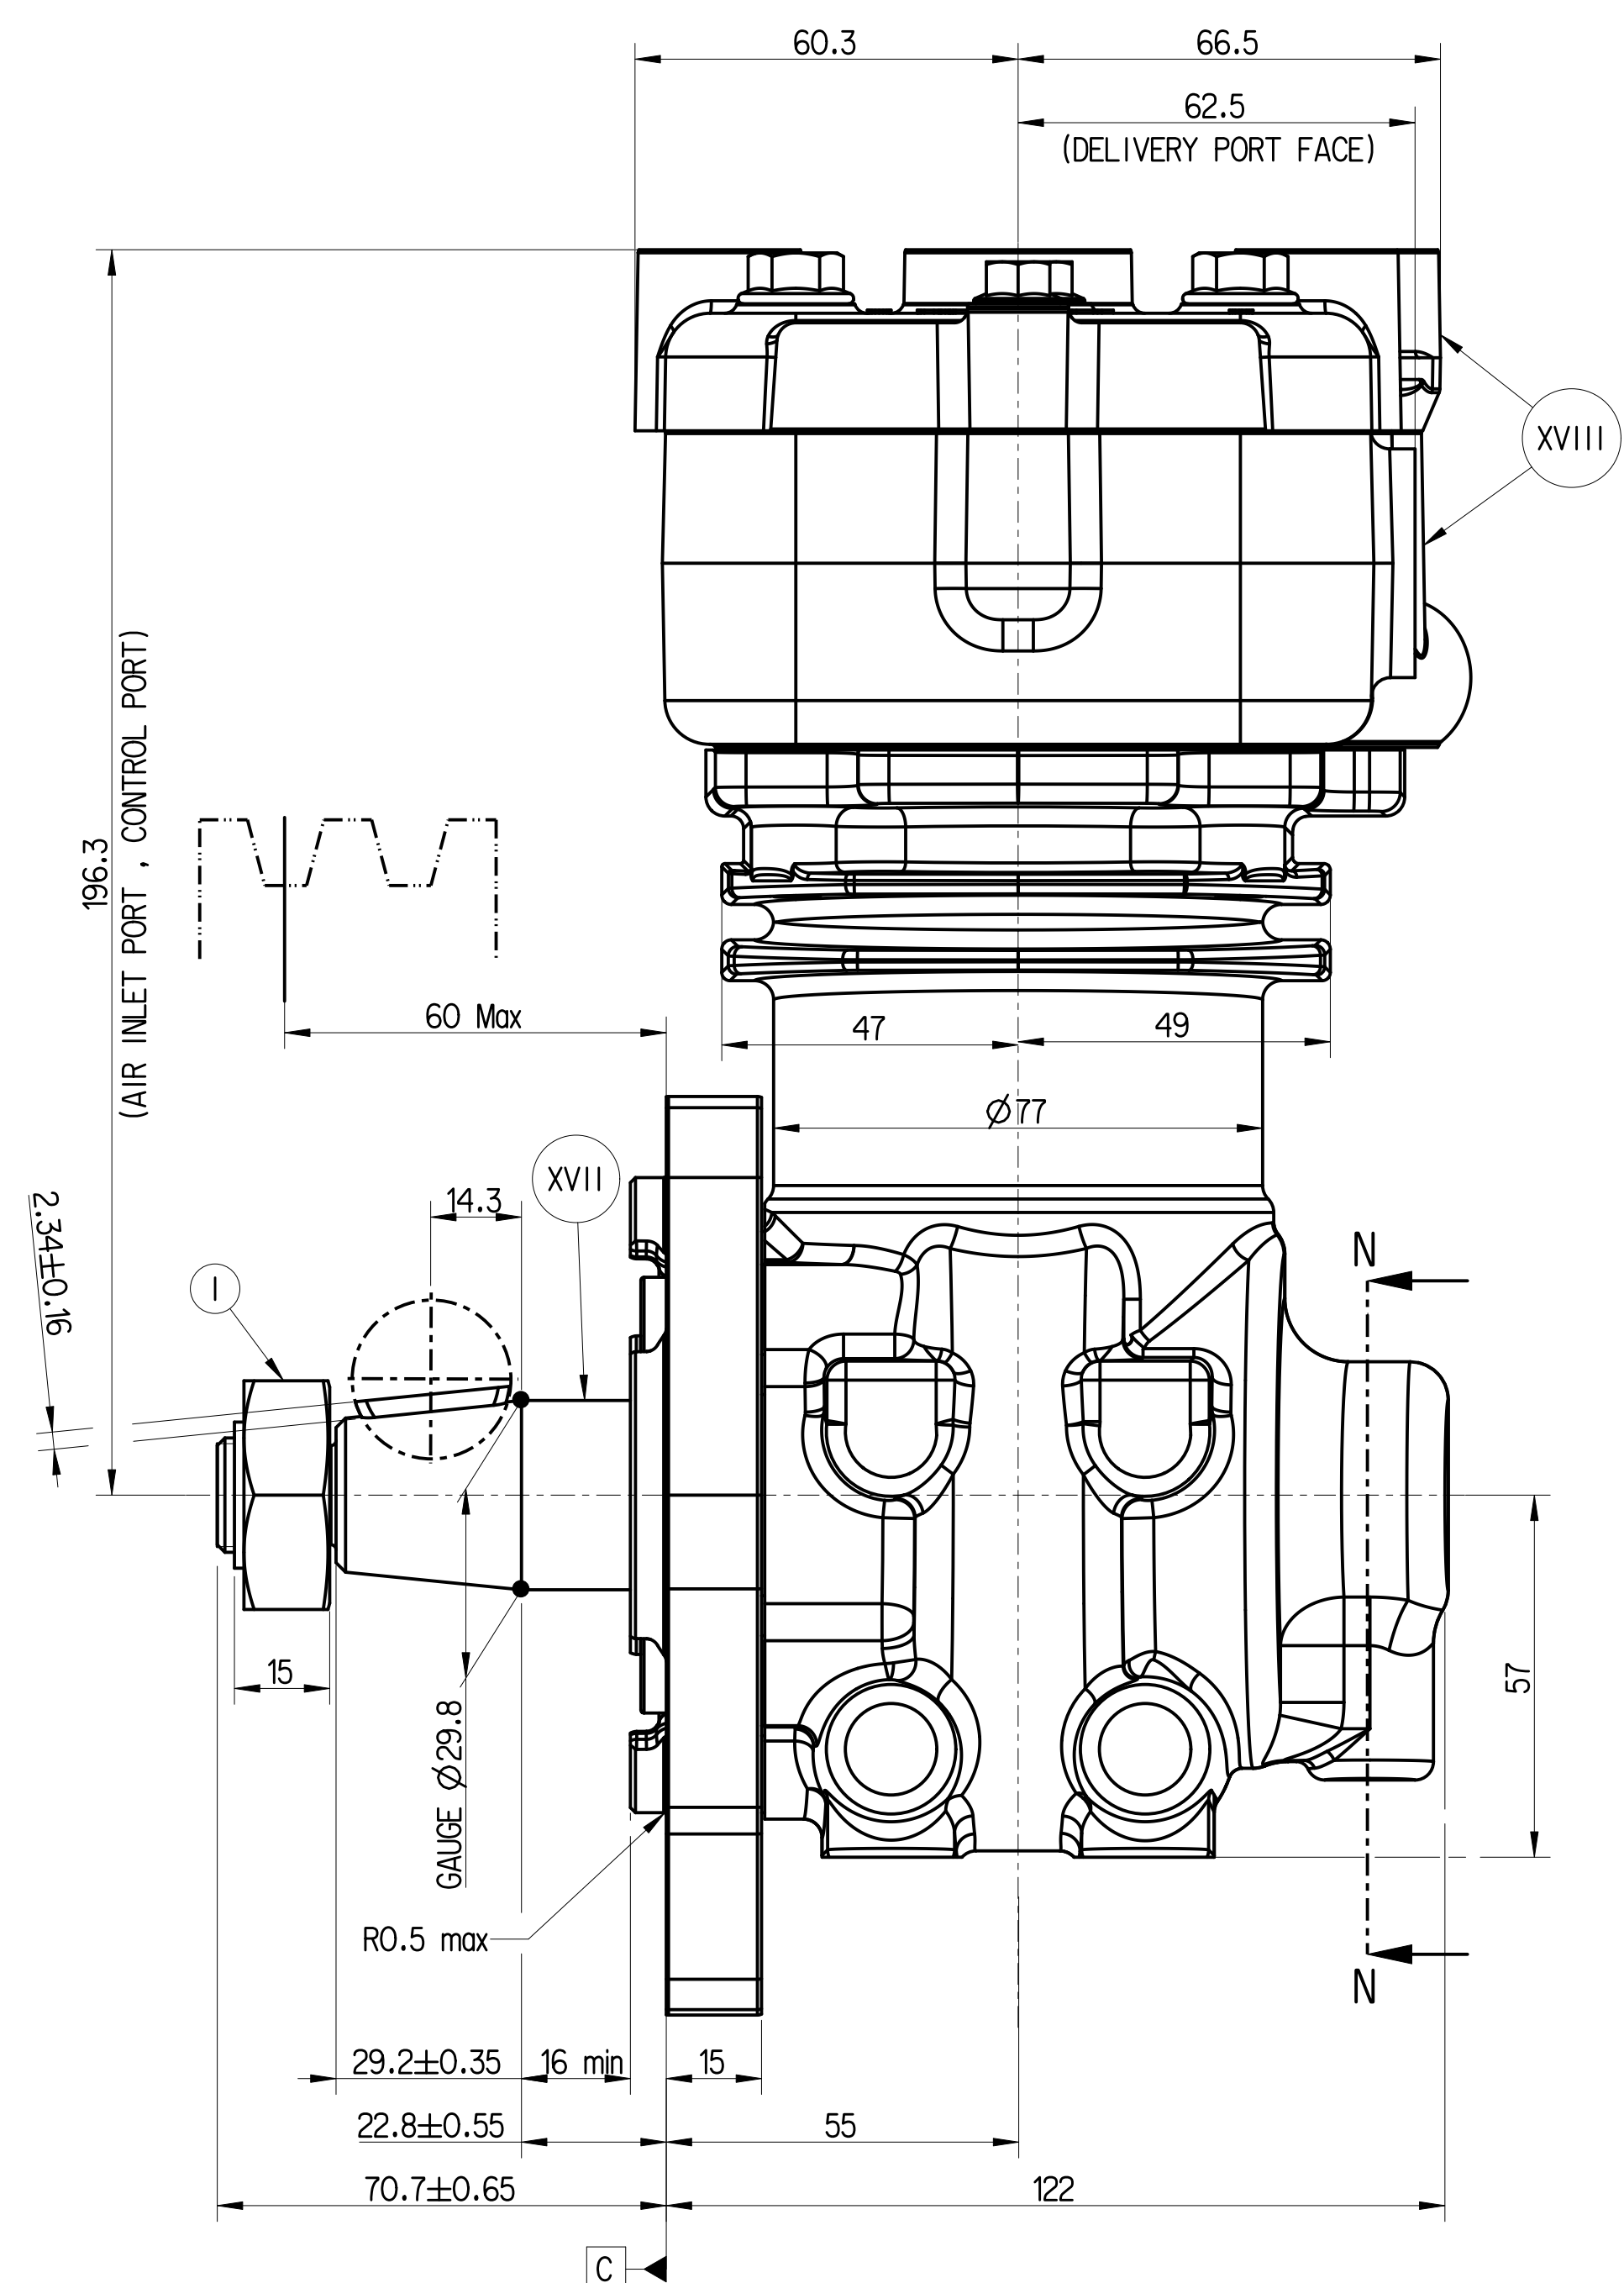

OPEN PORTS ARE FITTED WITH CLOSURE PLUGS FOR STORAGE AND TRANSIT PURPOSES.
EXPOSED MACHINED CAST IRON/STEEL SURFACES ARE PROTECTED
WITH RUST PREVENTION OIL

1 QR CODE/2D MATRIX IS MARKED AS PER STD "D-MED-002"

WORKING MEDIUM	AIR
BORE DIAMETER	66.7 mm
STROKE	46 mm
CAPACITY	160 cm ³
MAXIMUM SPEED	3000 r/min
MAXIMUM SPEED (SHORT DURATION)	3900 r/min
AXIAL PLAY	0.25±0.20 mm
MAXIMUM WORKING PRESSURE	8.5 bar
MAXIMUM PRESSURE AT DISCHARGE PORT	10 bar
MAXIMUM PRESSURE AT DISCHARGE PORT (TEMPORARILY < 4 sec)	12 bar
CRANKCASE PAINT COLOUR	BLACK

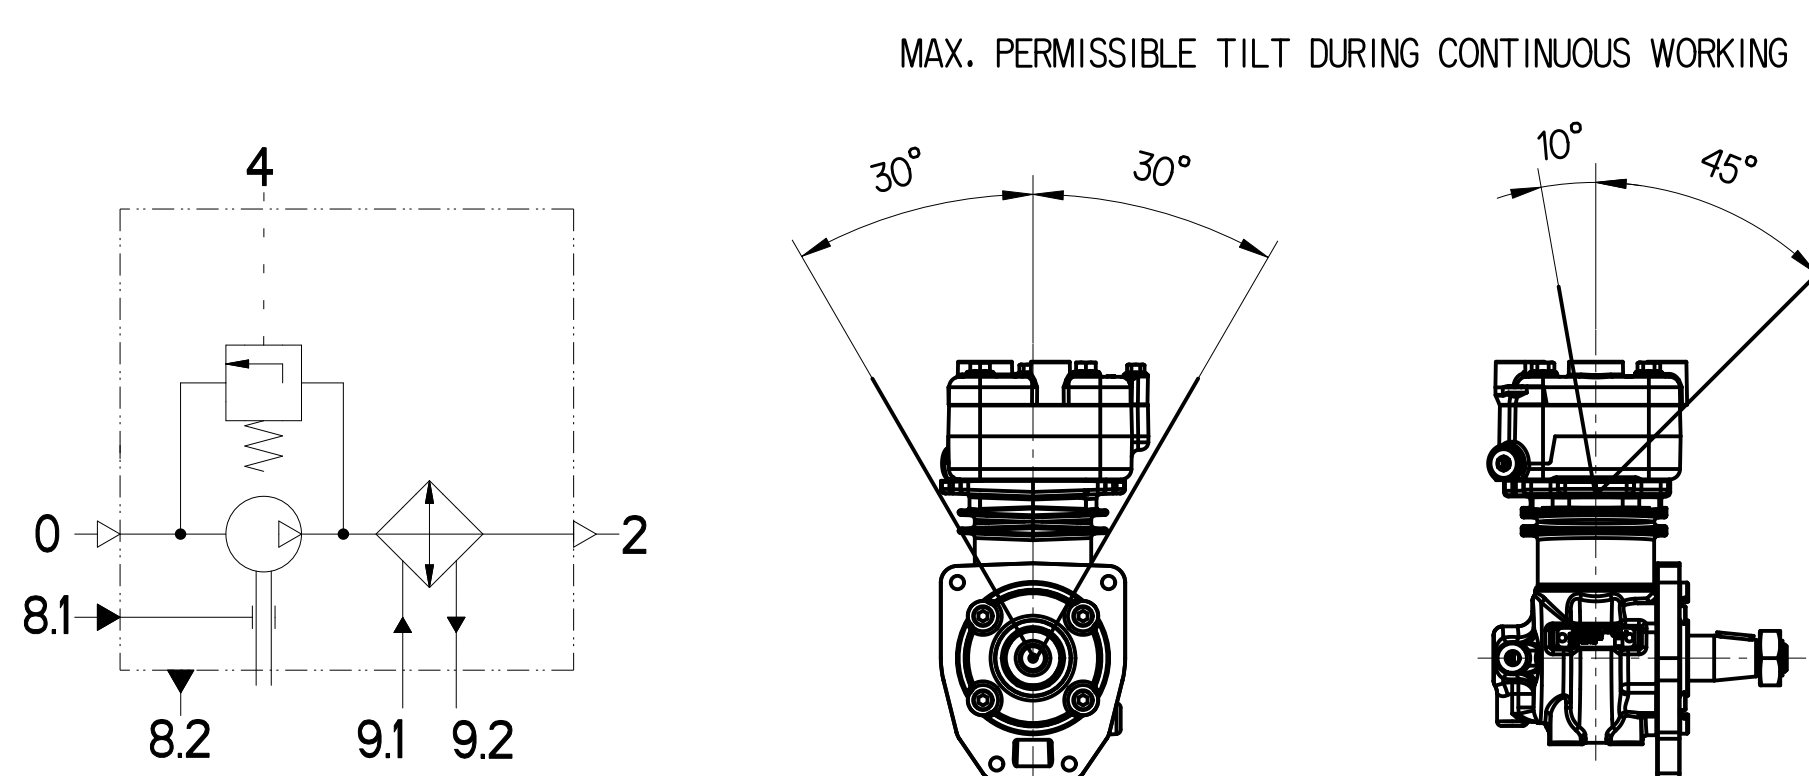

0 = AIR INLET PORT
2 = AIR DELIVERY PORT
9.1 = WATER INLET PORT
9.2 = WATER DELIVERY PORT
8.1 = OIL INLET
8.2 = OIL DELIVERY
4 = CONTROL PORT

[illegible]