
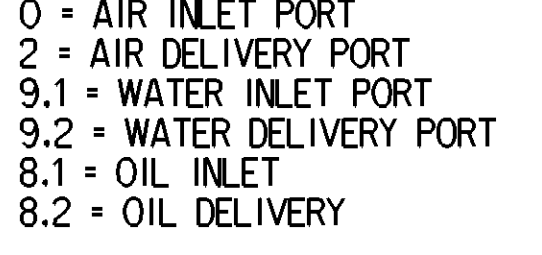


ASSEMBLY No.
SERIAL No. AND
MONTH/YEAR OF
MANUFACTURING SHOWN HERE



OPEN PORTS ARE FITTED WITH CLOSURE PLUGS FOR STORAGE AND TRANSIT PURPOSES.
EXPOSED MACHINED CAST IRON/STEEL SURFACES ARE PROTECTED
WITH RUST PREVENTION OIL

XVIII	ALUMINIUM ALLOY	NO TREATMENT	C
XVII	STEEL	NO TREATMENT	
XVI	CAST IRON	PLATED	
XV	STEEL	ZINC IRON PLATED	
XIV	CAST IRON	NO TREATMENT	
XIII	ZINC ALLOY	ANODISED	
XII	PLASTIC	NO TREATMENT	
XI	RUBBER	NO TREATMENT	
X	STAINLESS STEEL	NO TREATMENT	
IX	BRASS	NO TREATMENT	
VIII	ZINC ALLOY	CHROMATED	
VII	ALUMINIUM ALLOY	ANODISED	
VI	ALUMINIUM ALLOY	CHROMATED	
V	CAST IRON	PAINTED	
IV	STEEL	POWDER COATED	
III	STEEL	PAINTED	
II	STEEL	PHOSPHATED	
I	STEEL	ZINC PLATED	
PART CODE	MATERIAL	SURFACE PROTECTION	

Former Specifications: 42D-33A-0, Size 1440D-1-E			Daylight 4000?		 SINGLE CYLINDER COMPRESSOR	
Former Technical Data: 9129700700-0055			Drawn: SAMAYA			
Doc. Code: 005 Sheets: 1 To B			Checked: Kartheyyan B			
General Dimensions: 42D-261			Approved: Kartheyyan B			
Range of Nominal Dimensions (± mm)			Material: Al		Date of first series: 2004-07-02 Doc. Code: 1-000000 005 EN 1/1	
100 - 501 + 801			C/D Ratio: 1:1			
1500 - 501 + 801			Size: 42D 050			
Class 11 1 50 100 1500 4000 14000 45 ¹			A O O			
Feature			0.5		912 970 057 0	
Minimum			X		Date of first series: 2004-07-02	
Maximum					Doc. Code: 1-000000	
Tapped holes only: 42D-182					005 EN 1/1	
1. Tolerance class: Applied: International			(2)EN: Revision: Tech. Desc.: 500951 4 000 WIN		Responder for:	