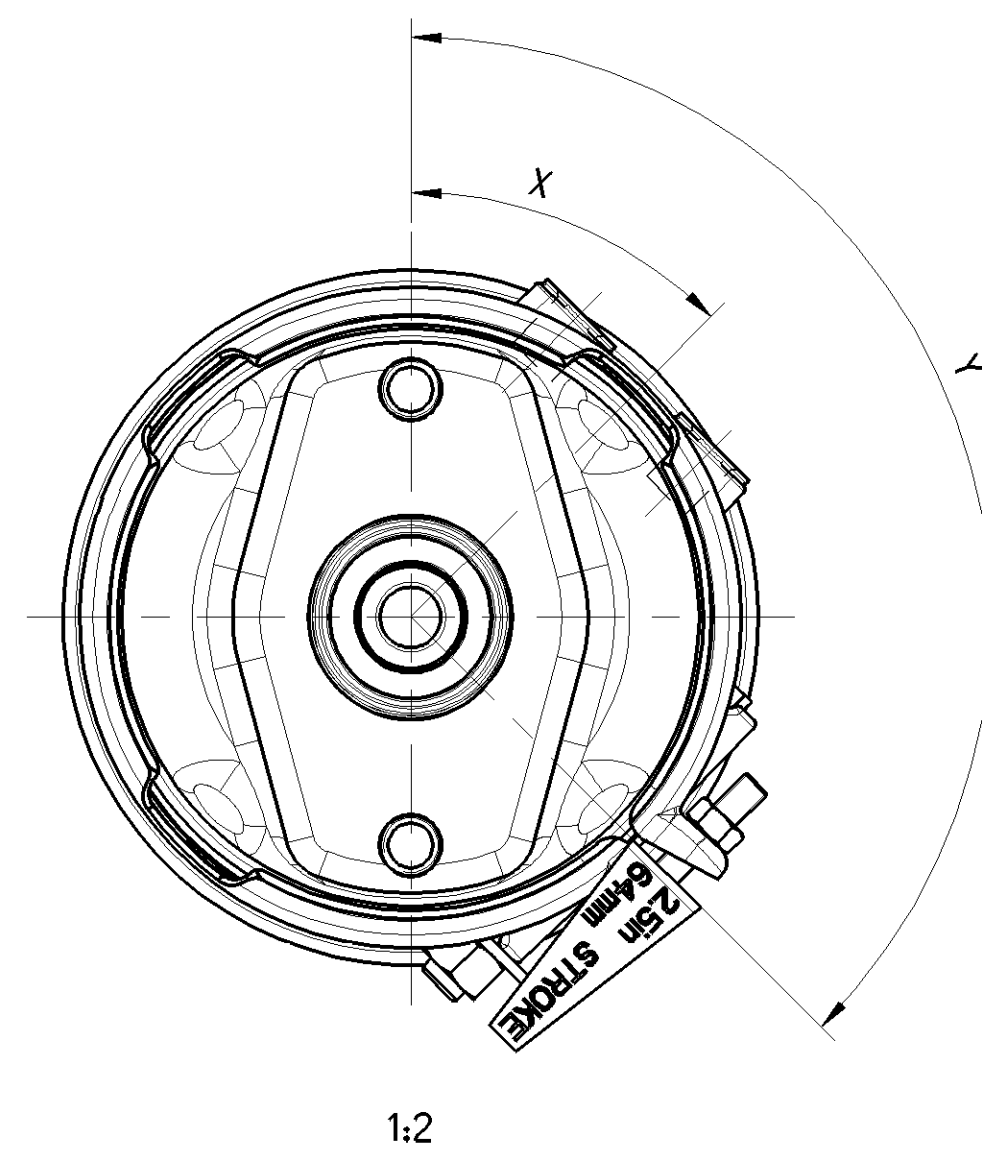
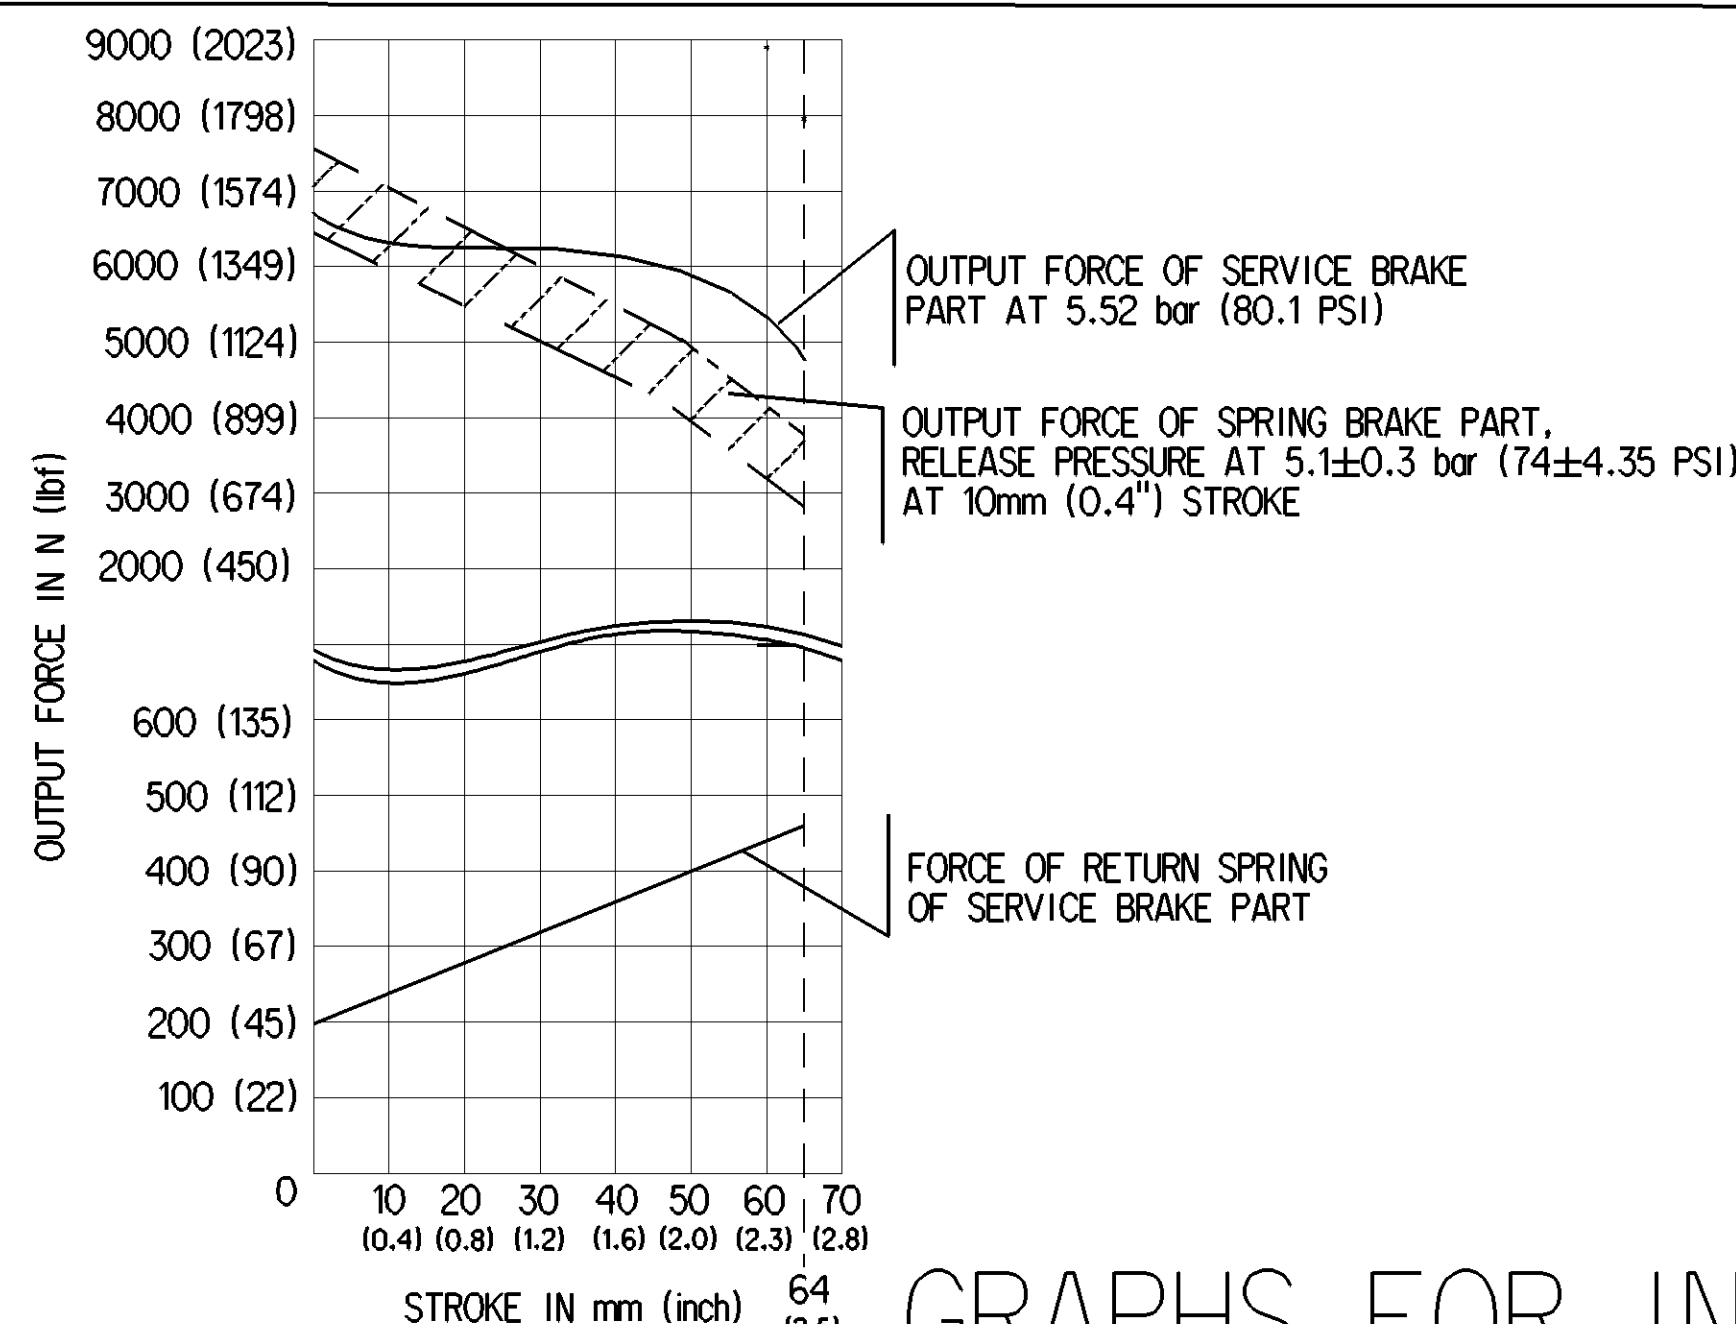
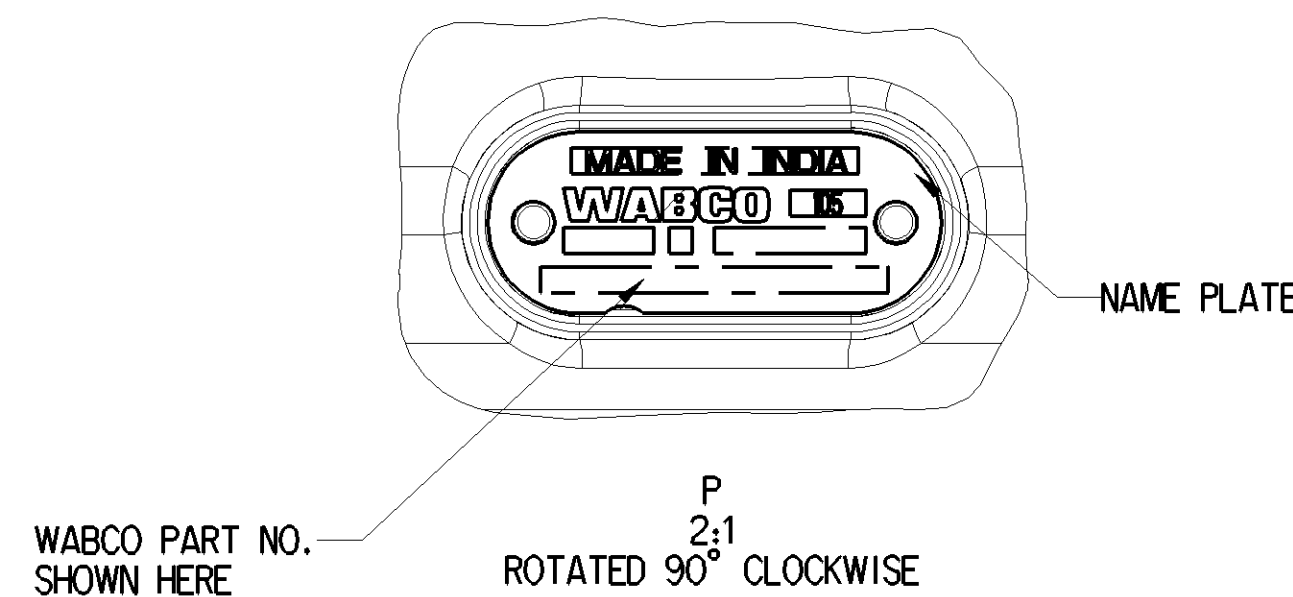


[illegible]

CAUTION

DUST PLUG

- 1) AFTER REMOVAL OF CAGING/ RELEASE BOLT ENSURE THE HOLE IS ALWAYS COVERED WITH DUST PLUG
- 2) MAY CAUSE PREMATURE FAILURE OF POWER SPRING AND POTENTIAL LOSS OF PARKING BRAKE FORCE

S/L No.	NOTES
1.1	WORKING MEDIUM
1.2	NOMINAL DIAMETER FOR INLET PORTS
1.3	STROKE
1.4	THERMAL RANGE OF APPLICATION
1.5	WORKING PRESSURE SERVICE SIDE
1.6	WORKING PRESSURE SPRING SIDE
1.7	MAXIMUM PRESSURE SERVICE SIDE (TEMPORARILY)
1.8	MAXIMUM PRESSURE SPRING SIDE (TEMPORARILY)
1.9	MALE THREAD TO BE PROTECTED AND OPEN PORTS TO BE FITTED WITH CLOSURE PLUG TO AVOID TRANSIT DAMAGE.
2.0	UNIT DRAWN WITH 8 bar (116 psi) AIR PRESSURE IN PORT 12
3.0	SUPPLIED WITH PARKING BRAKE IN RELEASED CONDITION

General Specification: ISO 8763, EN 5391-1, Size ISO 14495 (1)		Capacitor Markings		WABCO	
Further Technical Data: ISO 8763, S47 000 0		Type		Structure	
Doc. Code: 035		2022-08-05		Diagram 5	
General Dimensions (mm-DIN)		2022-09-16		Angraben A	
Range of nominal dimensions in mm:		Dimensions in mm		Marking	
$\varnothing$ 50 to $\varnothing$ 160 $\varnothing$ 50 to $\varnothing$ 80 400 400 $\varnothing$ 80 to $\varnothing$ 160 400 400 $\varnothing$ 160 to $\varnothing$ 250 400 400		$\varnothing$ 6.30 $\varnothing$ 1.1 $\varnothing$ 1.2 (2.1)		Date of first issue: 2008-03-05 Date of last issue: 2022-09-16	
Flange X 2022-08-05 2022-09-16 2022-09-16		A O OEO 511799 5421		925 347 000 0 005 EN 1/	
Tapped holes: ISO 2266, EN 6066		Reason for change		Replacement	
Technical Data: General Dimensions		Reason for change		Replacement	