
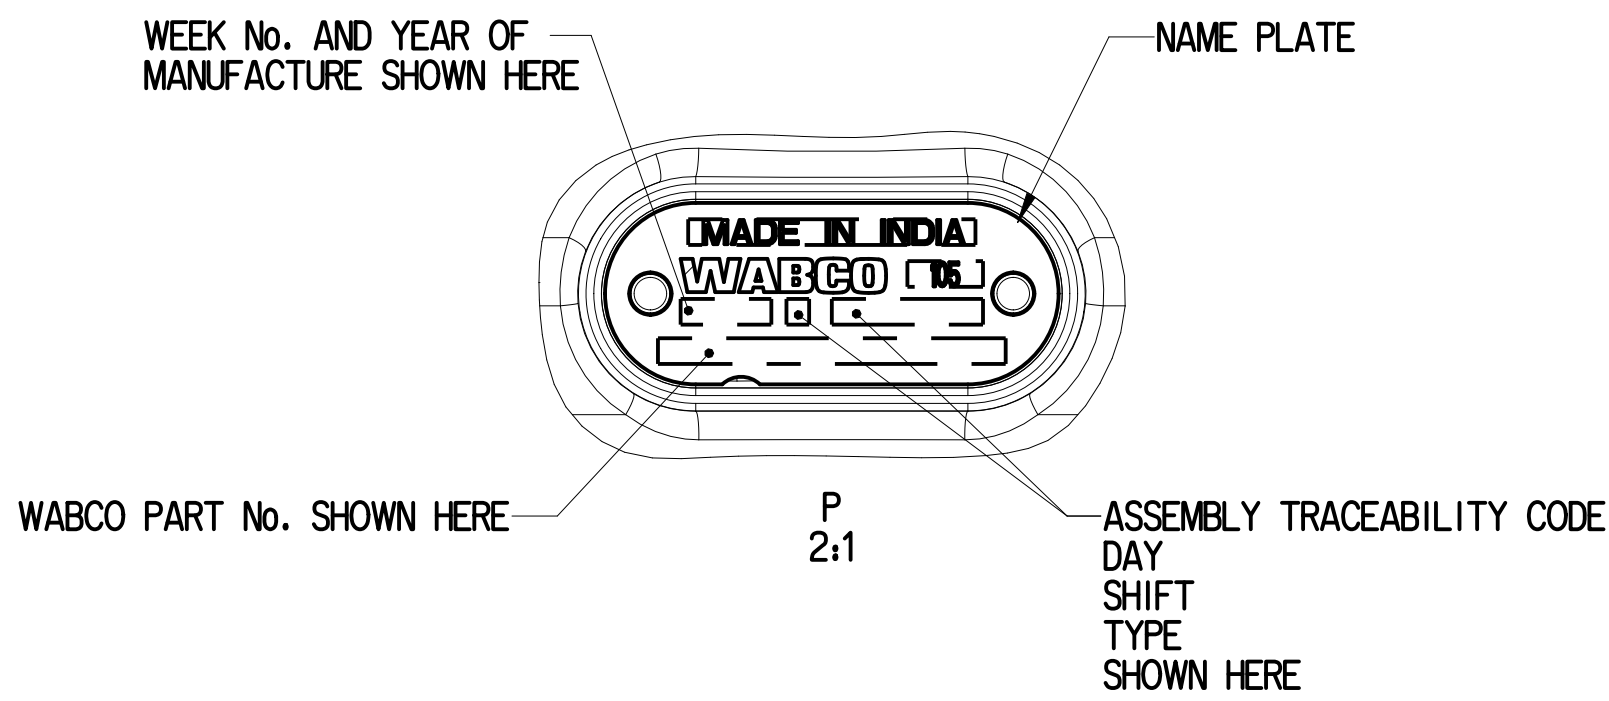
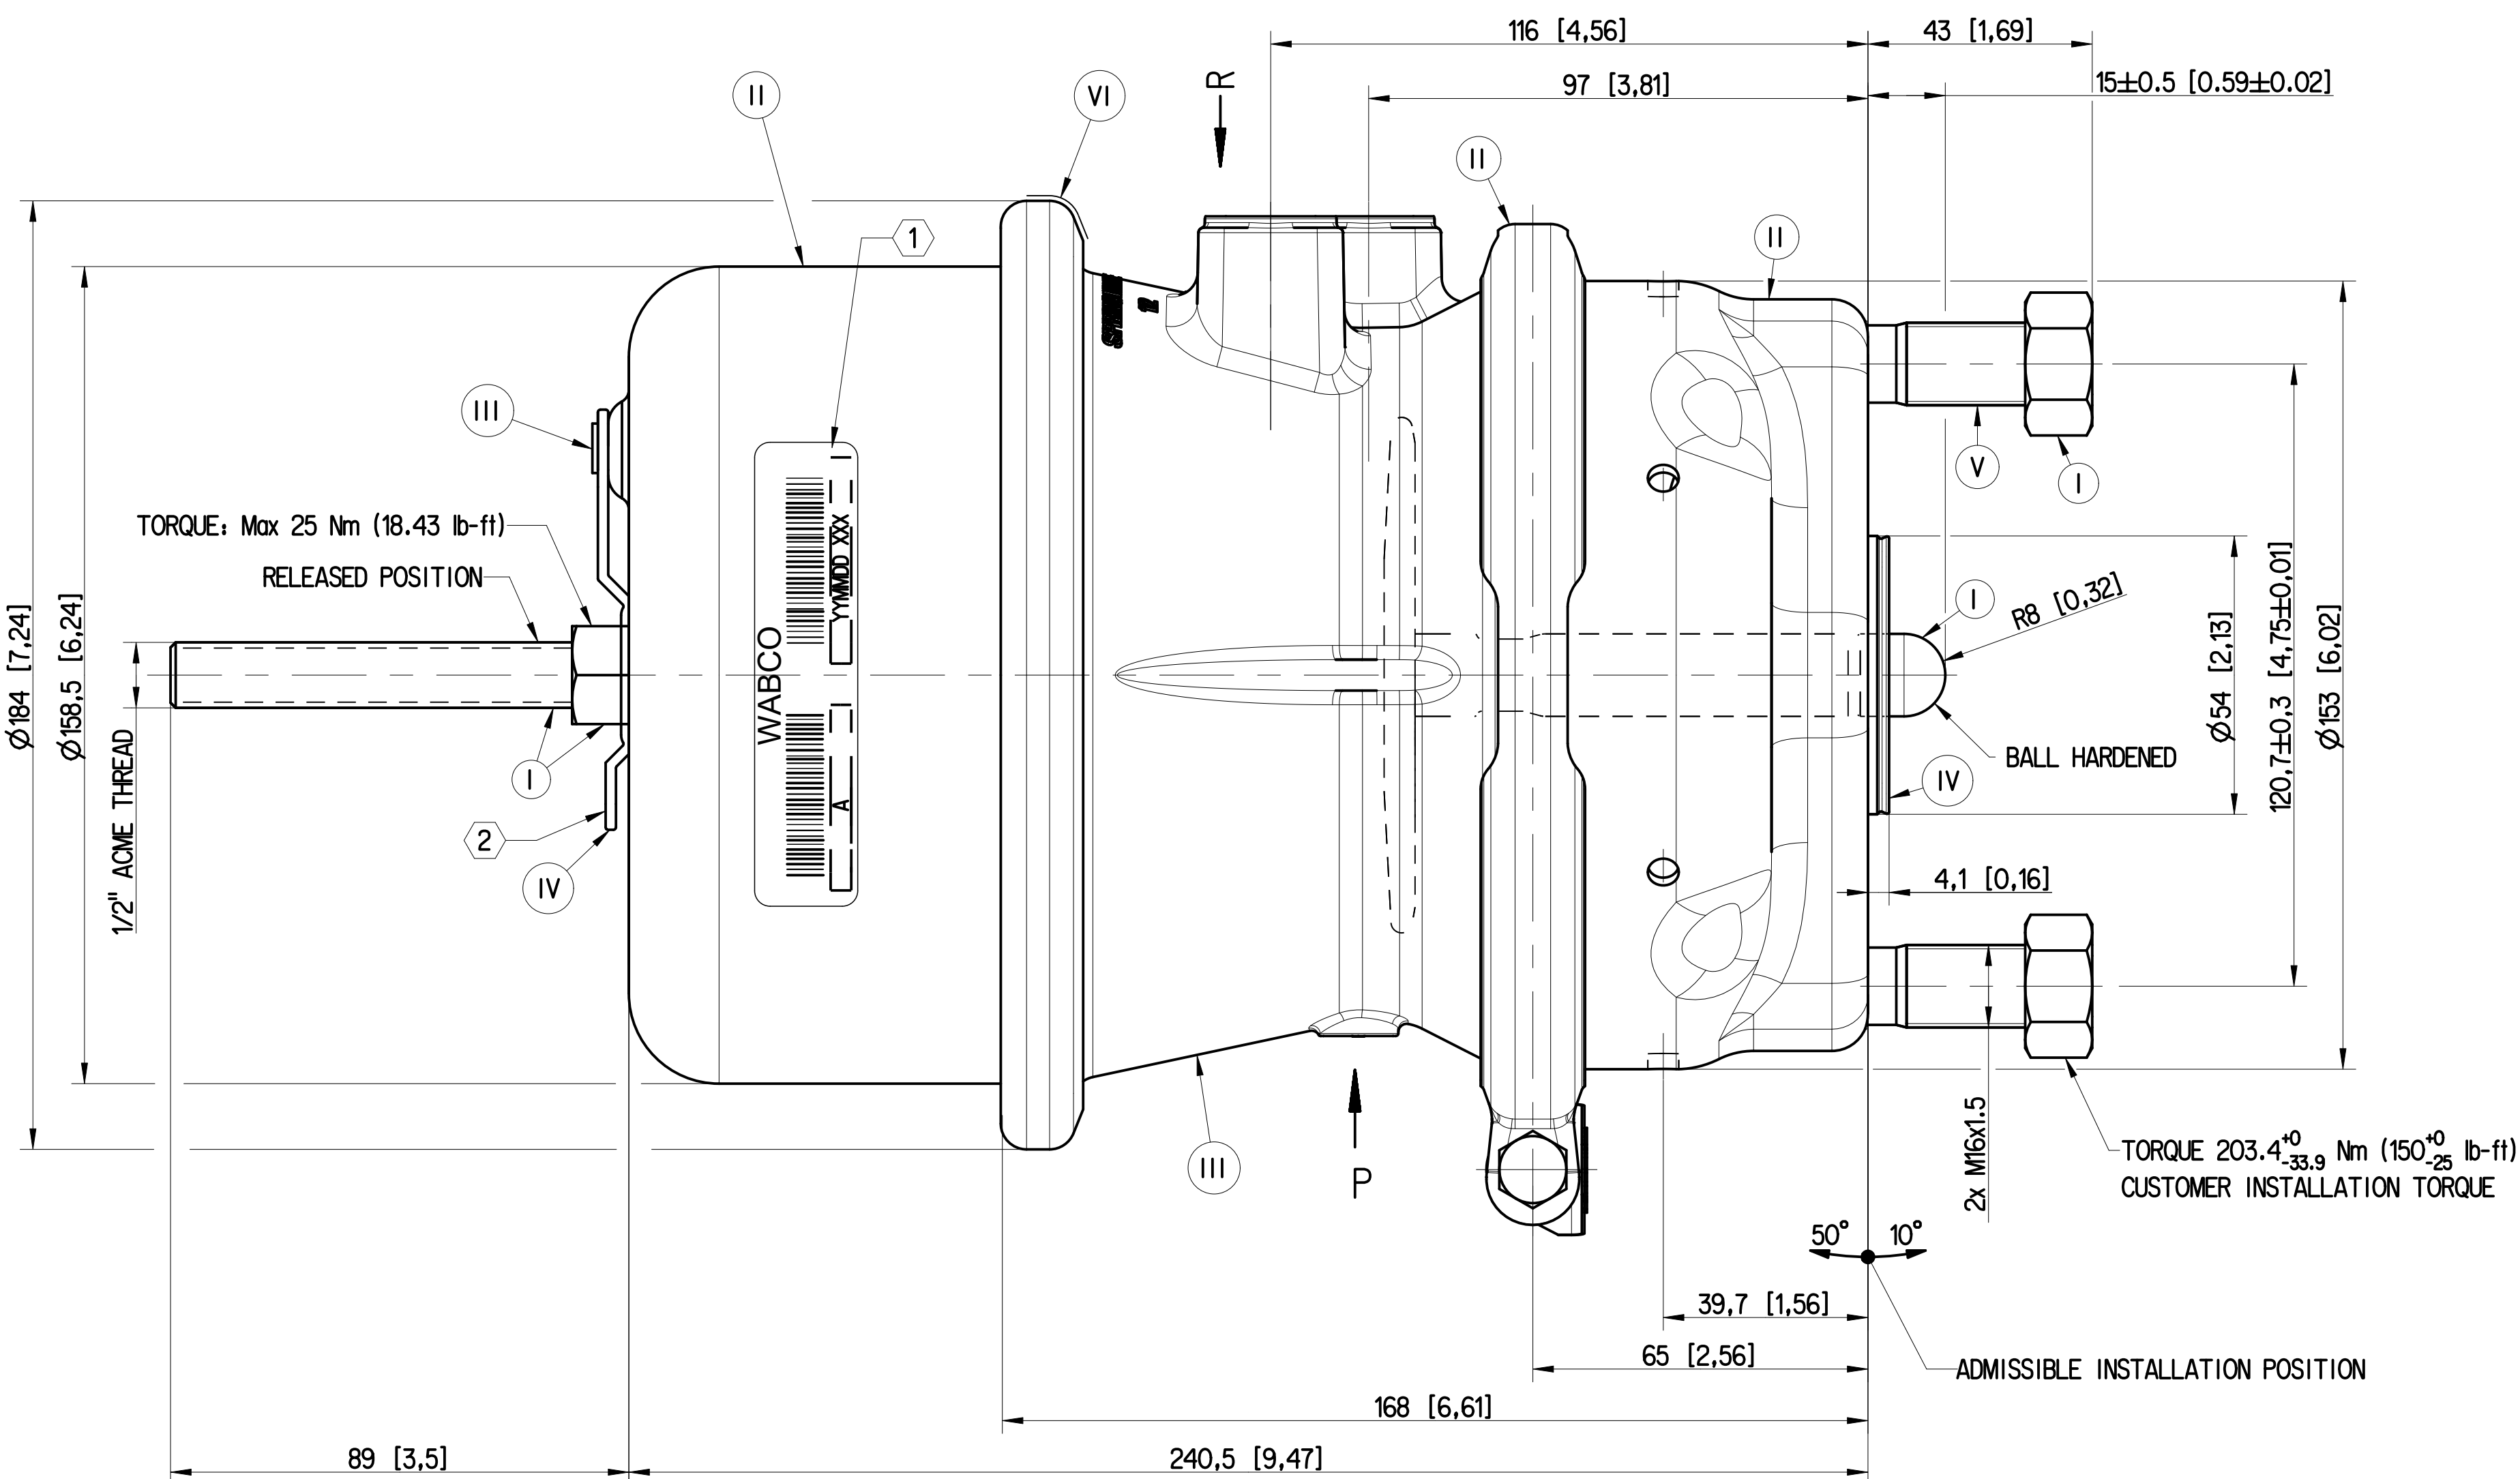
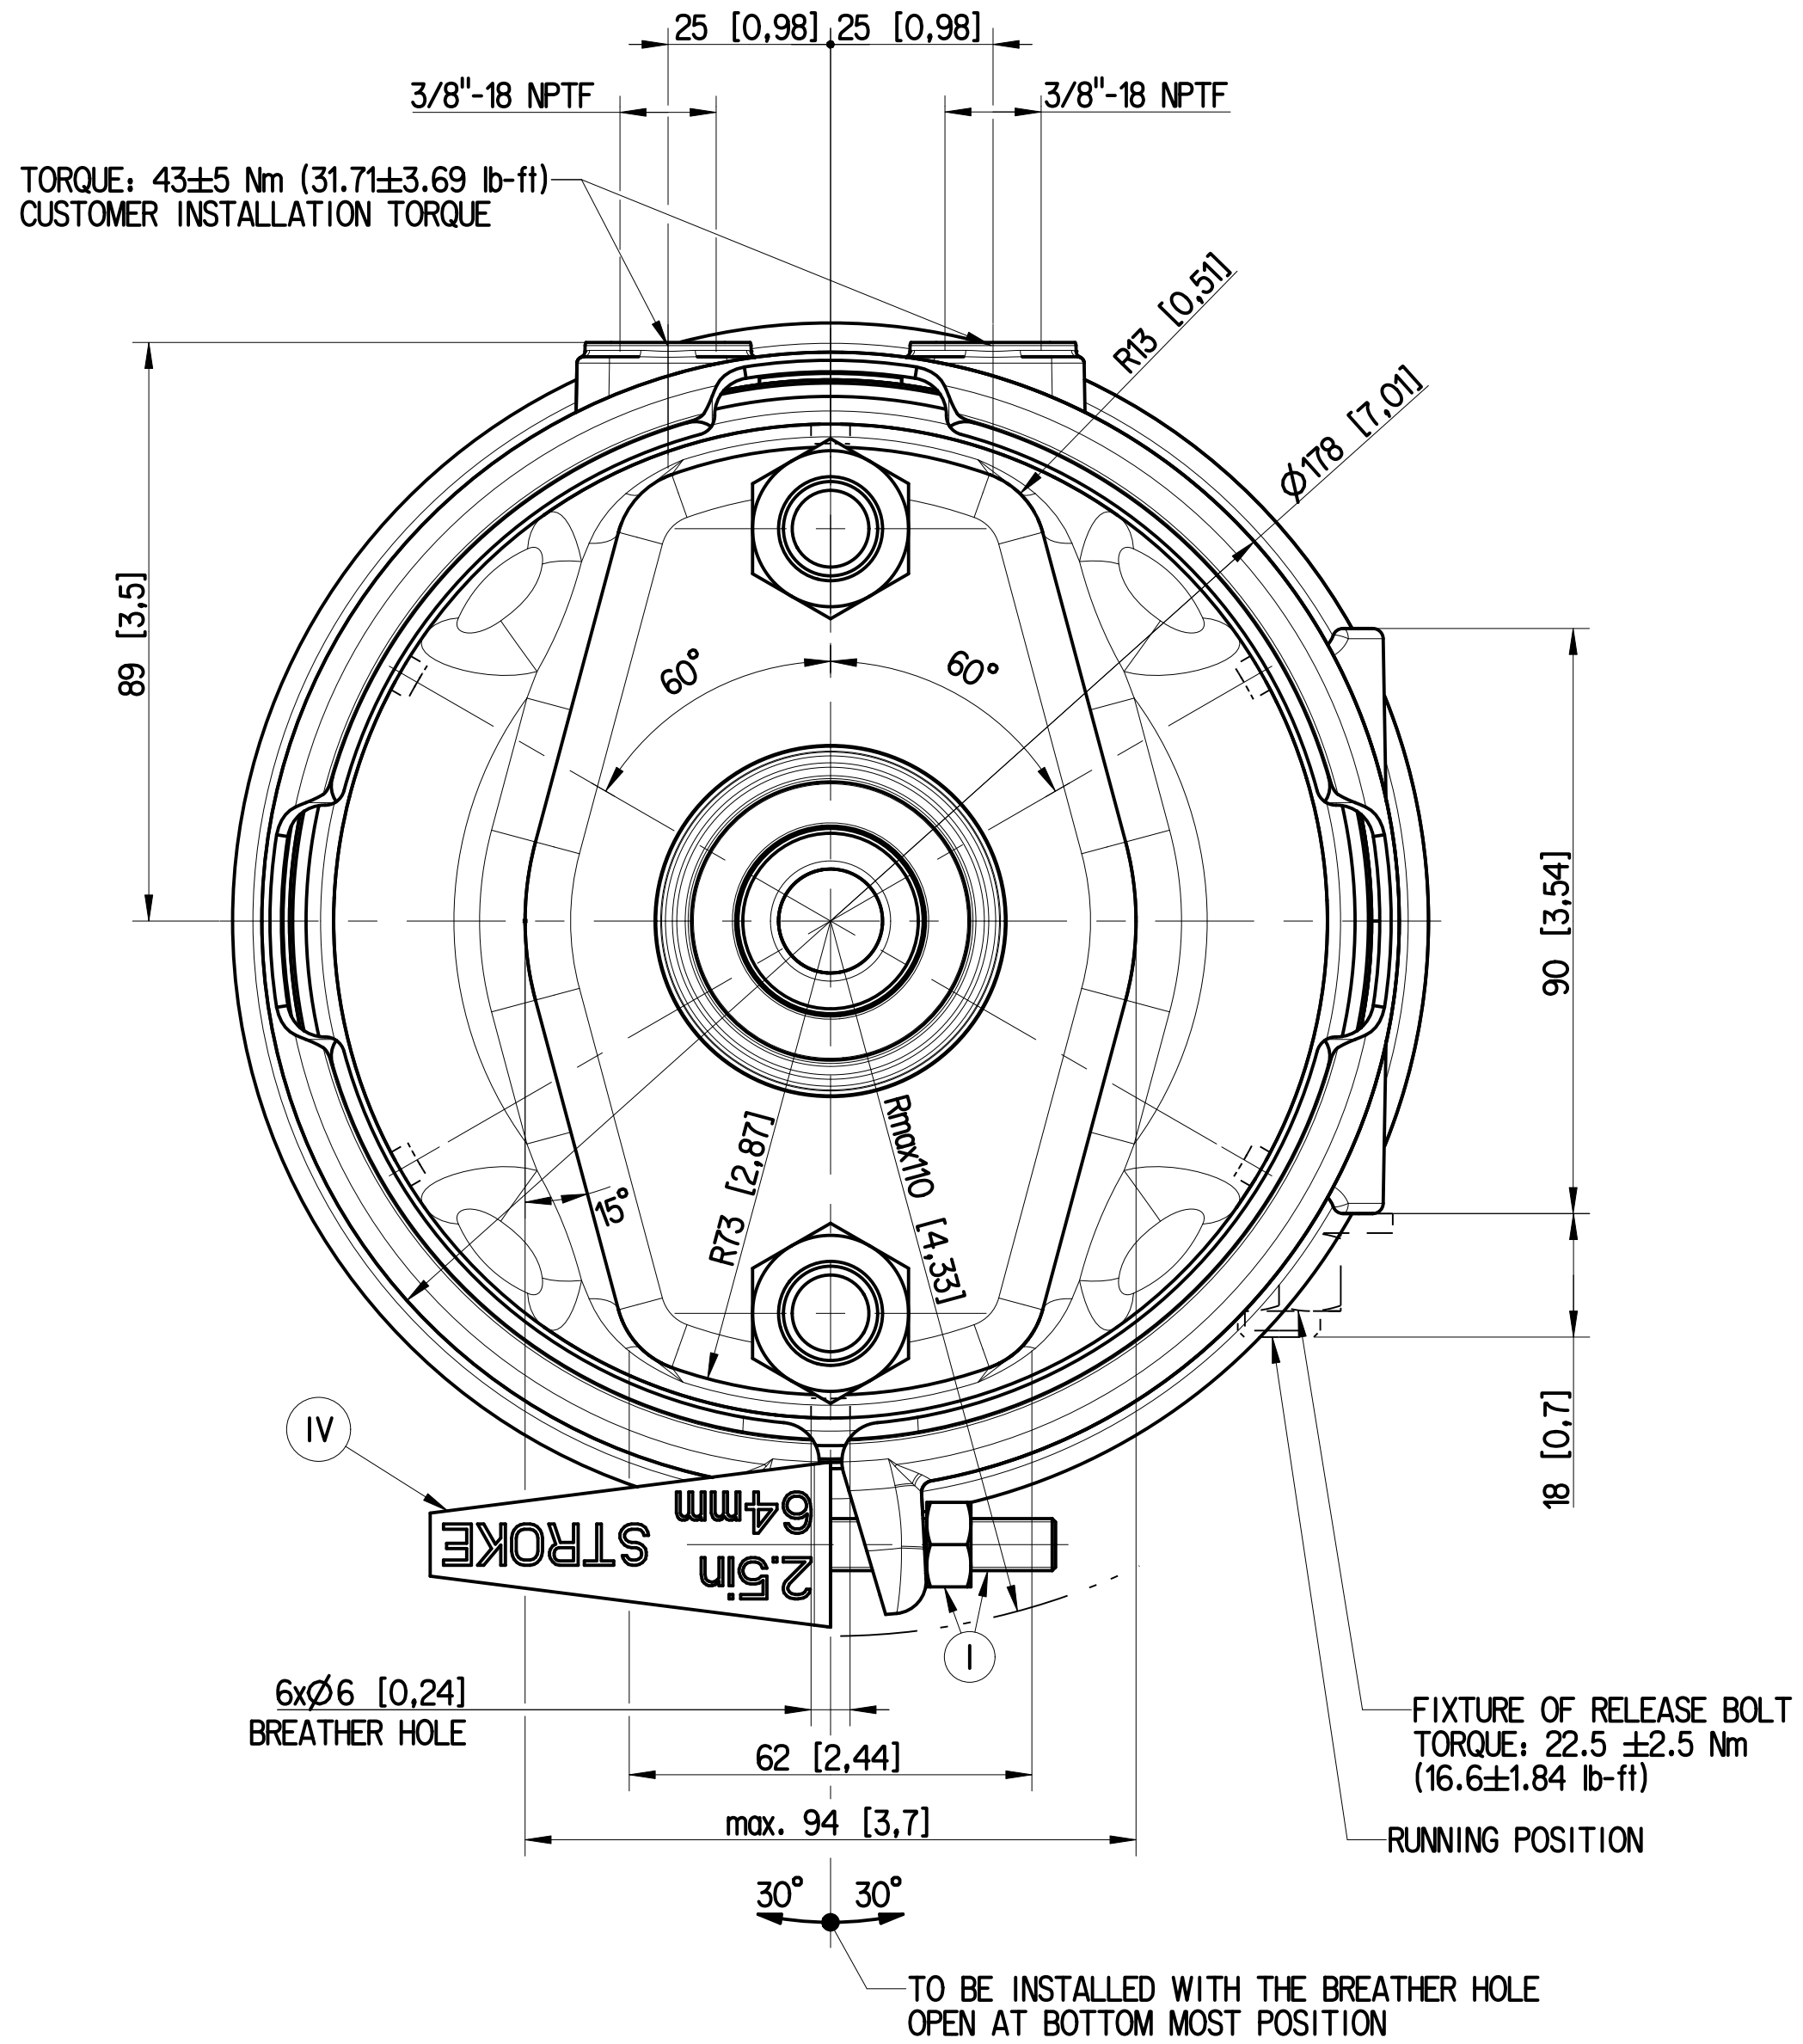
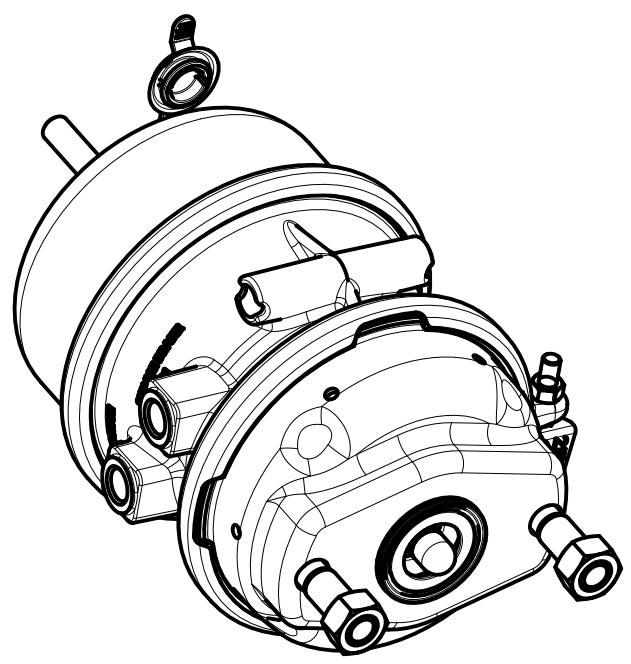
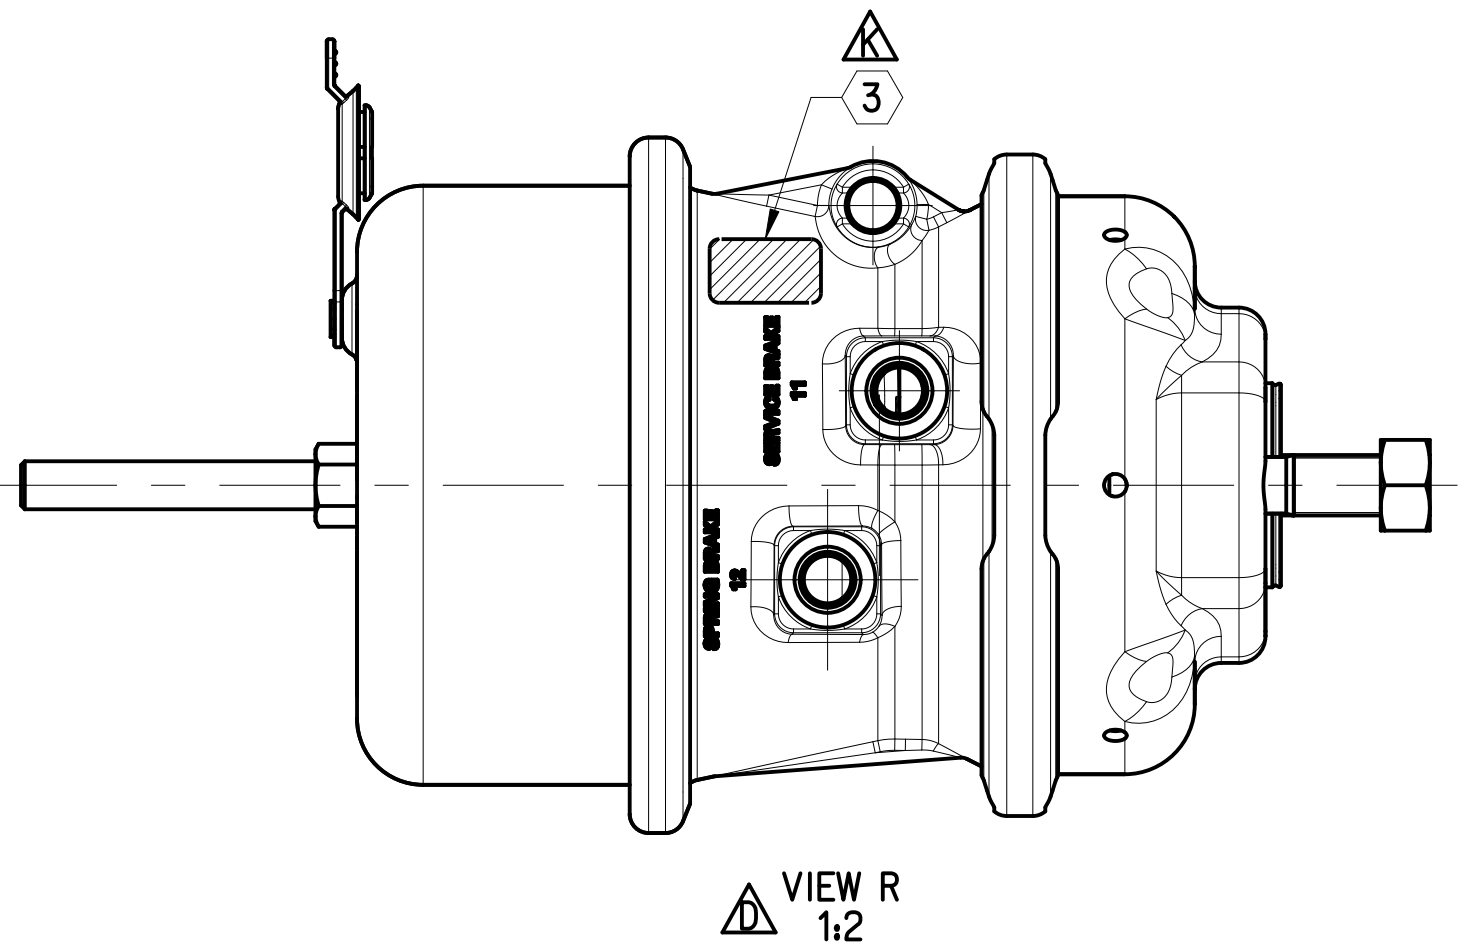




SURFACE PROTECTION	
I	JED-739-3 ZINC NICKEL PASSIVATION
II	JED-240-3 POWDER COATING
III	JED-259-1 CHROMATING
IV	- RUBBER / PLASTIC
V	JED-371 PHOSPHATING AND OILING
VI	JED-240-1 PAINTING

MAIN VIEWS REFER DIMENSIONS ONLY POSITION OF COMPONENTS SEE REPRESENTATION OF VARIATIONS


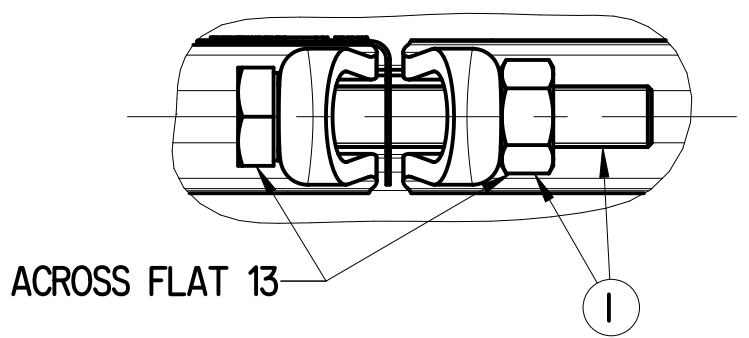


SL.No.	NOTES
1.1	WORKING MEDIUM AIR
1.2	NOMINAL DIAMETER FOR INLET PORTS MIN Ø11 (MIN Ø0.43")
1.3	STROKE 64mm min (2.5" min)
1.4	THERMAL RANGE OF APPLICATION -40°C.....+80°C (-40°F....+176°F)
1.5	WORKING PRESSURE SERVICE SIDE 8 bar (116 PSI)
1.6	WORKING PRESSURE SPRING SIDE 8 bar (116 PSI)
1.7	MAXIMUM PRESSURE SERVICE SIDE (TEMPORARILY) 10 bar (145 PSI)
1.8	MAXIMUM PRESSURE SPRING SIDE (TEMPORARILY) 10 bar (145 PSI)
1.9	MALE THREAD TO BE PROTECTED AND OPEN PORTS TO BE FITTED WITH CLOSURE PLUG TO AVOID TRANSIT DAMAGE.
2	UNIT DRAWN WITH 8 bar (116 PSI) AIR PRESSURE IN PORT 12
3	SUPPLIED WITH PARKING BRAKE IN RELEASED CONDITION

[...] DIMENSION IN INCHES

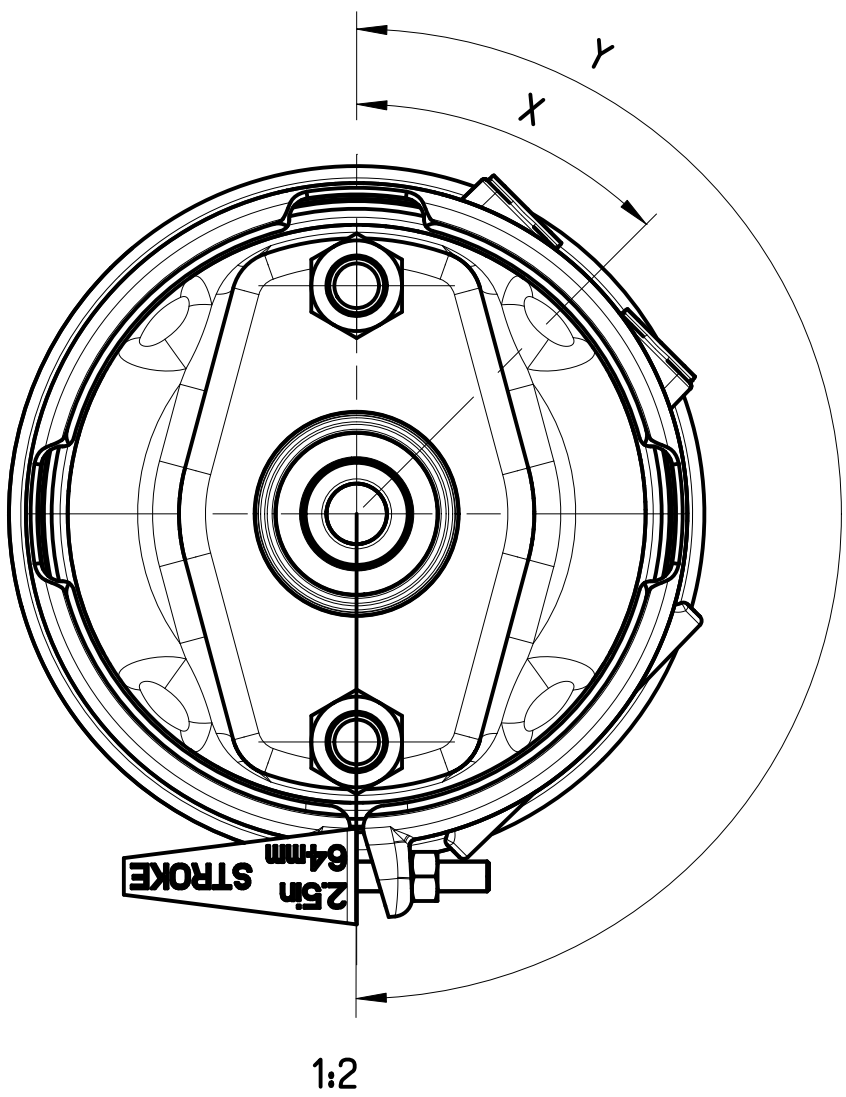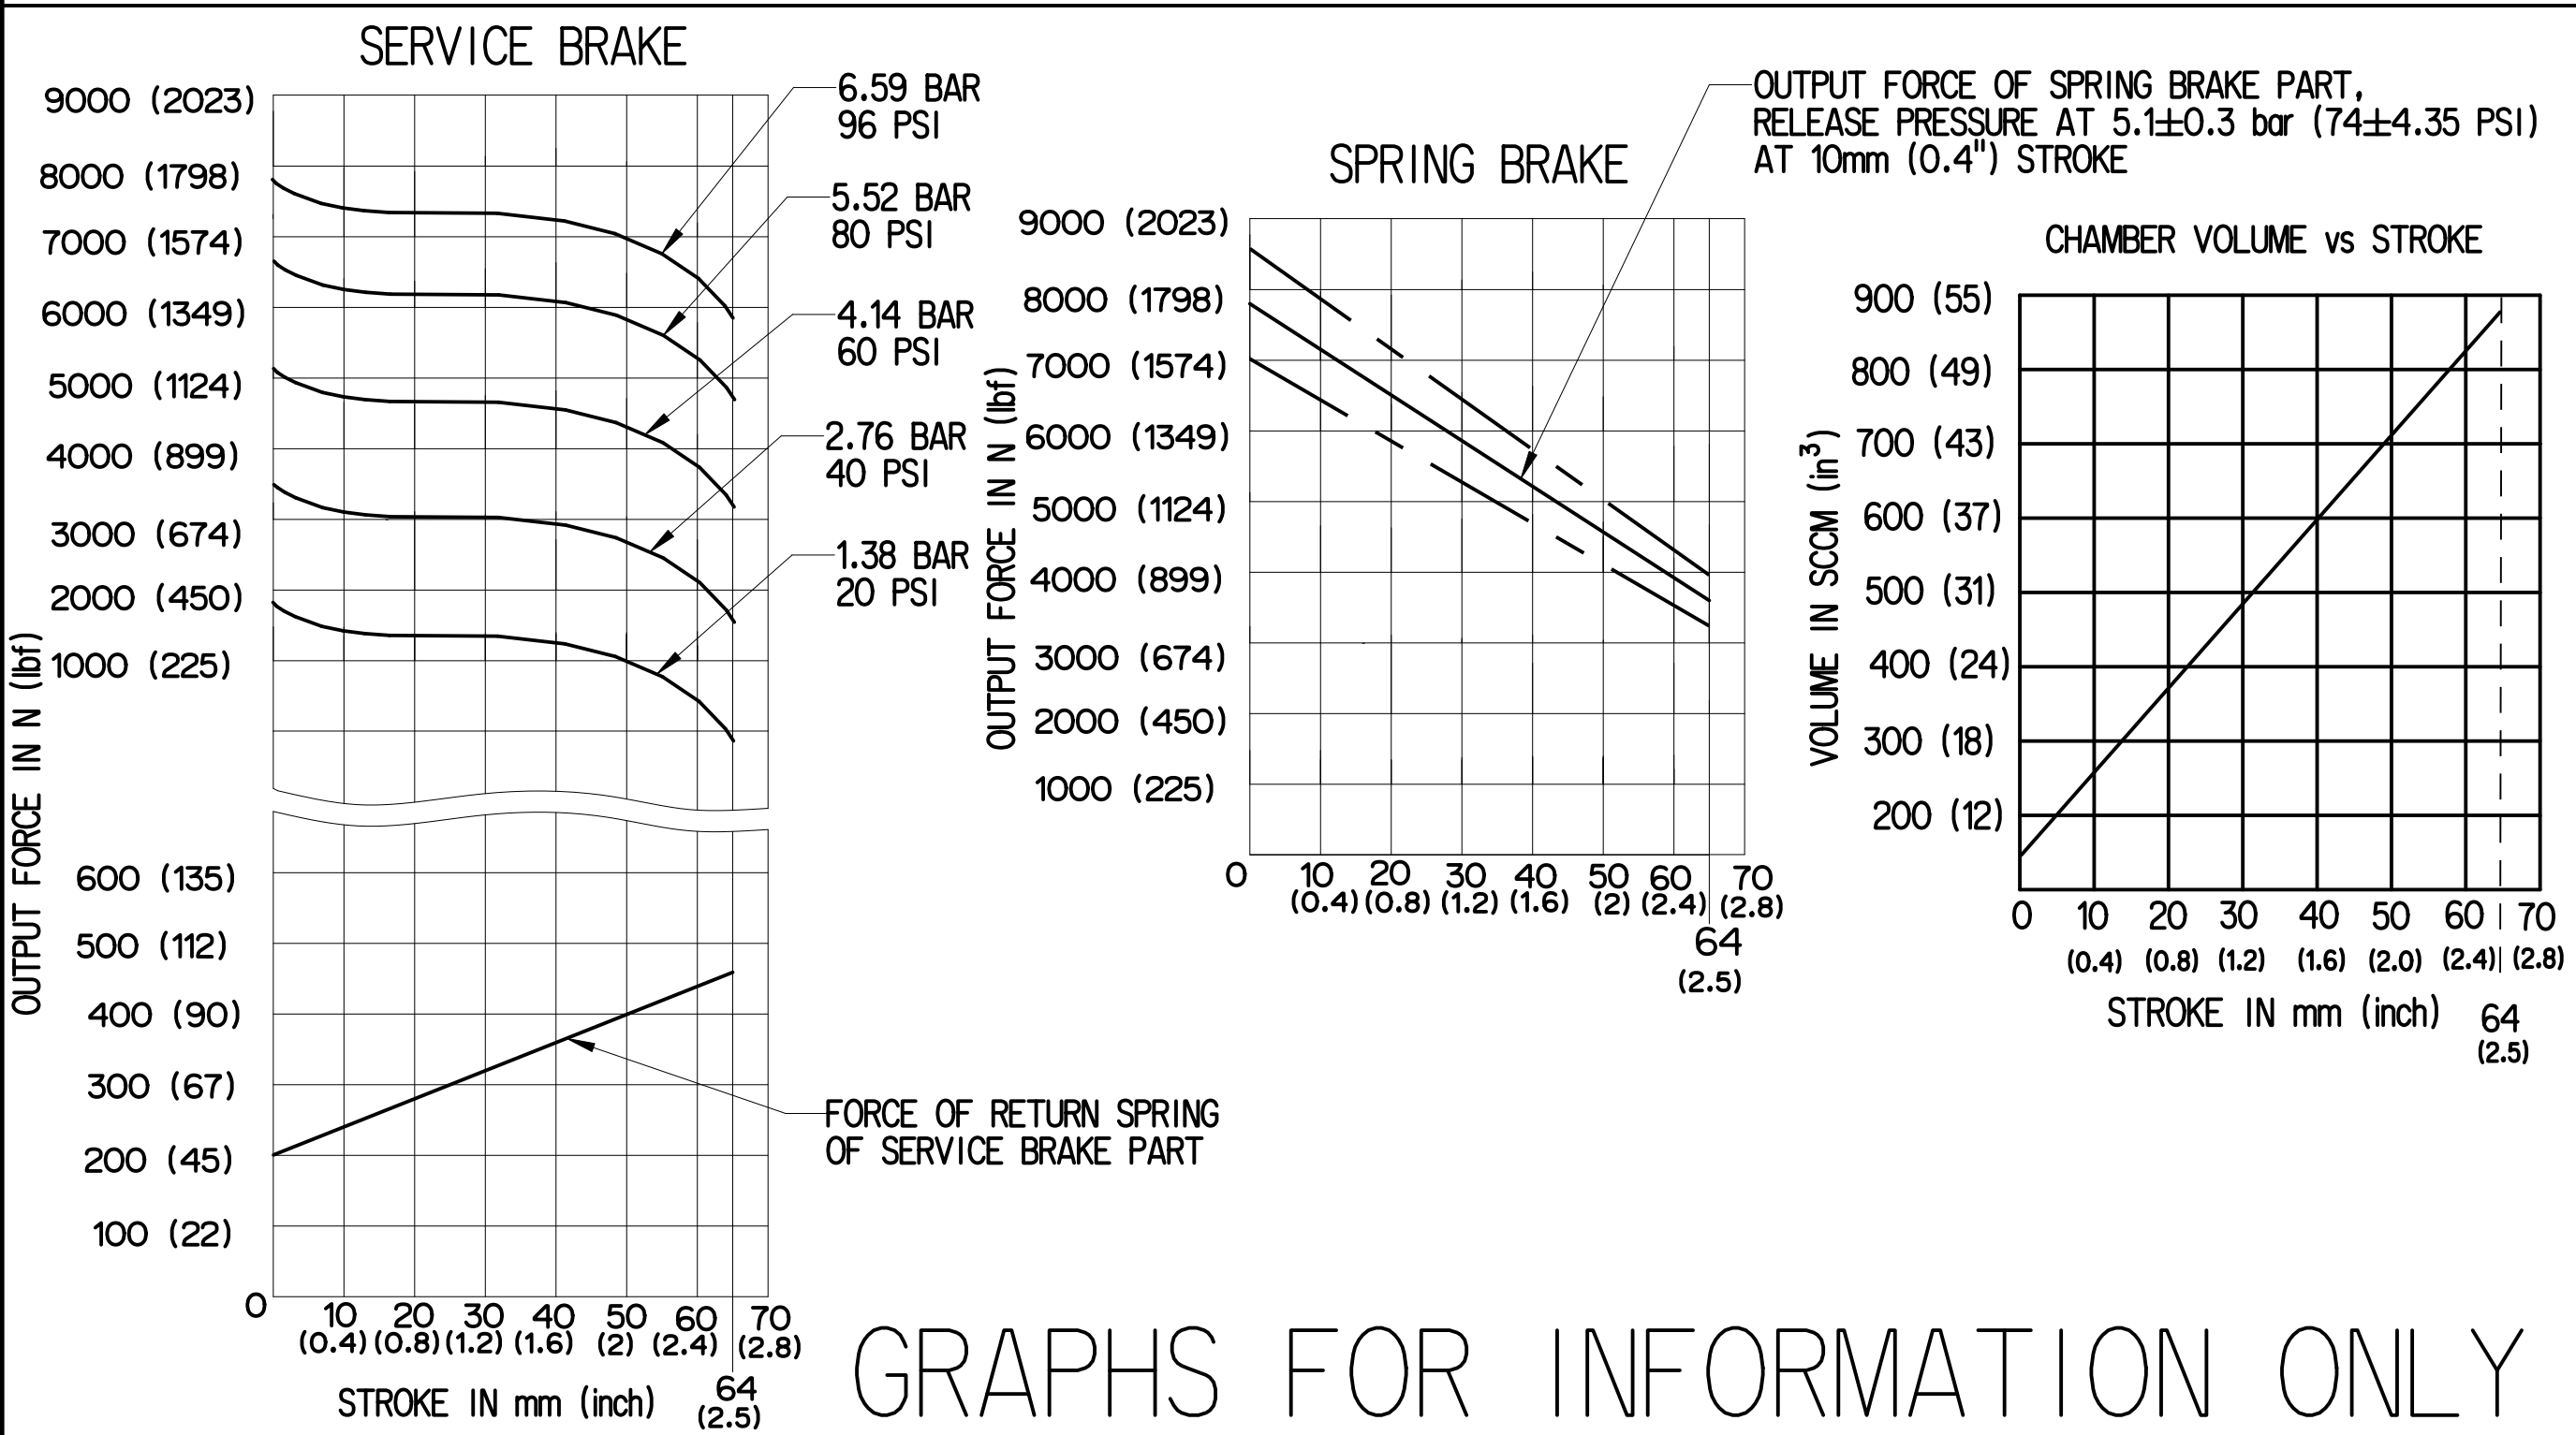

C-38722-R	925 347 010 0	300°	270°
C-38722-L	925 347 009 0	60°	270°
C-38721-R	925 347 008 0	135°	180°
C-38721-L	925 347 007 0	45°	180°
C-38721-U	925 347 006 0	0°	180°
A (HENDRICKSON PART No.)	B (WABCO PART No.)	PORT POSITION (X)	CLAMPBAND POSITION (Y)

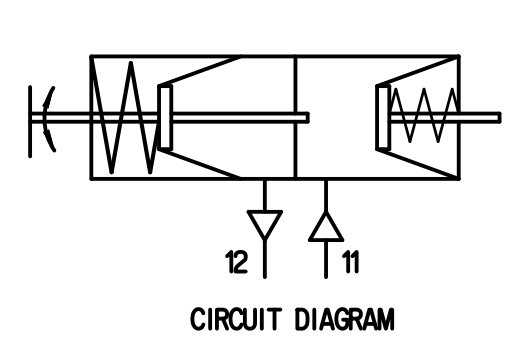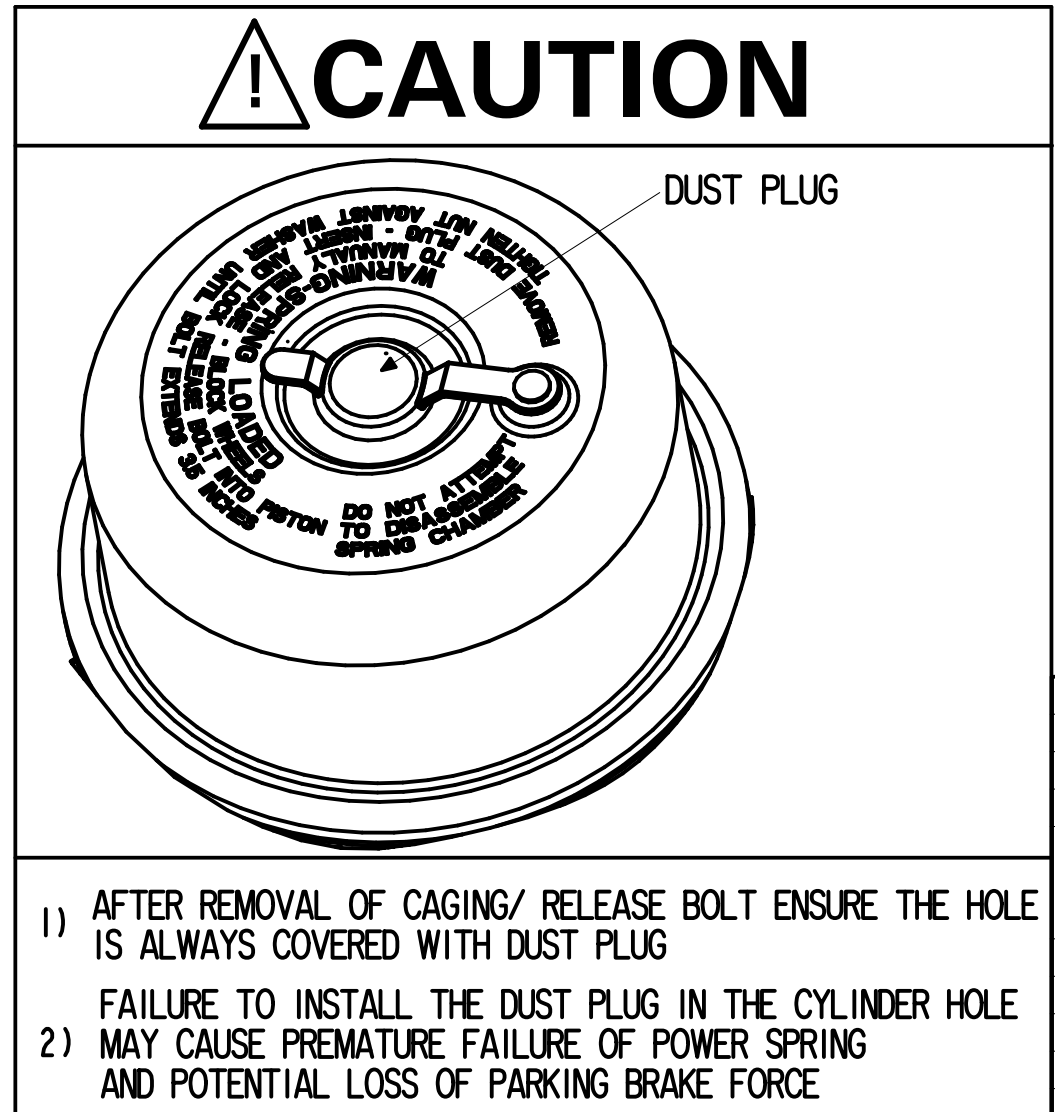

General Specifications ISO 8016, JED-334-1, Size ISO 14025 LP		Copyright 2024	
Further Technical Data 925 347 001 0		Doc. Code 0351	
1 To 6		1 To 6	
2024-04-24		2024-04-29	
Arangoon		Arangoon	
DOUBLE DIAPHRAGM TRISTOP 16/24		925 347 005 0	
053 EN 1/1		053 EN 1/1	