

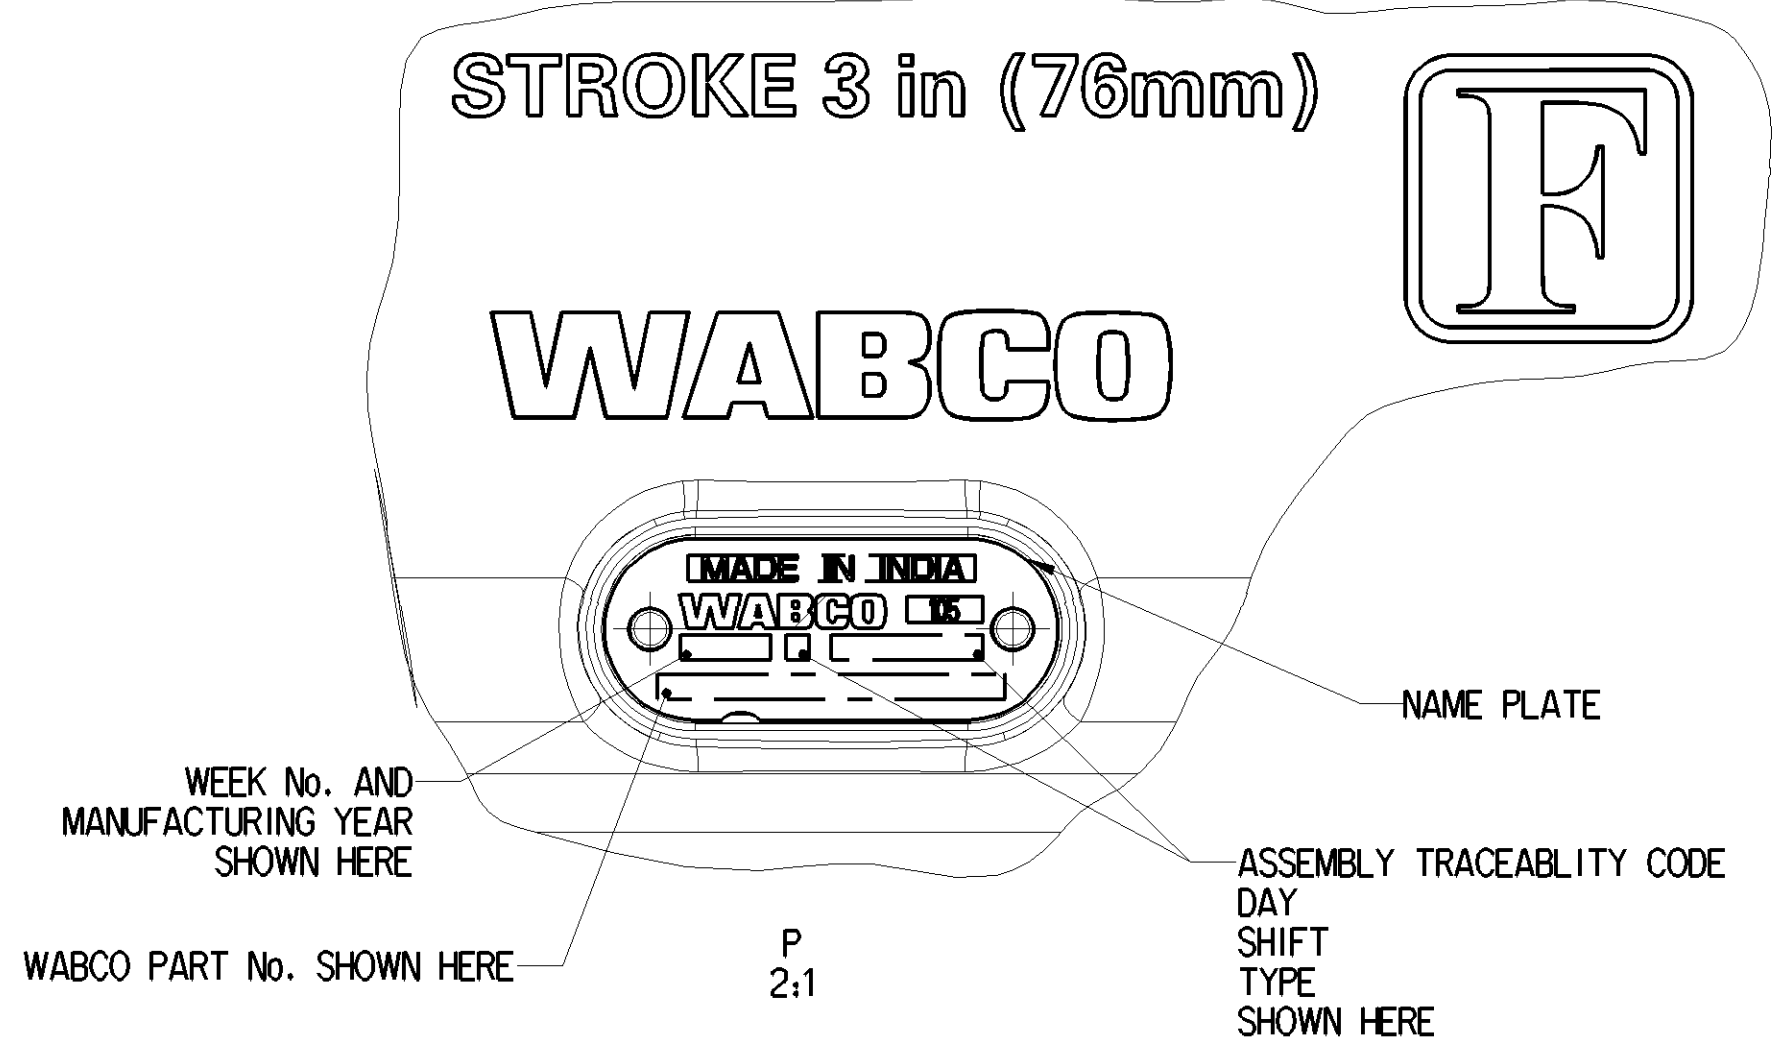
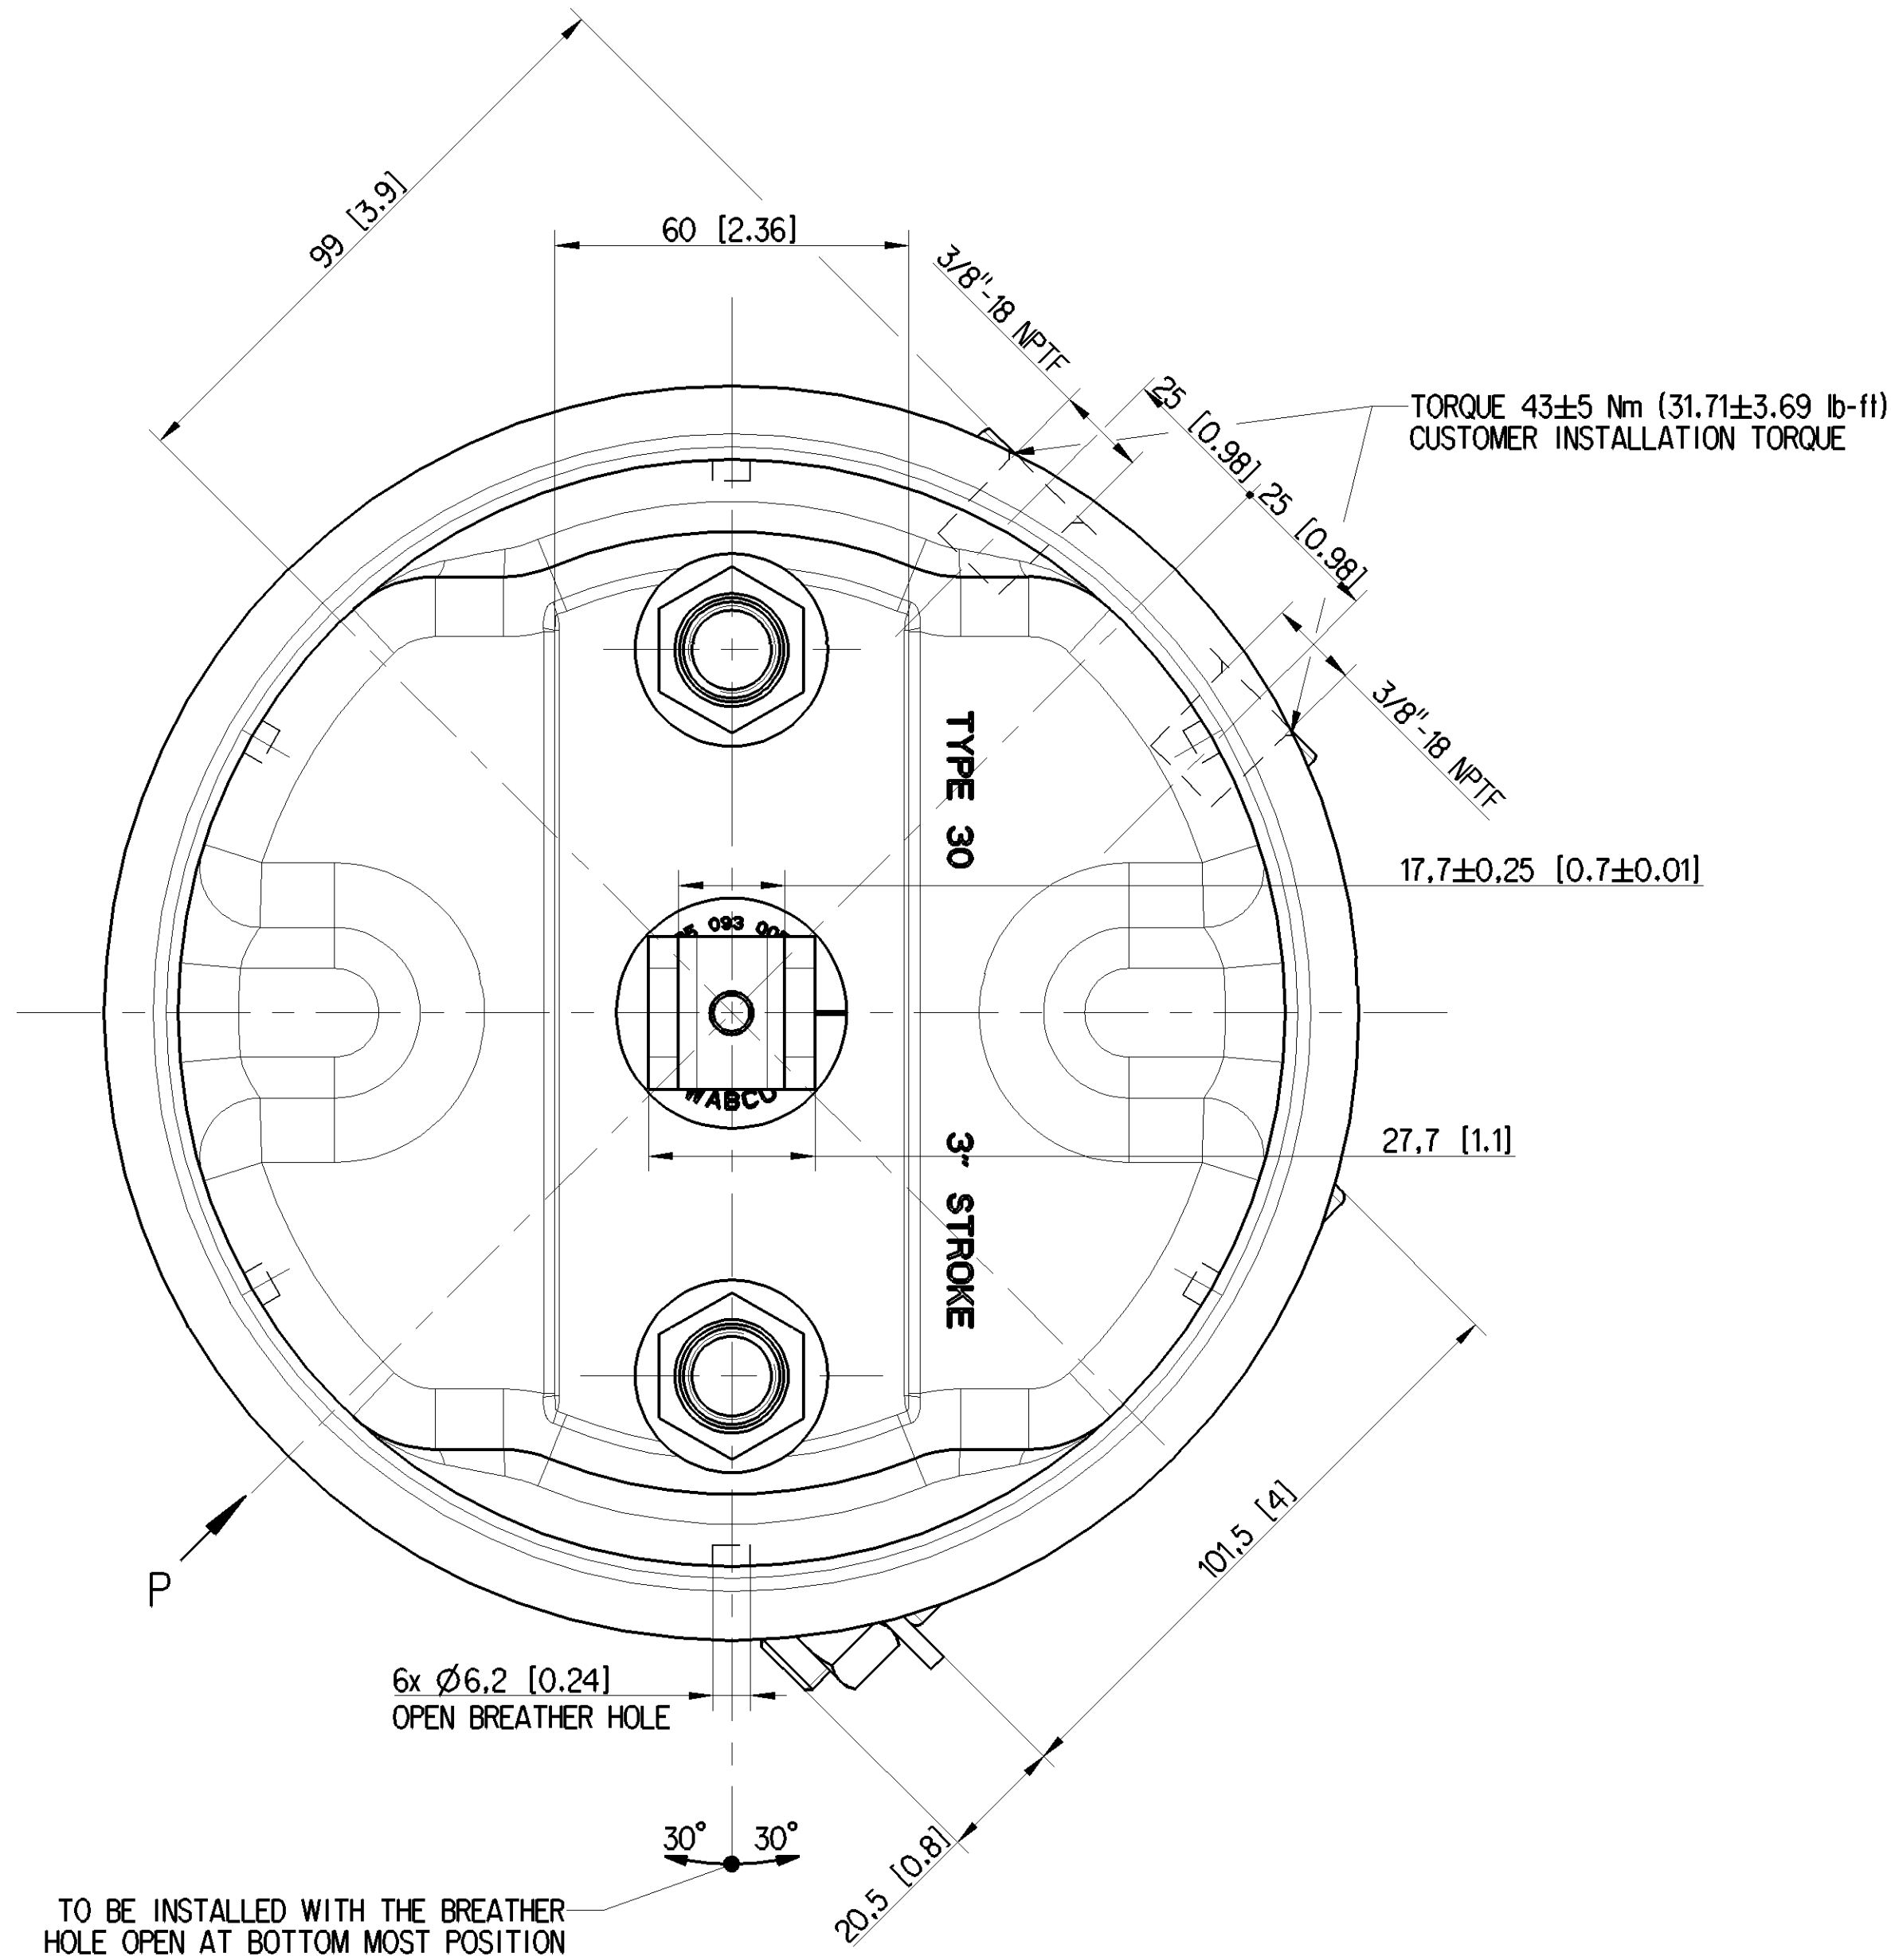
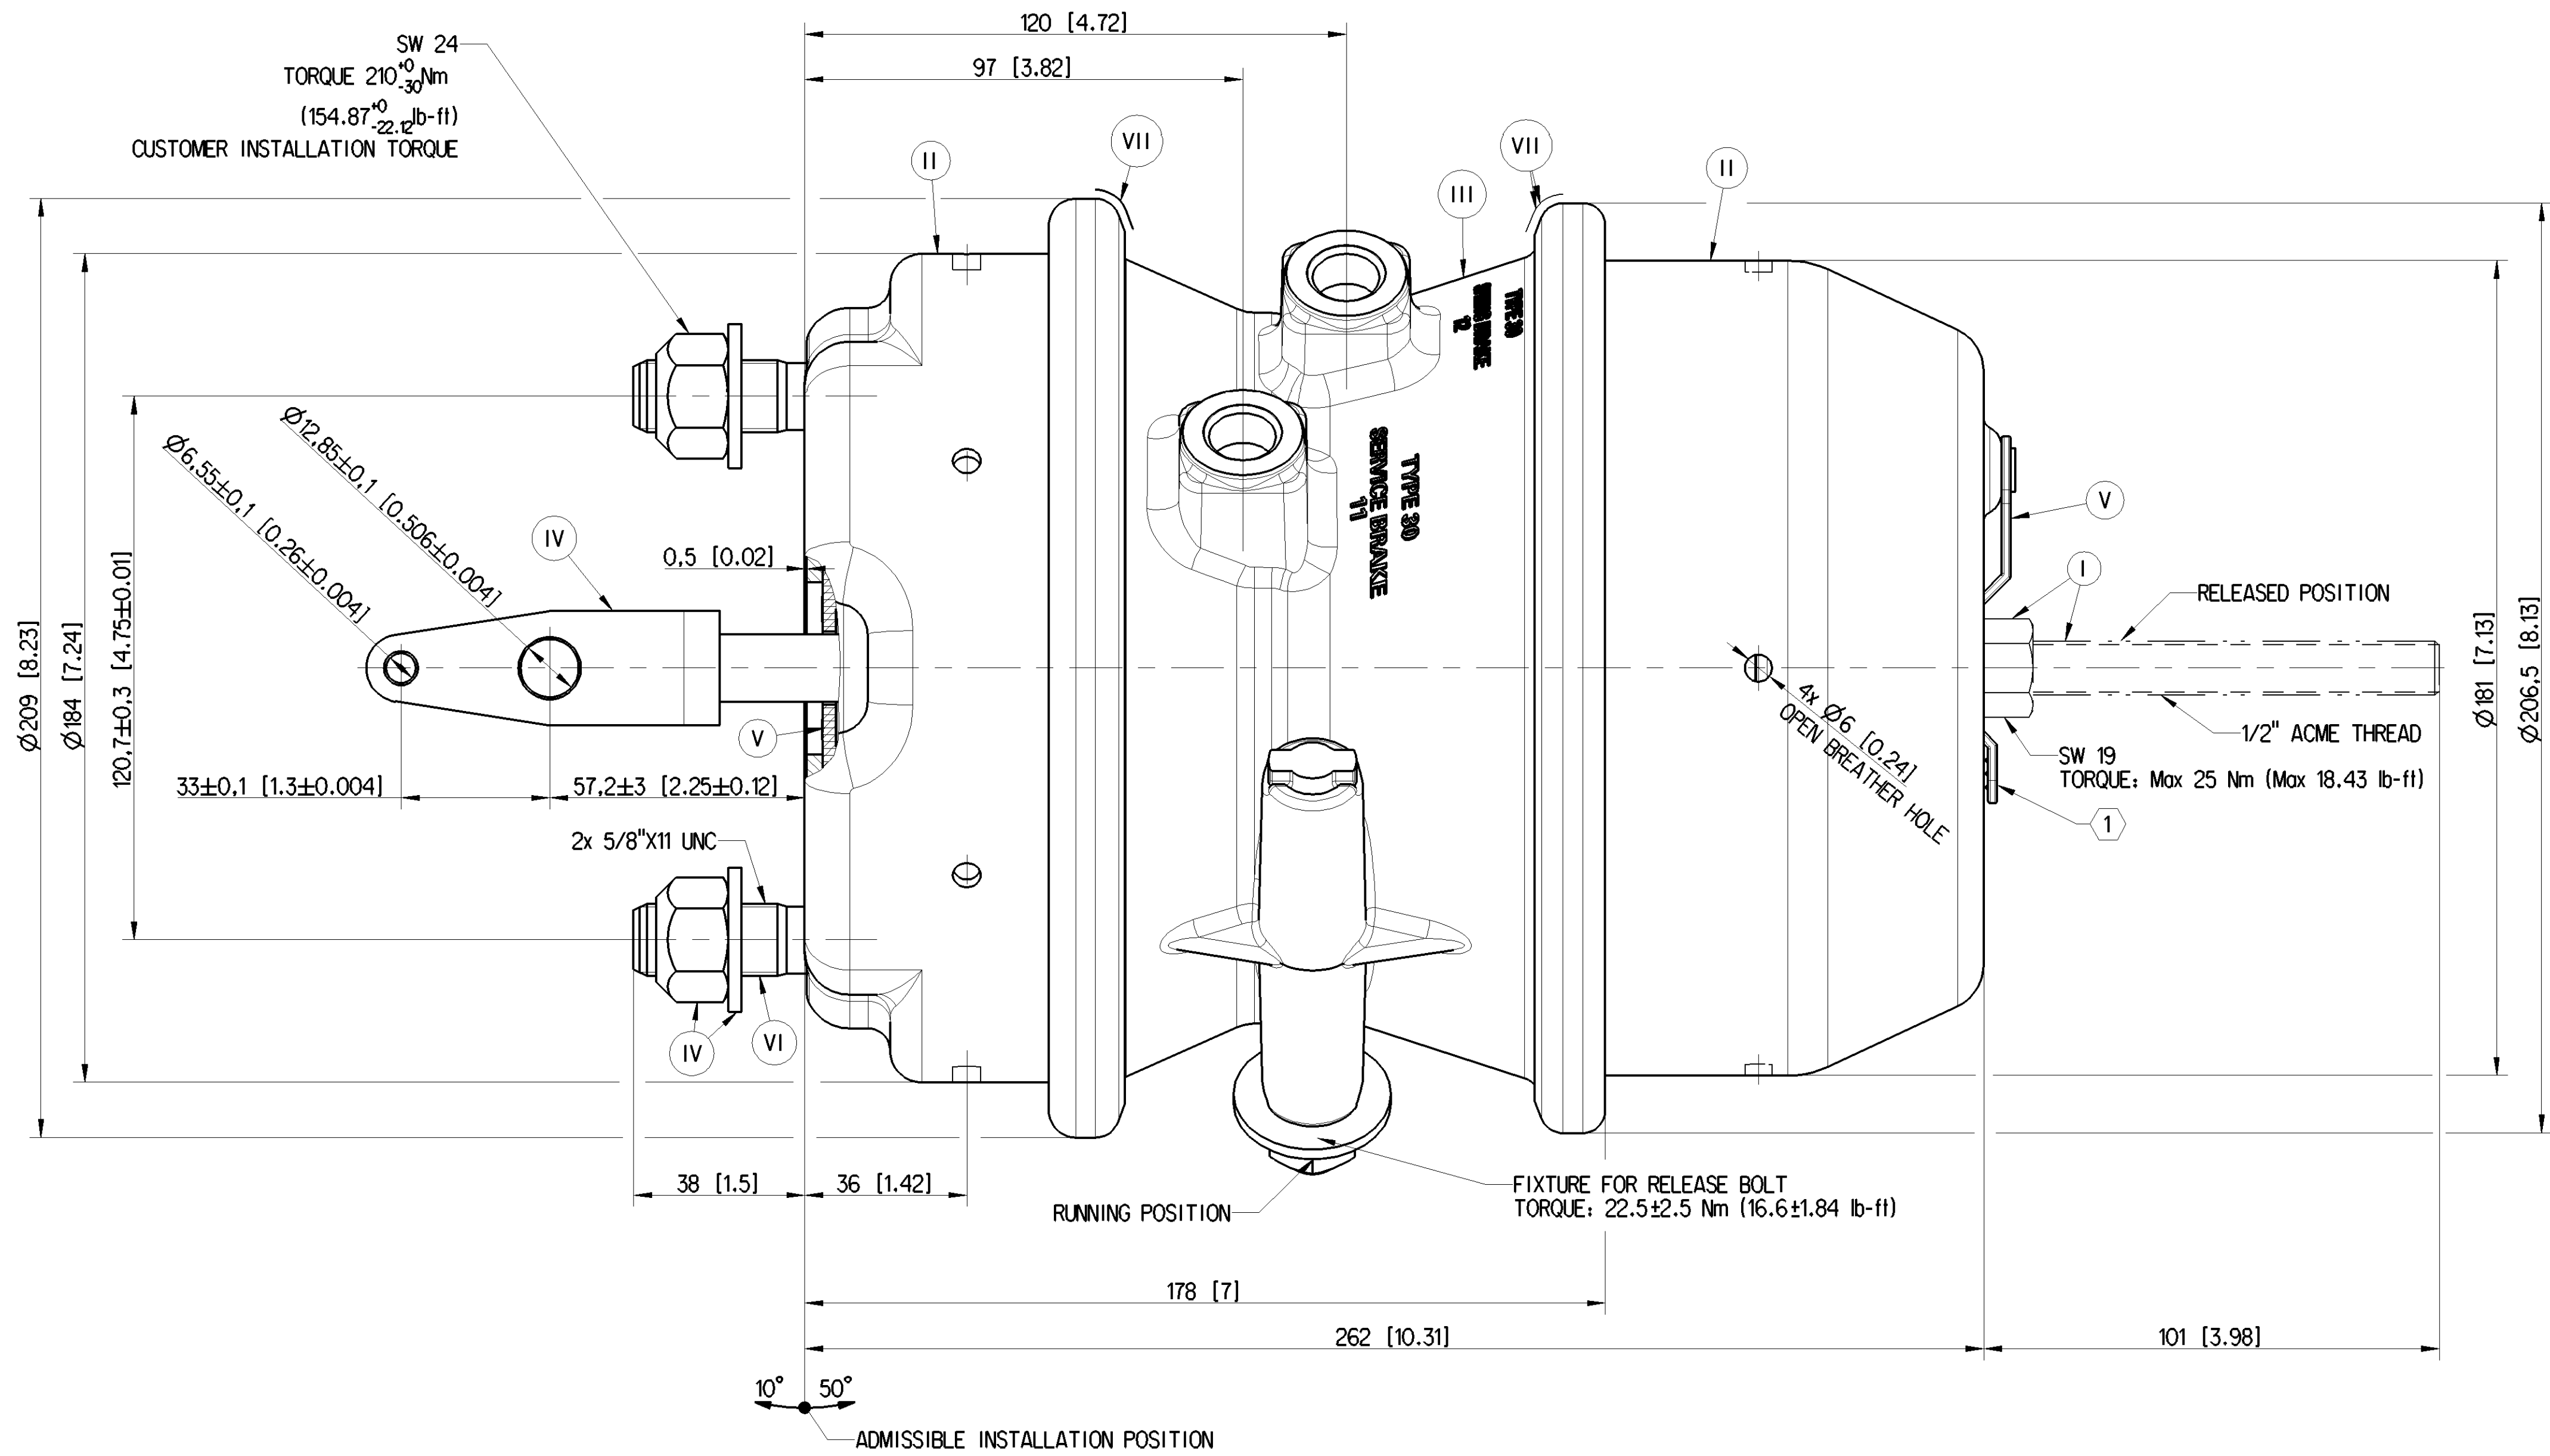


SURFACE PROTECTION	
S.No.	JED DESCRIPTION
I	JED-739-3 ZINC NICKEL PASSIVATION
II	JED-240-3 POWDER COATING
III	JED-259-1 CHROMATING
IV	JED-256-5 ZINC PASSIVATION
V	- RUBBER / PLASTIC
VI	JED-371-0 PHOSPHATING AND OILING
VII	JED-240-1 PAINTING

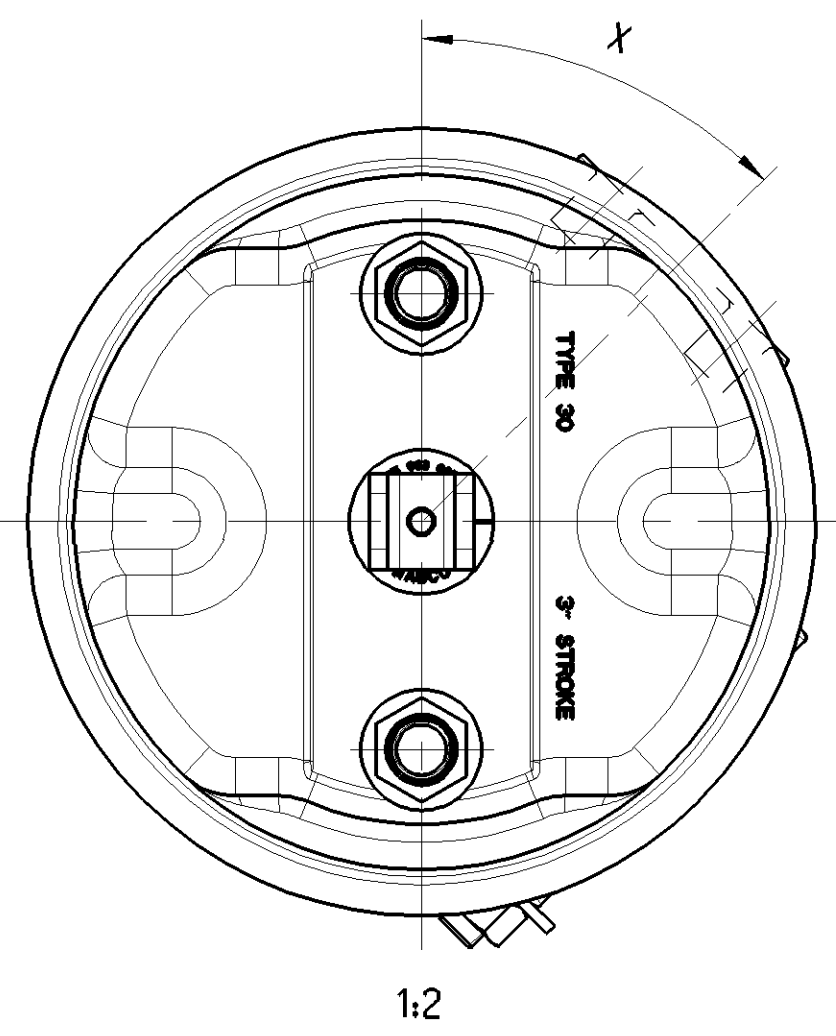



S.No.	NOTES	
1.1	WORKING MEDIUM	AIR
1.2	NOMINAL DIAMETER FOR INLET PORTS	MIN Ø11 [MIN Ø0.43"]
1.3	STROKE	76mm min [3" min]
1.4	THERMAL RANGE OF APPLICATION	-40°C...+90°C [-40°F...+176°F]
1.5	WORKING PRESSURE SERVICE SIDE	8 bar (116 PSI)
1.6	WORKING PRESSURE SPRING SIDE	8 bar (116 PSI)
1.7	MAXIMUM PRESSURE SERVICE SIDE (TEMPORARILY)	10 bar (145 PSI)
1.8	MAXIMUM PRESSURE SPRING SIDE (TEMPORARILY)	10 bar (145 PSI)
2	MALE THREAD TO BE PROTECTED AND OPEN PORTS TO BE FITTED WITH CLOSURE PLUG TO AVOID TRANSIT DAMAGE	
3	UNIT DRAWN WITH 8 bar (116 PSI) AIR PRESSURE IN PORT 12	
4	SUPPLIED WITH PARKING BRAKE IN RELEASED CONDITION	

1 DRAWN OUT OF PLANE

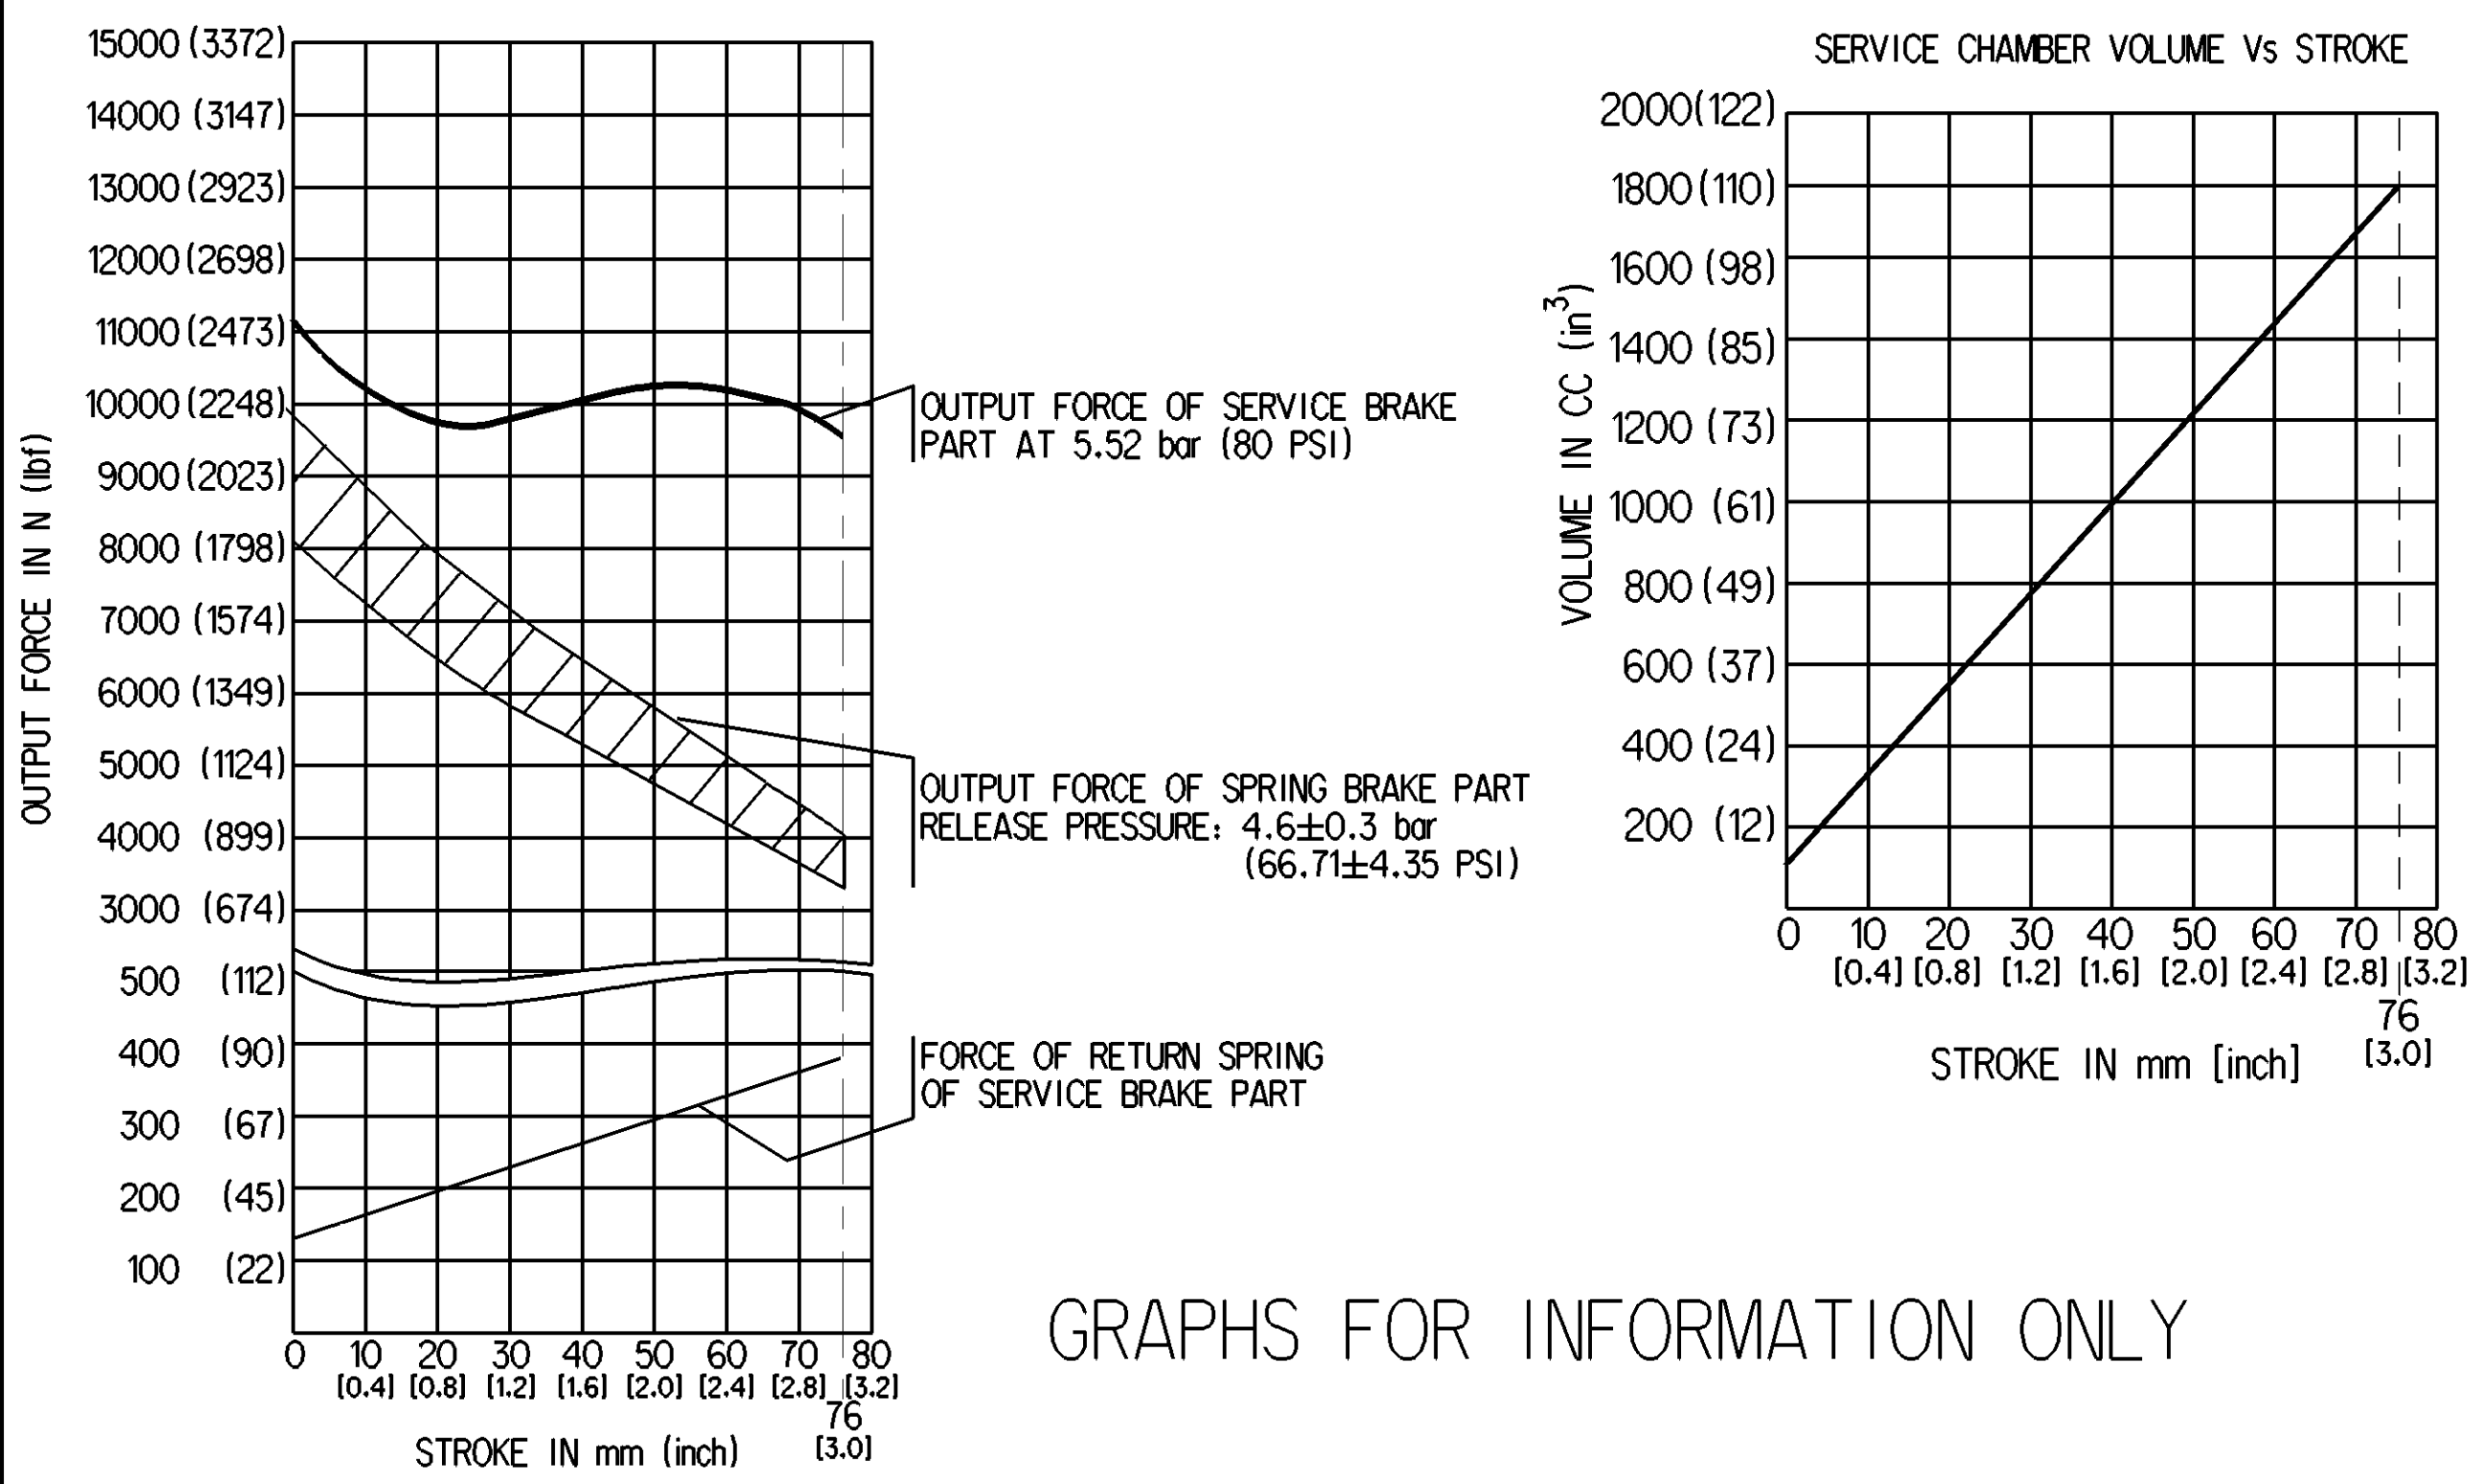

925 392 074 0	160°
925 392 073 0	20°
925 392 003 0	135°
925 392 002 0	45°
WABCO PART No.	PORT POSITION (X)

[...] Dimension in inches

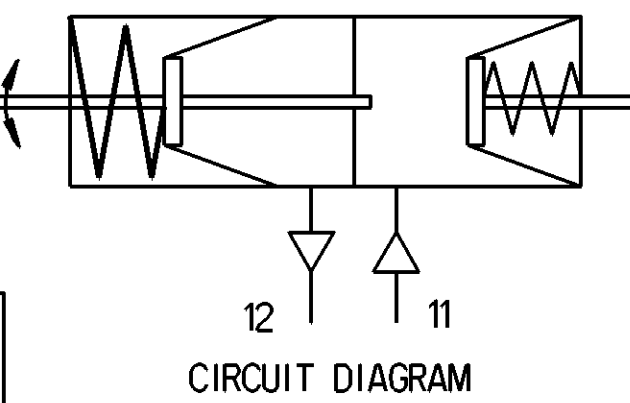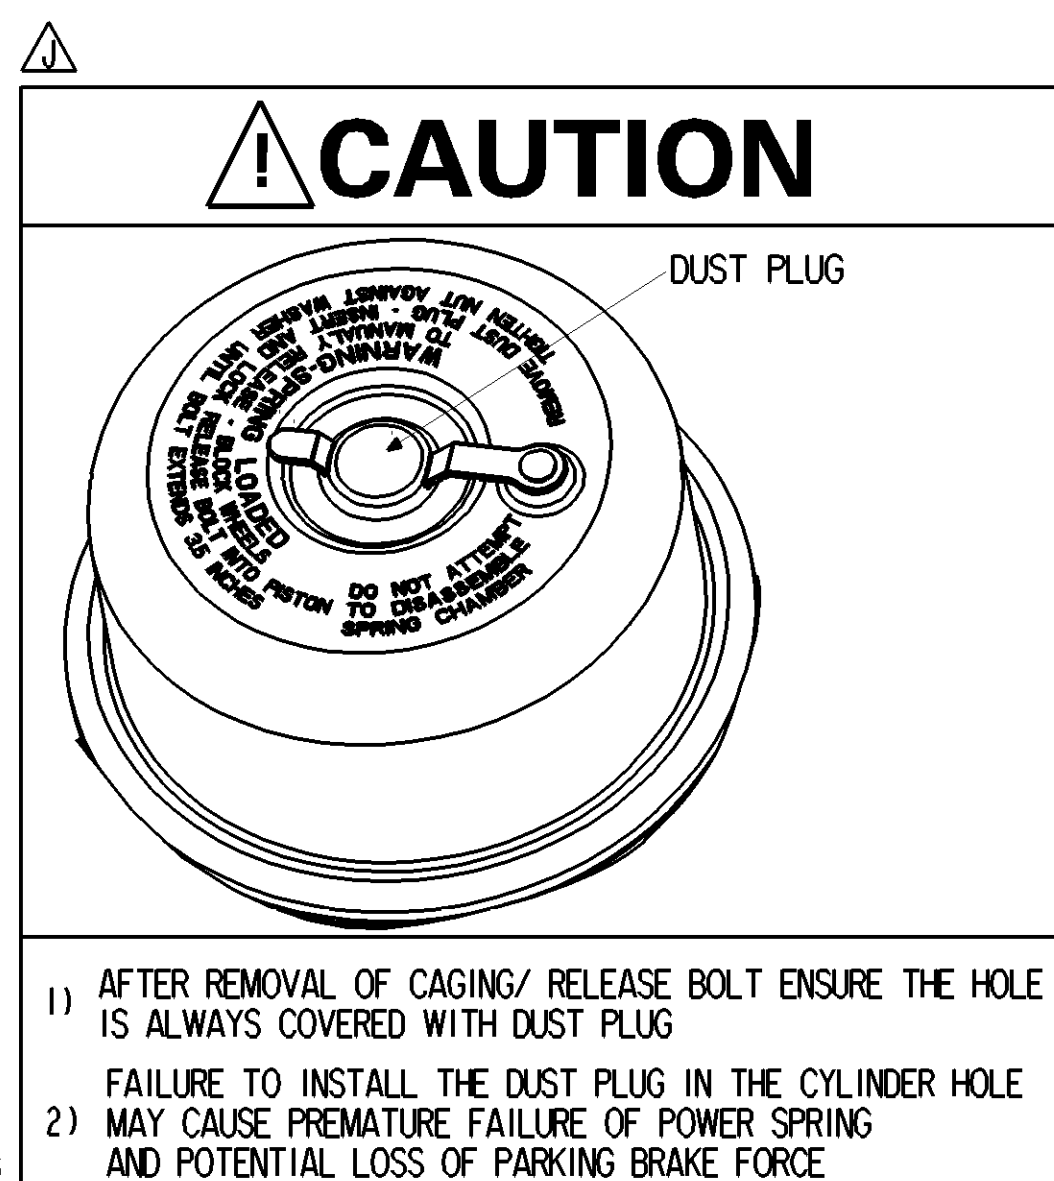

General Specification ISO 8476, JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data: 925 392 001 0	Date: 2023-01-04	Drawn: 1	Sheet: 1 To 8	Doc Code: 0357	Signature: 925 392 002 0
Doc. Code: 0357	General Tolerances: JED-261	2023-01-04	Ann	2023-01-04	053 EN 1/1
Class: 11	± 50	± 50	± 180	± 400	± 400
Fin: 1	± 0.05	± 0.1	± 0.15	± 0.2	± 0.2
Medium: X	± 1	± 2	± 3	± 4	± 5
Coarse: 1	± 2	± 3.5	± 4.5	± 5.5	± 6.5
Size: 11	± 0.05	± 0.1	± 0.15	± 0.2	± 0.2
Trapped Holes acc. JED-6086	0	0	0	0	0
Tolerance Class: Applied (assumed)	0	0	0	0	0
Material No.	925 392 002 0	Revision	2x	Drawn	5420