

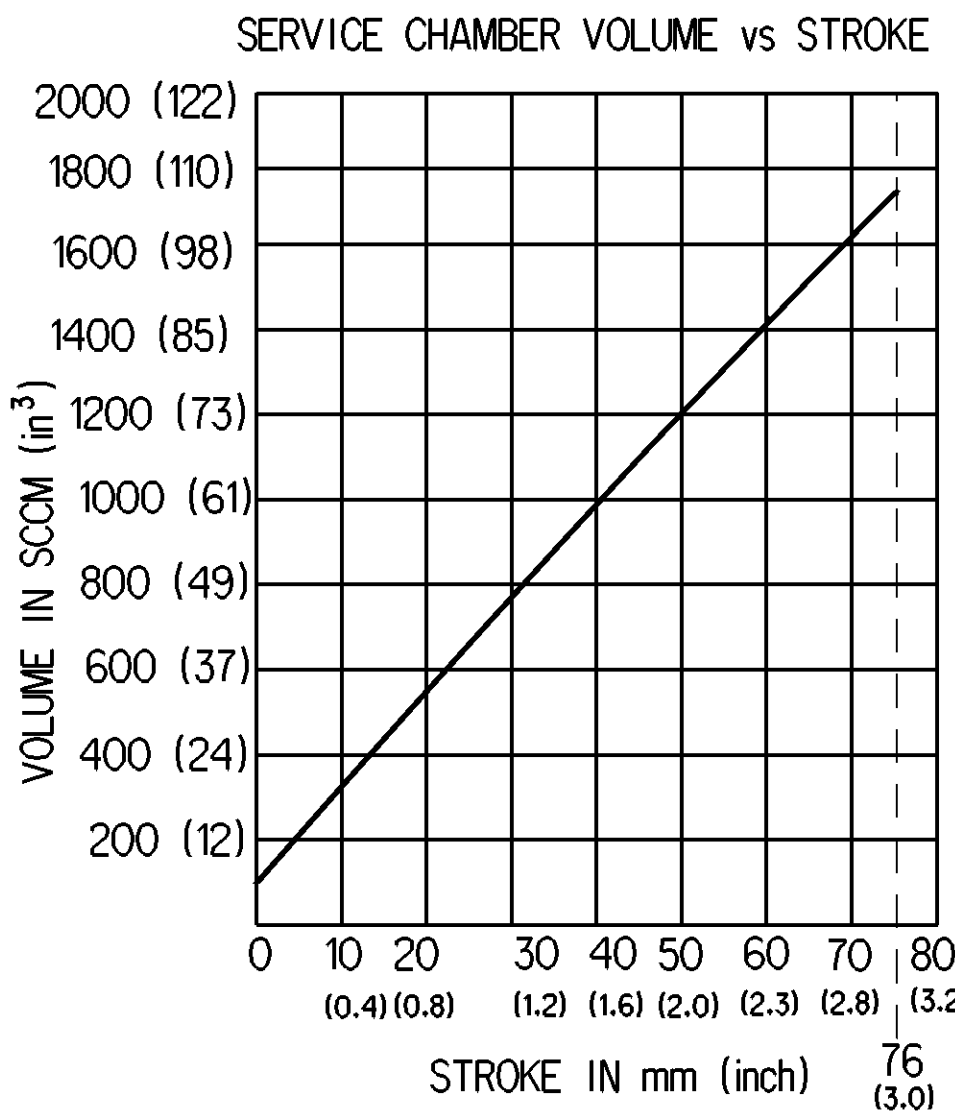
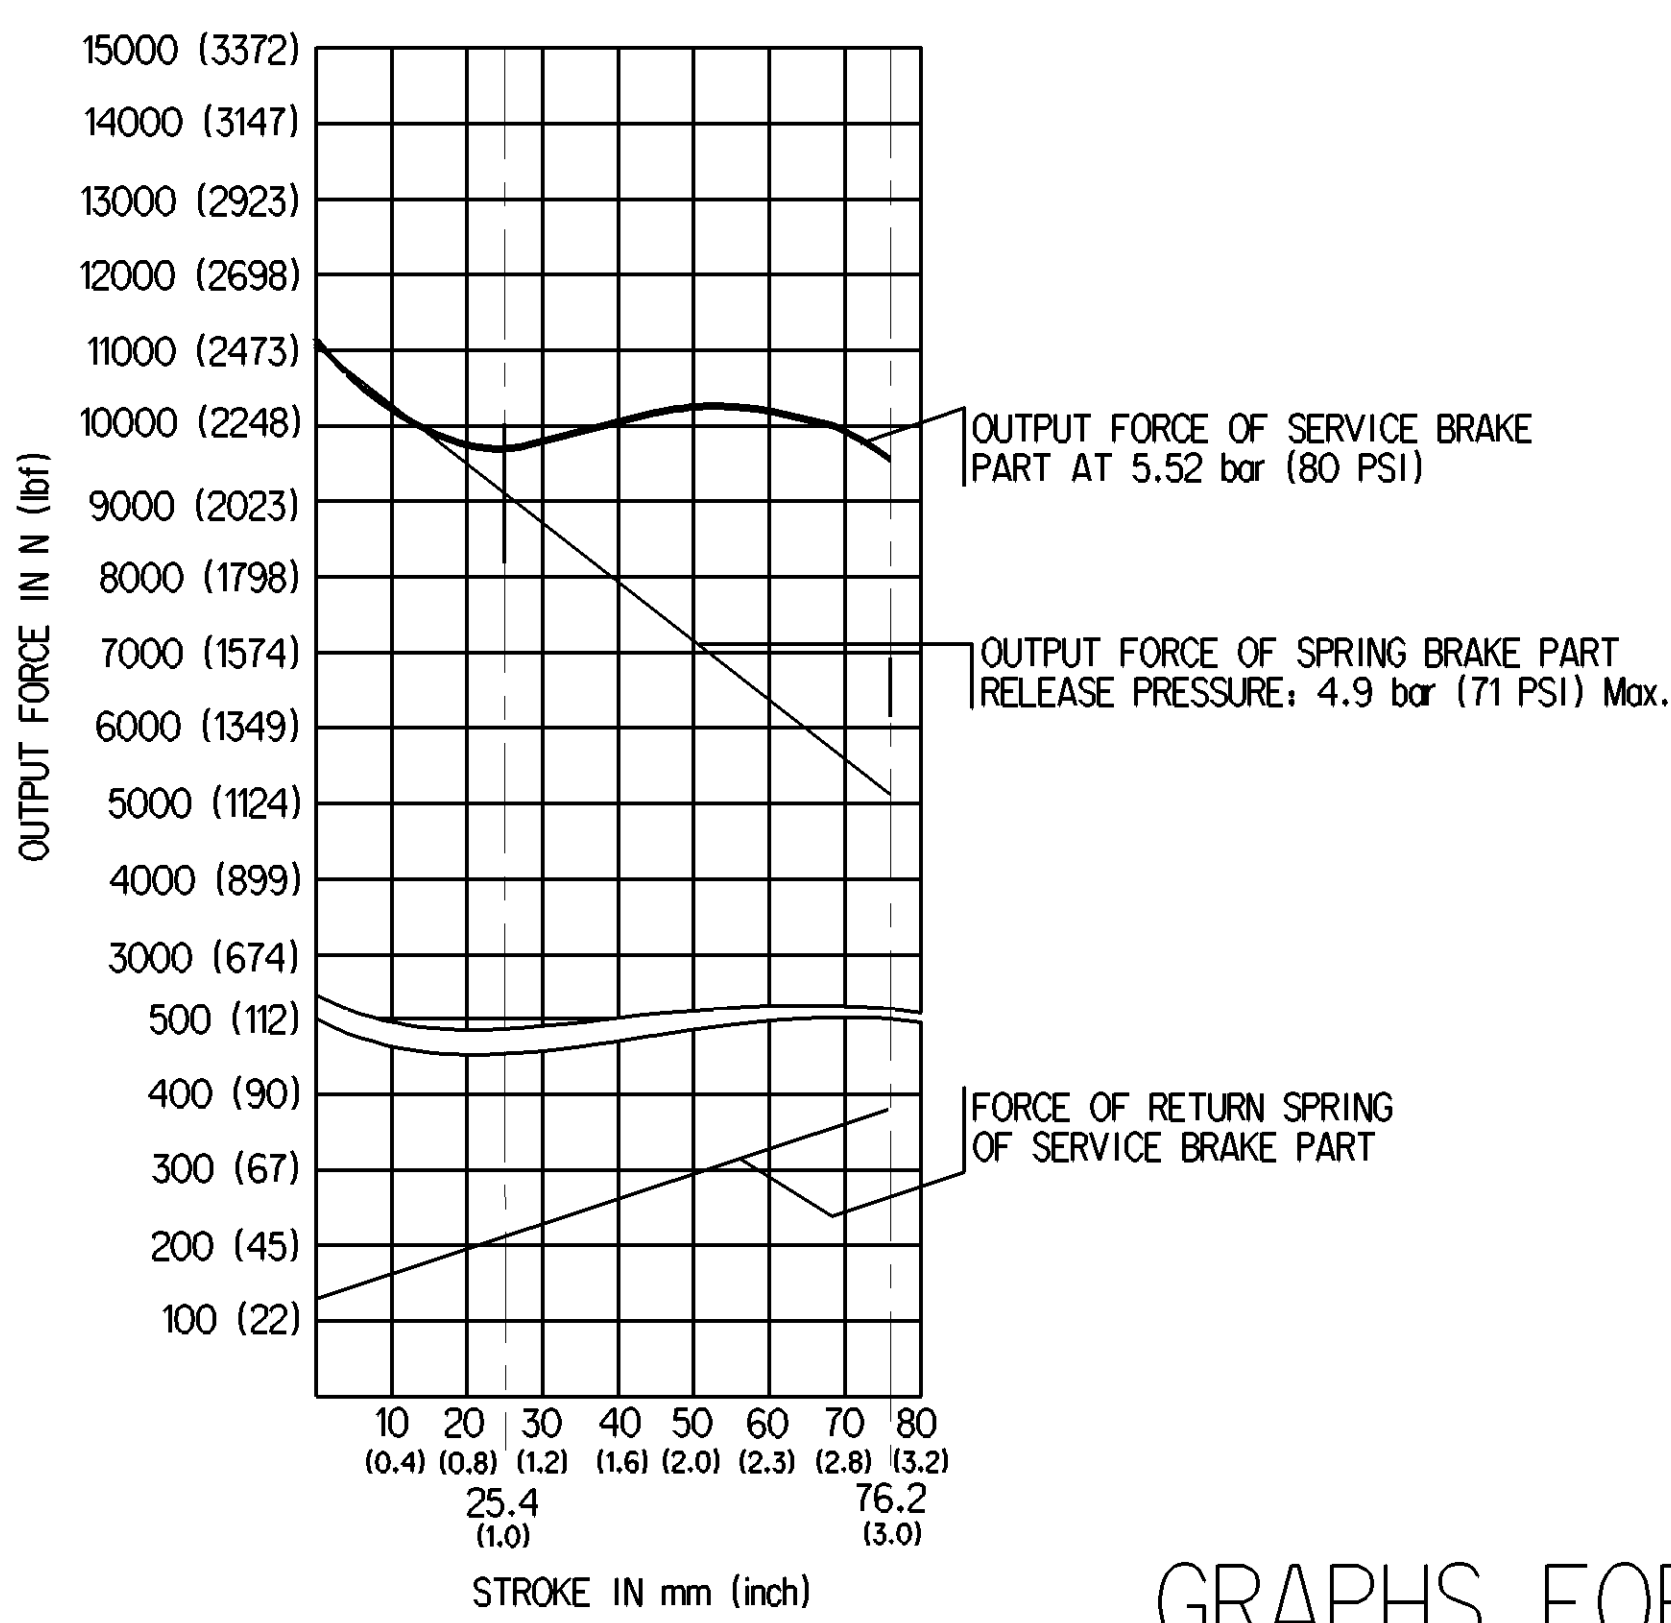
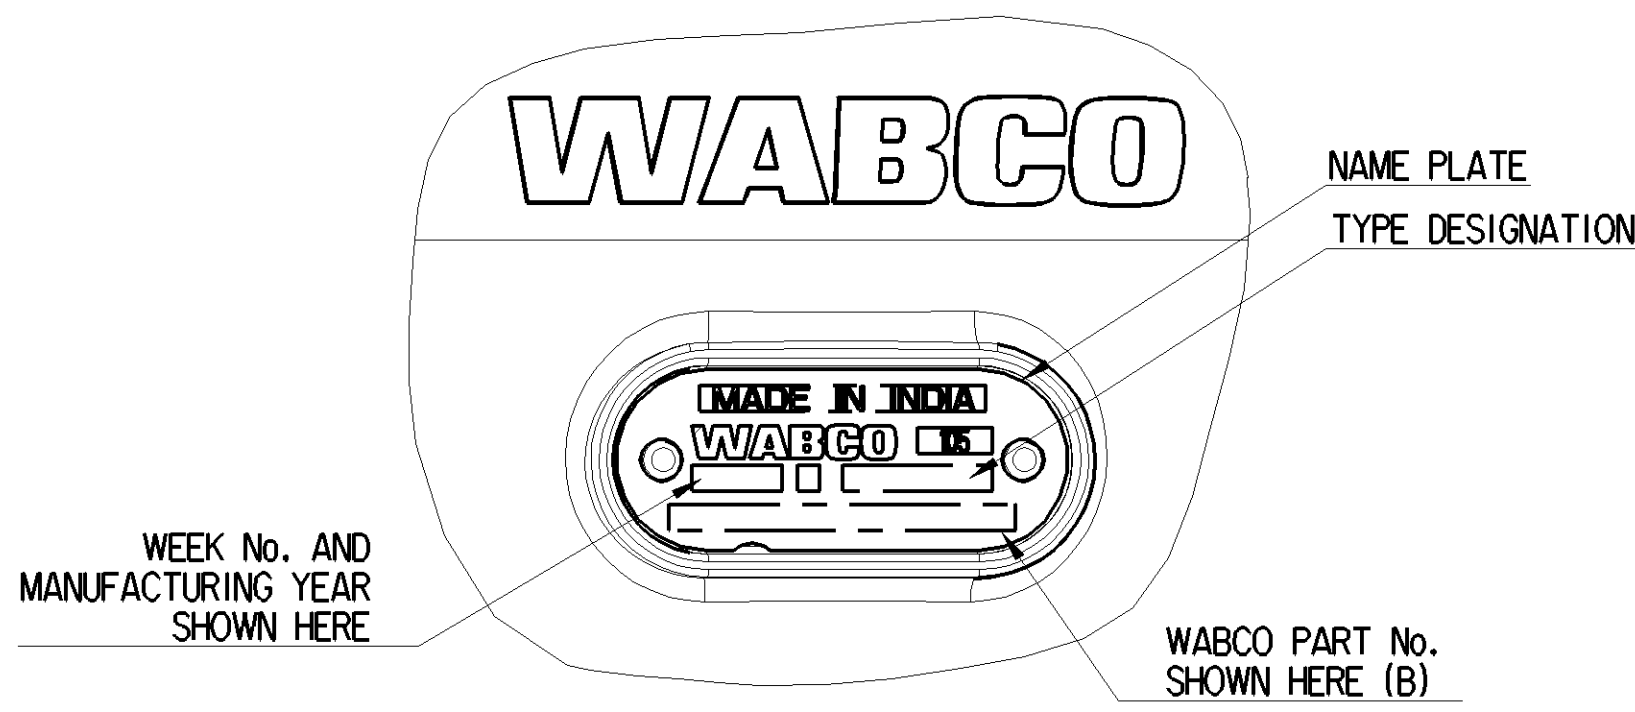
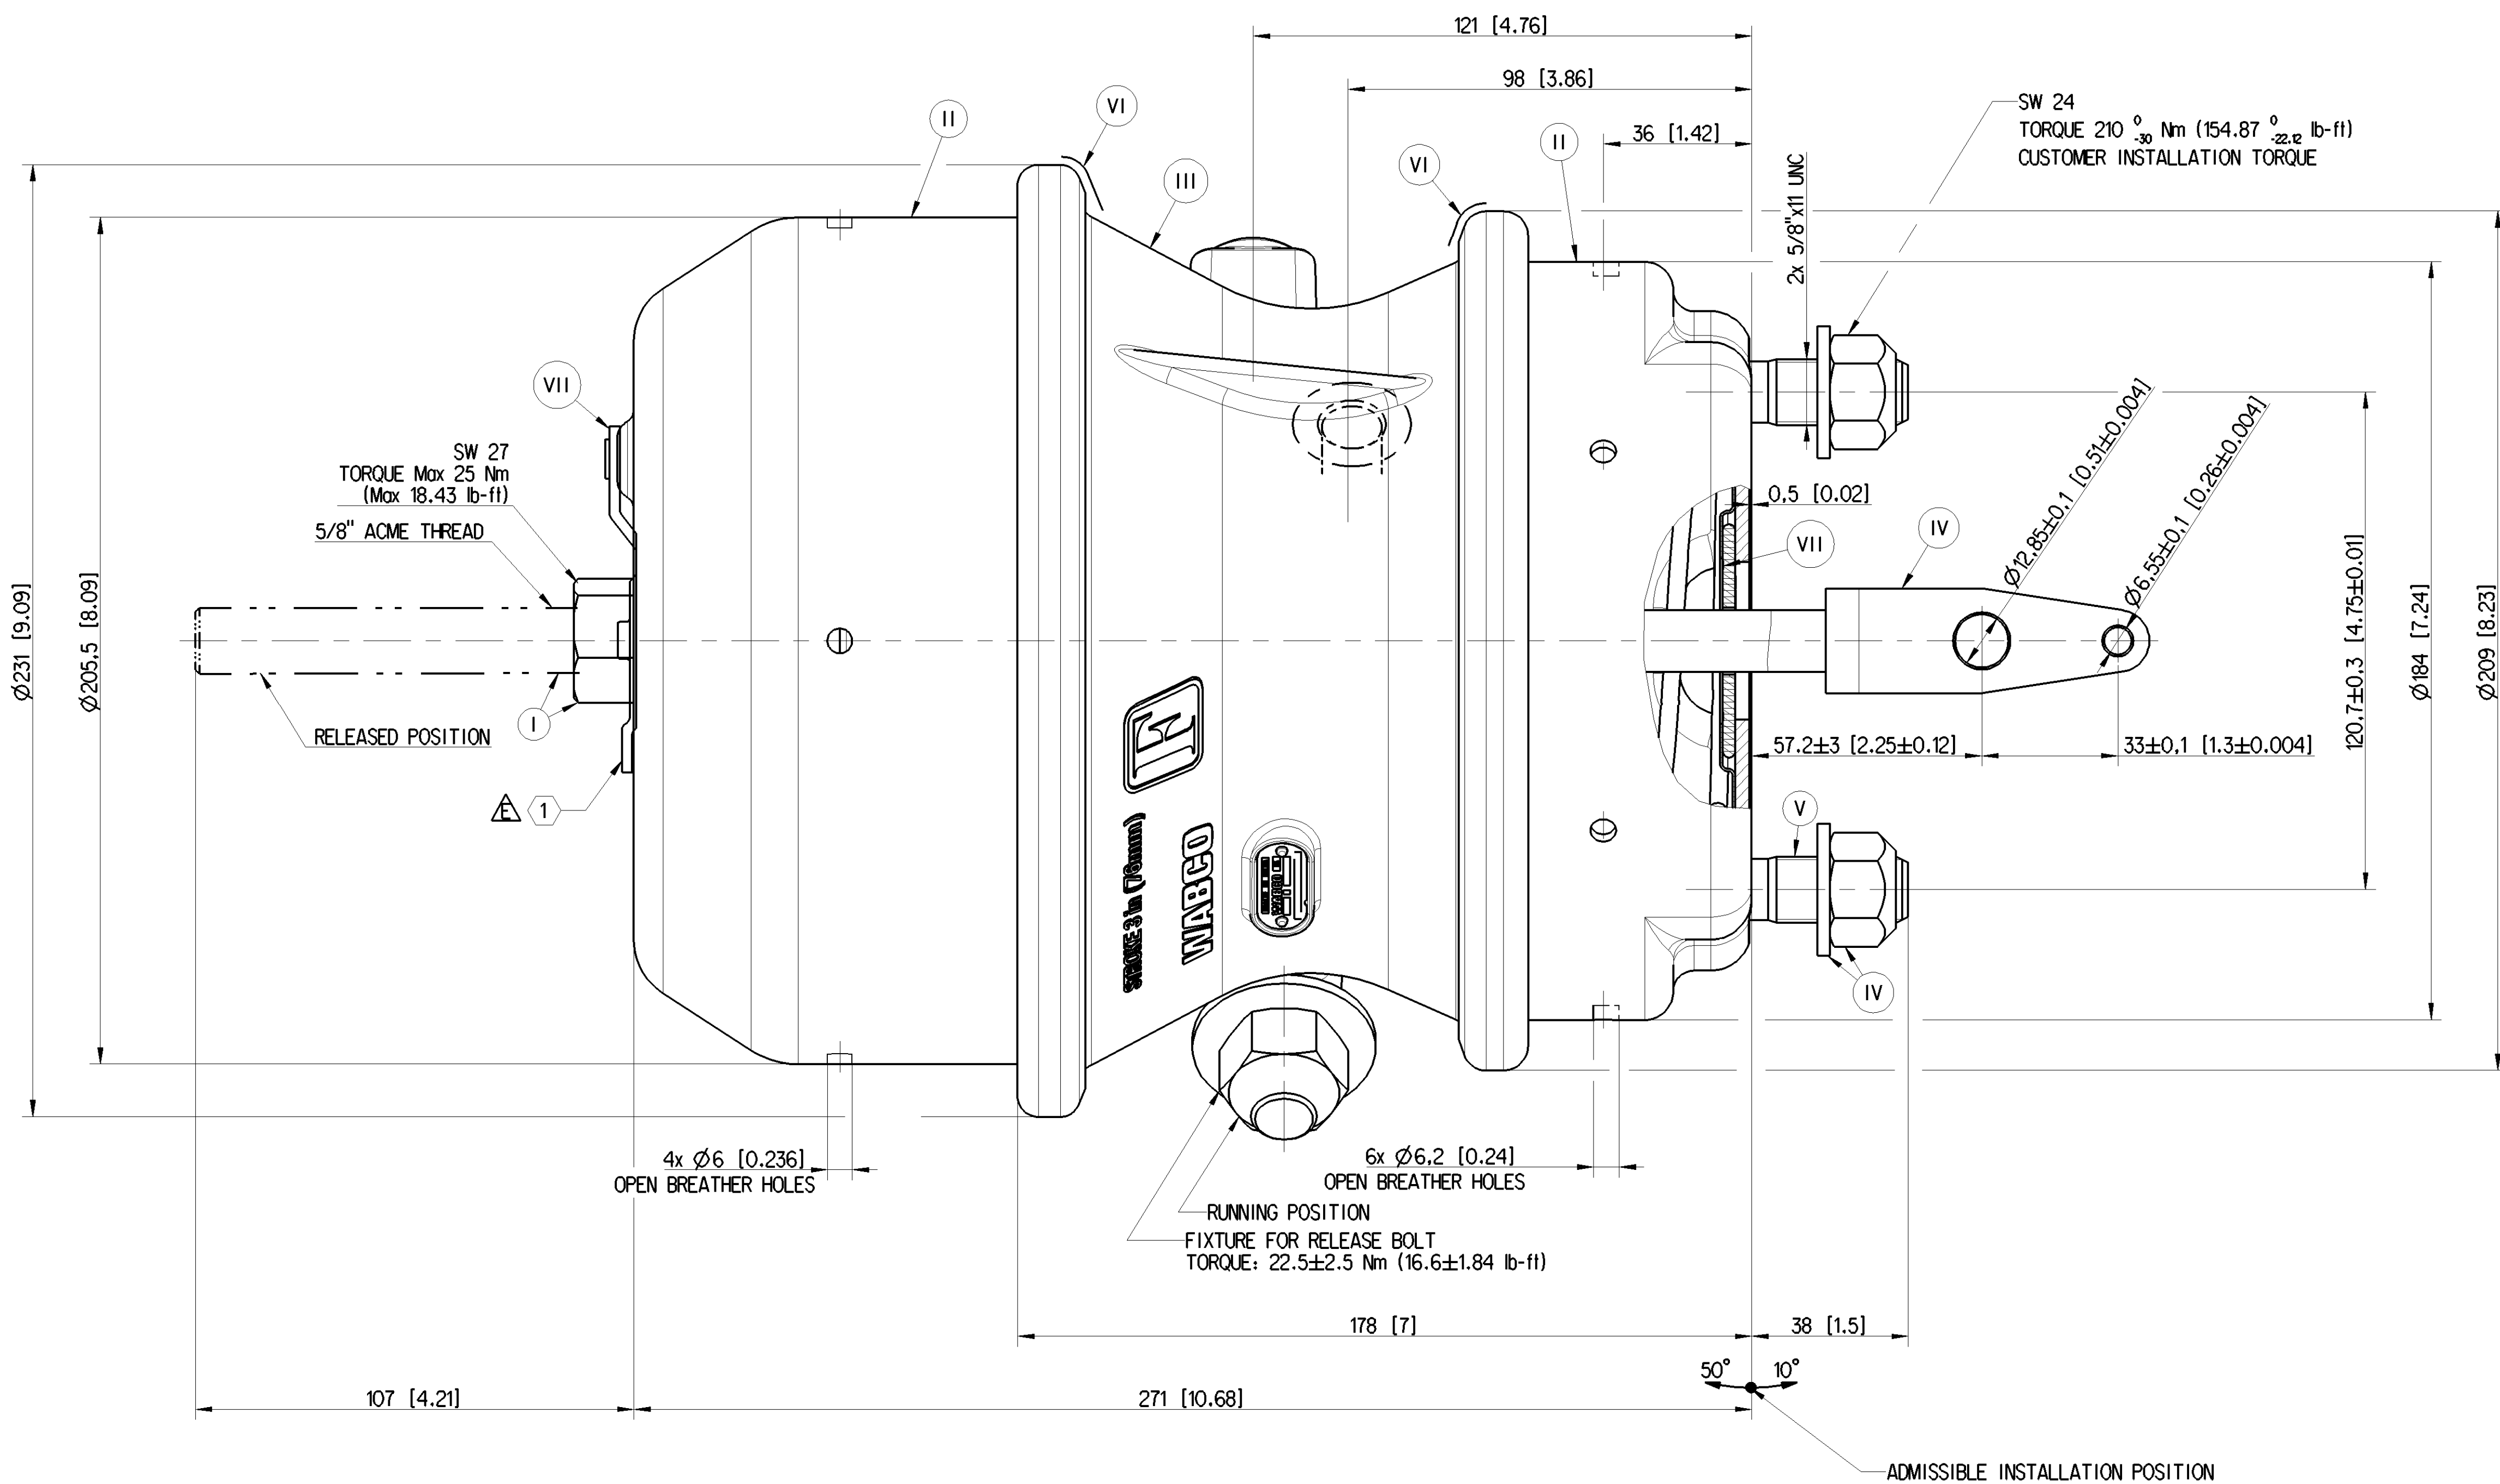
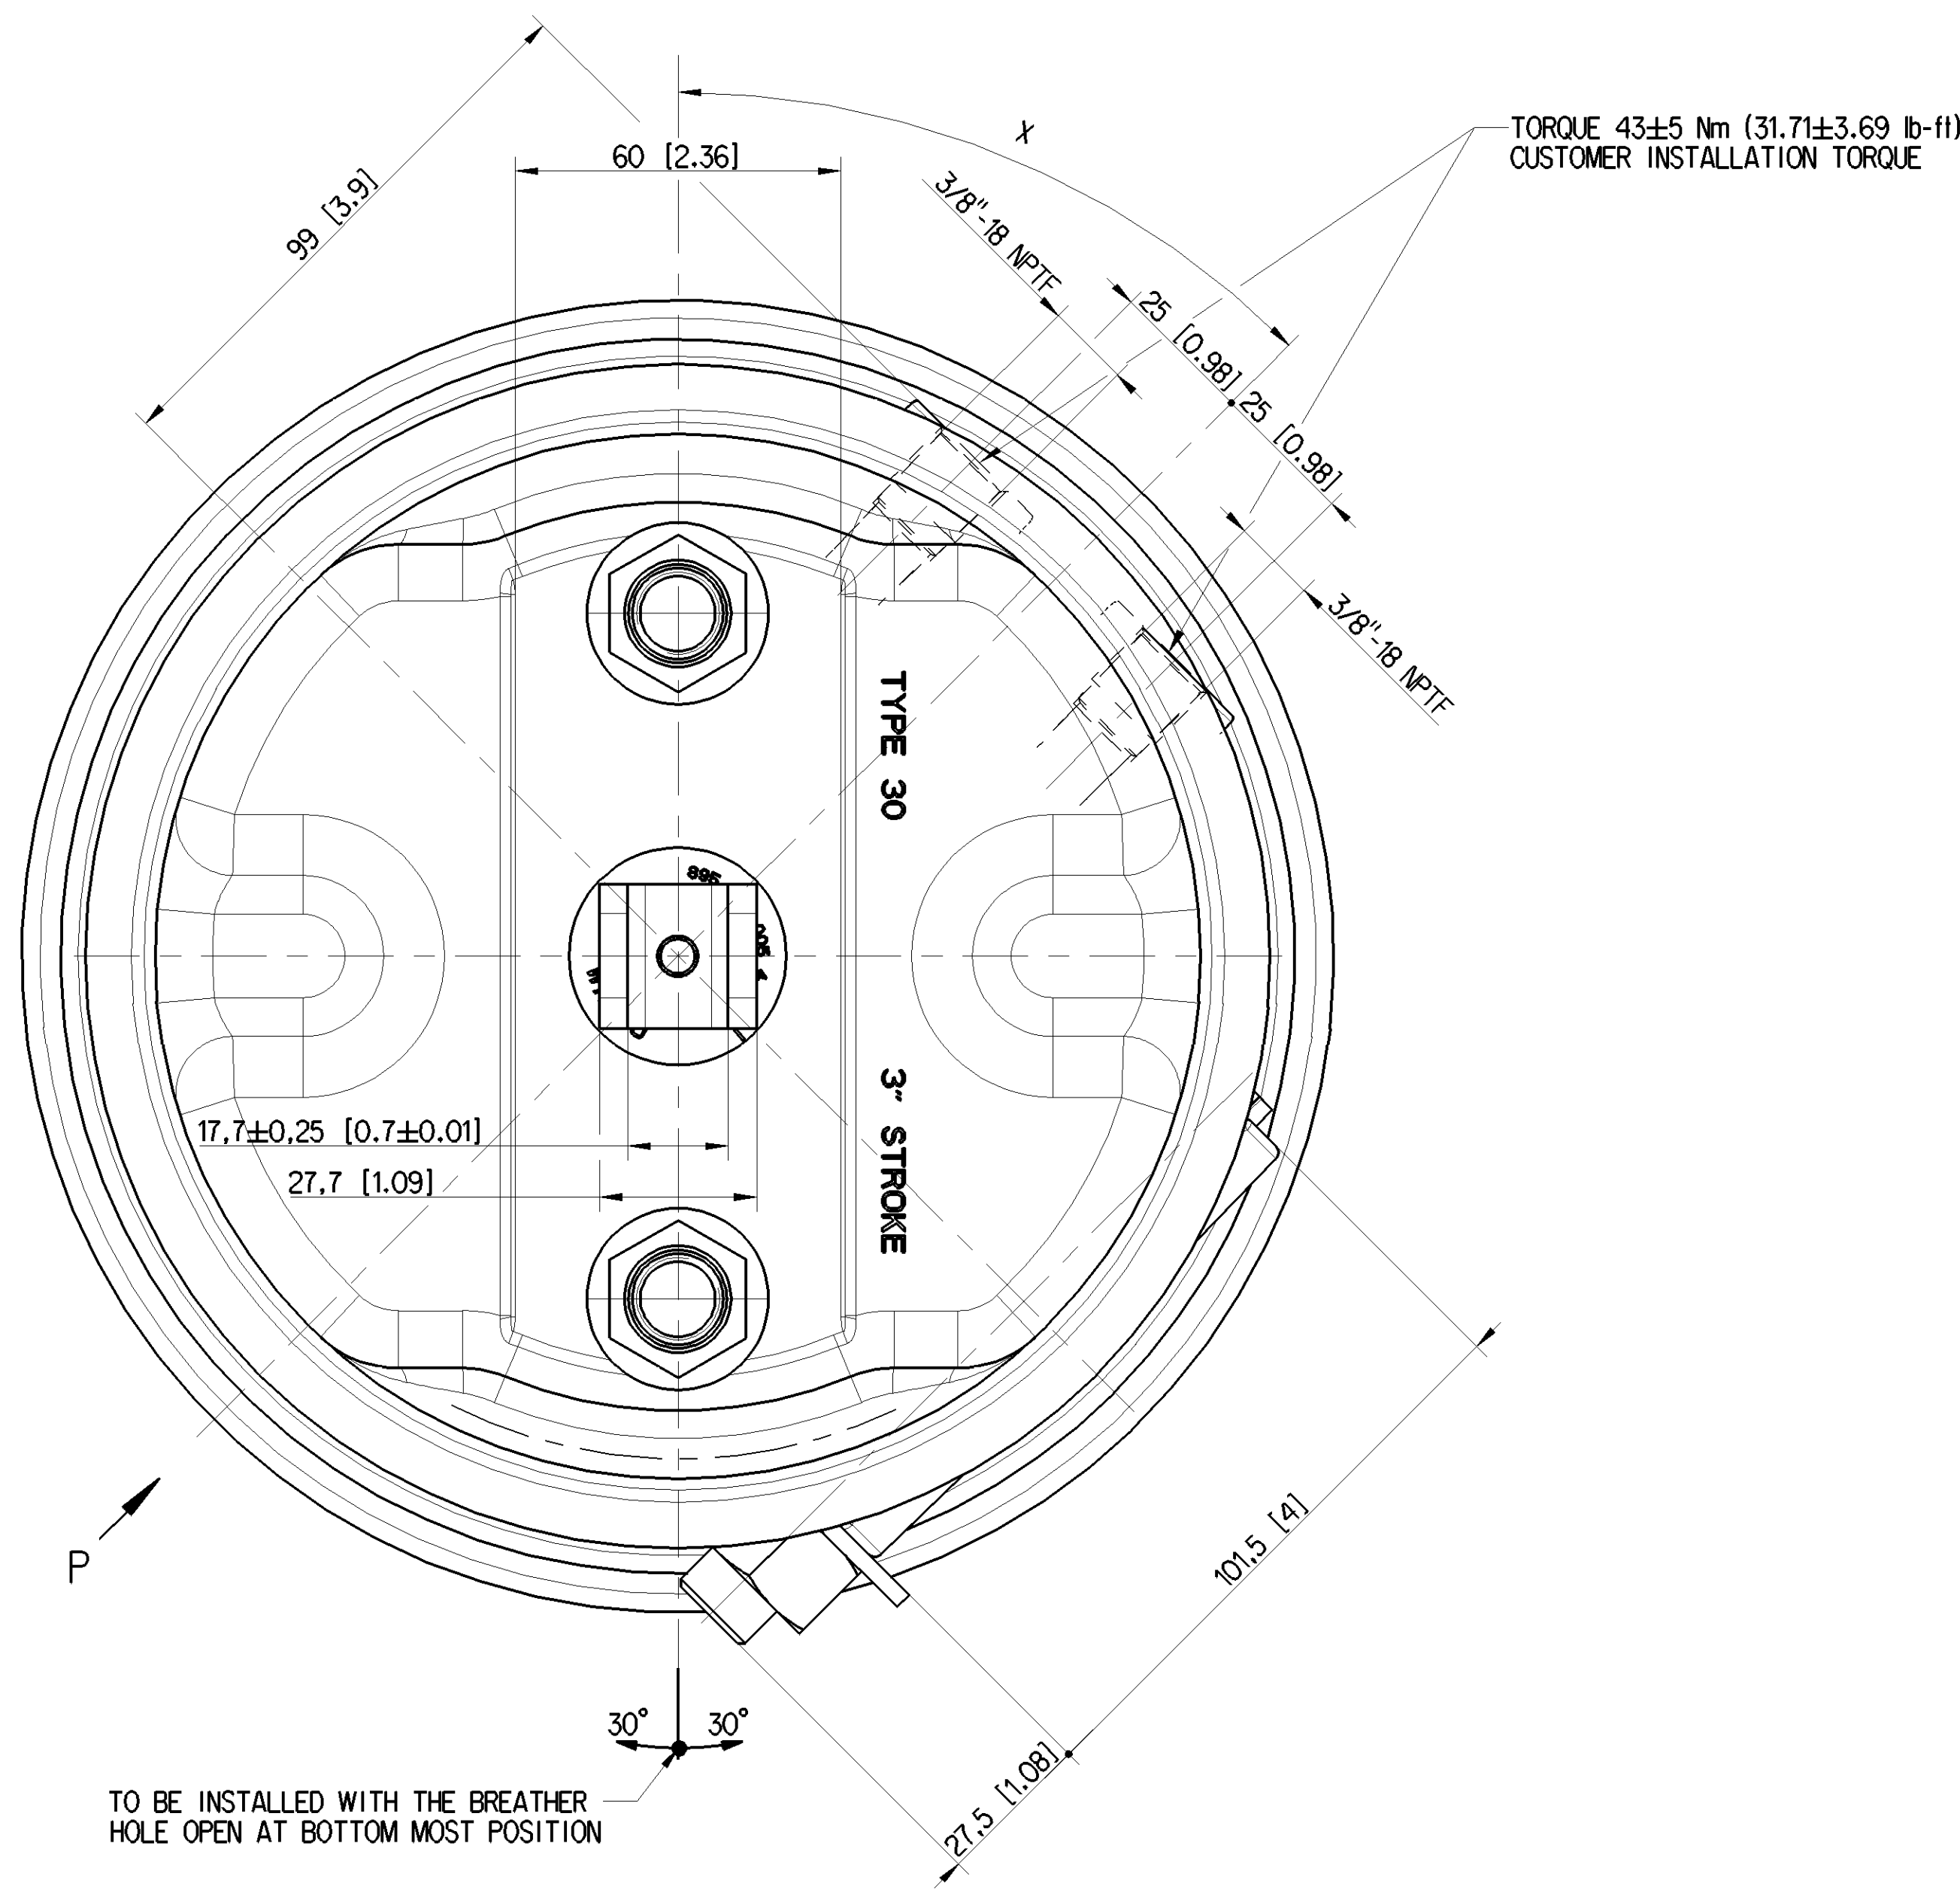


Sl.No.	JED	DESCRIPTION
I	JED-739-3	ZINC NICKEL PASSIVATION
II	JED-240-3	POWDER COATING
III	JED-259-1	CHROMATING
IV	JED-256-5	ZINC PASSIVATION
V	JED-371-0	PHOSPHATING AND OILING
VI	JED-240-1	PAINTING
VII	-	RUBBER/PLASTIC

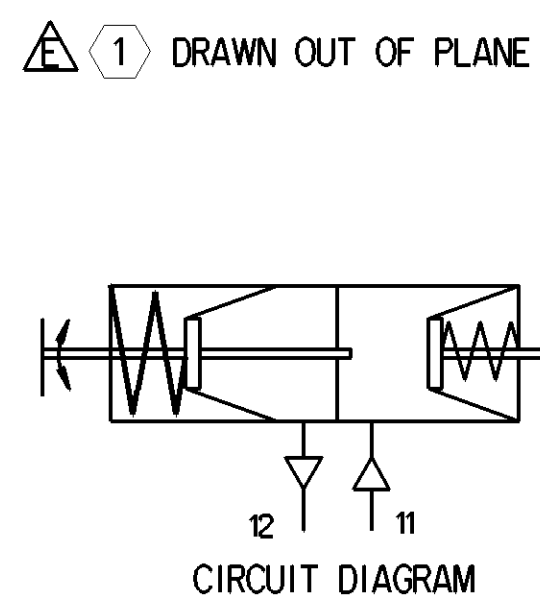

SL.No.	NOTES
1.1	WORKING MEDIUM
1.2	NOMINAL DIAMETER FOR INLET PORTS
1.3	STROKE
1.4	THERMAL RANGE OF APPLICATION
1.5	WORKING PRESSURE SERVICE SIDE
1.6	WORKING PRESSURE SPRING SIDE
1.7	MAXIMUM PRESSURE SERVICE SIDE (TEMPORARILY)
1.8	MAXIMUM PRESSURE SPRING SIDE (TEMPORARILY)
2	MALE THREAD TO BE PROTECTED AND OPEN PORTS TO BE FITTED WITH CLOSURE PLUG TO AVOID TRANSIT DAMAGE
3	UNIT DRAWN WITH 8 bar (116 PSI) AIR PRESSURE IN PORT 12
4	SUPPLIED WITH PARKING BRAKE IN RELEASED CONDITION

925 394 003 0	160°
925 394 002 0	20°
925 394 001 0	135°
925 394 000 0	45°

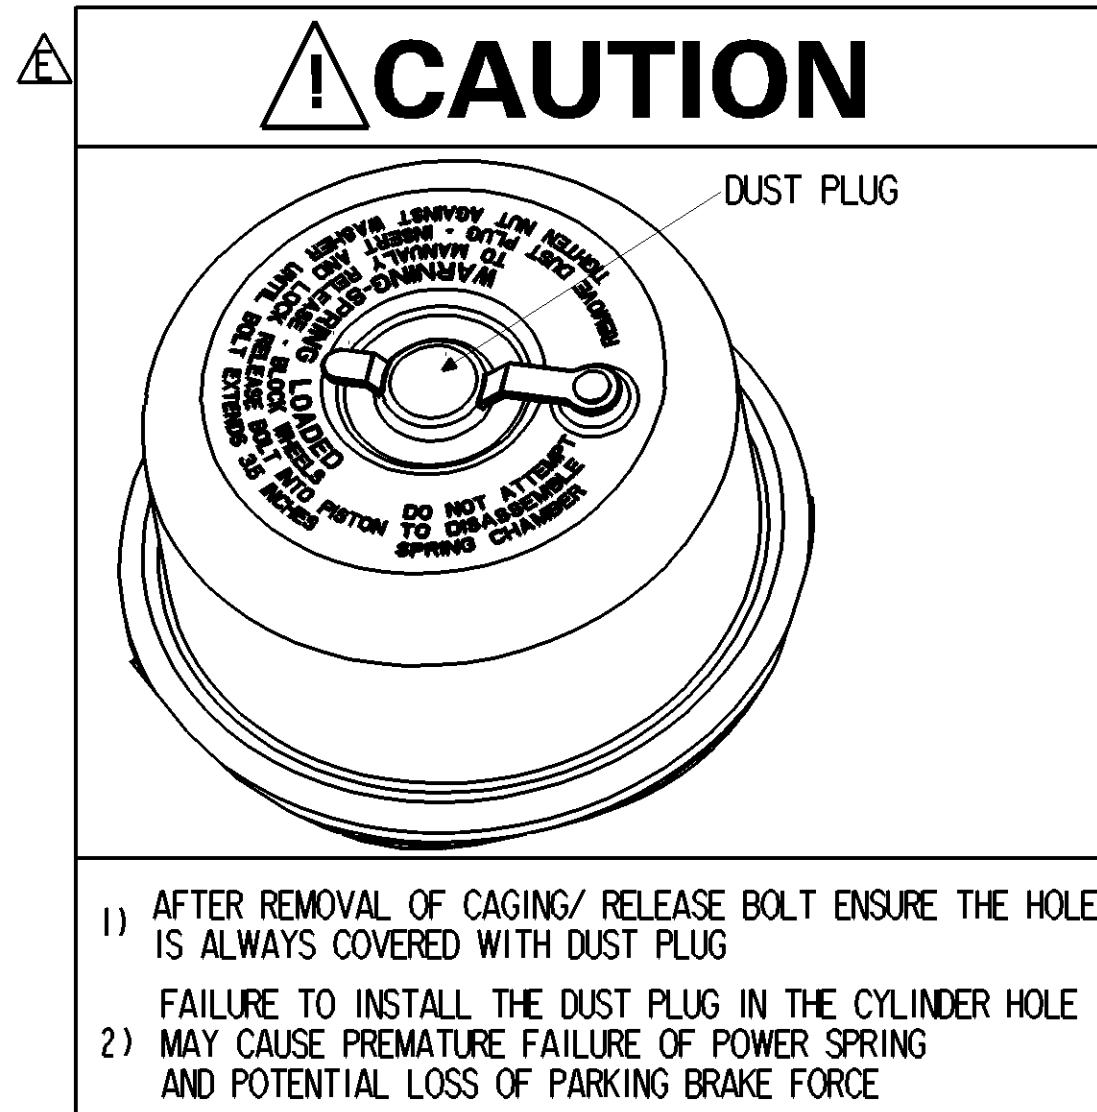

General Specification ISO 8476, JED-534-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Doc. Code: 0355	Sheet: 1 To 6	Date: 2022-11-27	Signature: Eloyraj S	DOUBLE DIAPHRAGM TRISTOP 30/36	
Range of nominal dimensions in mm		Dimensions in mm		Date of first issue: 2018-05-17	
Class	11 ± 50 ± 180 ± 400 ± 400	Min	Max	925 394 000 0	
Flow	140.5 141 141.5 142 ± 3°	11.0	1/1 (2/1)	053 EN 1/1	
Medium	X ± 1 ± 2 ± 3 ± 4 ± 5	Size	3	E 5420	
Control	± 2 ± 3.5 ± 5 ± 5.5	Tapped Holes acc. JED-6386		Replacement for	
Tolerance Class: Applied (assumed)		Tolerance Class: Applied (assumed)		Replacement for	