
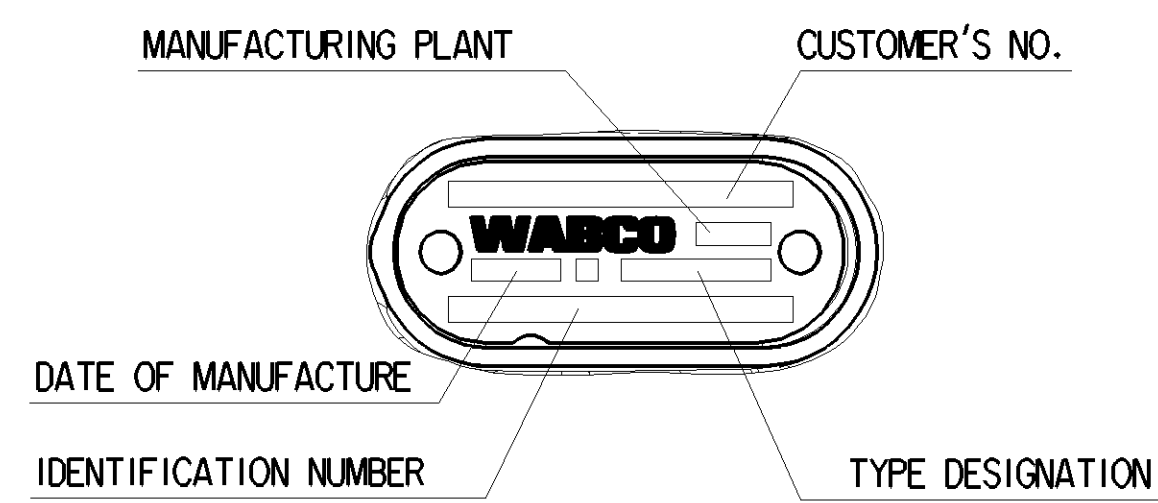
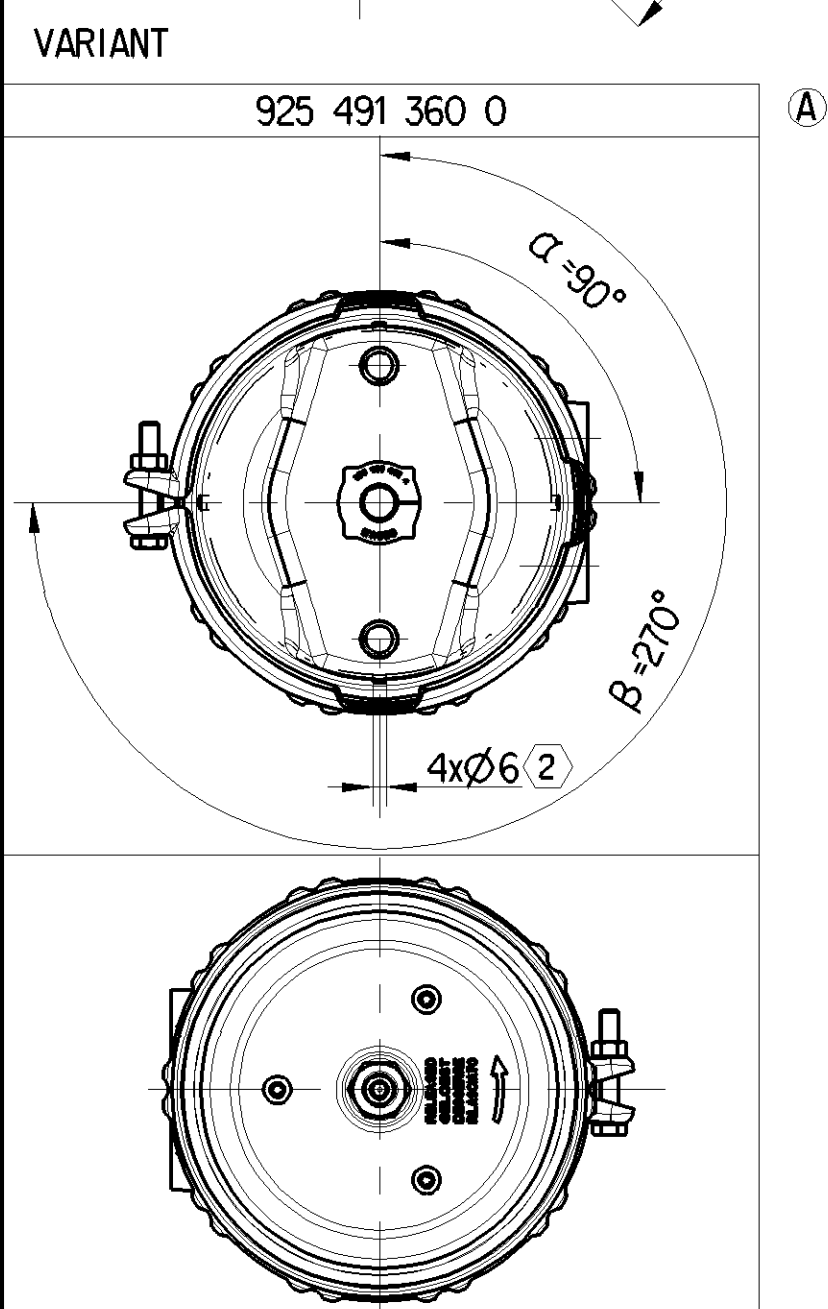
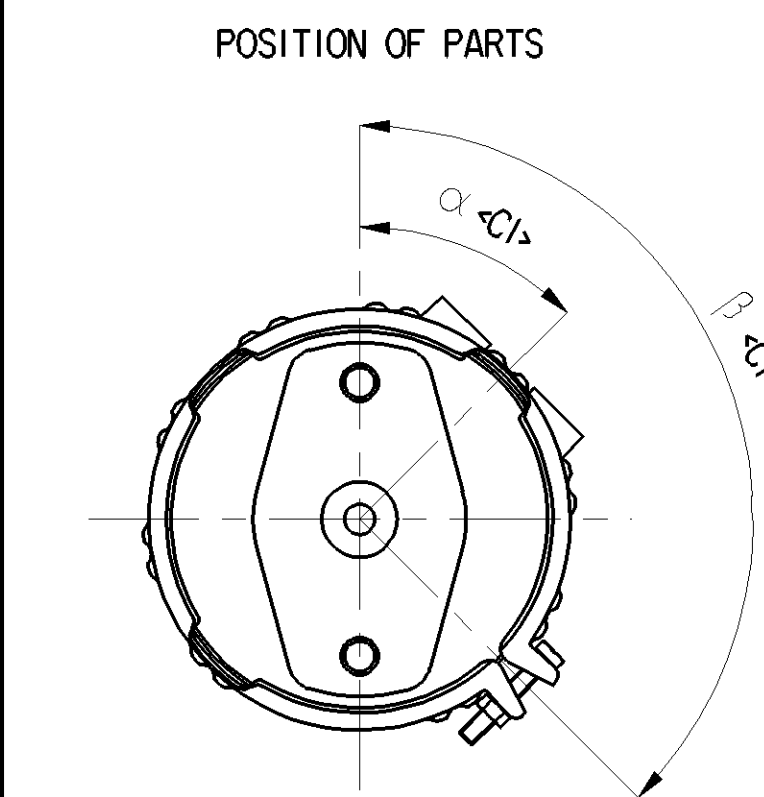
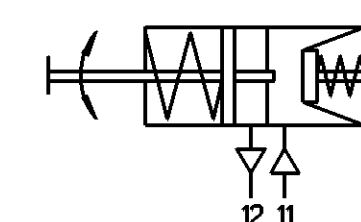
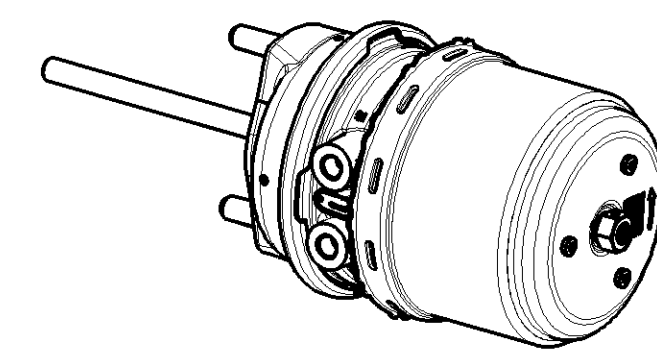
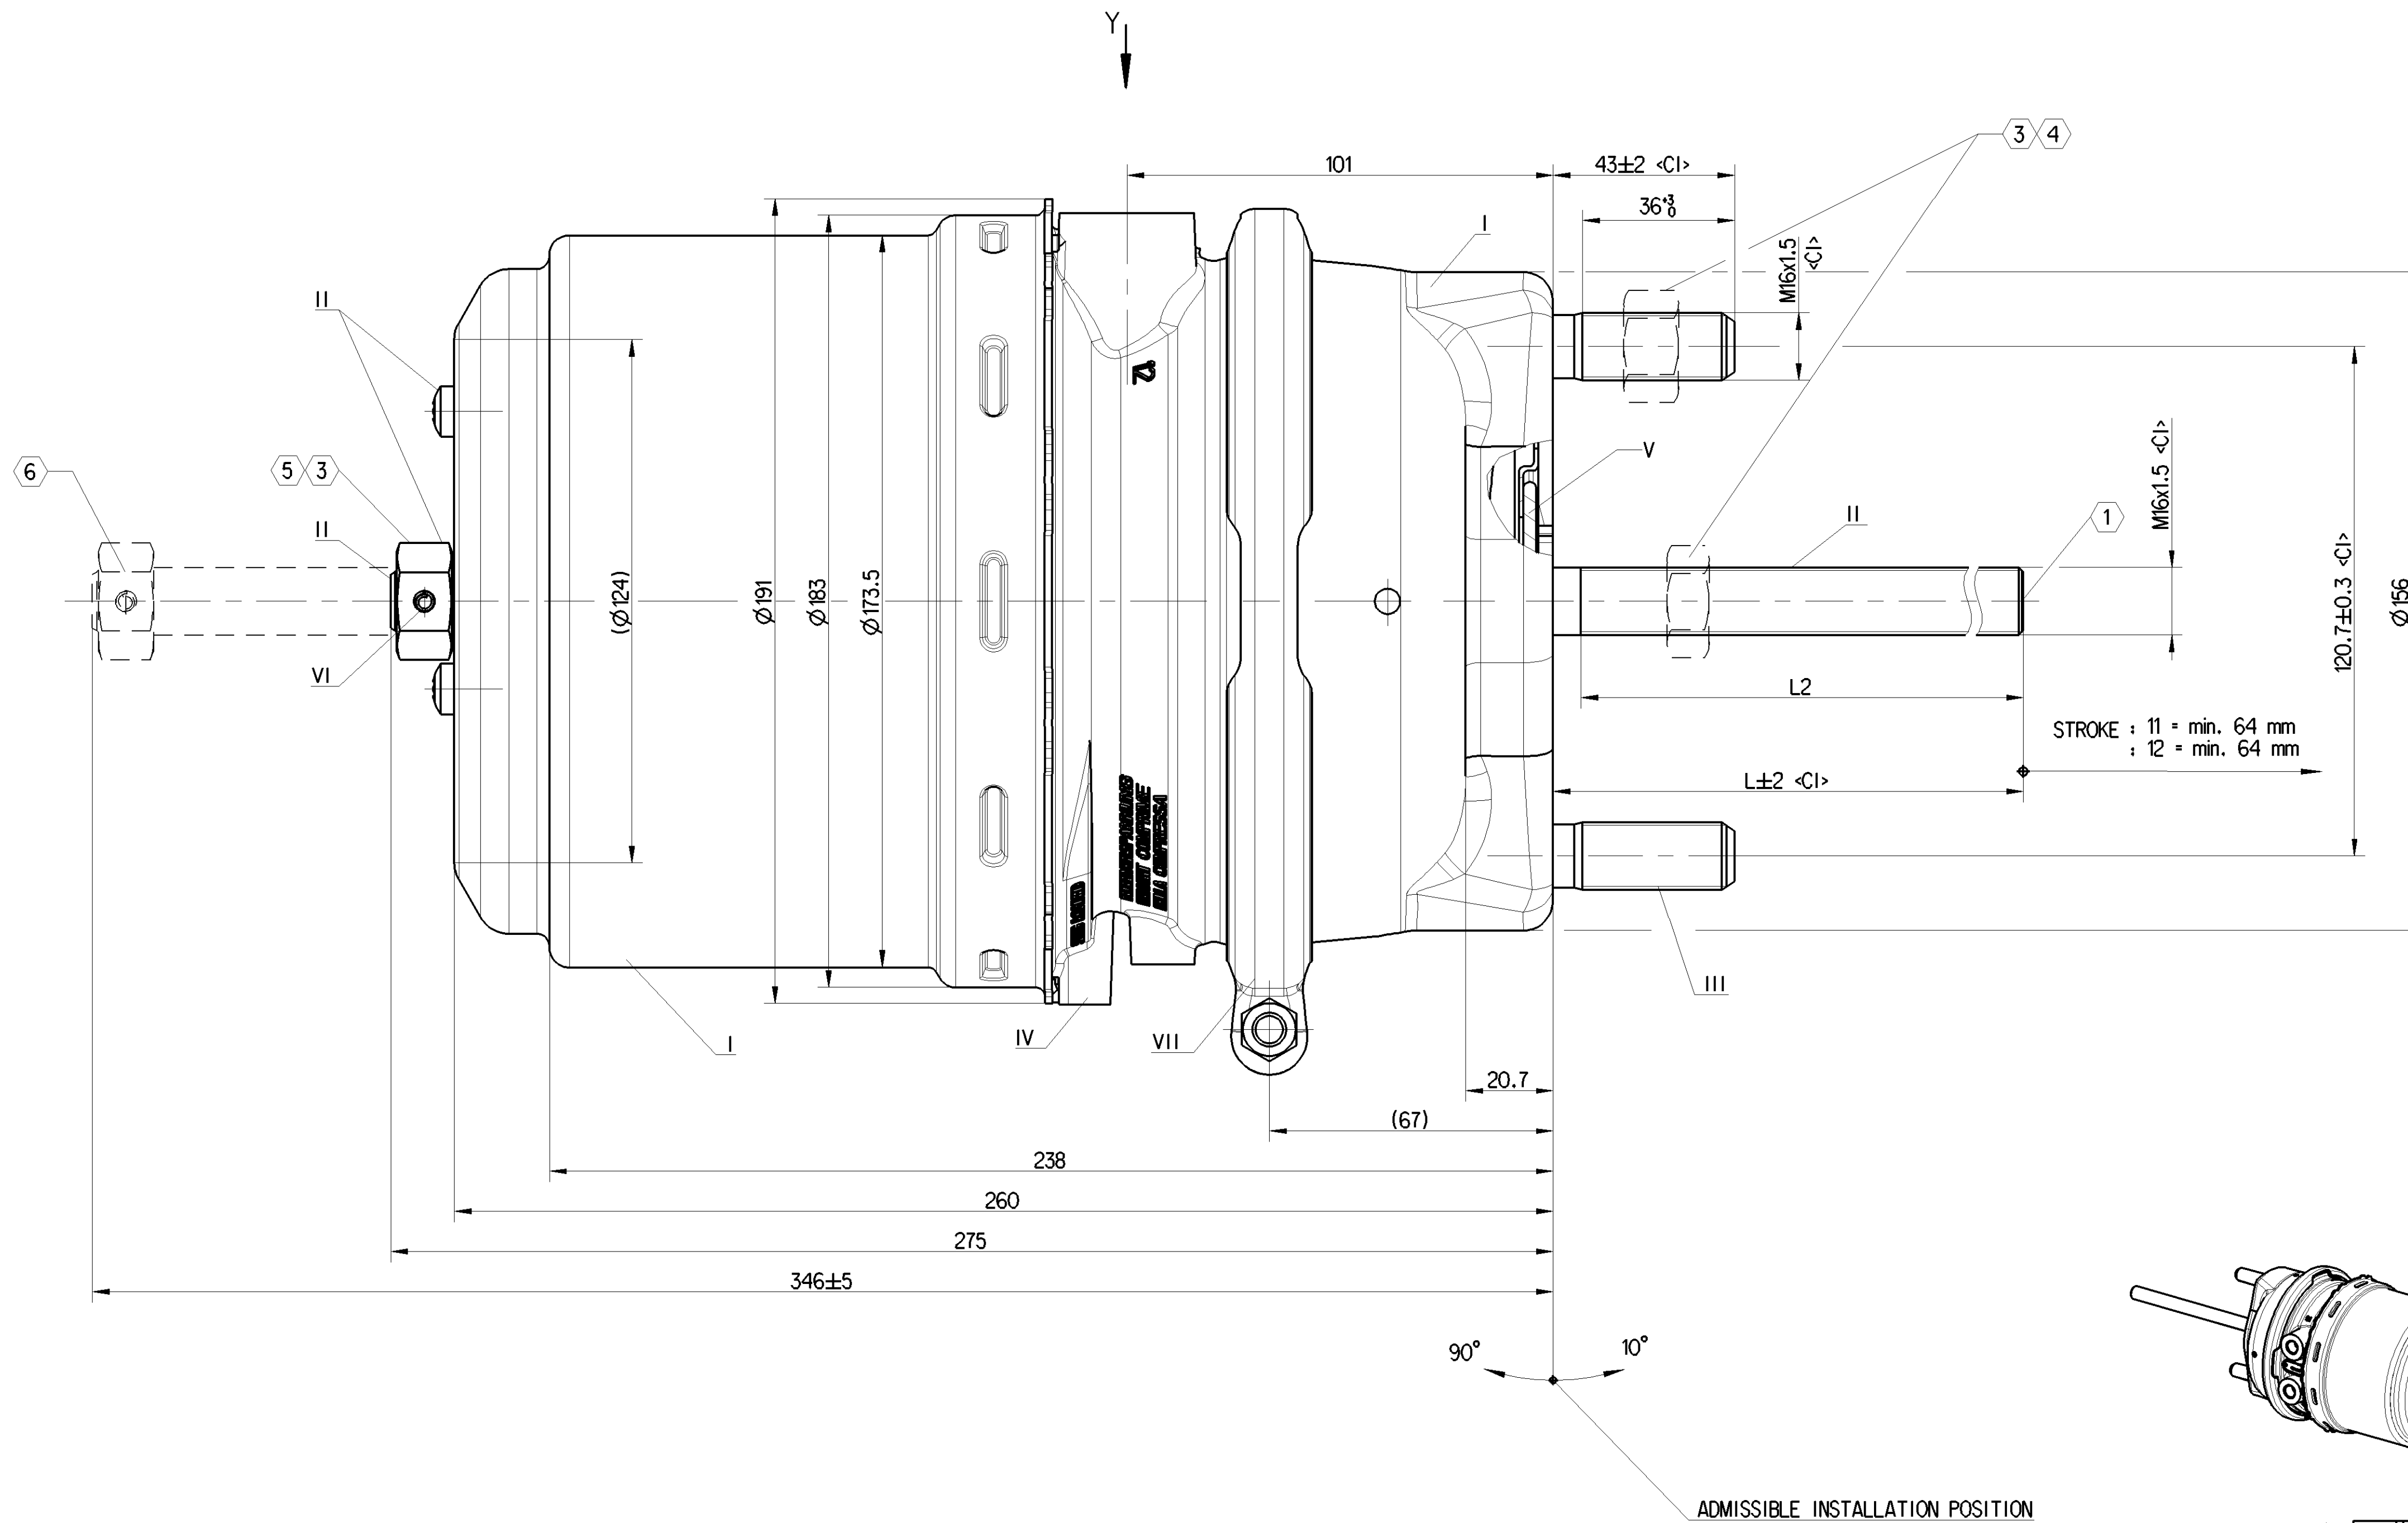
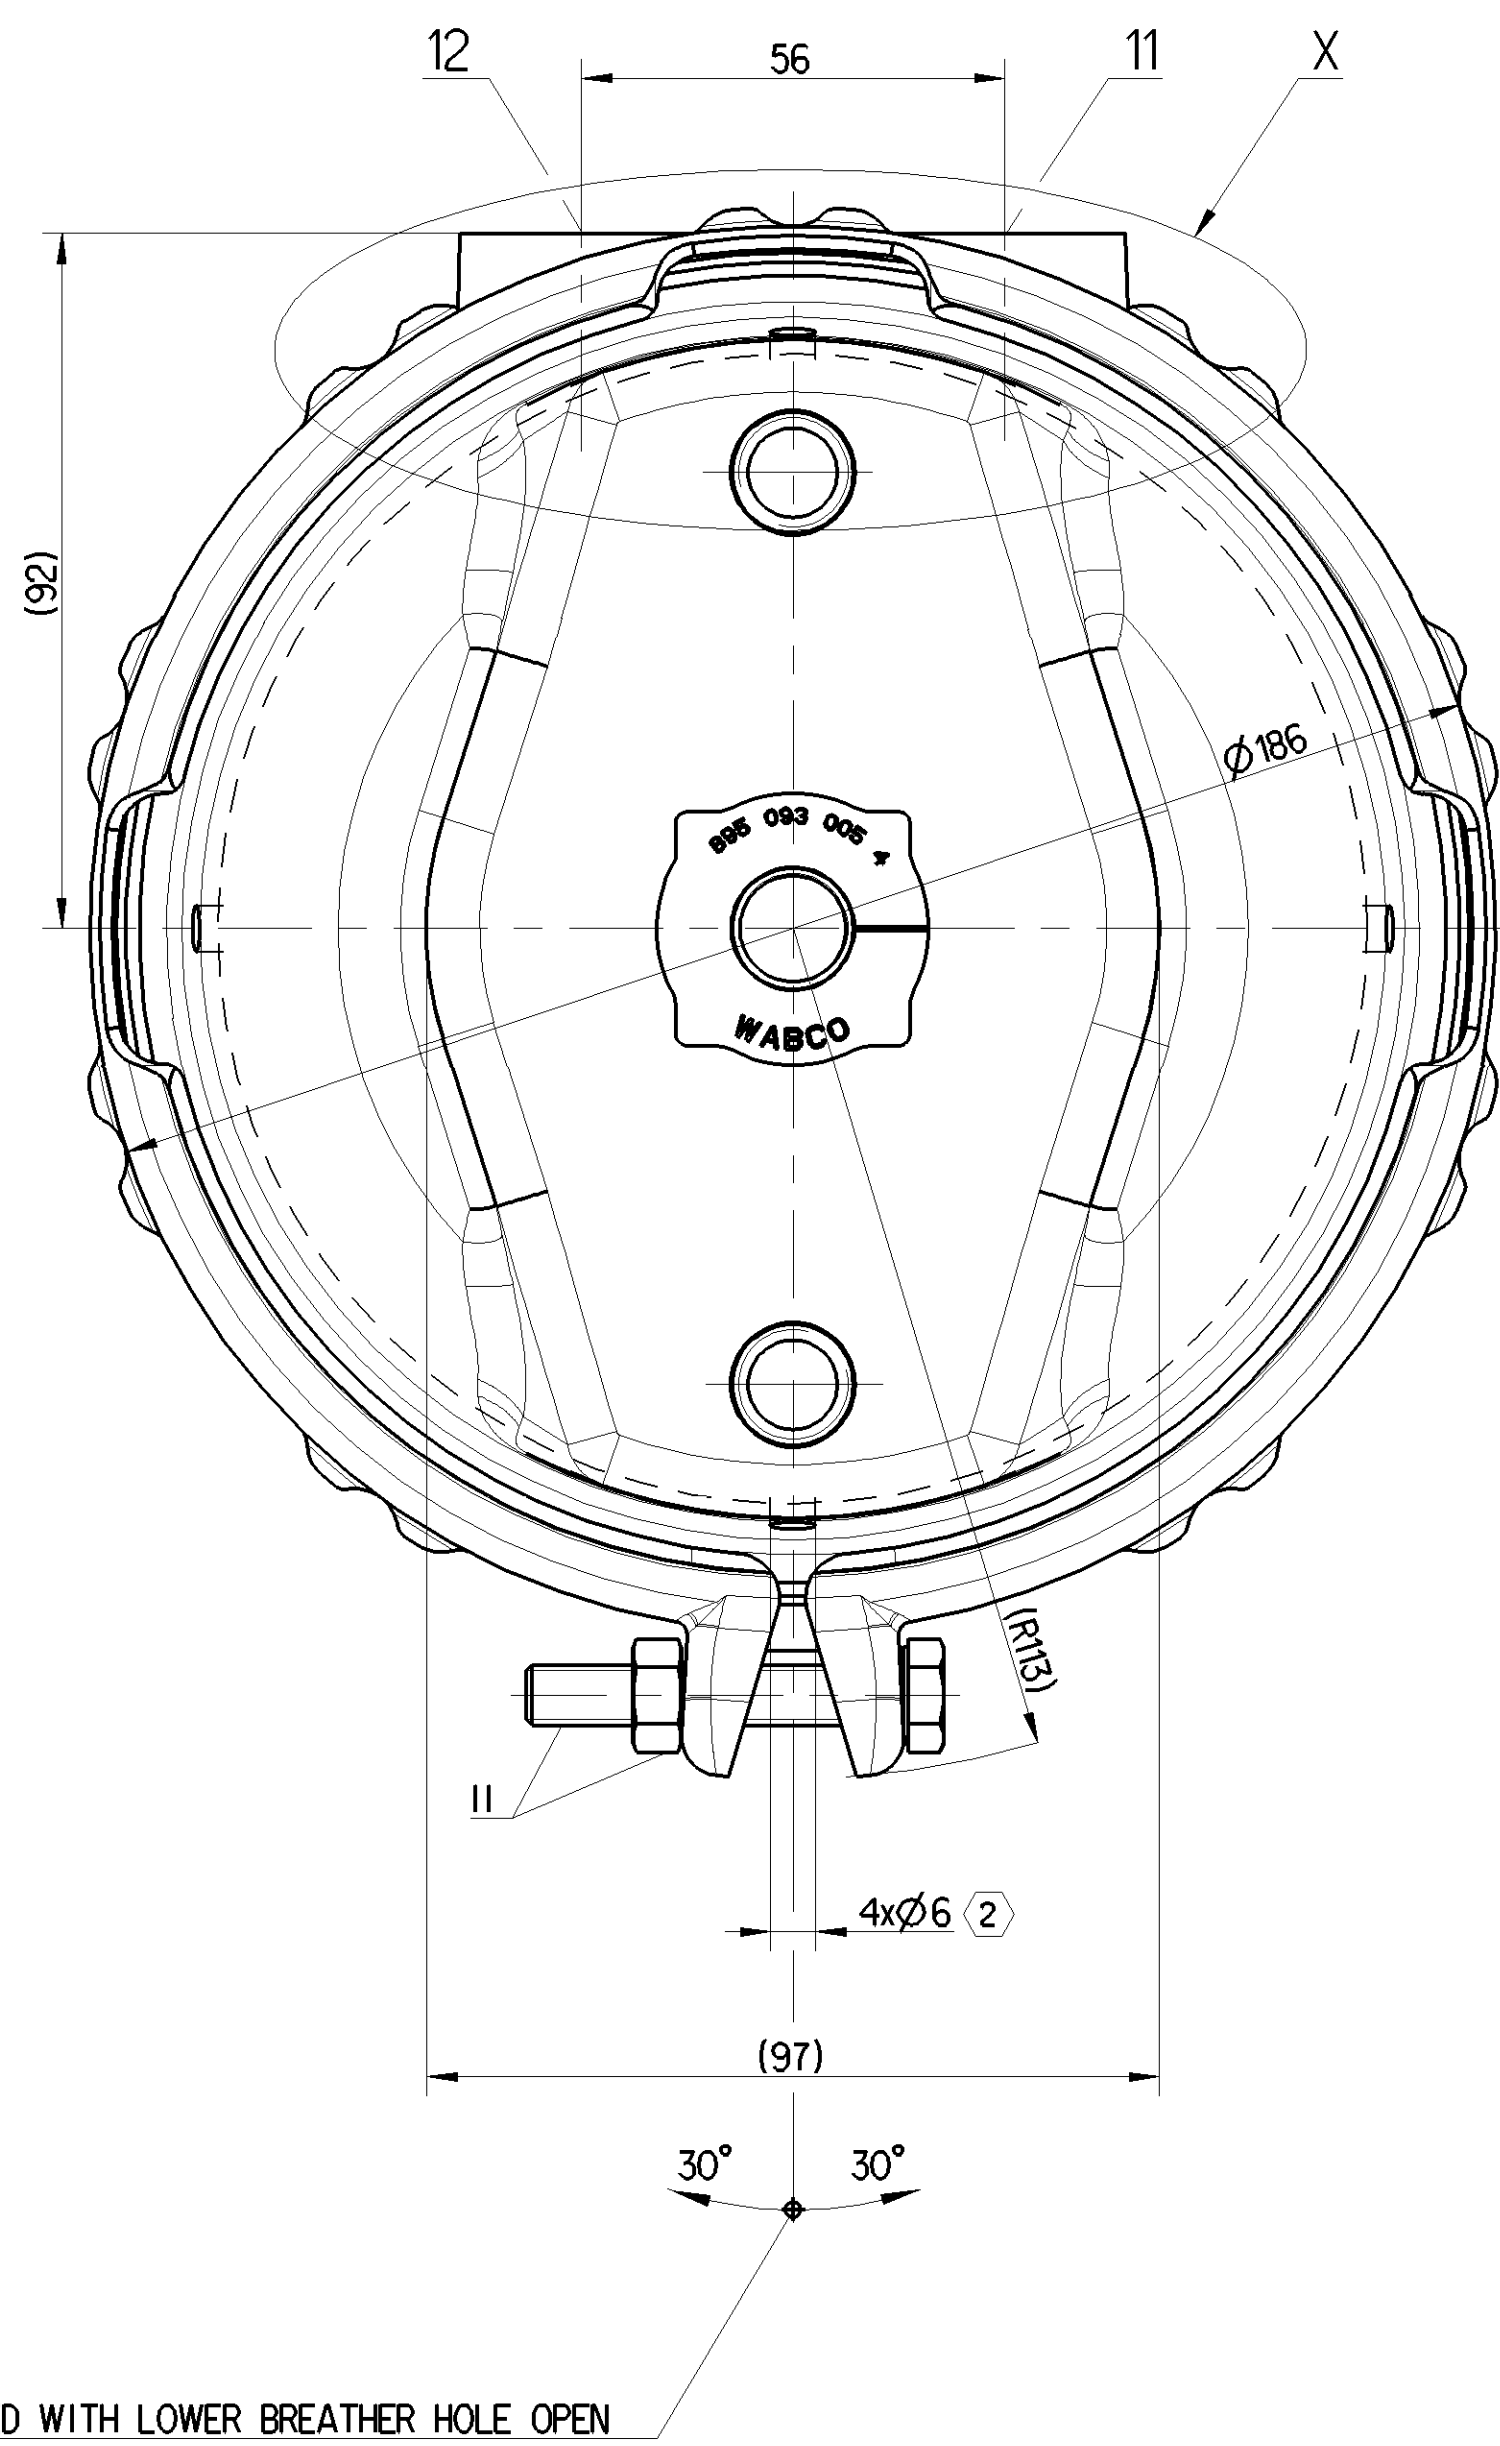
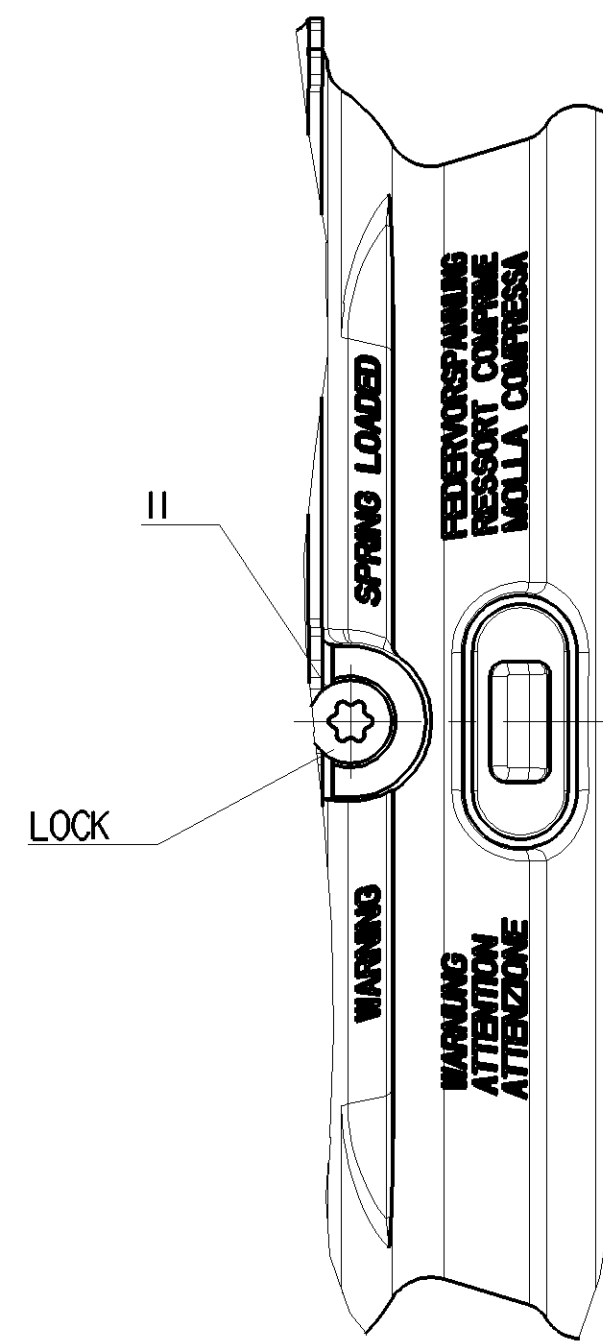
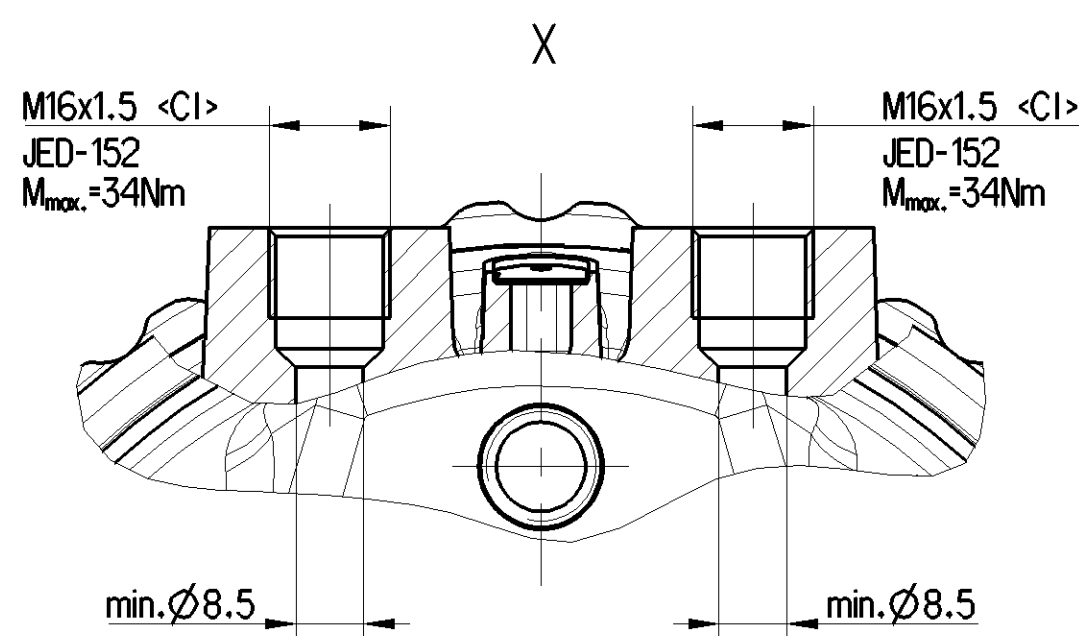


| SURFACE PROTECTION |                  | TECHNICAL DATA |                                                          | VALUE         |                                    |
|--------------------|------------------|----------------|----------------------------------------------------------|---------------|------------------------------------|
| I                  | JED-240-3        | 1              | ADMISSIBLE DEFLECTION OF PISTON IN EVERY DIRECTION       |               | max. 3°                            |
| II                 | JED-256-1        | 2              | OPEN BREATHER HOLE                                       |               | ---                                |
| III                | JED-371          | 3              | SW = WIDTH ACROSS FLATS                                  |               | 24                                 |
| IV                 | JED-259-0        | 4              | TORQUE                                                   |               | 210 <sup>0</sup> <sub>-30</sub> Nm |
| V                  | RUBBER / PLASTIC | 5              | DRIVING POSITION. TIGHTENING WITH                        |               | 25 <sup>0</sup> <sub>-10</sub> Nm  |
| VI                 | JED-378-4        | 6              | RELEASE POSITION. RELEASING WITH                         |               | max. 80Nm                          |
| VII                | JED-240-2        |                | MEDIUM                                                   |               | AIR                                |
|                    |                  |                | THERMAL RANGE OF APPLICATION                             |               | -40°C...+80°C                      |
|                    |                  |                | PORT 11 SERVICE BRAKING SYSTEM, WORKING PRESSURE         | max. 10,2 bar | (TEMPORARILY max. 13 bar)          |
|                    |                  |                | PORT 12 SPRING BRAKE CYLINDER, WORKING PRESSURE          | max. 8,5 bar  | (TEMPORARILY max. 11 bar)          |
|                    |                  |                | AIR VOLUME OF SERVICE BRAKE PART AT 2/3 OF ITS STROKE    |               | ca. 0,8 dm <sup>3</sup>            |
|                    |                  |                | AIR VOLUME OF SPRING BRAKE PART                          |               | ca. 1,4 dm <sup>3</sup>            |
|                    |                  |                | MAIN VIEWS REFER TO DIMENSIONS ONLY                      |               | ---                                |
|                    |                  |                | POSITION OF COMPONENTS : SEE REPRESENTATIONS OF VARIANTS |               | ---                                |
|                    |                  |                | ( ) AUXILIARY DIMENSION                                  |               | ---                                |

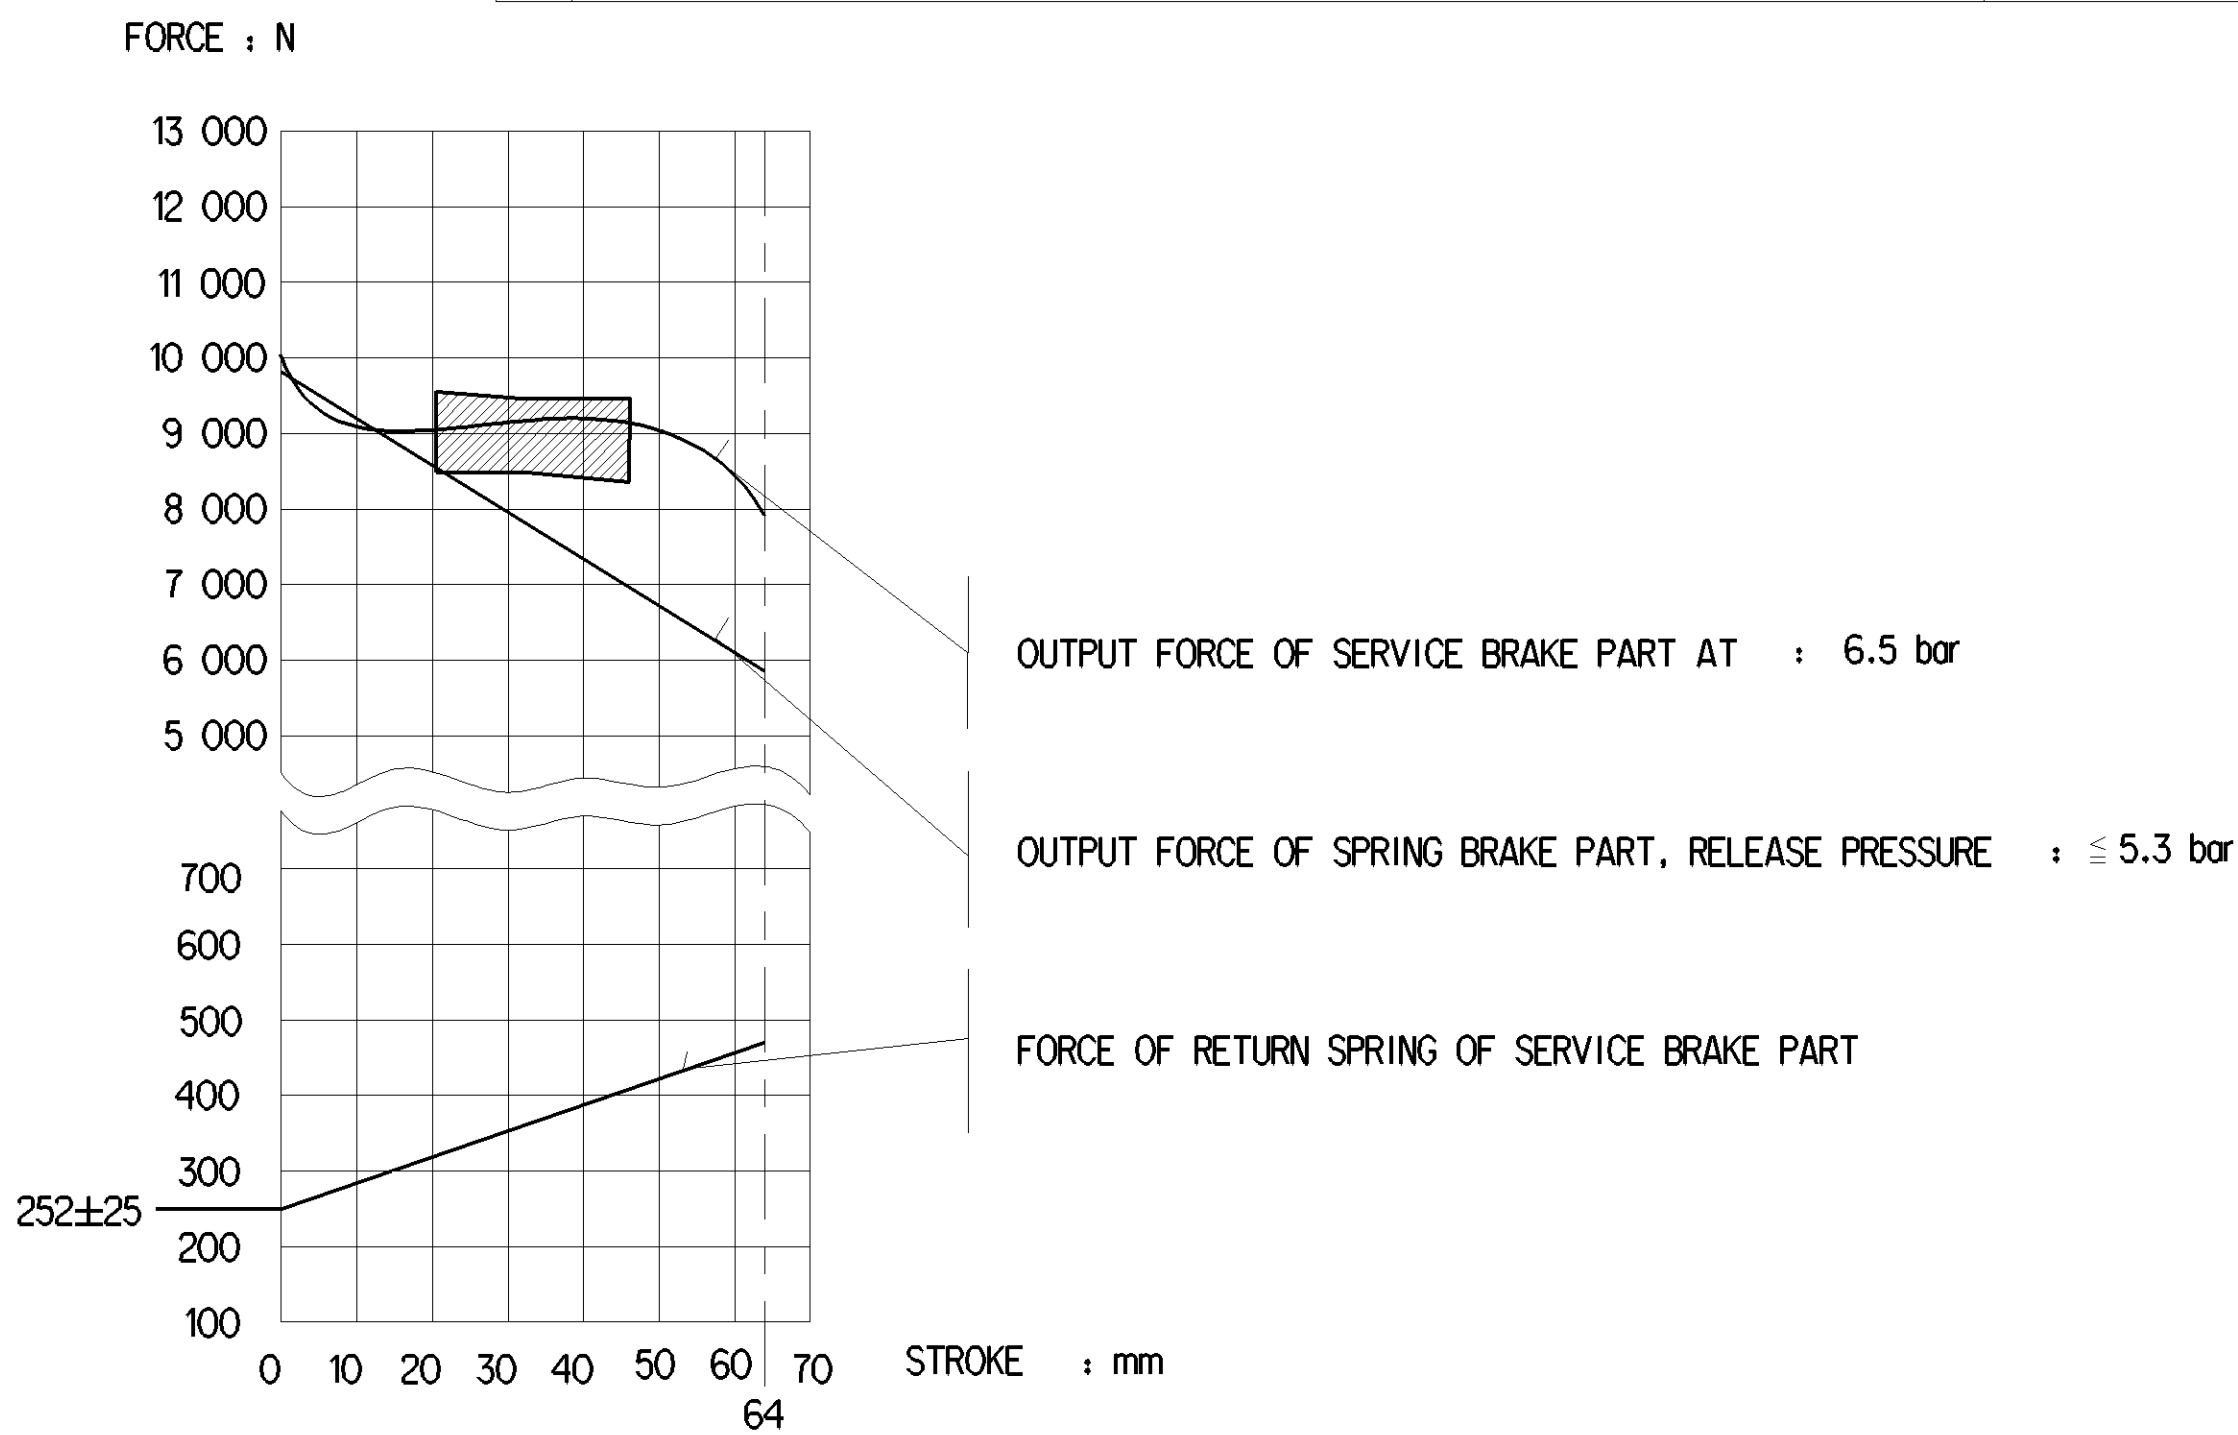

|               |                |     |     |                        |           |
|---------------|----------------|-----|-----|------------------------|-----------|
| 925 491 360 0 | -              | 189 | 183 | RELEASE POSITION       | 9.13      |
| WABCO         | CUSTOMER'S NO. | L   | L2  | DELIVERY POSITION <C1> | MASS [kg] |

|                                                     |  |                  |  |            |  |
|-----------------------------------------------------|--|------------------|--|------------|--|
| General Specifications JED-554-1, Size ISO 14405 L1 |  | Copyright WABCO® |  | WABCO      |  |
| Further Technical Data:                             |  | Date             |  | 2021-04-22 |  |
| Doc. Code:                                          |  | Sheet:           |  | Zhong      |  |
| General Tolerances JED-261                          |  | Checked          |  | Franz      |  |
| Range of Nominal Dimensions ( ± mm)                 |  | 2021-04-23       |  | Franz      |  |
| Class II                                            |  | ± 50             |  | ± 180      |  |
| Fine                                                |  | 0,5              |  | 1,0        |  |
| Medium                                              |  | 1,0              |  | 2,0        |  |
| Coarse                                              |  | 2,0              |  | 3,5        |  |
| Tapped holes acc. JED-152                           |  | 1:1              |  | 2:1        |  |
| Tolerance Class Applied (unspecified)               |  | A 0              |  | CREO       |  |
| Material No.                                        |  | 925 491 369 0    |  | 506749     |  |
| Date of first issue                                 |  | 2016-07-08       |  | 5380       |  |
| Doc. Code                                           |  | Language         |  | EN         |  |
| Sheet                                               |  | 1/1              |  | 1/1        |  |