
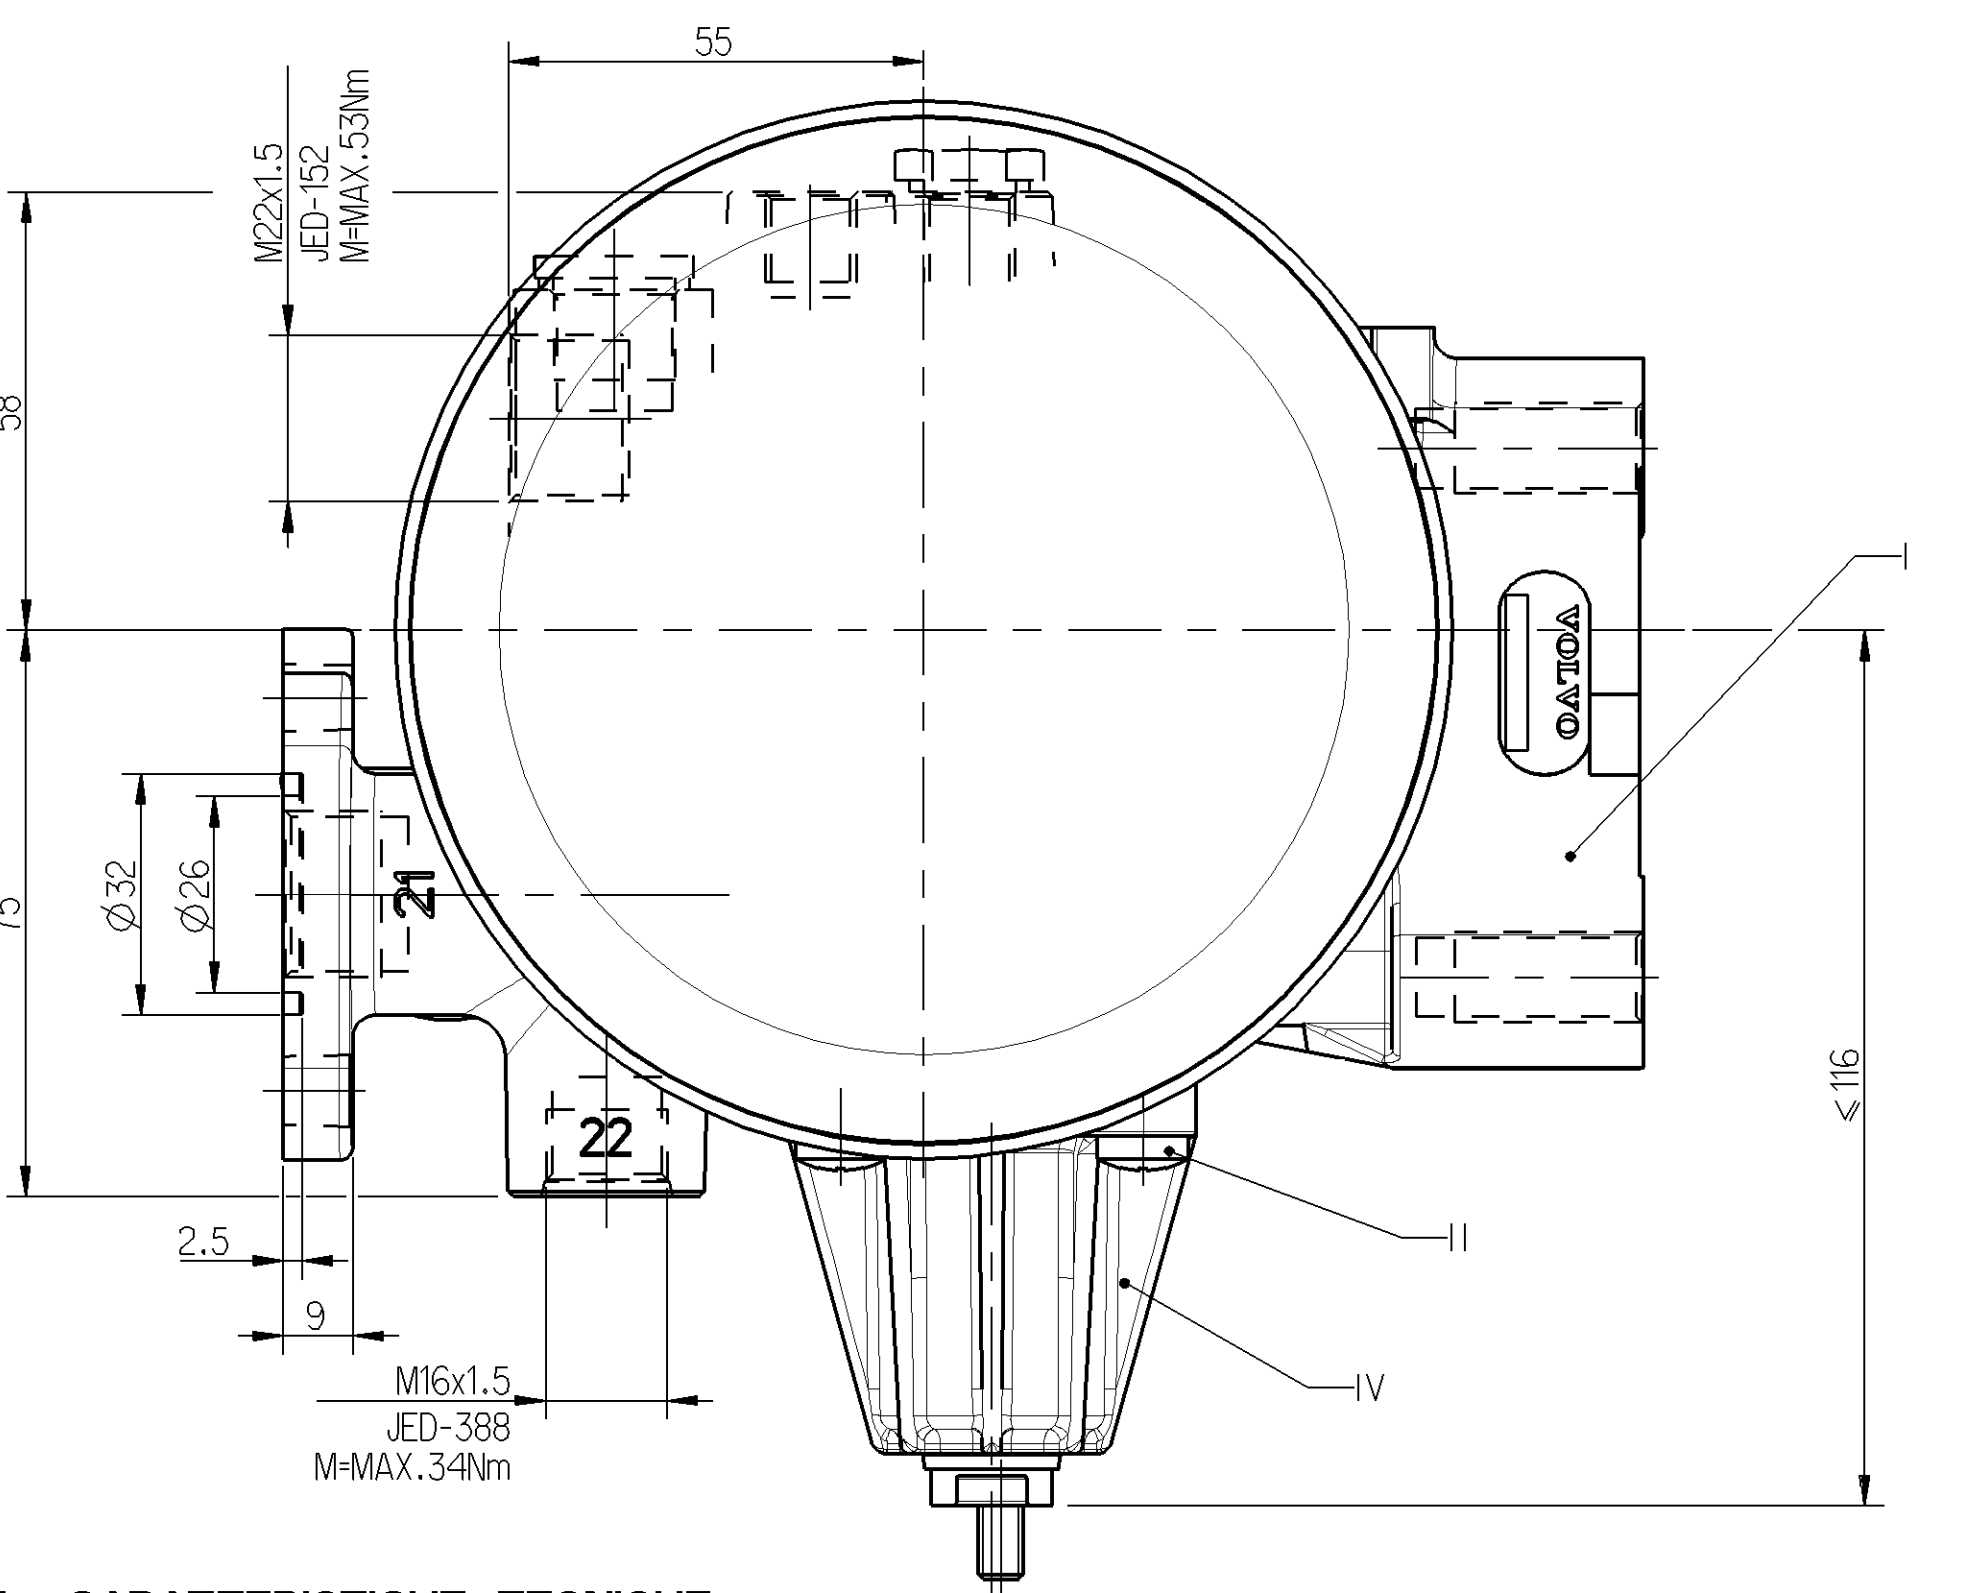

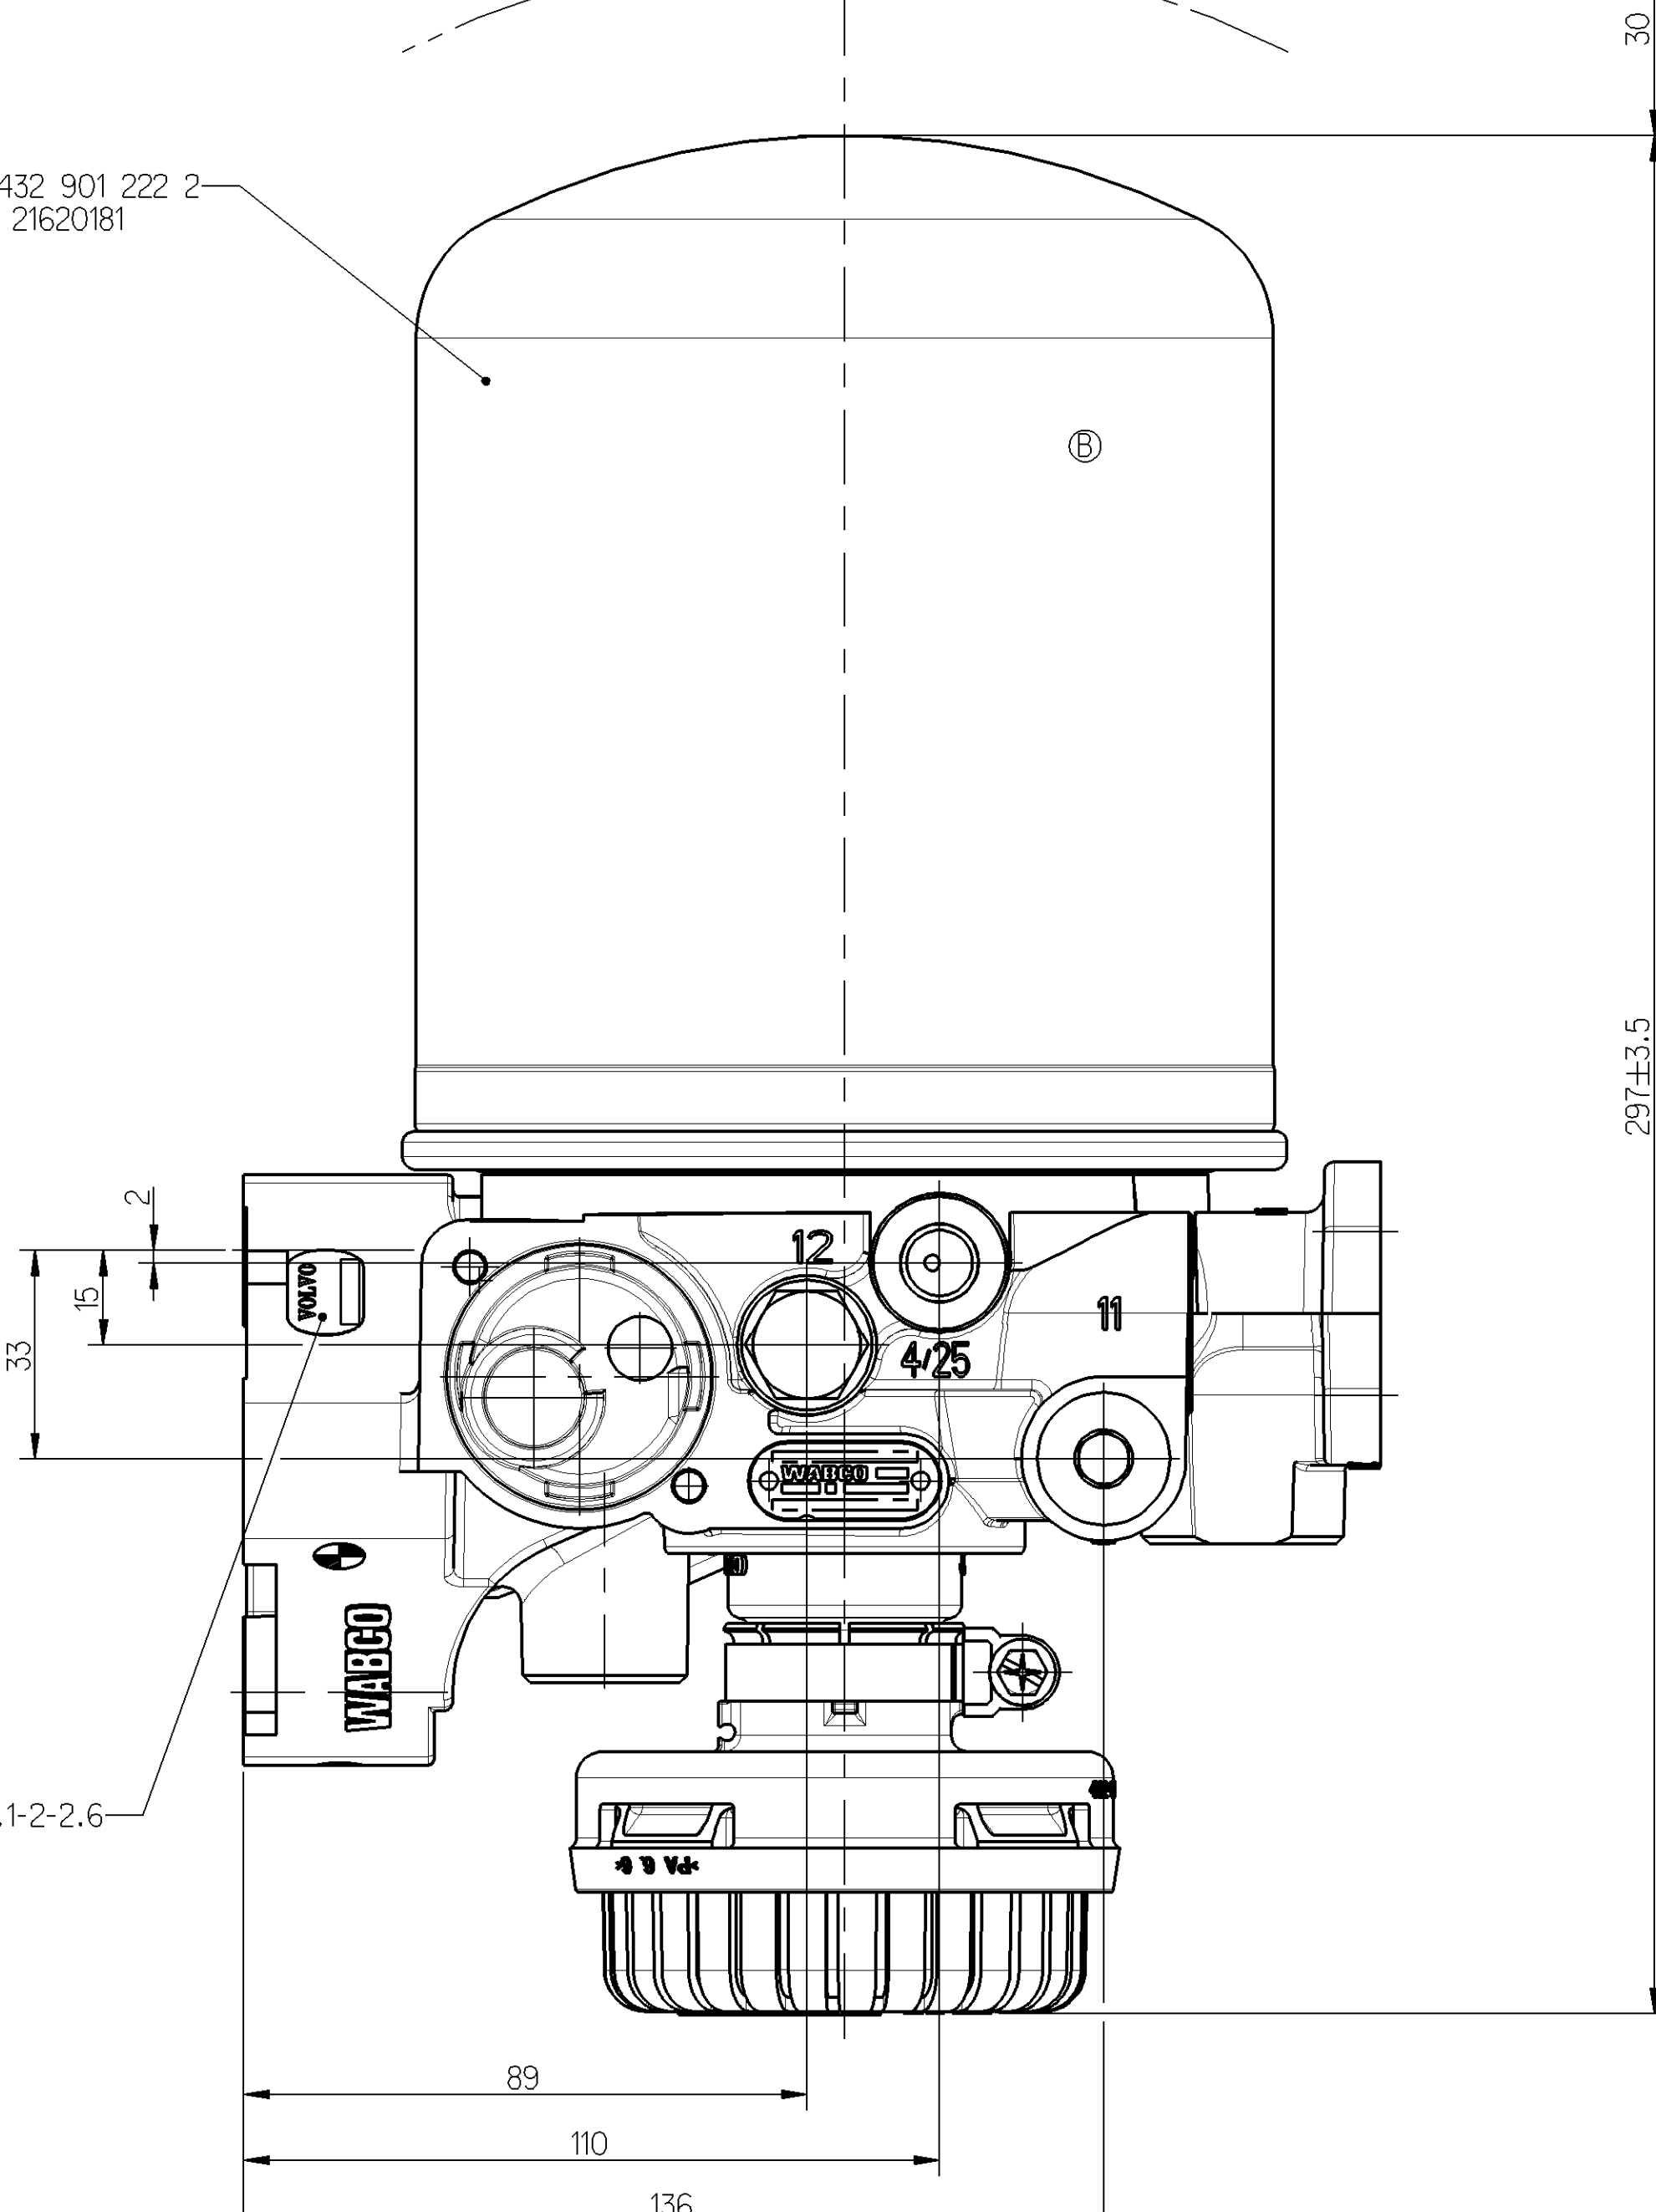
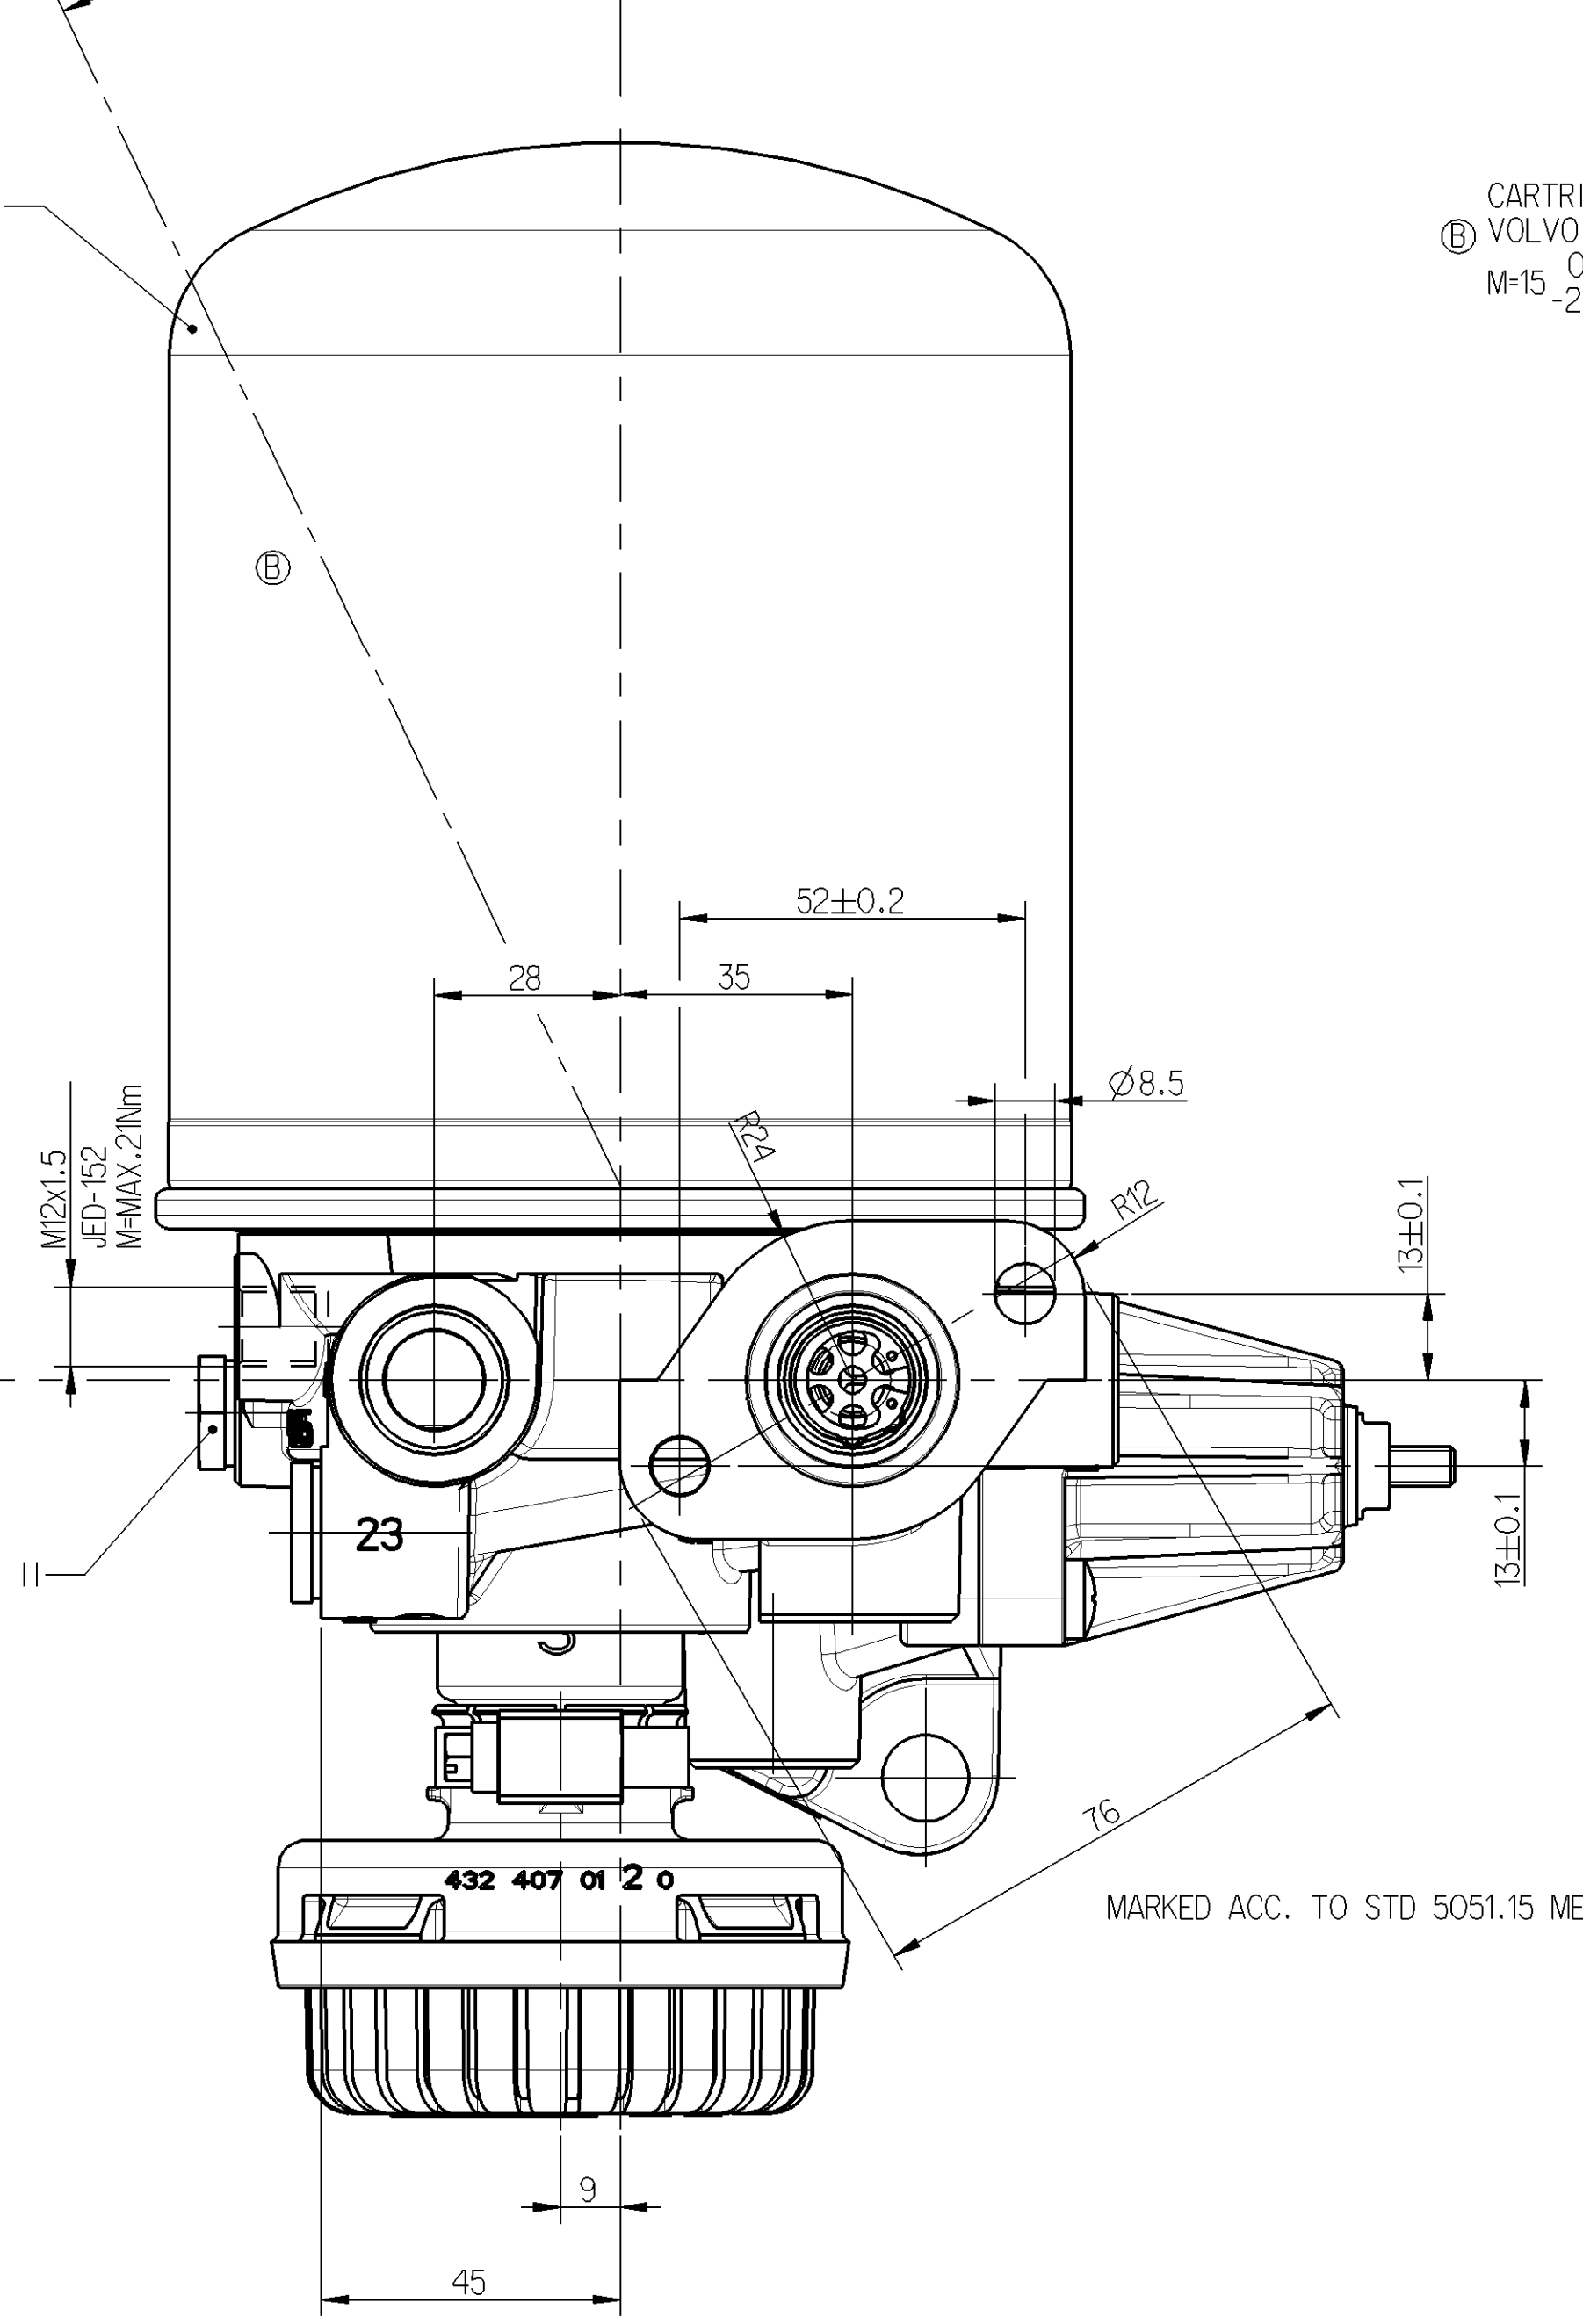
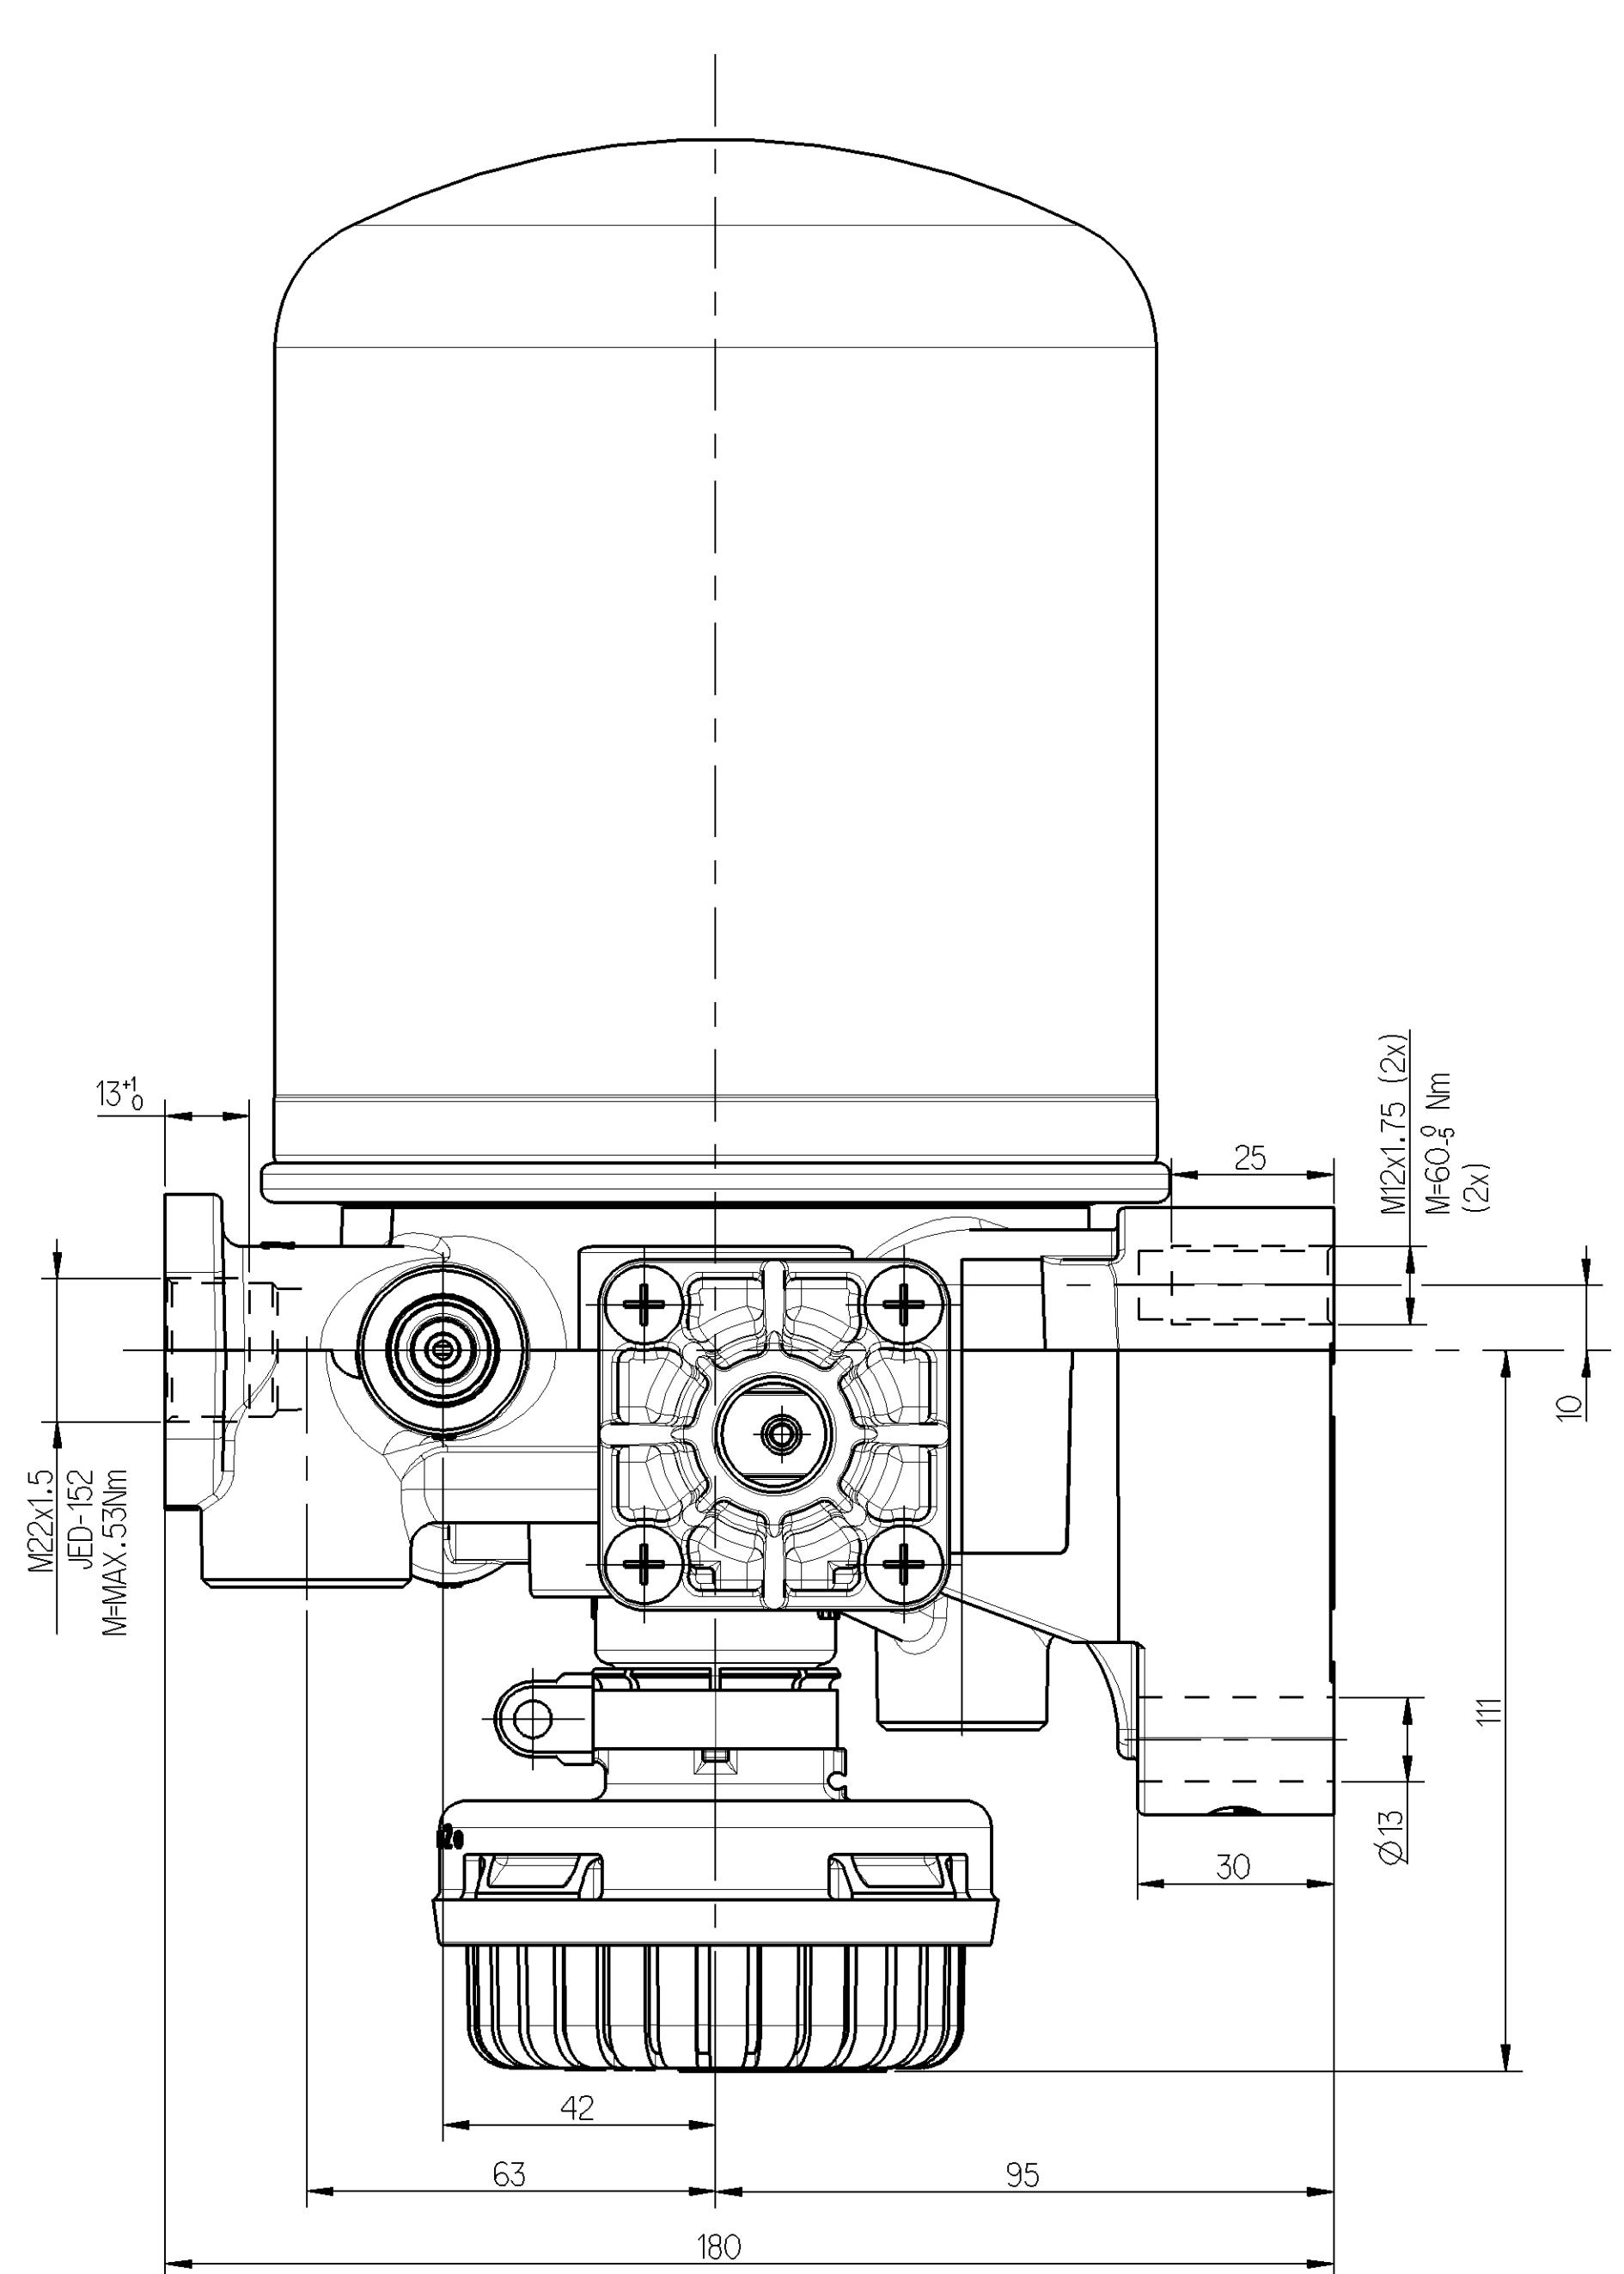



SURFACE PROTECTION OBERFLÄCHENSCHUTZ PROTECTION DE SURFACE PROTEZIONE SUPERFICIALE	
I	LED-259
II	LED-256
III	LED-471 WEISS/WHITE
IV	LED-KLASSE/CLASS 25

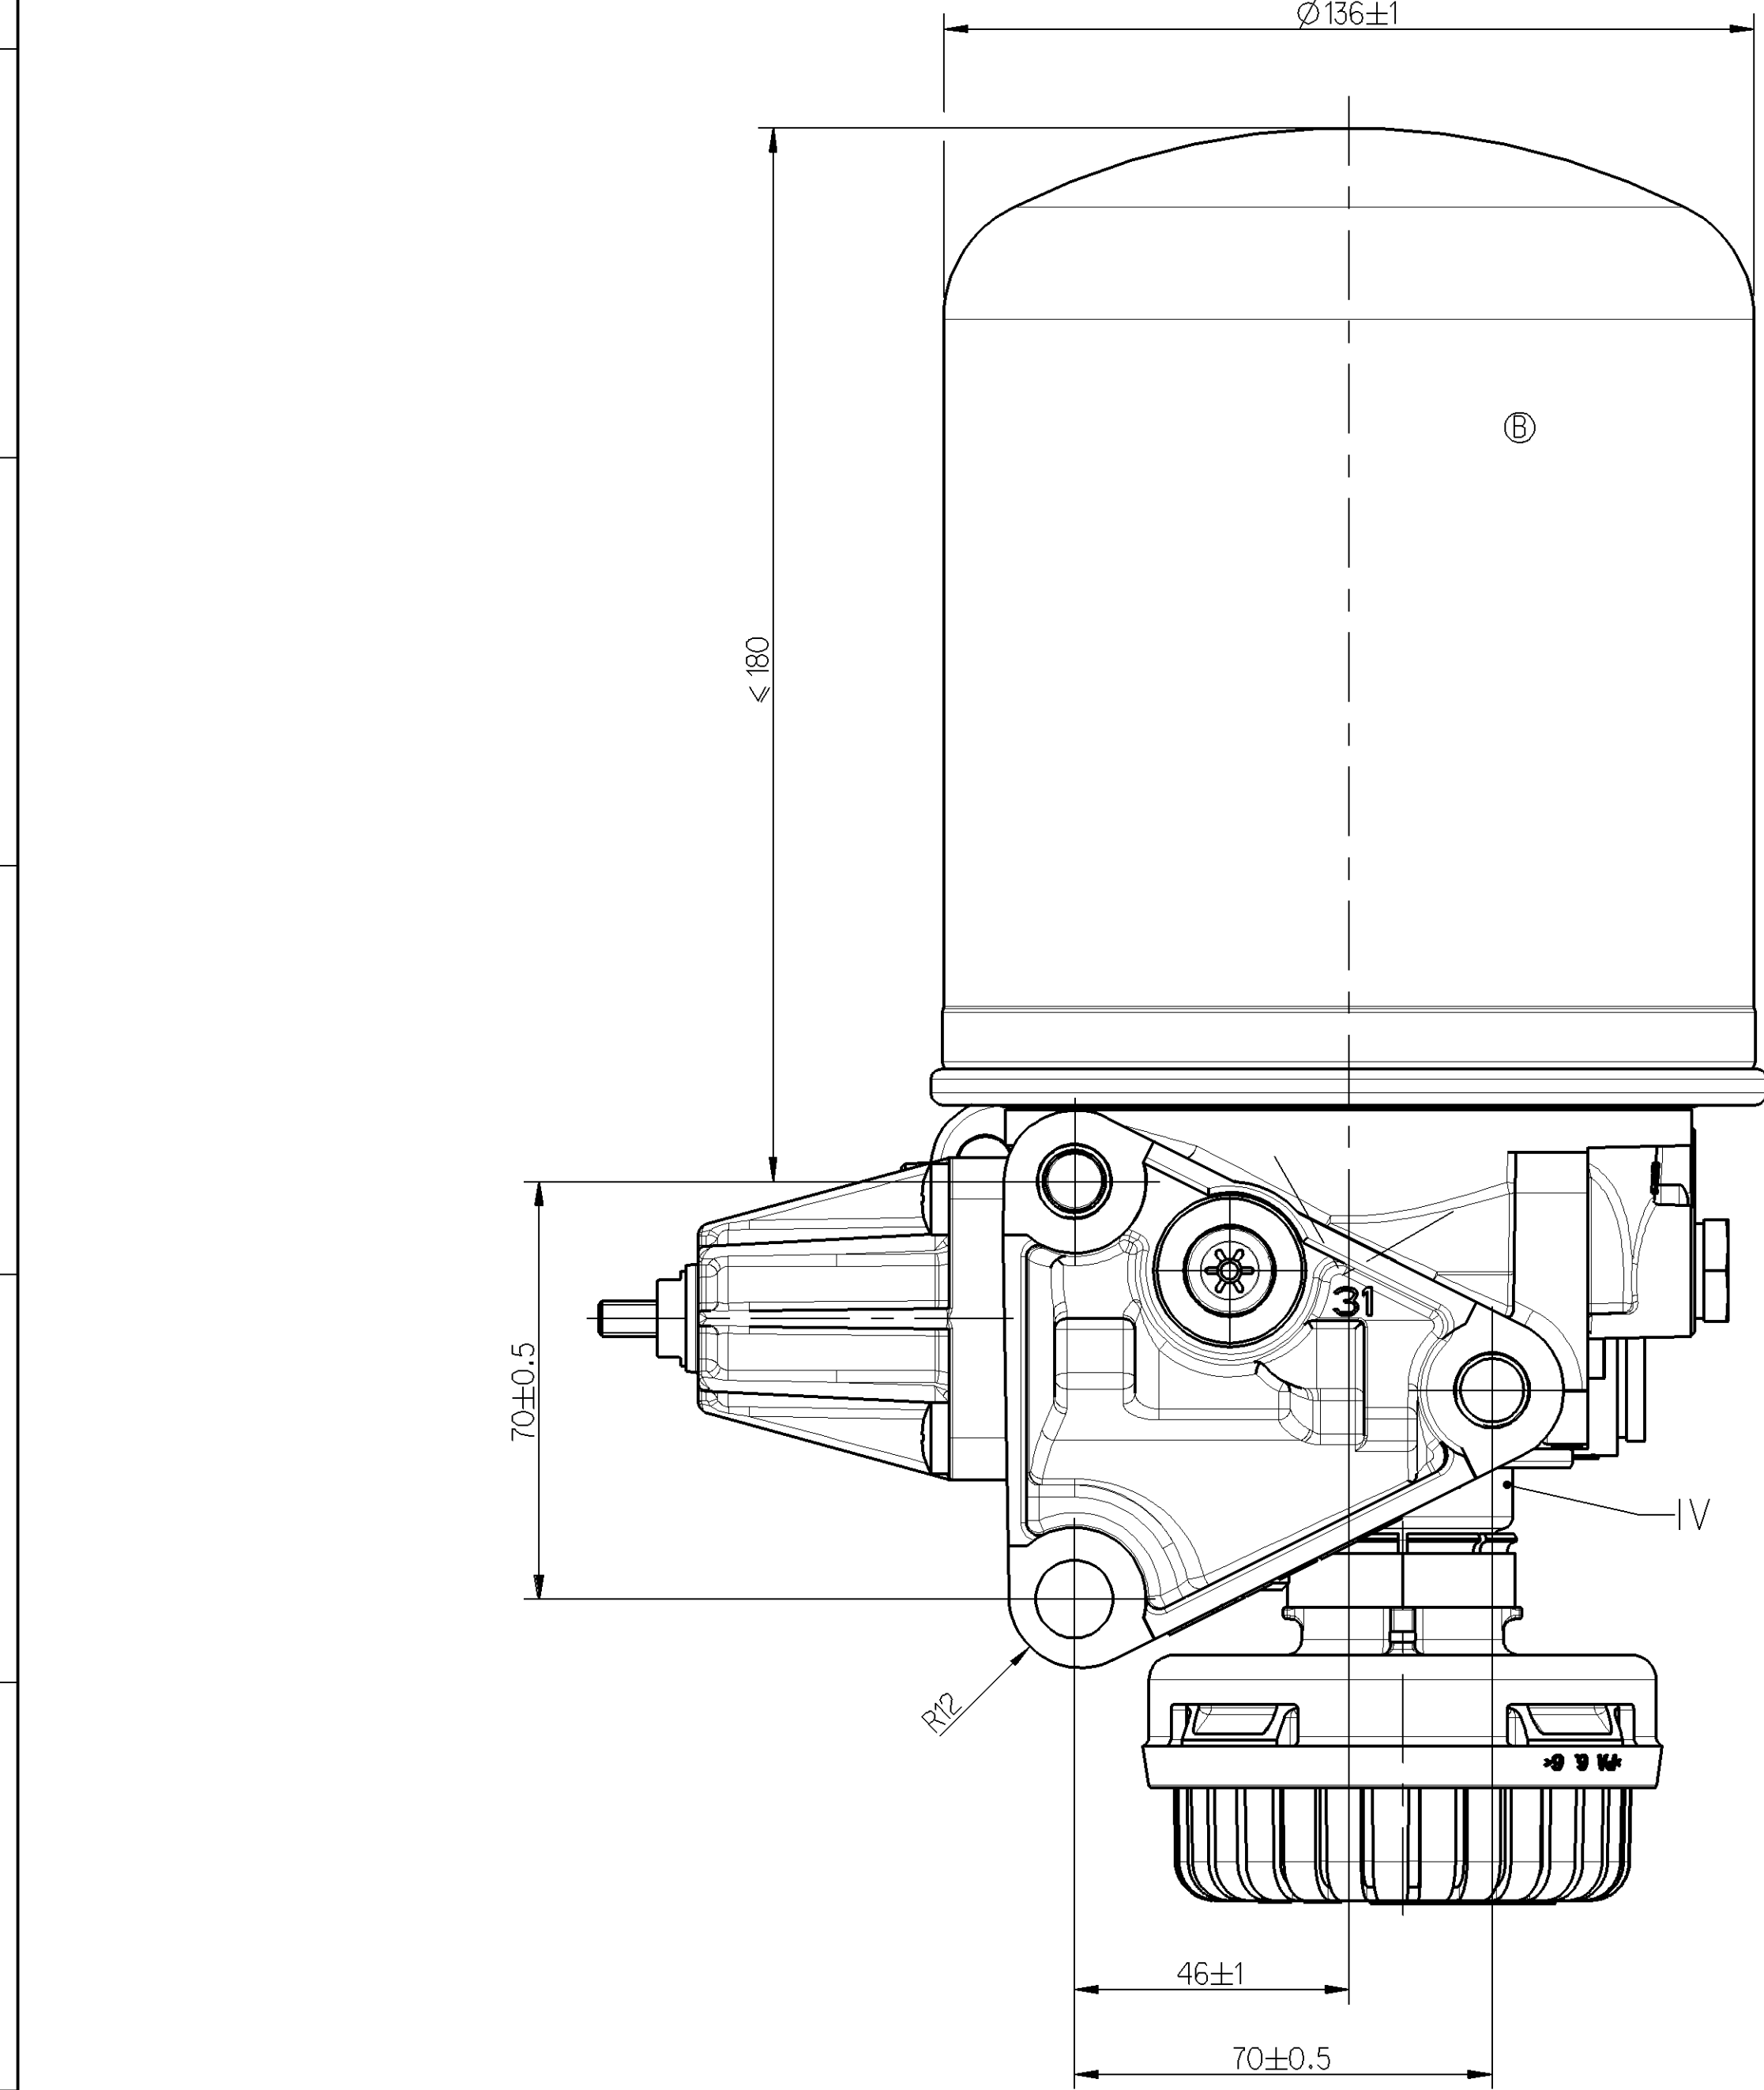

TECHNICAL DATA: / TECHNISCHE DATEN: / CARACTERISTIQUES TECHNIQUES: / CARATTERISTICHE TECNICHE:

THERMAL RANGE OF CONTINUOUS APPLICATION: THERMISCHER DAUERANWENDUNGSBEREICH: PLAGE DE TEMPERATURE EN UTILISATION CONTINUE: COMPO DI APPLICAZIONE CONTINUA:		-40°C.....+65°C	
RESISTANCE TO HEAT: WÄRMESTÄNDIGKEIT: RESISTANCE A LA CHALEUR: RESISTENZA AL CALORE:		MAX. +80°C	
MEDIUM, COMPRESSED AIR: MEDIUM, DRUCKLUFT: FLUIDE, AIR COMPRIME: FLUIDO, ARIA COMPRESSA:		PeMAX. = 13bar	
WORKING PRESSURE: BETRIEBSDRUCK: PRESSION DE SERVICE: PRESSIONE D'ESERCIZIO:		PeMAX. = 13bar	
MAX. PERMISSIBLE FREQUENCY: MAX. ZULÄSSIGE FREQUENZ: MAX. AMMISSIBILE FREQUENZA: MAX. AMMISSIBILE FREQUENZA:		50Hz	
MAX. PERMISSIBLE ACCELERATION: MAX. ZULÄSSIGE BESCHLEUNIGUNG: ACCELERATION MAX. AMMISSIBILE: ACCELERAZIONE MAX. AMMESSA:		±15g	
INSTALLATION POSITION AS DRAWN: EINBALLAGE WIE GEZEICHNET: POSITION D'INSTALLATION SUIVANT DESSIN: POSIZIONE DI MONTAGGIO COME DISEGNATO:			

COMBINED UNLOADER: DRUCKREGLER: REGULATEUR DE PRESSION: GRUPPO DI REGOLAZIONE:		9.3±0.2bar	
CUT OUT PRESSURE: ABSCHALTDRUCK: PRESSION D'OUVERTURE: PRESSIONE D'APERTURA:		9.3±0.2bar	
OPERATING RANGE: SCHALTSPANNE: PLAGE DE REGULATION: GAMME DI REGOLAZIONE:		0.9±0.3bar	
SAFETY VALVE: SICHERHEITSVENTIL: SOUPAPE DE SECURITE: VALVOLA DI SICUREZZA:			
OPENING PRESSURE: OFFNUNGSDRUCK: PRESSION D'OUVERTURE: PRESSIONE D'APERTURA:		14.5 ^{+2.5} ₀ bar	

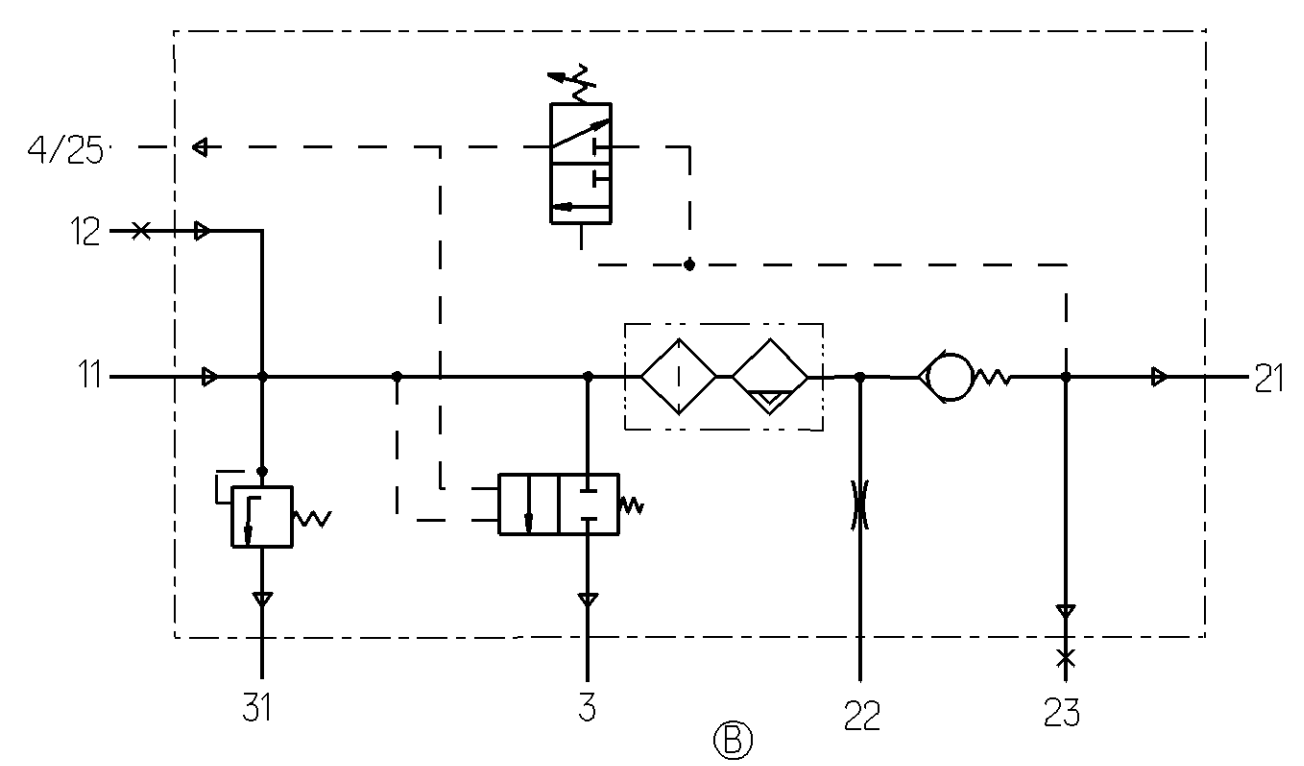

- 11 FROM THE COMPRESSOR
VOM KOMPRESSOR
PROVENANT DU COMPRESSEUR
PROVENIENTE DEL COMPRESSORE
- 12 EXTERNAL FILLING
FREIENBEFÜLLUNG
ALIMENTATION DE L'EXTERIEUR
ALIMENTAZIONE SEPERATA
- 21 TO PROTECTION VALVE
ZUM SCHUTZVENTIL
AU VALVE DE PROTECTION
A VALVOLA DI PROTEZIONE
- 22 TO RESERVOIR FOR REGENERATION AIR
ZUM REGENERATIONS-LUFTBEHALTER
AU RESERVOIR D'AIR DE REGENERATION
AL SERBATOIO PER L'ARIA RIGENERATA
- 3 EXHAUST FOR COMPRESSOR IDLING
ENTLÜFTUNG BEI KOMPRESSOR-LEERLAUF
ECHAPPEMENT POUR MARCHE A VIDE DU COMPRESSEUR
SCARICO PER MARCIA A FOLLE DEL COMPRESSORE
- 31 EXHAUST OF THE SAFETY VALVE
ENTLÜFTUNG DES SICHERHEITSVENTILES
ECHAPPEMENT DE LA SOUPAPE DE SECURITE
SCARICO DELLA VALVOLA DI SICUREZZA
- 4/25 CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO

General Specification: LED-354-D		Copyright WABCO®		WABCO	
Further Technical Data:		Date: 2011-04-28		Signature: Obyedyn	
Dwg. Code:		Sheet: 1		To: 2011-04-28	
General Tolerances: ISO-201		Unit: mm		Scale: 1:1	
Range of Nominal Dimensions (± mm)		100 - 500		1000 - 5000	
Class 11		± 0.5		± 0.5	
Class 12		± 0.5		± 0.5	
Class 13		± 0.5		± 0.5	
Class 14		± 0.5		± 0.5	
Class 15		± 0.5		± 0.5	
Class 16		± 0.5		± 0.5	
Class 17		± 0.5		± 0.5	
Class 18		± 0.5		± 0.5	
Class 19		± 0.5		± 0.5	
Class 20		± 0.5		± 0.5	
Class 21		± 0.5		± 0.5	
Class 22		± 0.5		± 0.5	
Class 23		± 0.5		± 0.5	
Class 24		± 0.5		± 0.5	
Class 25		± 0.5		± 0.5	
Class 26		± 0.5		± 0.5	
Class 27		± 0.5		± 0.5	
Class 28		± 0.5		± 0.5	
Class 29		± 0.5		± 0.5	
Class 30		± 0.5		± 0.5	
Class 31		± 0.5		± 0.5	
Class 32		± 0.5		± 0.5	
Class 33		± 0.5		± 0.5	
Class 34		± 0.5		± 0.5	
Class 35		± 0.5		± 0.5	
Class 36		± 0.5		± 0.5	
Class 37		± 0.5		± 0.5	
Class 38		± 0.5		± 0.5	
Class 39		± 0.5		± 0.5	
Class 40		± 0.5		± 0.5	
Class 41		± 0.5		± 0.5	
Class 42		± 0.5		± 0.5	
Class 43		± 0.5		± 0.5	
Class 44		± 0.5		± 0.5	
Class 45		± 0.5		± 0.5	
Class 46		± 0.5		± 0.5	
Class 47		± 0.5		± 0.5	
Class 48		± 0.5		± 0.5	
Class 49		± 0.5		± 0.5	
Class 50		± 0.5		± 0.5	
Class 51		± 0.5		± 0.5	
Class 52		± 0.5		± 0.5	
Class 53		± 0.5		± 0.5	
Class 54		± 0.5		± 0.5	
Class 55		± 0.5		± 0.5	
Class 56		± 0.5		± 0.5	
Class 57		± 0.5		± 0.5	
Class 58		± 0.5		± 0.5	
Class 59		± 0.5		± 0.5	
Class 60		± 0.5		± 0.5	
Class 61		± 0.5		± 0.5	
Class 62		± 0.5		± 0.5	
Class 63		± 0.5		± 0.5	
Class 64		± 0.5		± 0.5	
Class 65		± 0.5		± 0.5	
Class 66		± 0.5		± 0.5	
Class 67		± 0.5		± 0.5	
Class 68		± 0.5		± 0.5	
Class 69		± 0.5		± 0.5	
Class 70		± 0.5		± 0.5	
Class 71		± 0.5		± 0.5	
Class 72		± 0.5		± 0.5	
Class 73		± 0.5		± 0.5	
Class 74		± 0.5		± 0.5	
Class 75		± 0.5		± 0.5	
Class 76		± 0.5		± 0.5	
Class 77		± 0.5		± 0.5	
Class 78		± 0.5		± 0.5	
Class 79		± 0.5		± 0.5	
Class 80		± 0.5		± 0.5	
Class 81		± 0.5		± 0.5	
Class 82		± 0.5		± 0.5	
Class 83		± 0.5		± 0.5	
Class 84		± 0.5		± 0.5	
Class 85		± 0.5		± 0.5	
Class 86		± 0.5		± 0.5	
Class 87		± 0.5		± 0.5	
Class 88		± 0.5		± 0.5	
Class 89		± 0.5		± 0.5	
Class 90		± 0.5		± 0.5	
Class 91		± 0.5		± 0.5	
Class 92		± 0.5		± 0.5	
Class 93		± 0.5		± 0.5	
Class 94		± 0.5		± 0.5	
Class 95		± 0.5		± 0.5	
Class 96		± 0.5		± 0.5	
Class 97		± 0.5		± 0.5	
Class 98		± 0.5		± 0.5	
Class 99		± 0.5		± 0.5	
Class 100		± 0.5		± 0.5	