
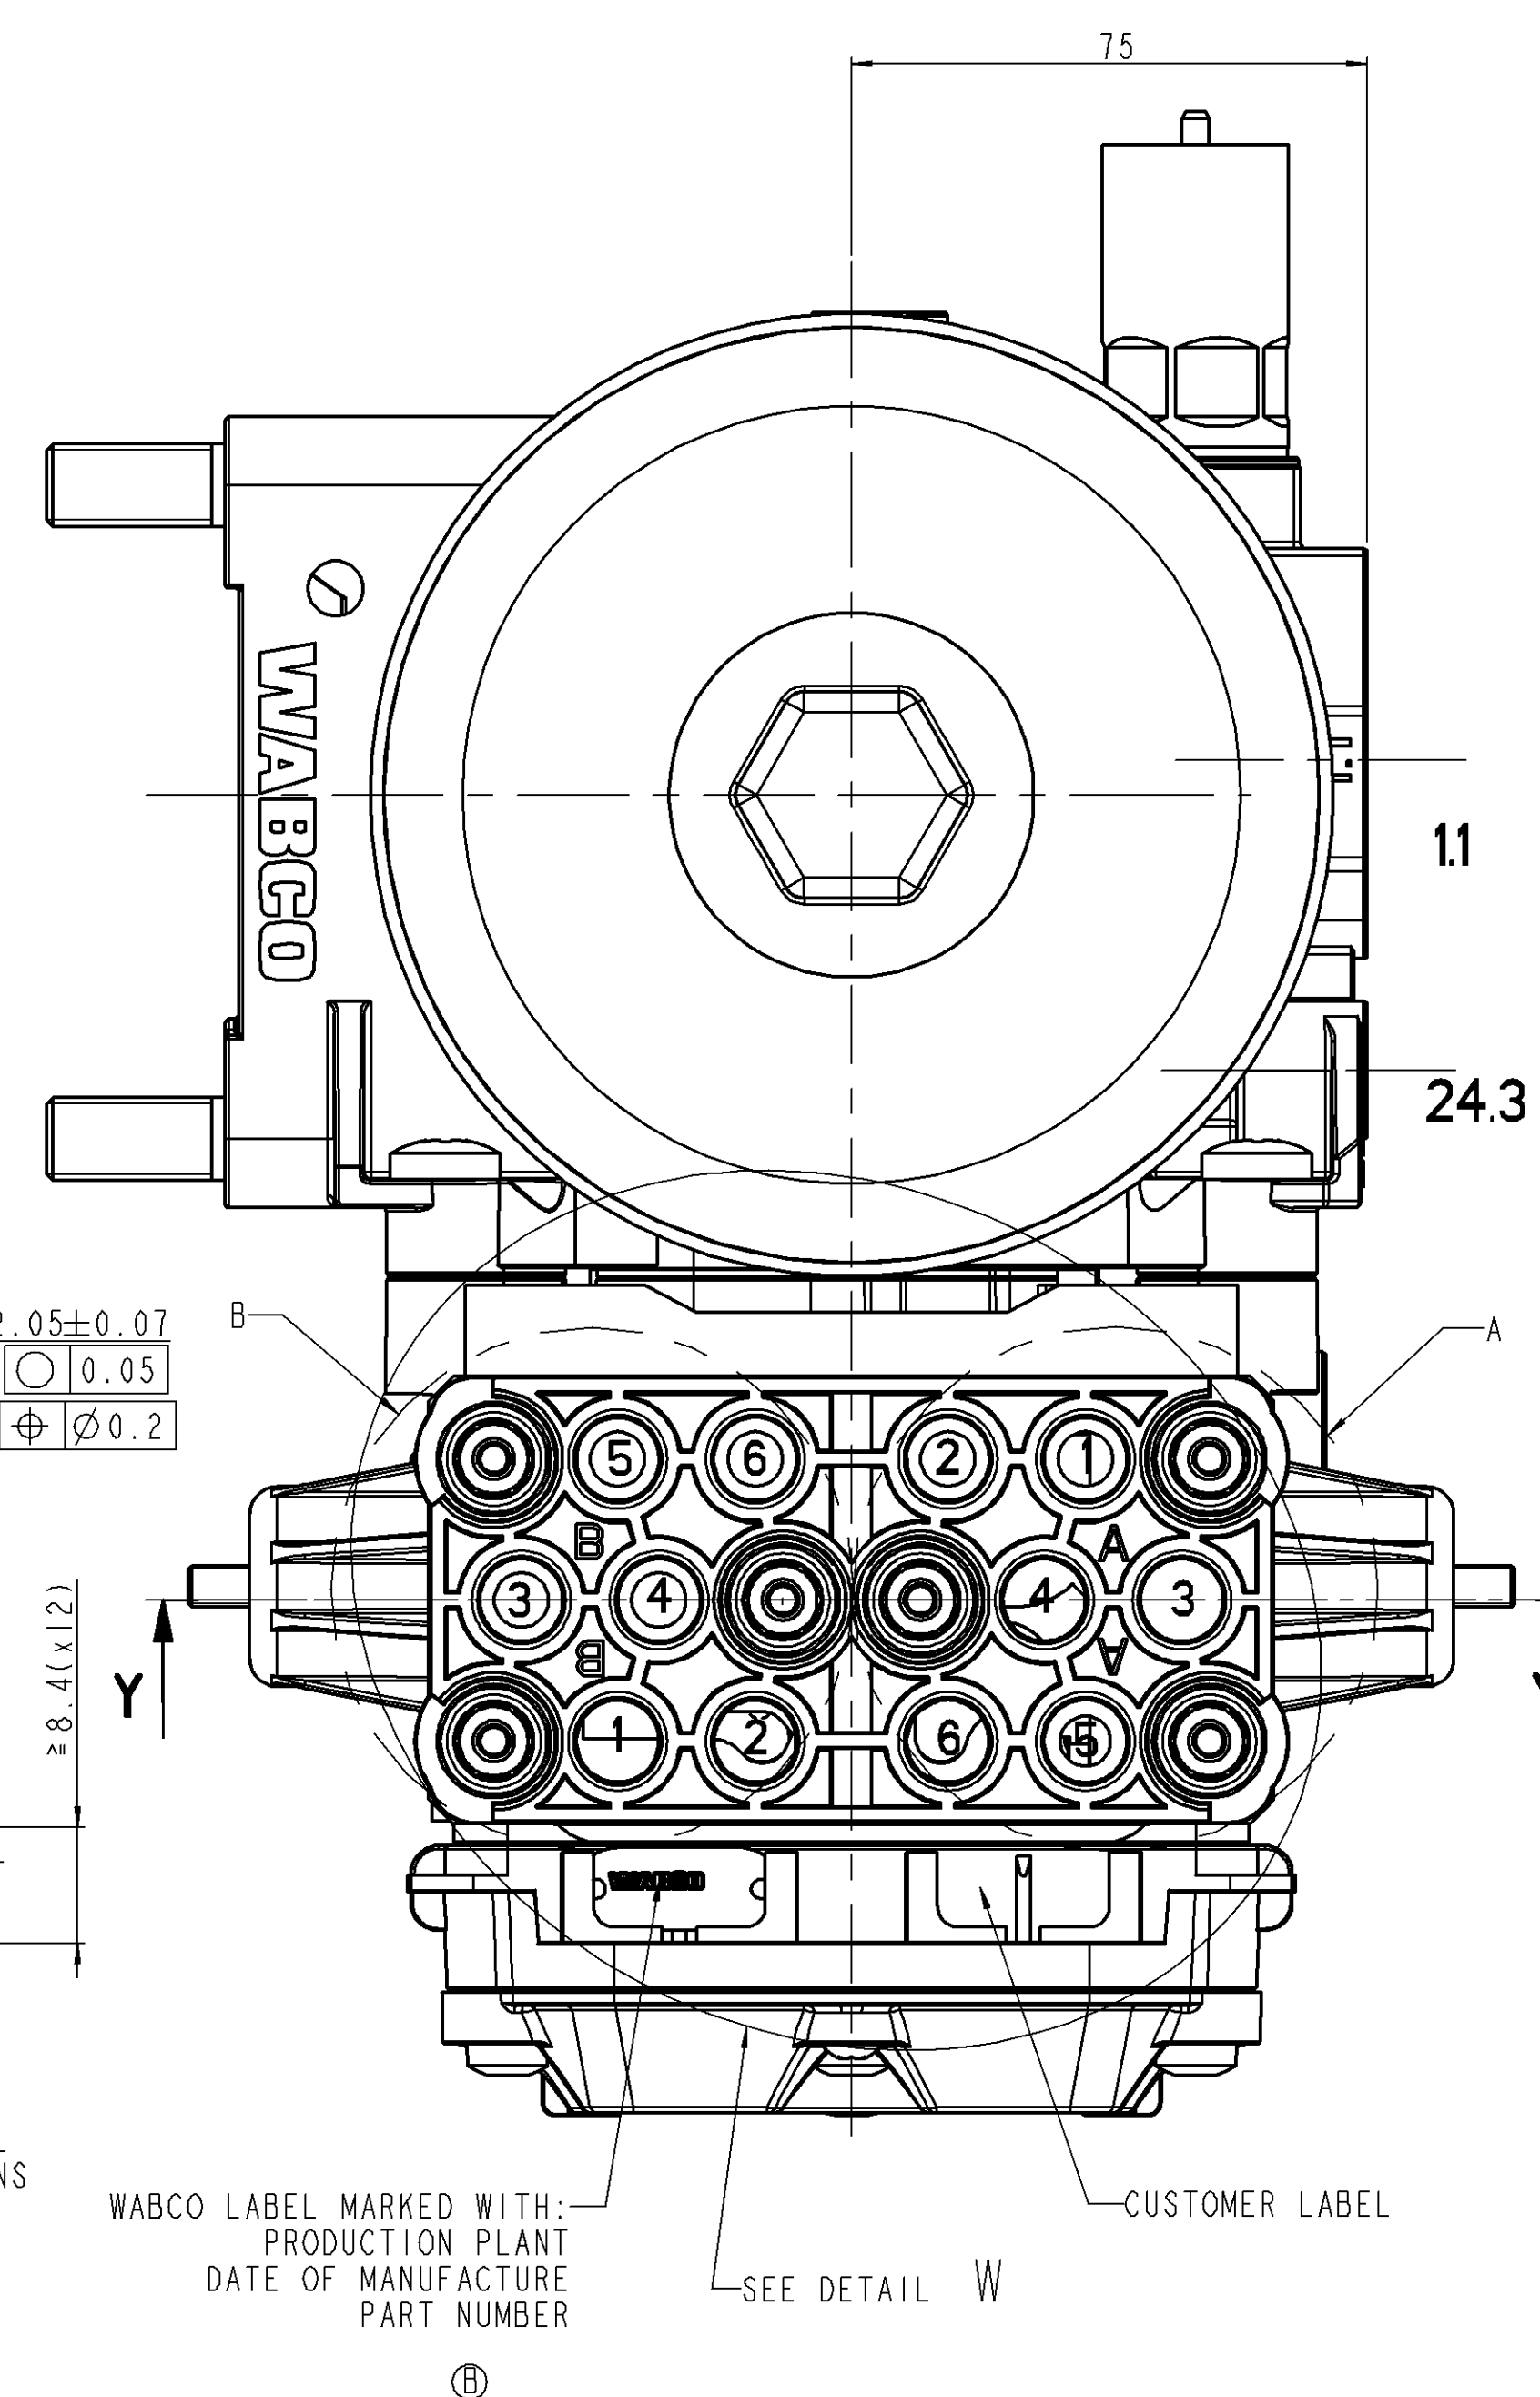
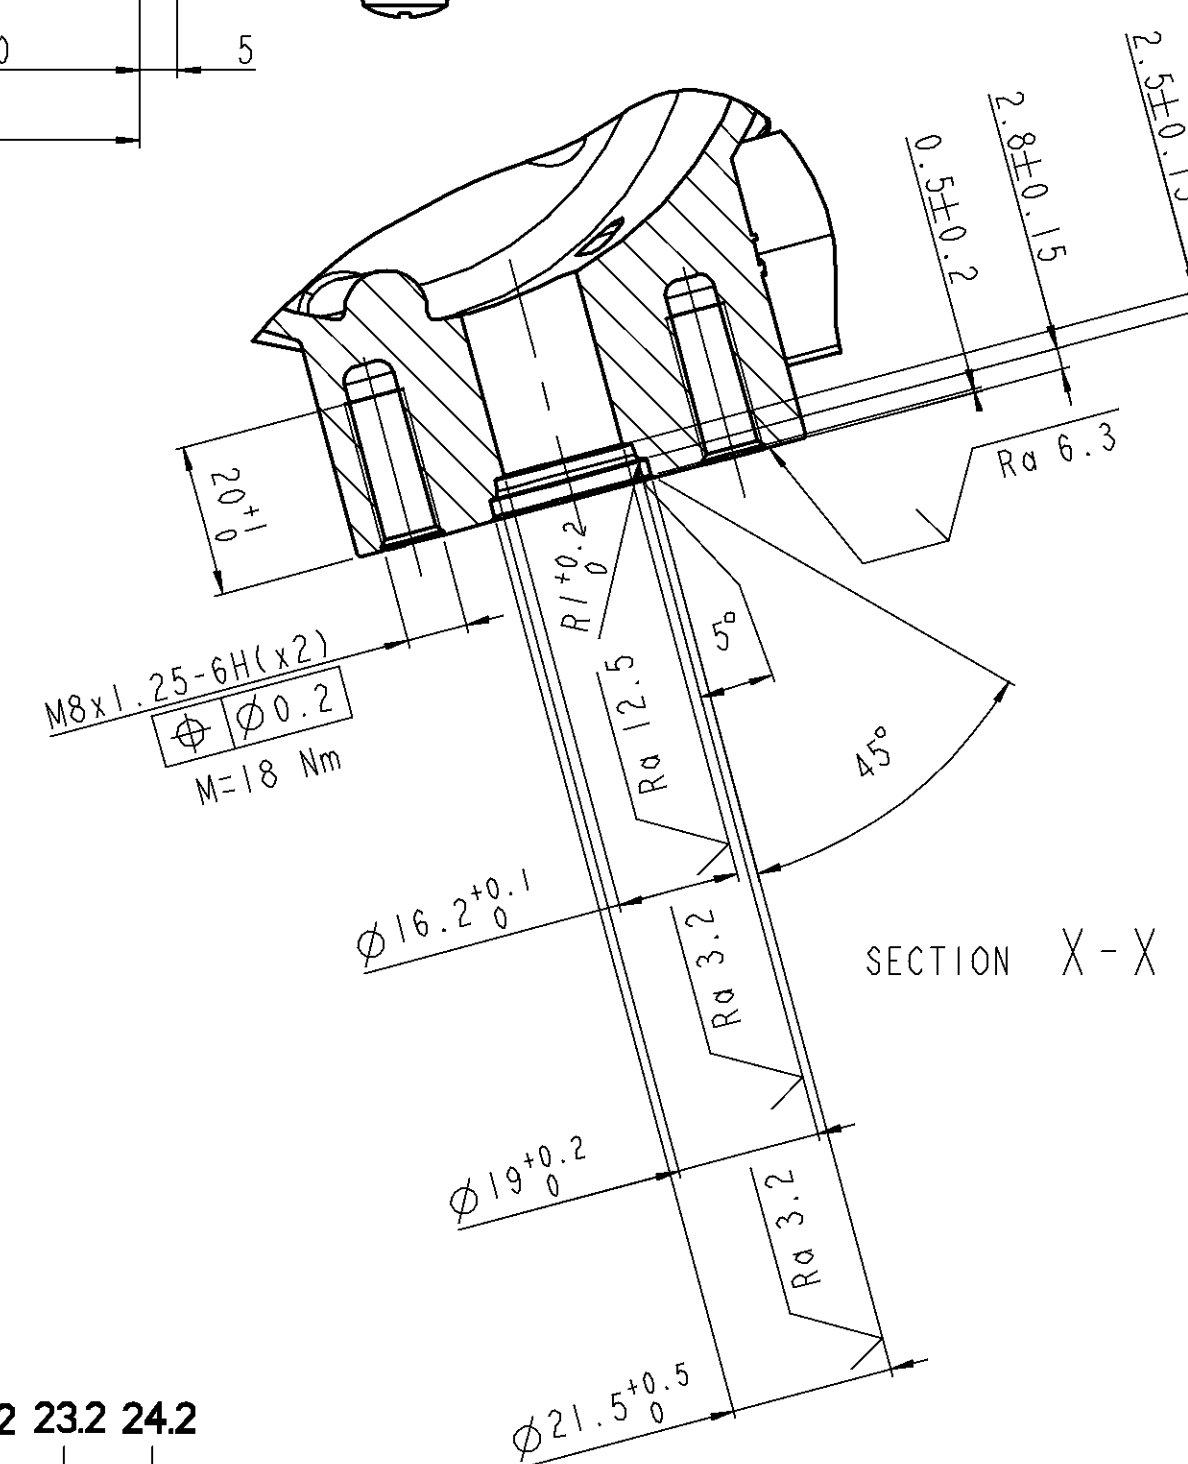
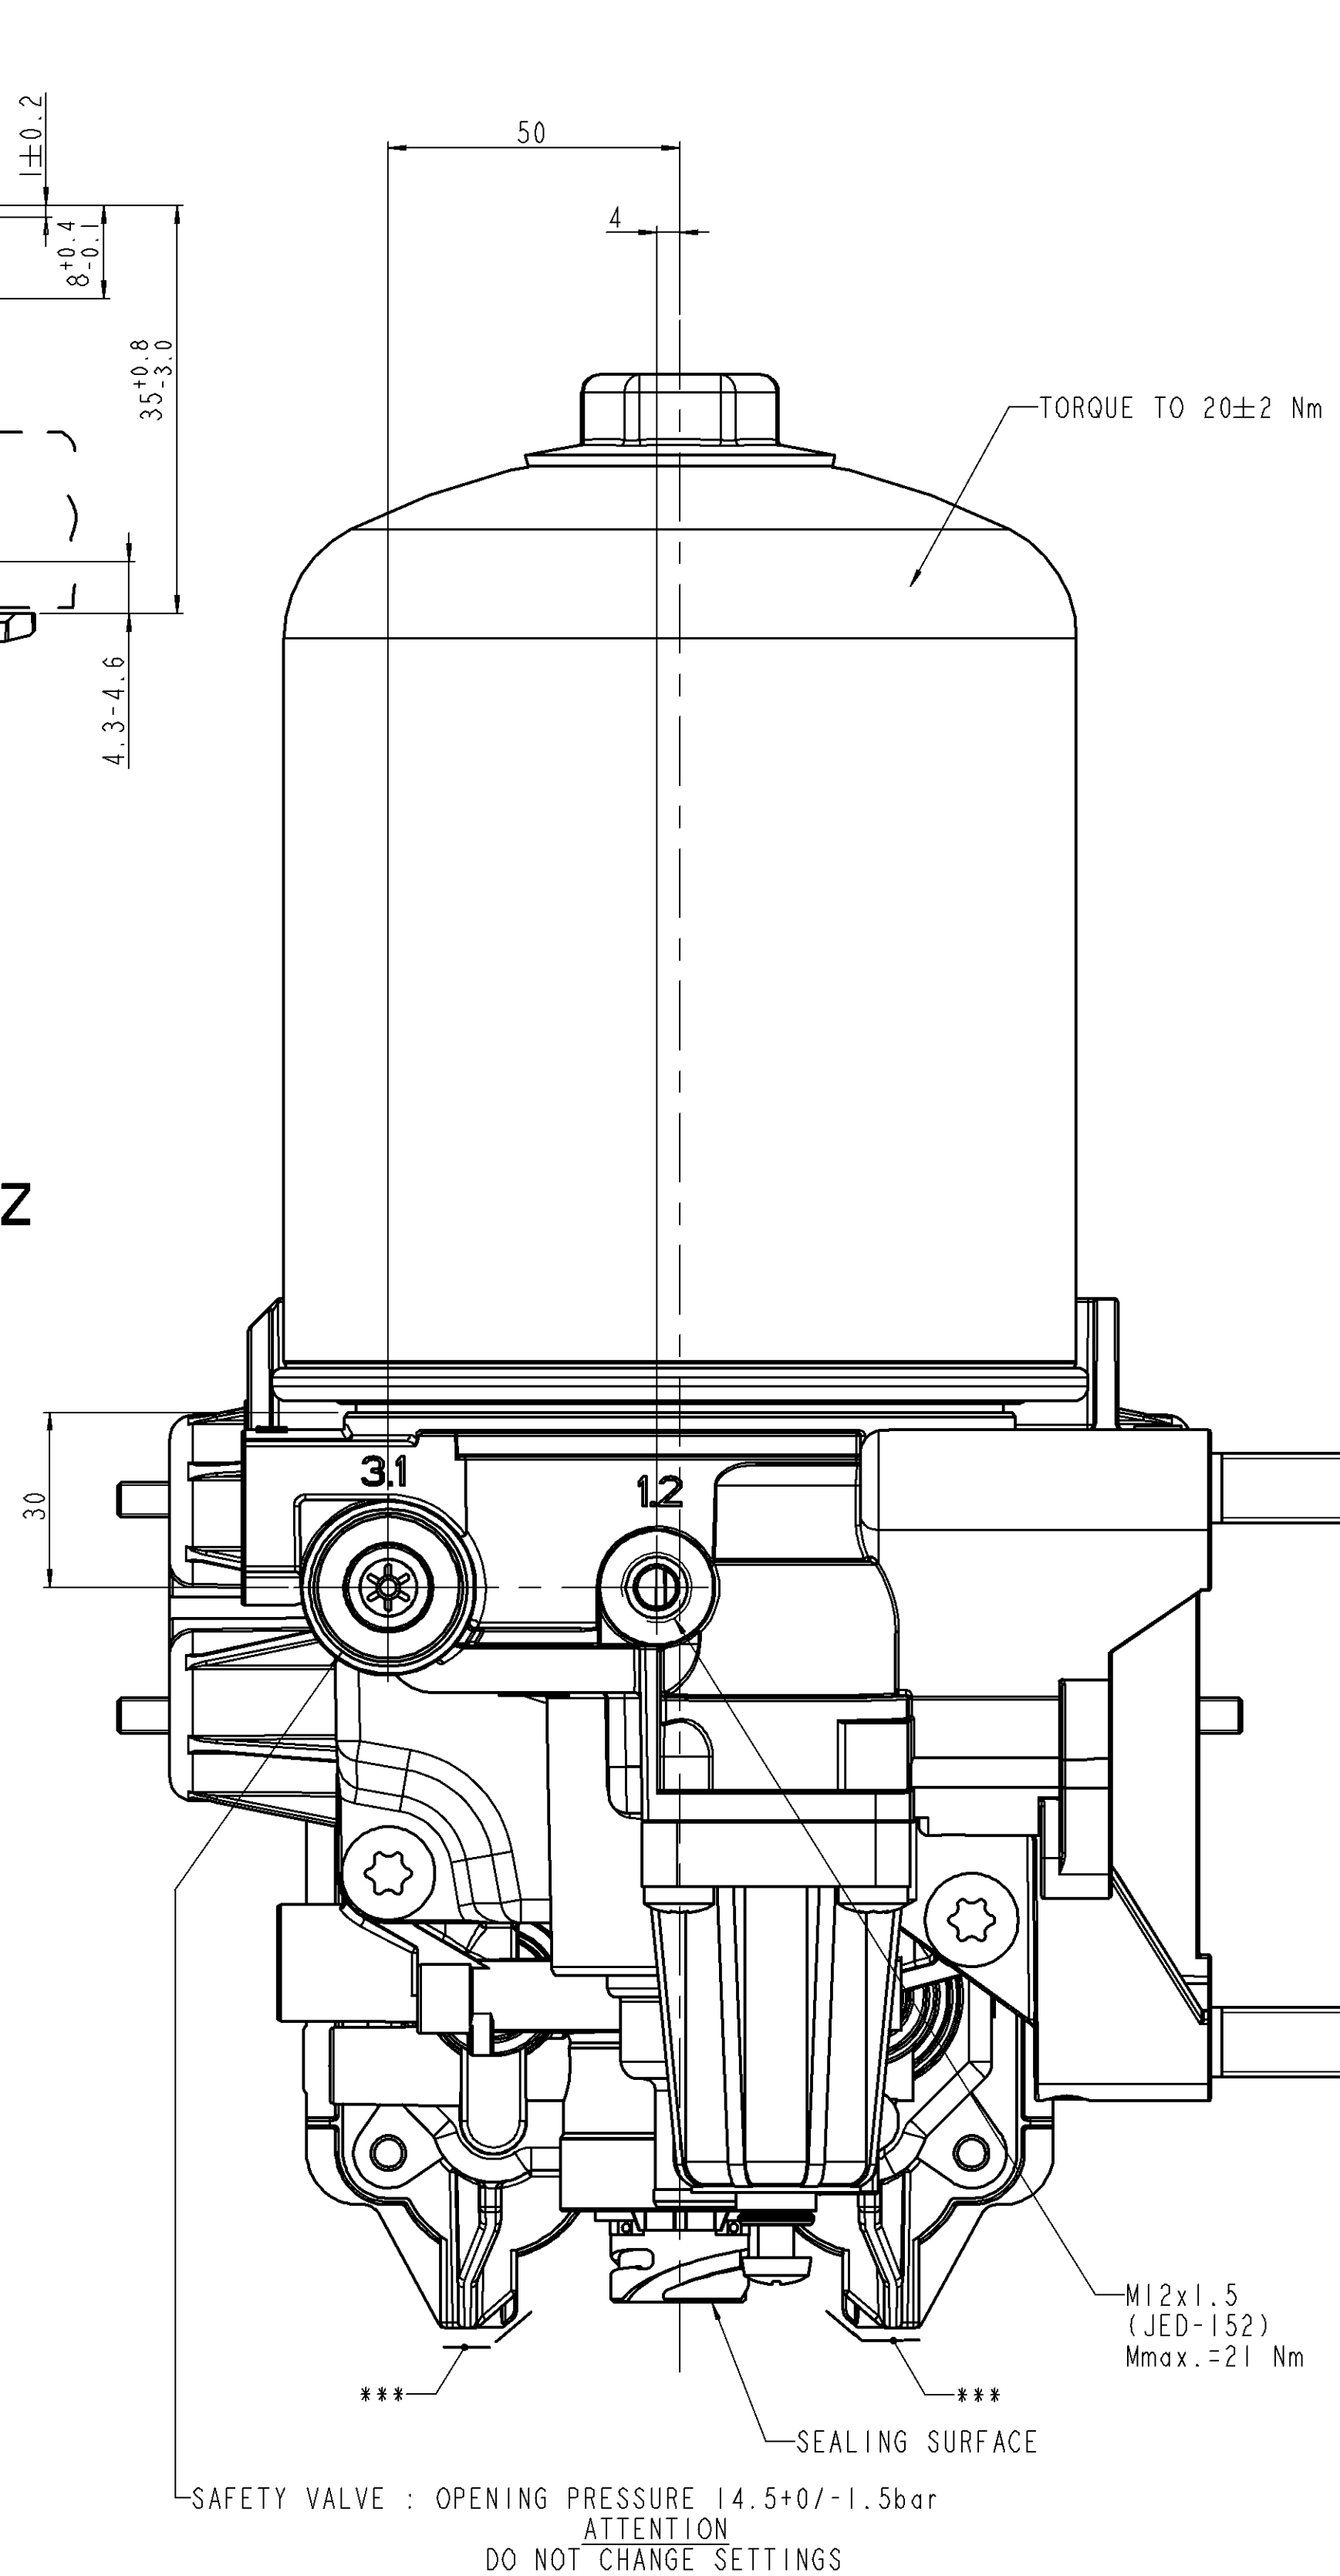



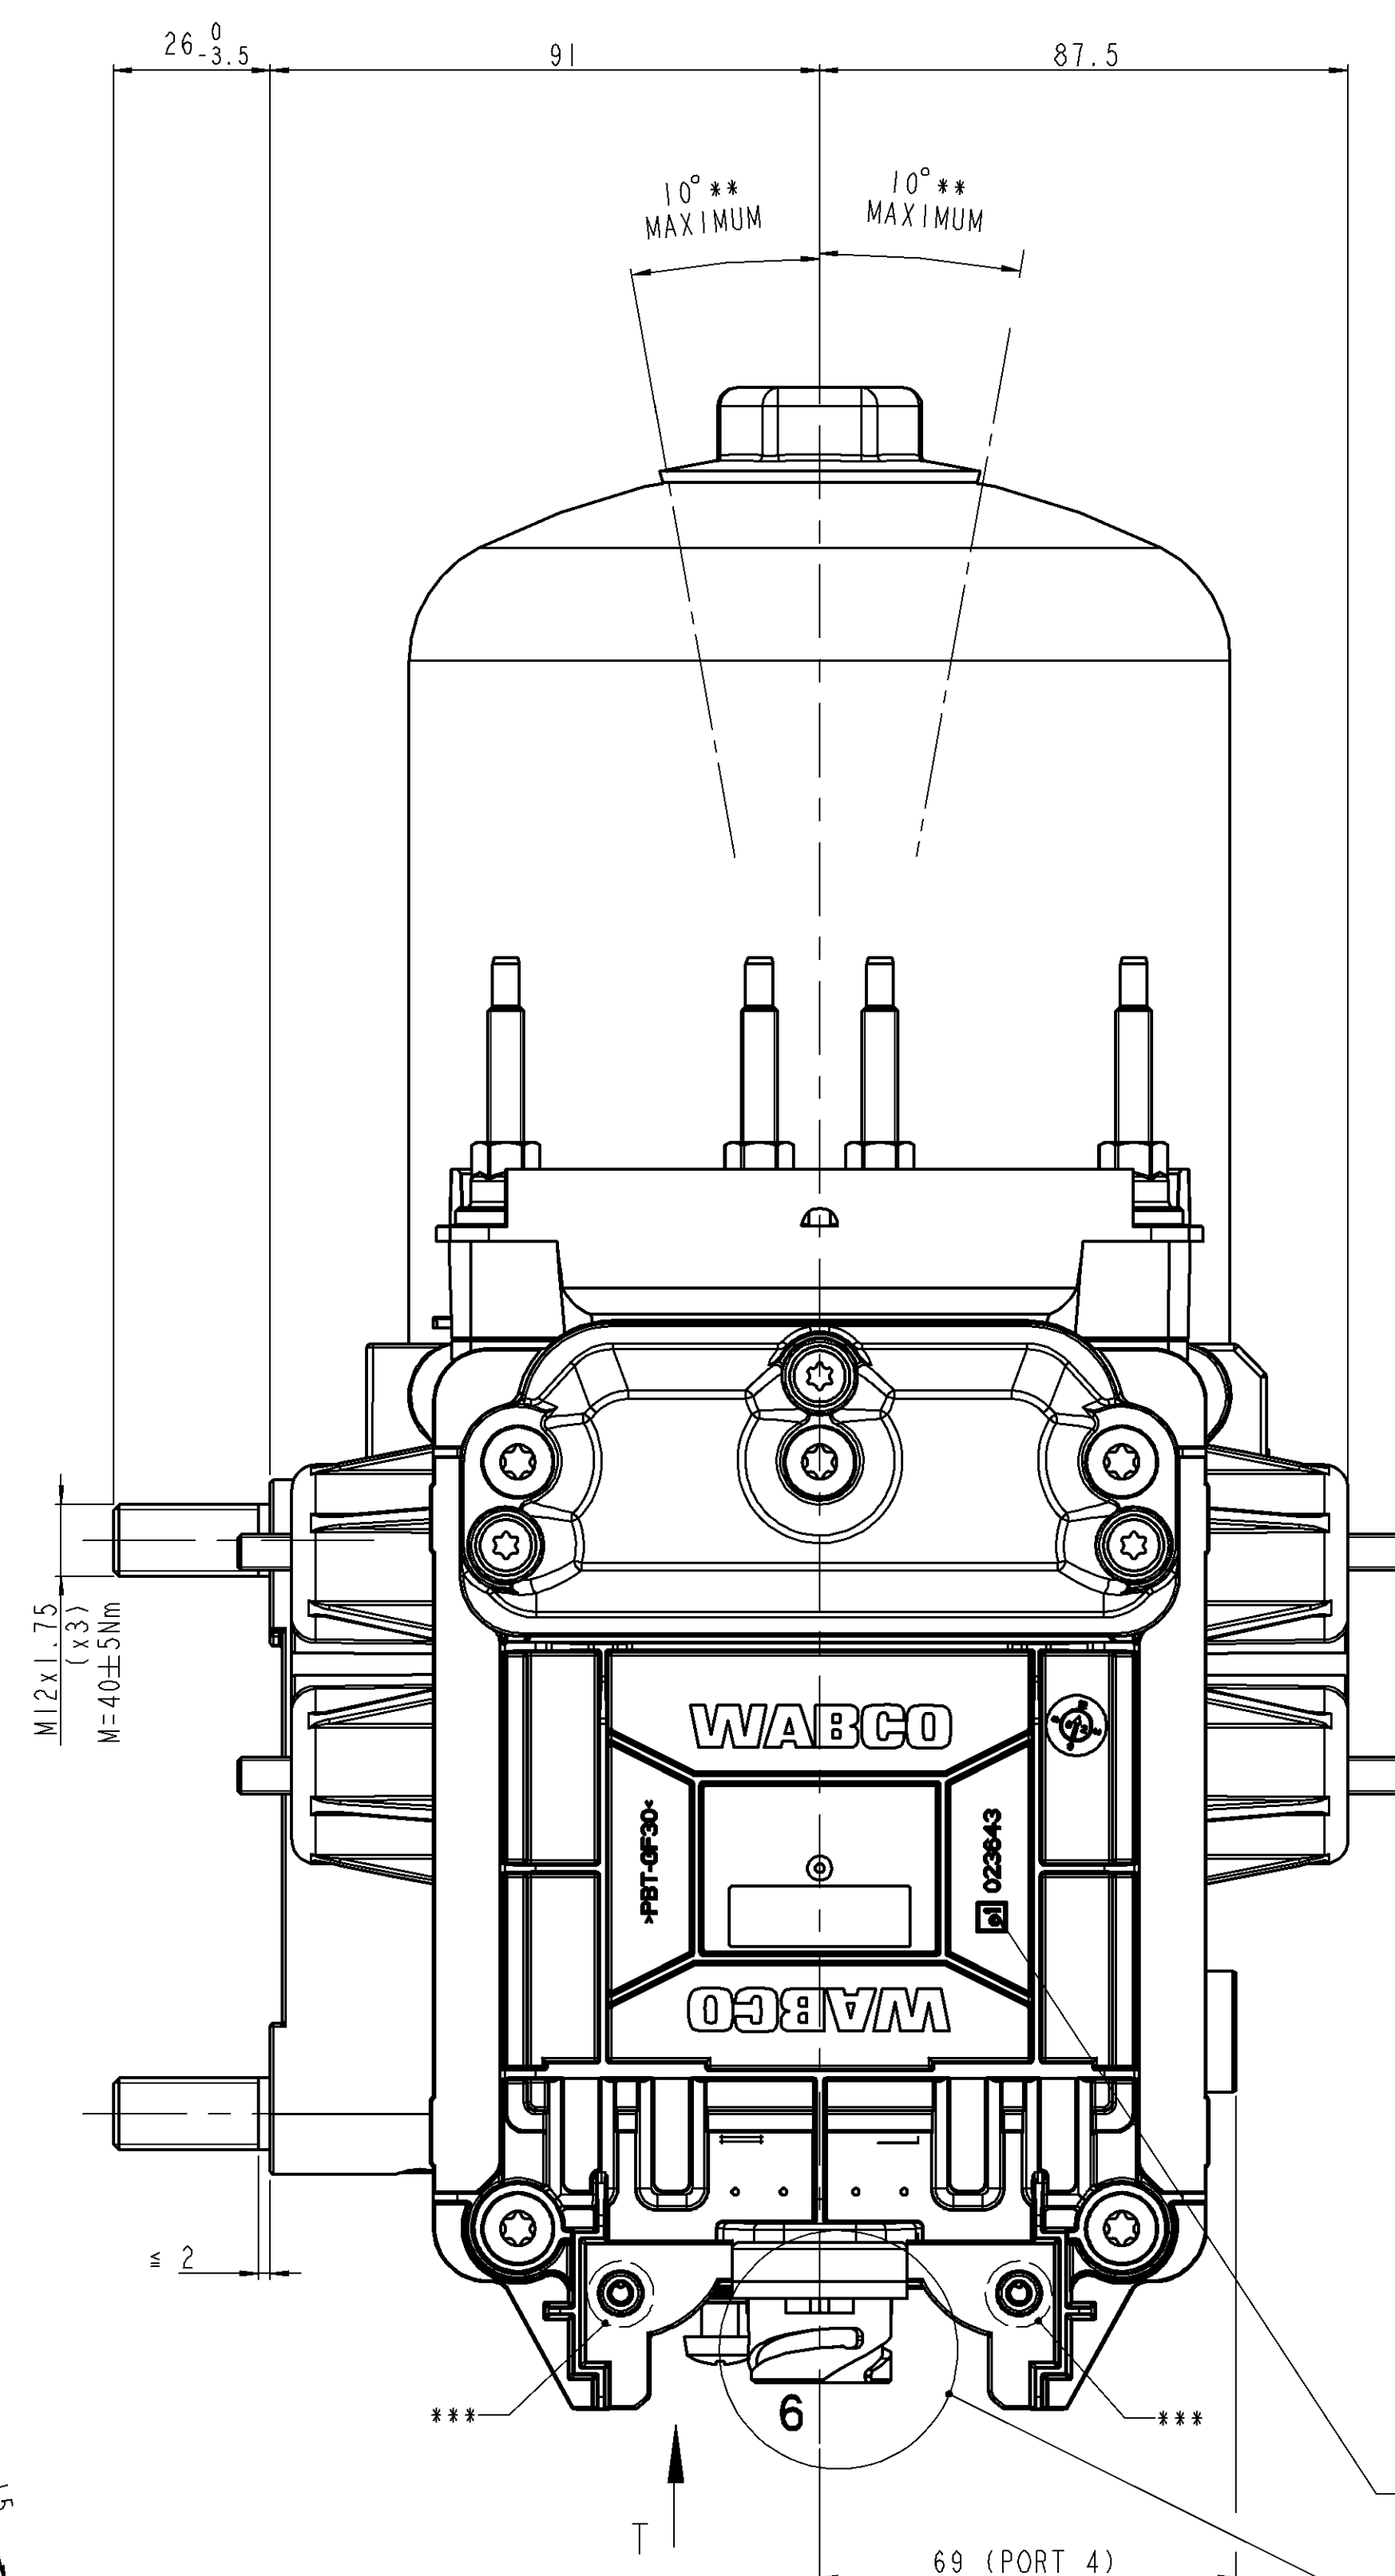


WABCO: 894 110 772 4		VIEW OF
(DIN72585-A1-21H-Sn/K CONNECTOR)		
PIN NUMBER	FUNCTION	
6.1	V _{cc} , BATTERY (24V)	
6.2	GROUND	
6.3	V _{cc} , IGNITION (24V)	
6.4	CAN HIGH	
6.5	CAN LOW	
6.6	N.C.	
6.7	N.C.	

AIRDRYER						
PORT	FUNCTION			OPENING PRESSURE bar		
1.1	FROM COMPRESSOR			-		
1.2	EXTERNAL FILLING			-		
24.3	AUXILIARIES			-		
3	EXHAUST			-		
3.1	EXHAUST FOR SAFETY VALVE			14.5 +0/-1.5		
Five CIRCUIT PROTECTION VALVE						
PORT	FUNCTION			DYNAMIC OPENING bar (+0/-0.3)	STATIC CLOSING bar (> OR =)	PRESSURE LIMITING bar
		REF.	CIRCUIT			
25.1	AIR SUSPENSION	B5	5	8.5	-	-
21.1	SERVICE BRAKE	B3	1	7.5	4.5	-
21.2	SERVICE BRAKE	B1	1	7.5	4.5	-
25.2	AIR SUSPENSION	B6	5	8.5	-	-
23.1	PARKING BRAKE/ TRAILER	B4	3	6.5+1/-0 AND 21+22>OR=7,2bar	4.5	8.4±0.1
21.3	SERVICE BRAKE	B2	1	7.5	4.5	-
24.1	AUXILIARIES	A2	4	7.5	4.5	8.4±0.1
22.1	SERVICE BRAKE	A4	2	7.5	4.5	-
22.2	SERVICE BRAKE	A6	2	7.5	4.5	-
24.2	AUXILIARIES	A1	4	7.5	4.5	8.4±0.1
NC	-	A3	-	-	-	-
23.2	PARKING BRAKE/ TRAILER	A5	3	6.5+1/-0 AND 21+22>OR=7,2bar	4.5	8.4±0.1
4	COMPRESSOR CONTROL	-	-	-	-	8.4±0.1

GENERAL NOTES:

OPTIMUM THERMAL RANGE OF CONTINUOUS APPLICATION: -40°C....+65°C
RESISTANCE TO HEAT: +80°C MAXIMUM
INSTALLATION POSITION: AS DRAWN (division only with WABCO agreement)
WORKING PRESSURE: 12.5bar MAXIMUM
MEDIUM : COMPRESSED AIR
BREATHING/EXHAUSTING AREAS MARKED: *** MUST NOT BE OBSTRUCTED
FURTHER NOTES SEE PRODUCT SPECIFICATION DOC. CODE 435

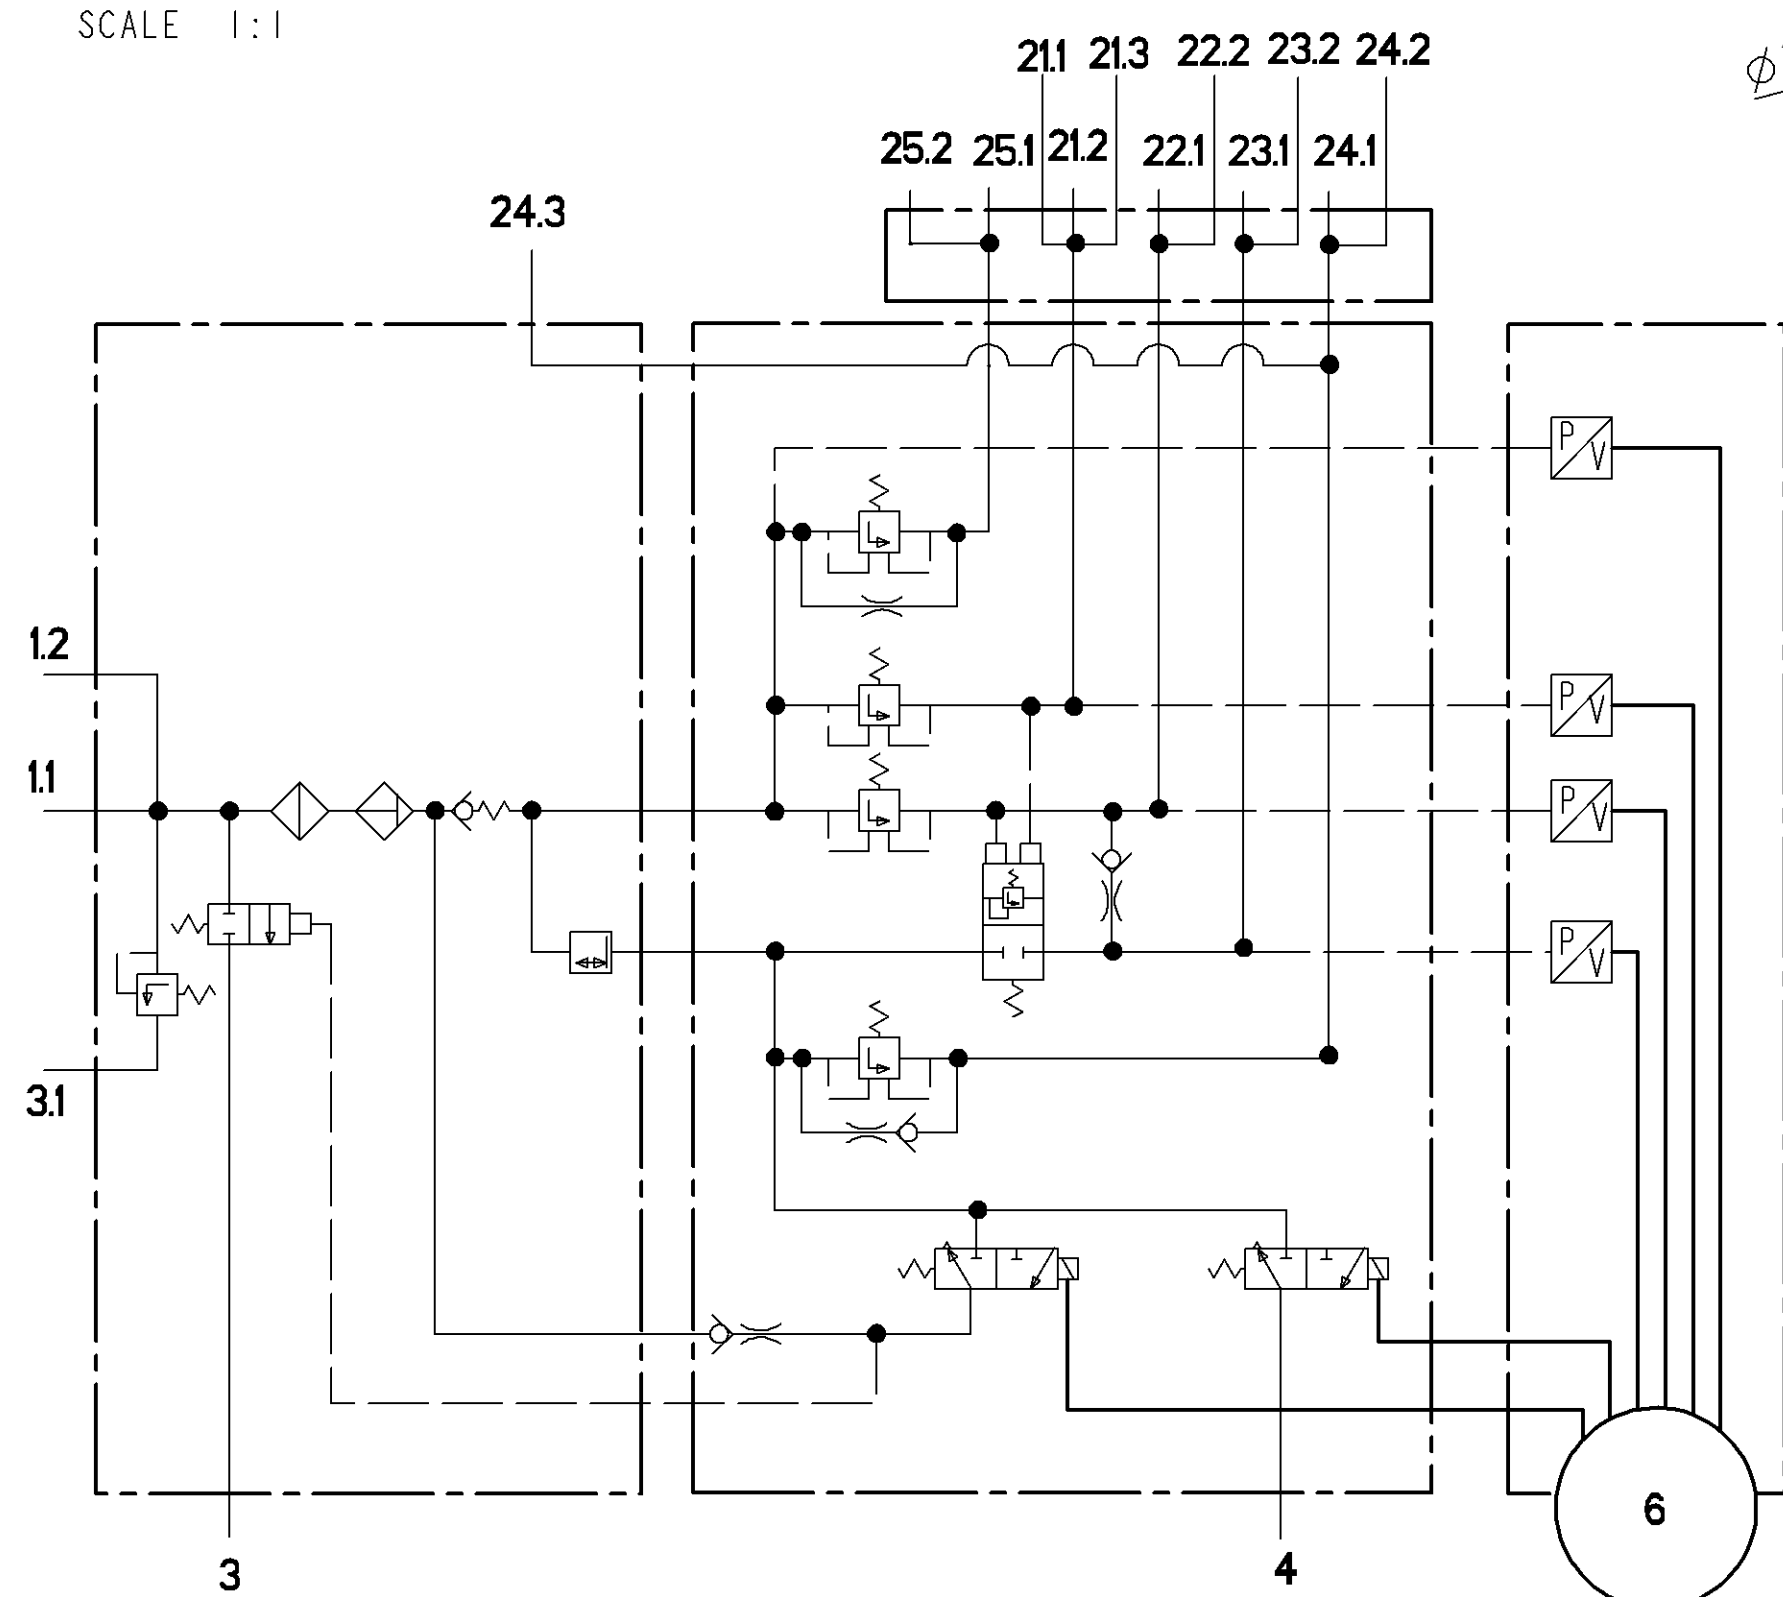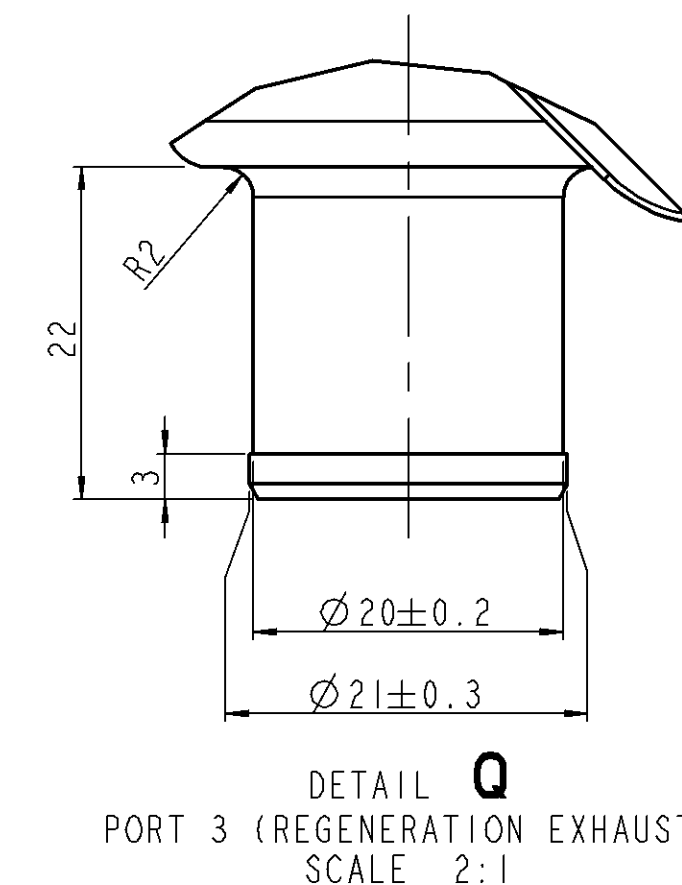

SECTION Y-Y
OUTPUT PORT DETAIL
TYPICAL 11 POSITION:
12 PLACES
SCALE 2:1

WABCO LABEL MARKED WITH:
PRODUCTION PLANT
DATE OF MANUFACTURE
PART NUMBER

CUSTOMER LABEL

SEE DETAIL W

GENERAL SPECIFICATION		JED-334-C		<table border="1"> <tr> <th colspan="2">PROVISION DRAWING</th> </tr> <tr> <th>DATE</th> <th>REVISION</th> </tr> <tr> <td>2003-10-21</td> <td>Eingetragen</td> </tr> <tr> <td>2003-11-12</td> <td>Bearbeitet</td> </tr> <tr> <td colspan="2">100001-C00</td> </tr> <tr> <td colspan="2">068</td> </tr> </table>		PROVISION DRAWING		DATE	REVISION	2003-10-21	Eingetragen	2003-11-12	Bearbeitet	100001-C00		068													
PROVISION DRAWING																													
DATE	REVISION																												
2003-10-21	Eingetragen																												
2003-11-12	Bearbeitet																												
100001-C00																													
068																													
FURTHER TECHNICAL DATA		TO																											
DOC. CODE:	SHEET:			<table border="1"> <tr> <th colspan="2">HAPU (ELECTRONIC)</th> </tr> <tr> <th colspan="2">HAPU (ELECTRONISCH)</th> </tr> <tr> <th colspan="2">HAPU (ELECTRONIQUE)</th> </tr> <tr> <th colspan="2">HAPU (ELECTRONIC)</th> </tr> </table>		HAPU (ELECTRONIC)		HAPU (ELECTRONISCH)		HAPU (ELECTRONIQUE)		HAPU (ELECTRONIC)																	
HAPU (ELECTRONIC)																													
HAPU (ELECTRONISCH)																													
HAPU (ELECTRONIQUE)																													
HAPU (ELECTRONIC)																													
GENERAL TOLERANCES				<table border="1"> <tr> <th colspan="2">PRODUCT IDENTIFICATION</th> </tr> <tr> <th>DOC. CODE</th> <th>SHEET</th> </tr> <tr> <td>605</td> <td>1</td> </tr> </table>		PRODUCT IDENTIFICATION		DOC. CODE	SHEET	605	1																		
PRODUCT IDENTIFICATION																													
DOC. CODE	SHEET																												
605	1																												
<table border="1"> <tr> <th colspan="2">RANGE OF NOMINAL DIMENSIONS (± mm)</th> </tr> <tr> <th>CLASS</th> <th>1st</th> </tr> <tr> <td>1</td> <td>± 0.15</td> </tr> <tr> <td>2</td> <td>± 0.30</td> </tr> <tr> <td>3</td> <td>± 0.40</td> </tr> <tr> <td>4</td> <td>± 0.50</td> </tr> <tr> <td>5</td> <td>± 0.63</td> </tr> <tr> <td>6</td> <td>± 0.80</td> </tr> <tr> <td>7</td> <td>± 1.00</td> </tr> <tr> <td>8</td> <td>± 1.25</td> </tr> <tr> <td>9</td> <td>± 1.60</td> </tr> <tr> <td>10</td> <td>± 2.00</td> </tr> </table>		RANGE OF NOMINAL DIMENSIONS (± mm)		CLASS	1st	1	± 0.15	2	± 0.30	3	± 0.40	4	± 0.50	5	± 0.63	6	± 0.80	7	± 1.00	8	± 1.25	9	± 1.60	10	± 2.00	<table border="1"> <tr> <th colspan="2">TAPED HOLES</th></tr></table>		TAPED HOLES	
RANGE OF NOMINAL DIMENSIONS (± mm)																													
CLASS	1st																												
1	± 0.15																												
2	± 0.30																												
3	± 0.40																												
4	± 0.50																												
5	± 0.63																												
6	± 0.80																												
7	± 1.00																												
8	± 1.25																												
9	± 1.60																												
10	± 2.00																												
TAPED HOLES																													
ISO 4028 / ISO 4026	ISO 4026																												
1	1																												
2	2																												
3	3																												
4	4																												
5	5																												
6	6																												
7	7																												
8	8																												
9	9																												
10	10																												

TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
	TAPED HOLES			-------------	--		-------------	--				
ISO 4028 / ISO 4026	ISO 4026											
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
	TAPED HOLES			-------------	--		-------------	--				
ISO 4028 / ISO 4026	ISO 4026											
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
	TAPED HOLES			-------------	--		-------------	--				
ISO 4028 / ISO 4026	ISO 4026											
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											
TAPED HOLES			-------------	--		-------------	--				ISO 4028 / ISO 4026	ISO 4026
1	1											
2	2											
3	3											
4	4											
5	5											
6	6											
7	7											
8	8											
9	9											
10	10											

</