
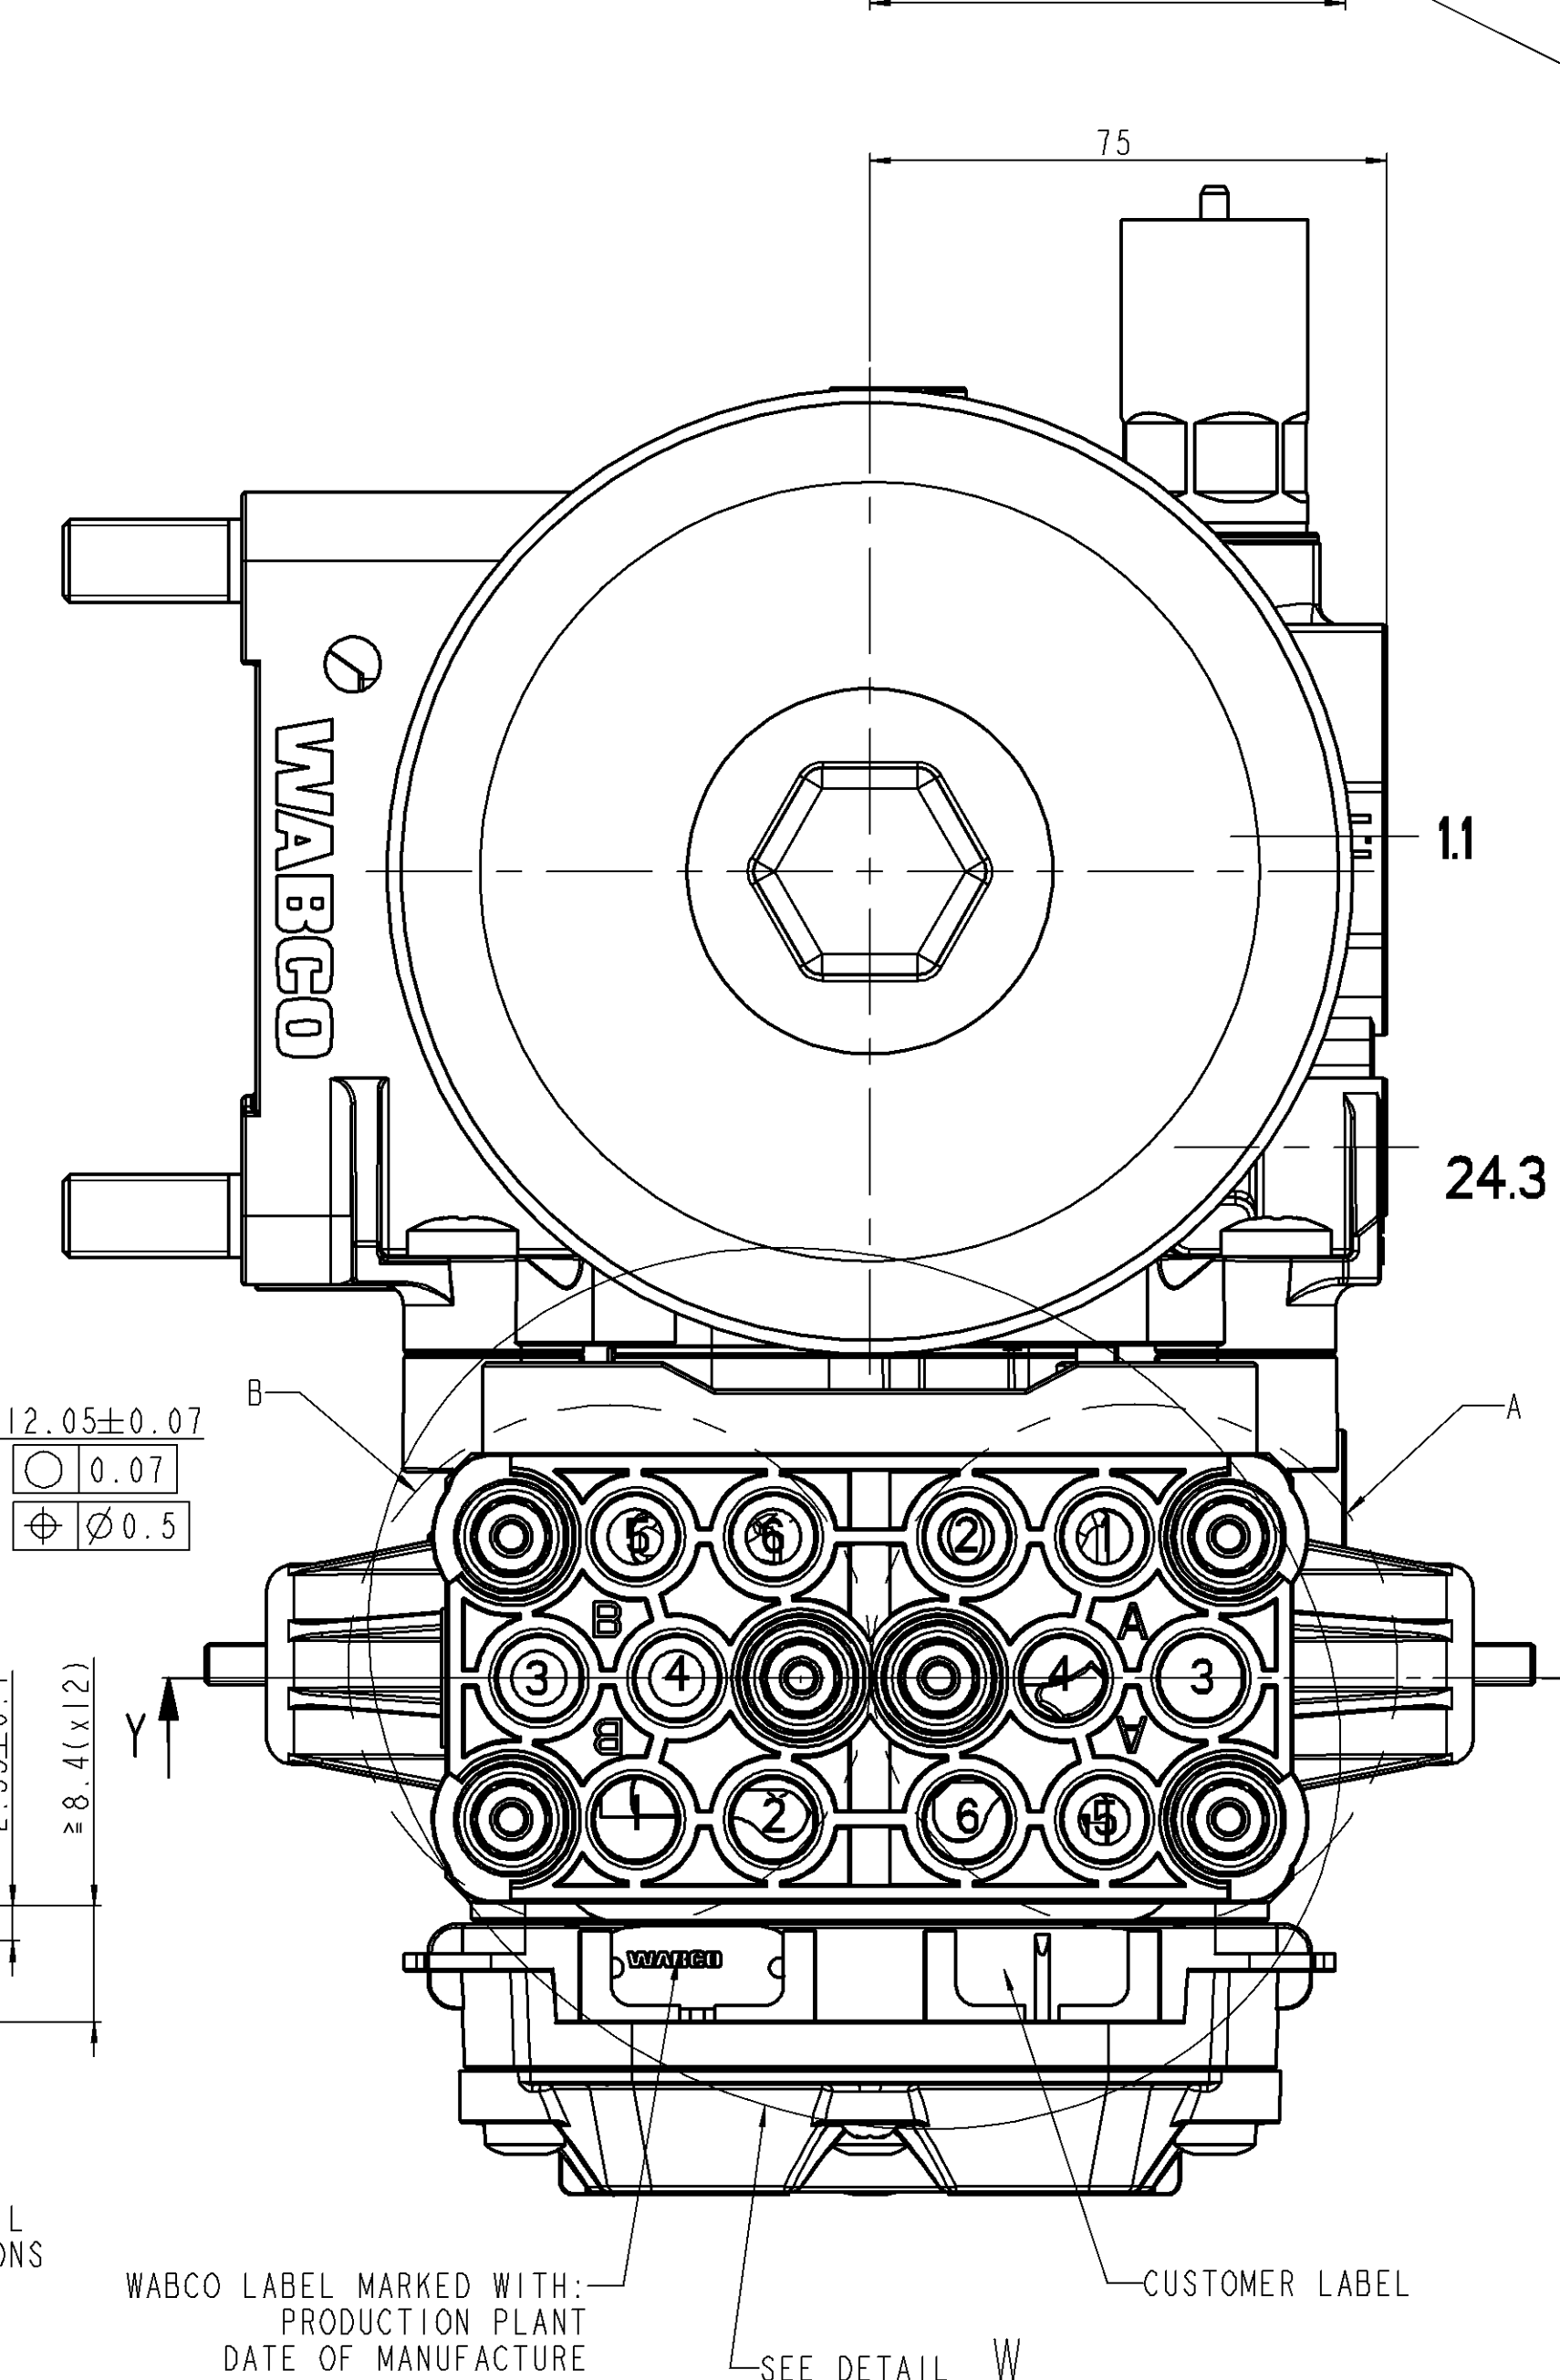
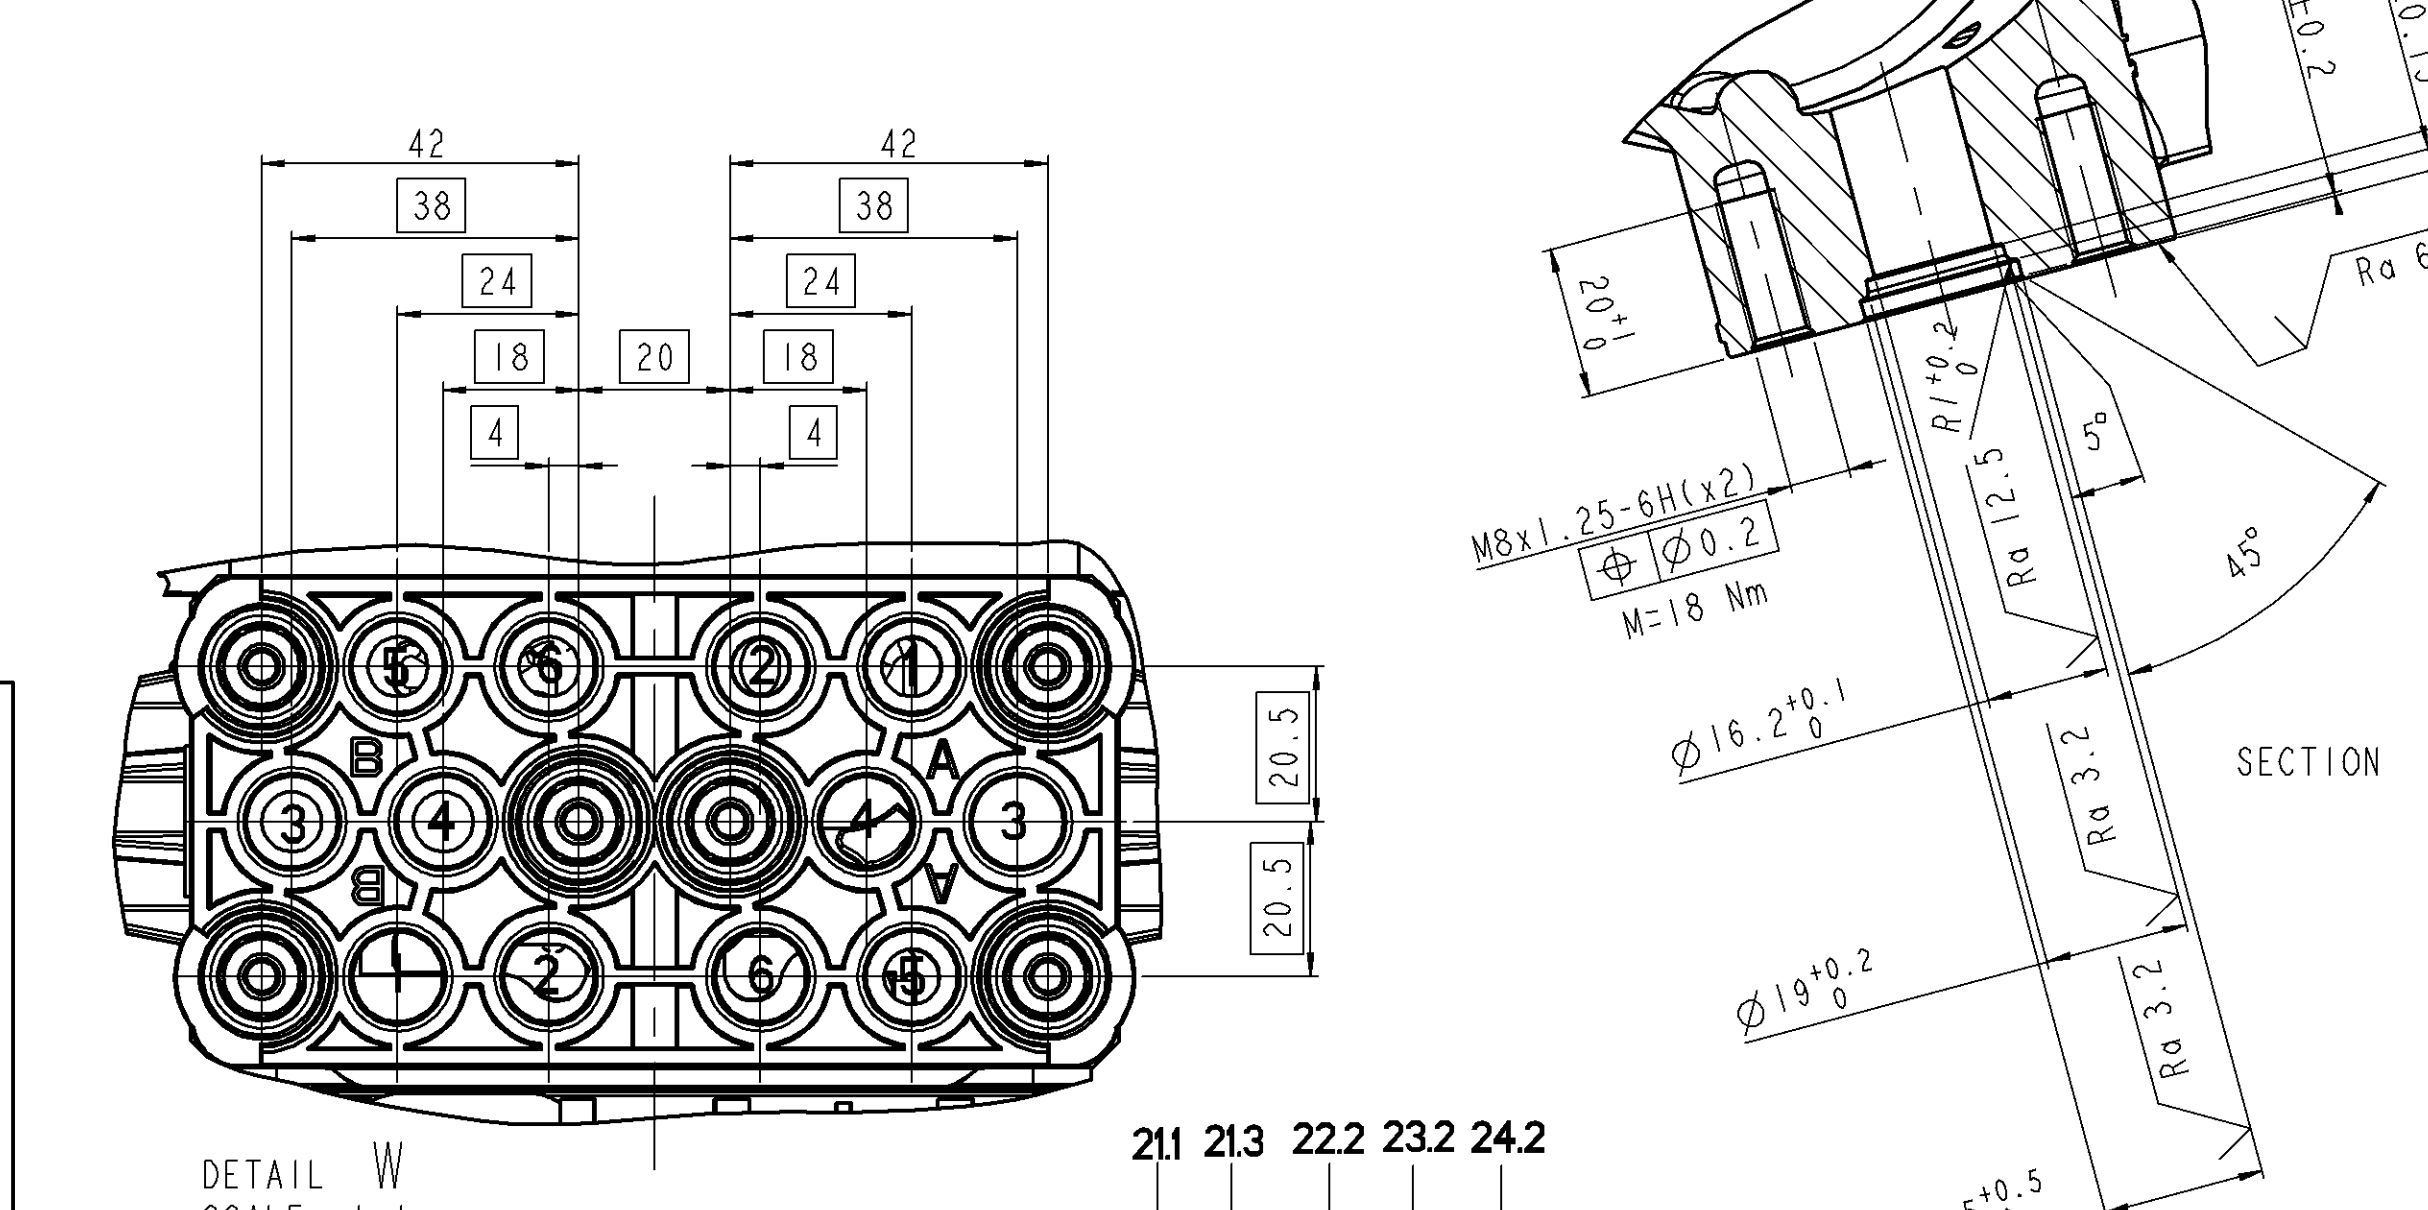
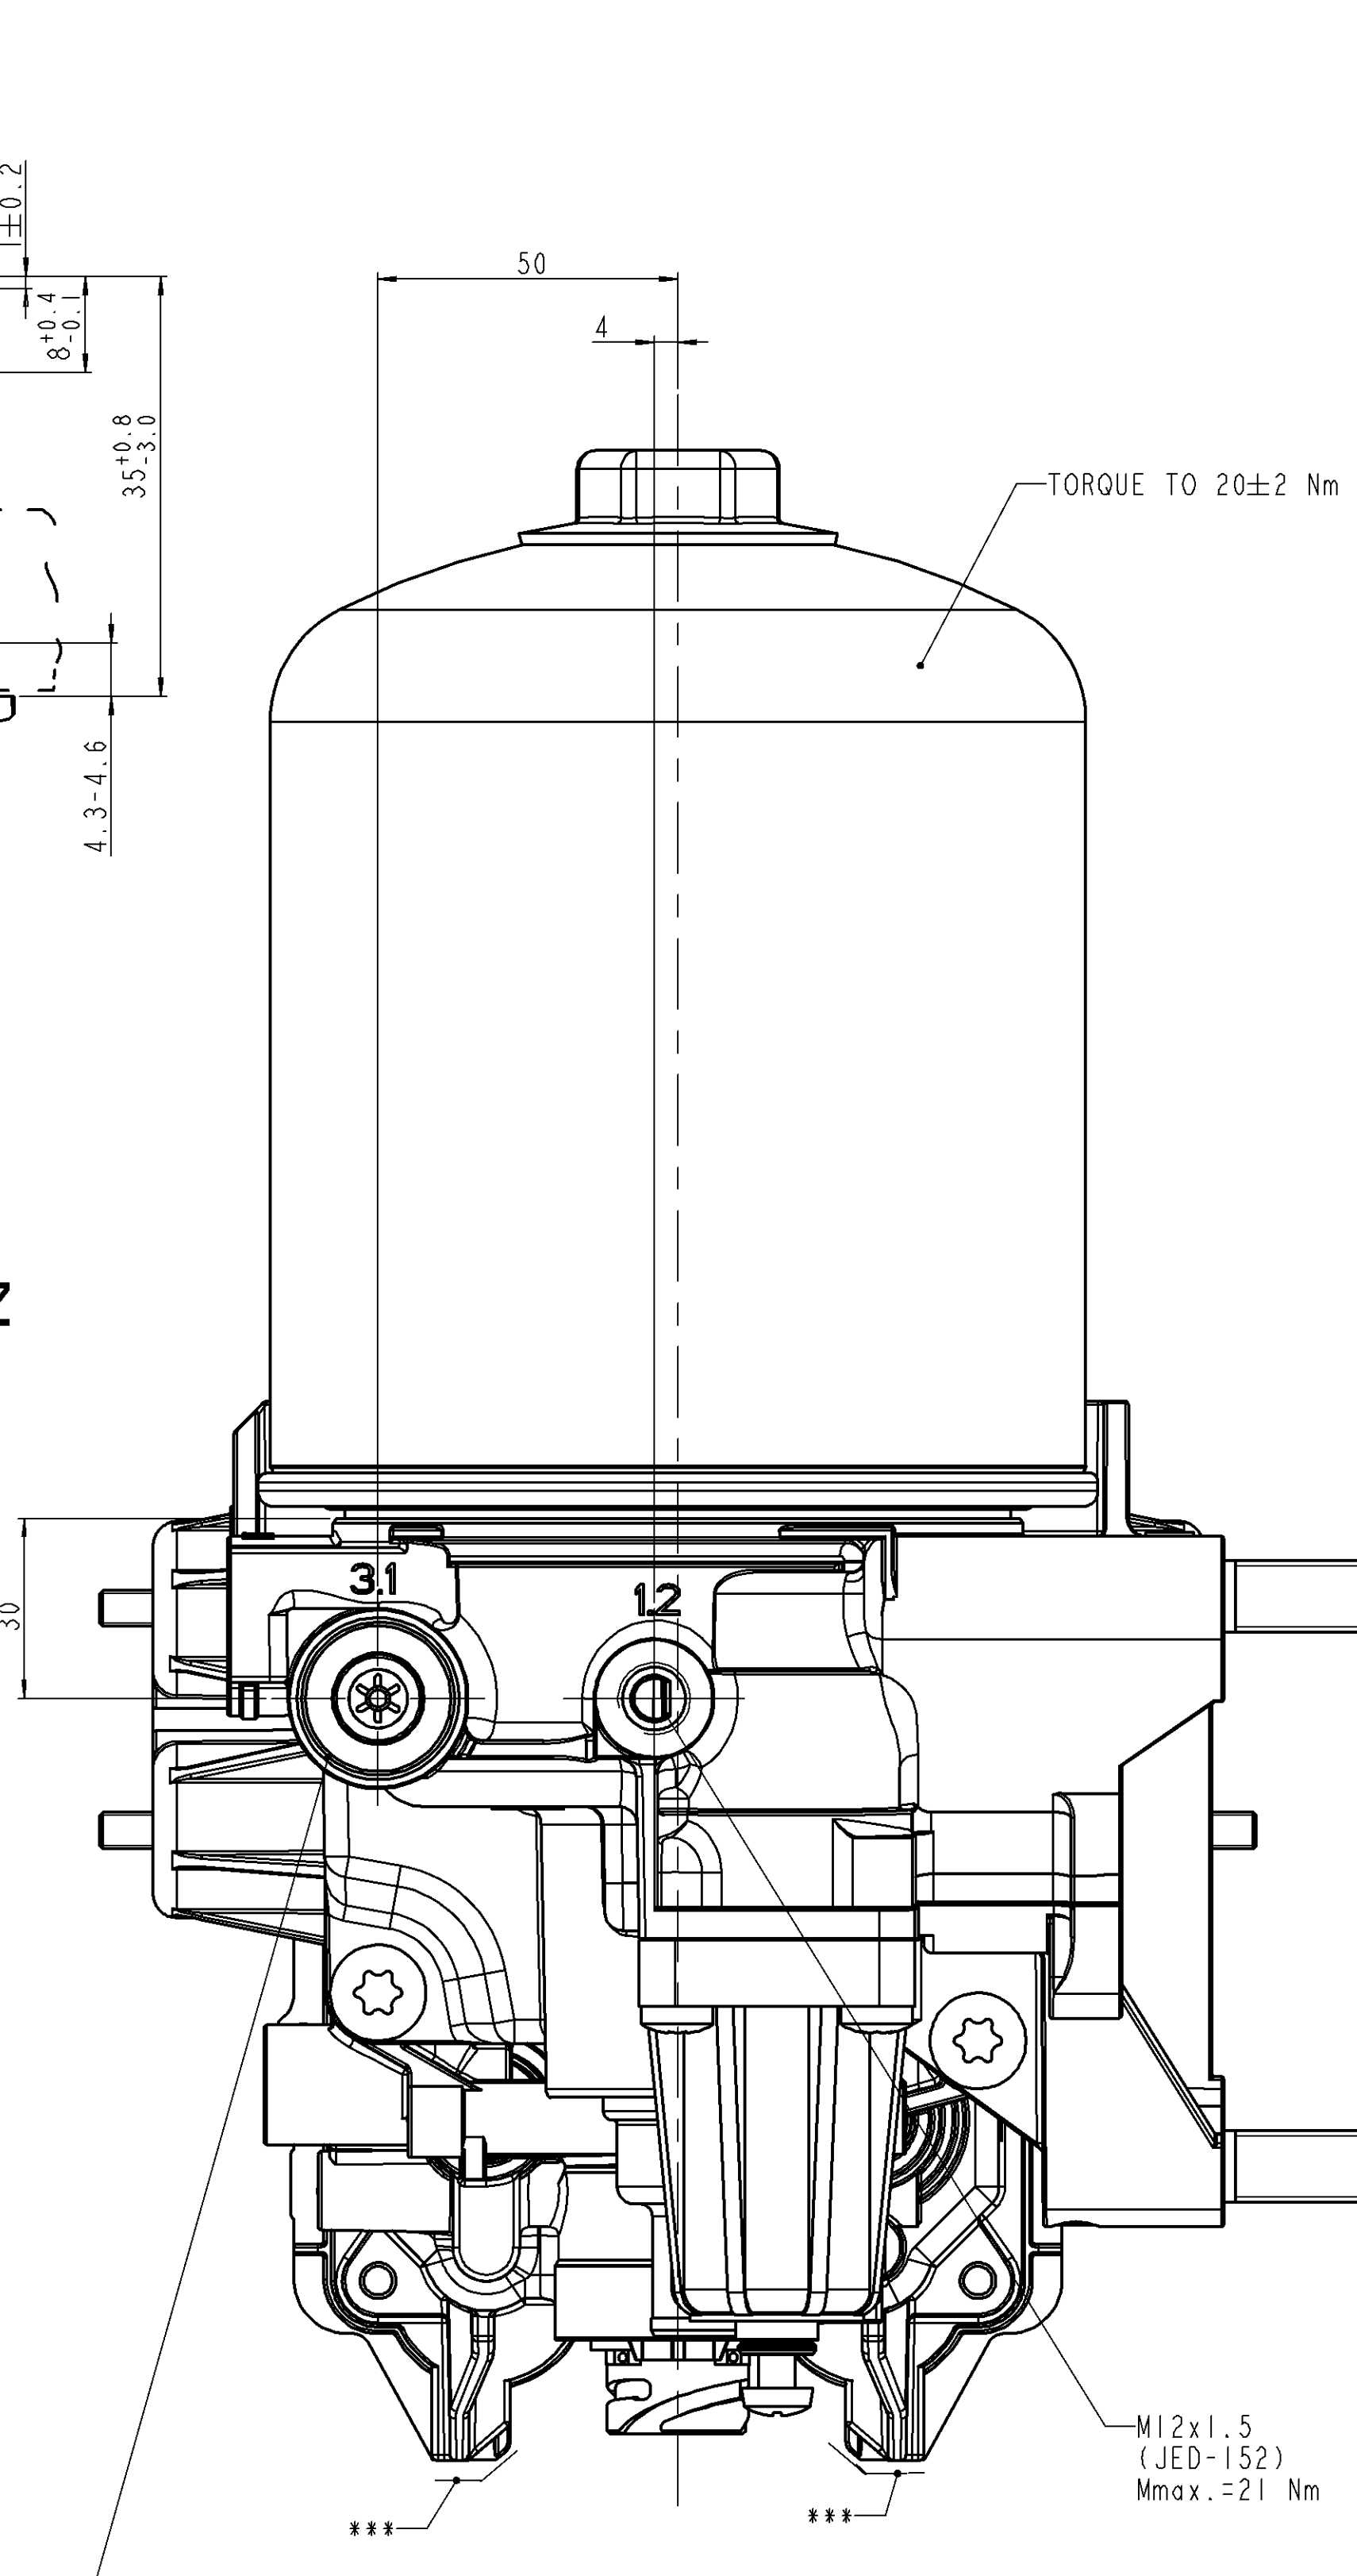
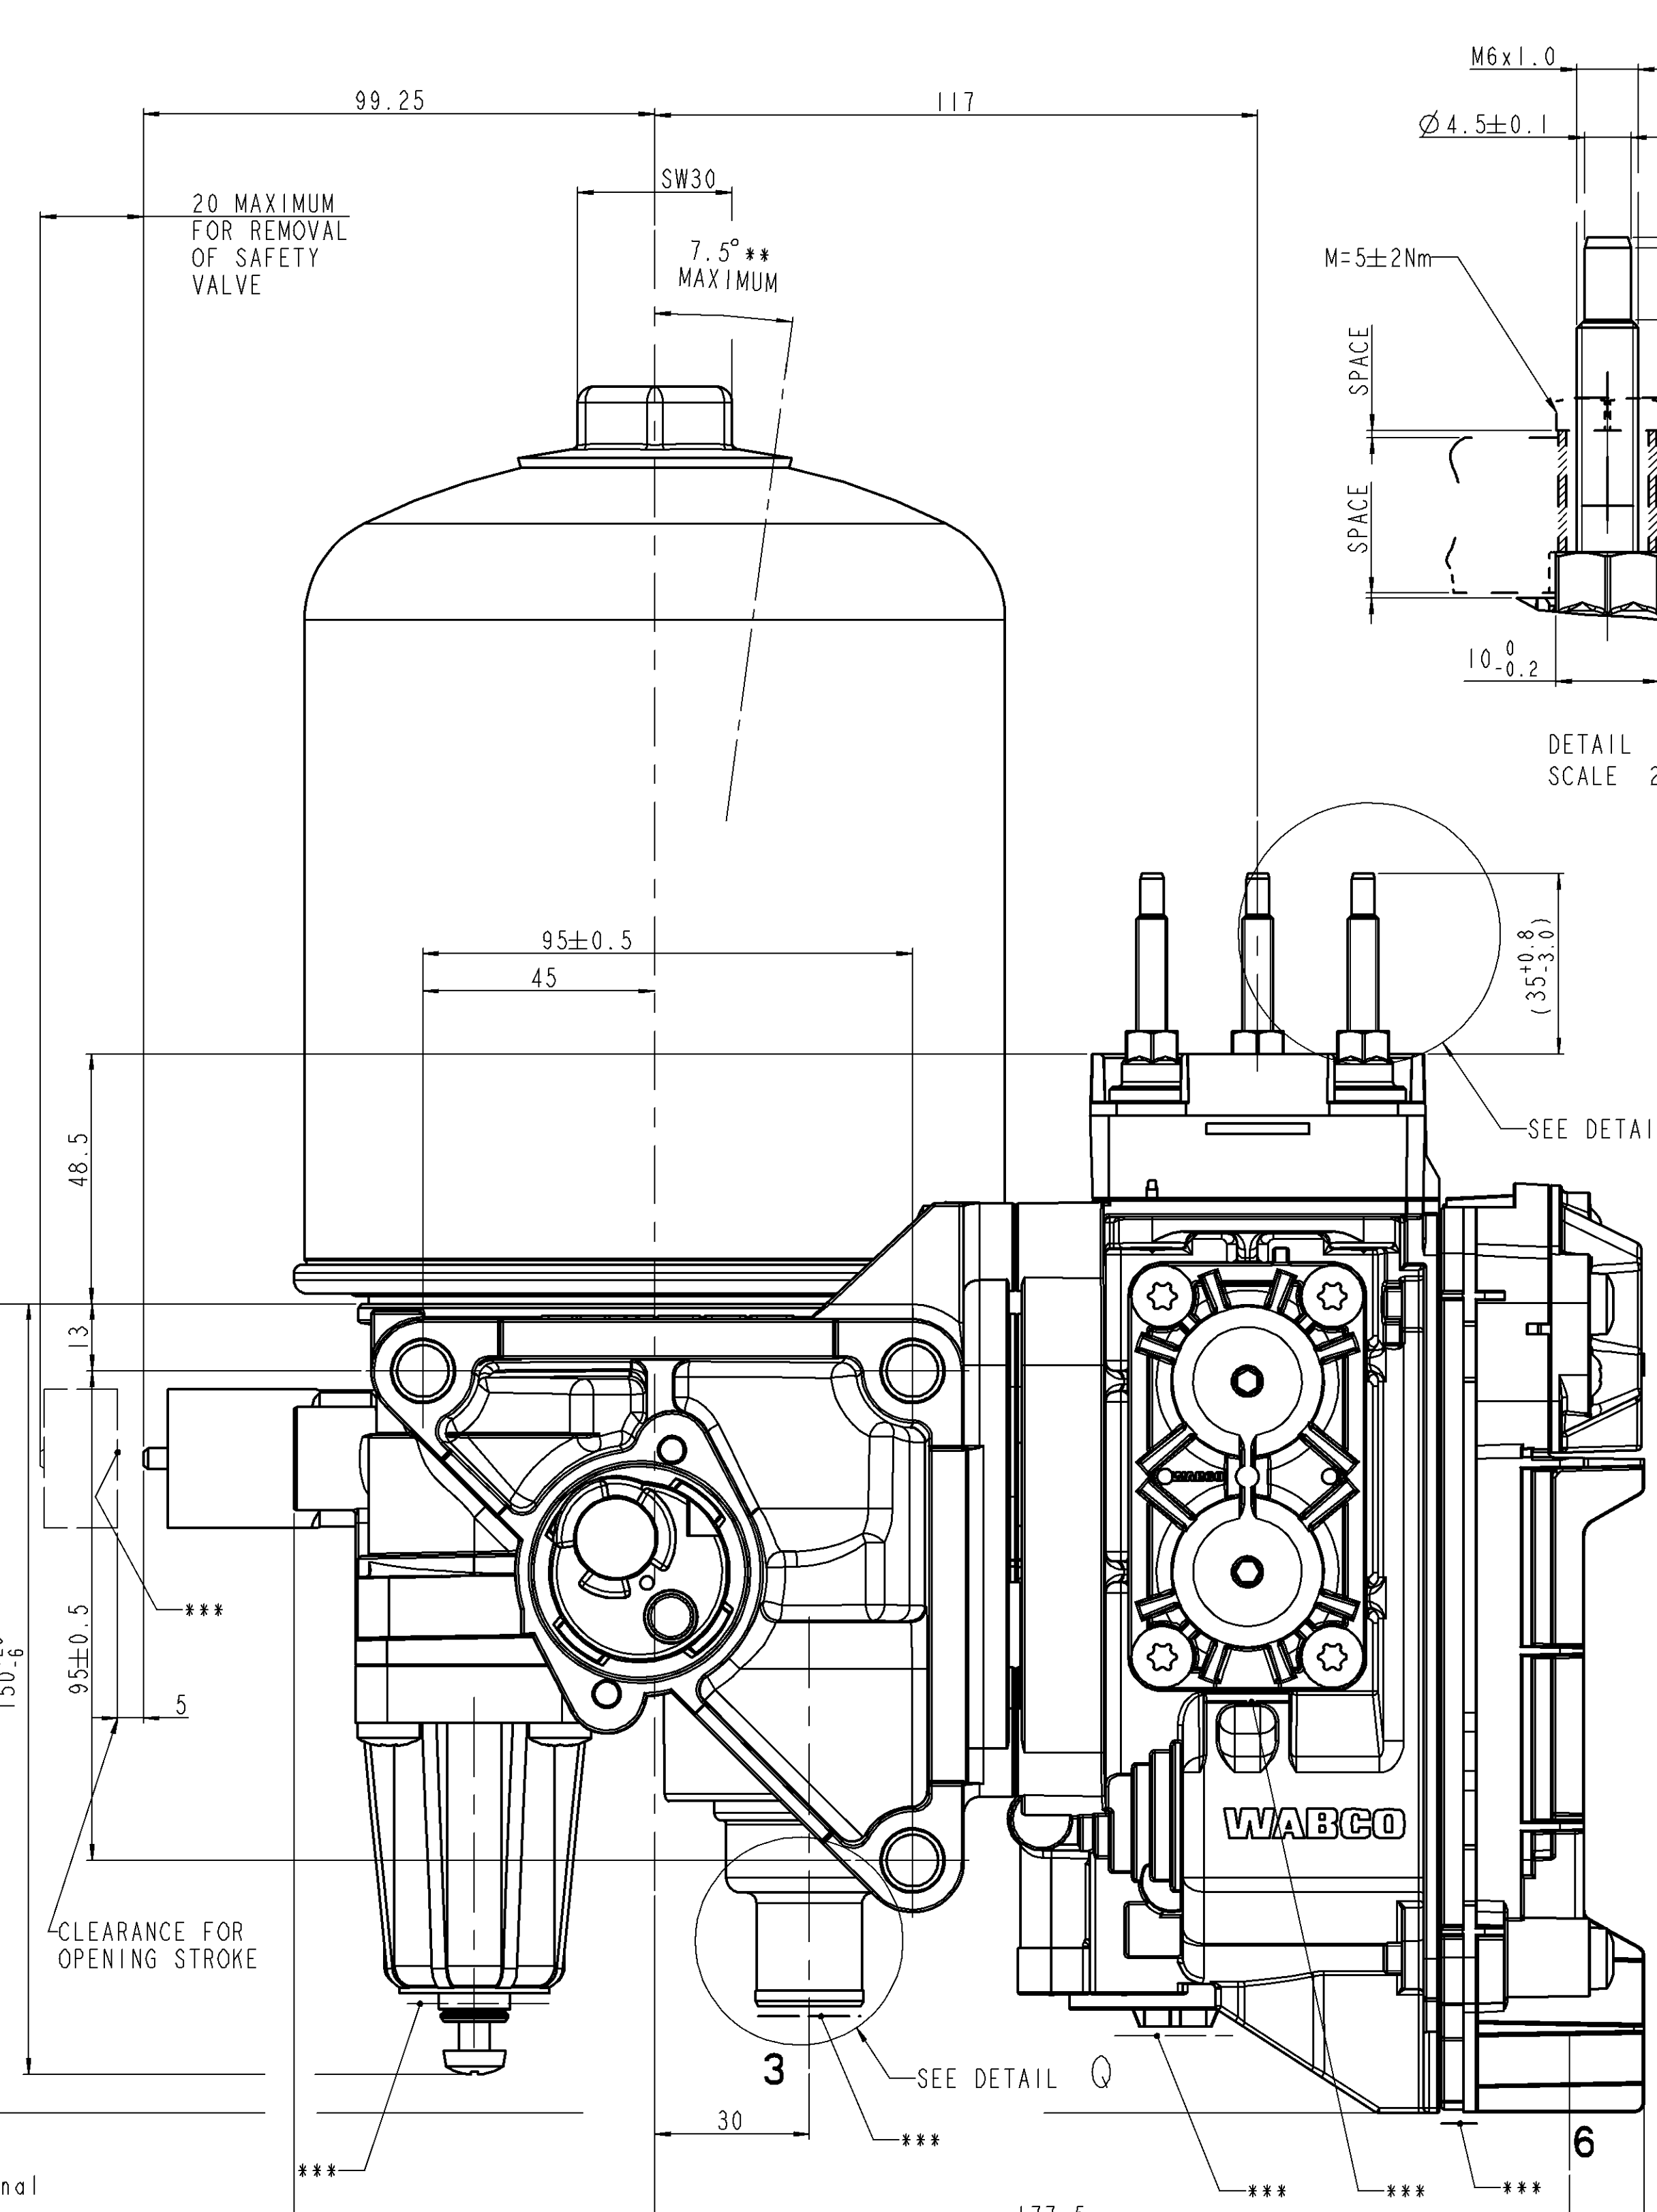
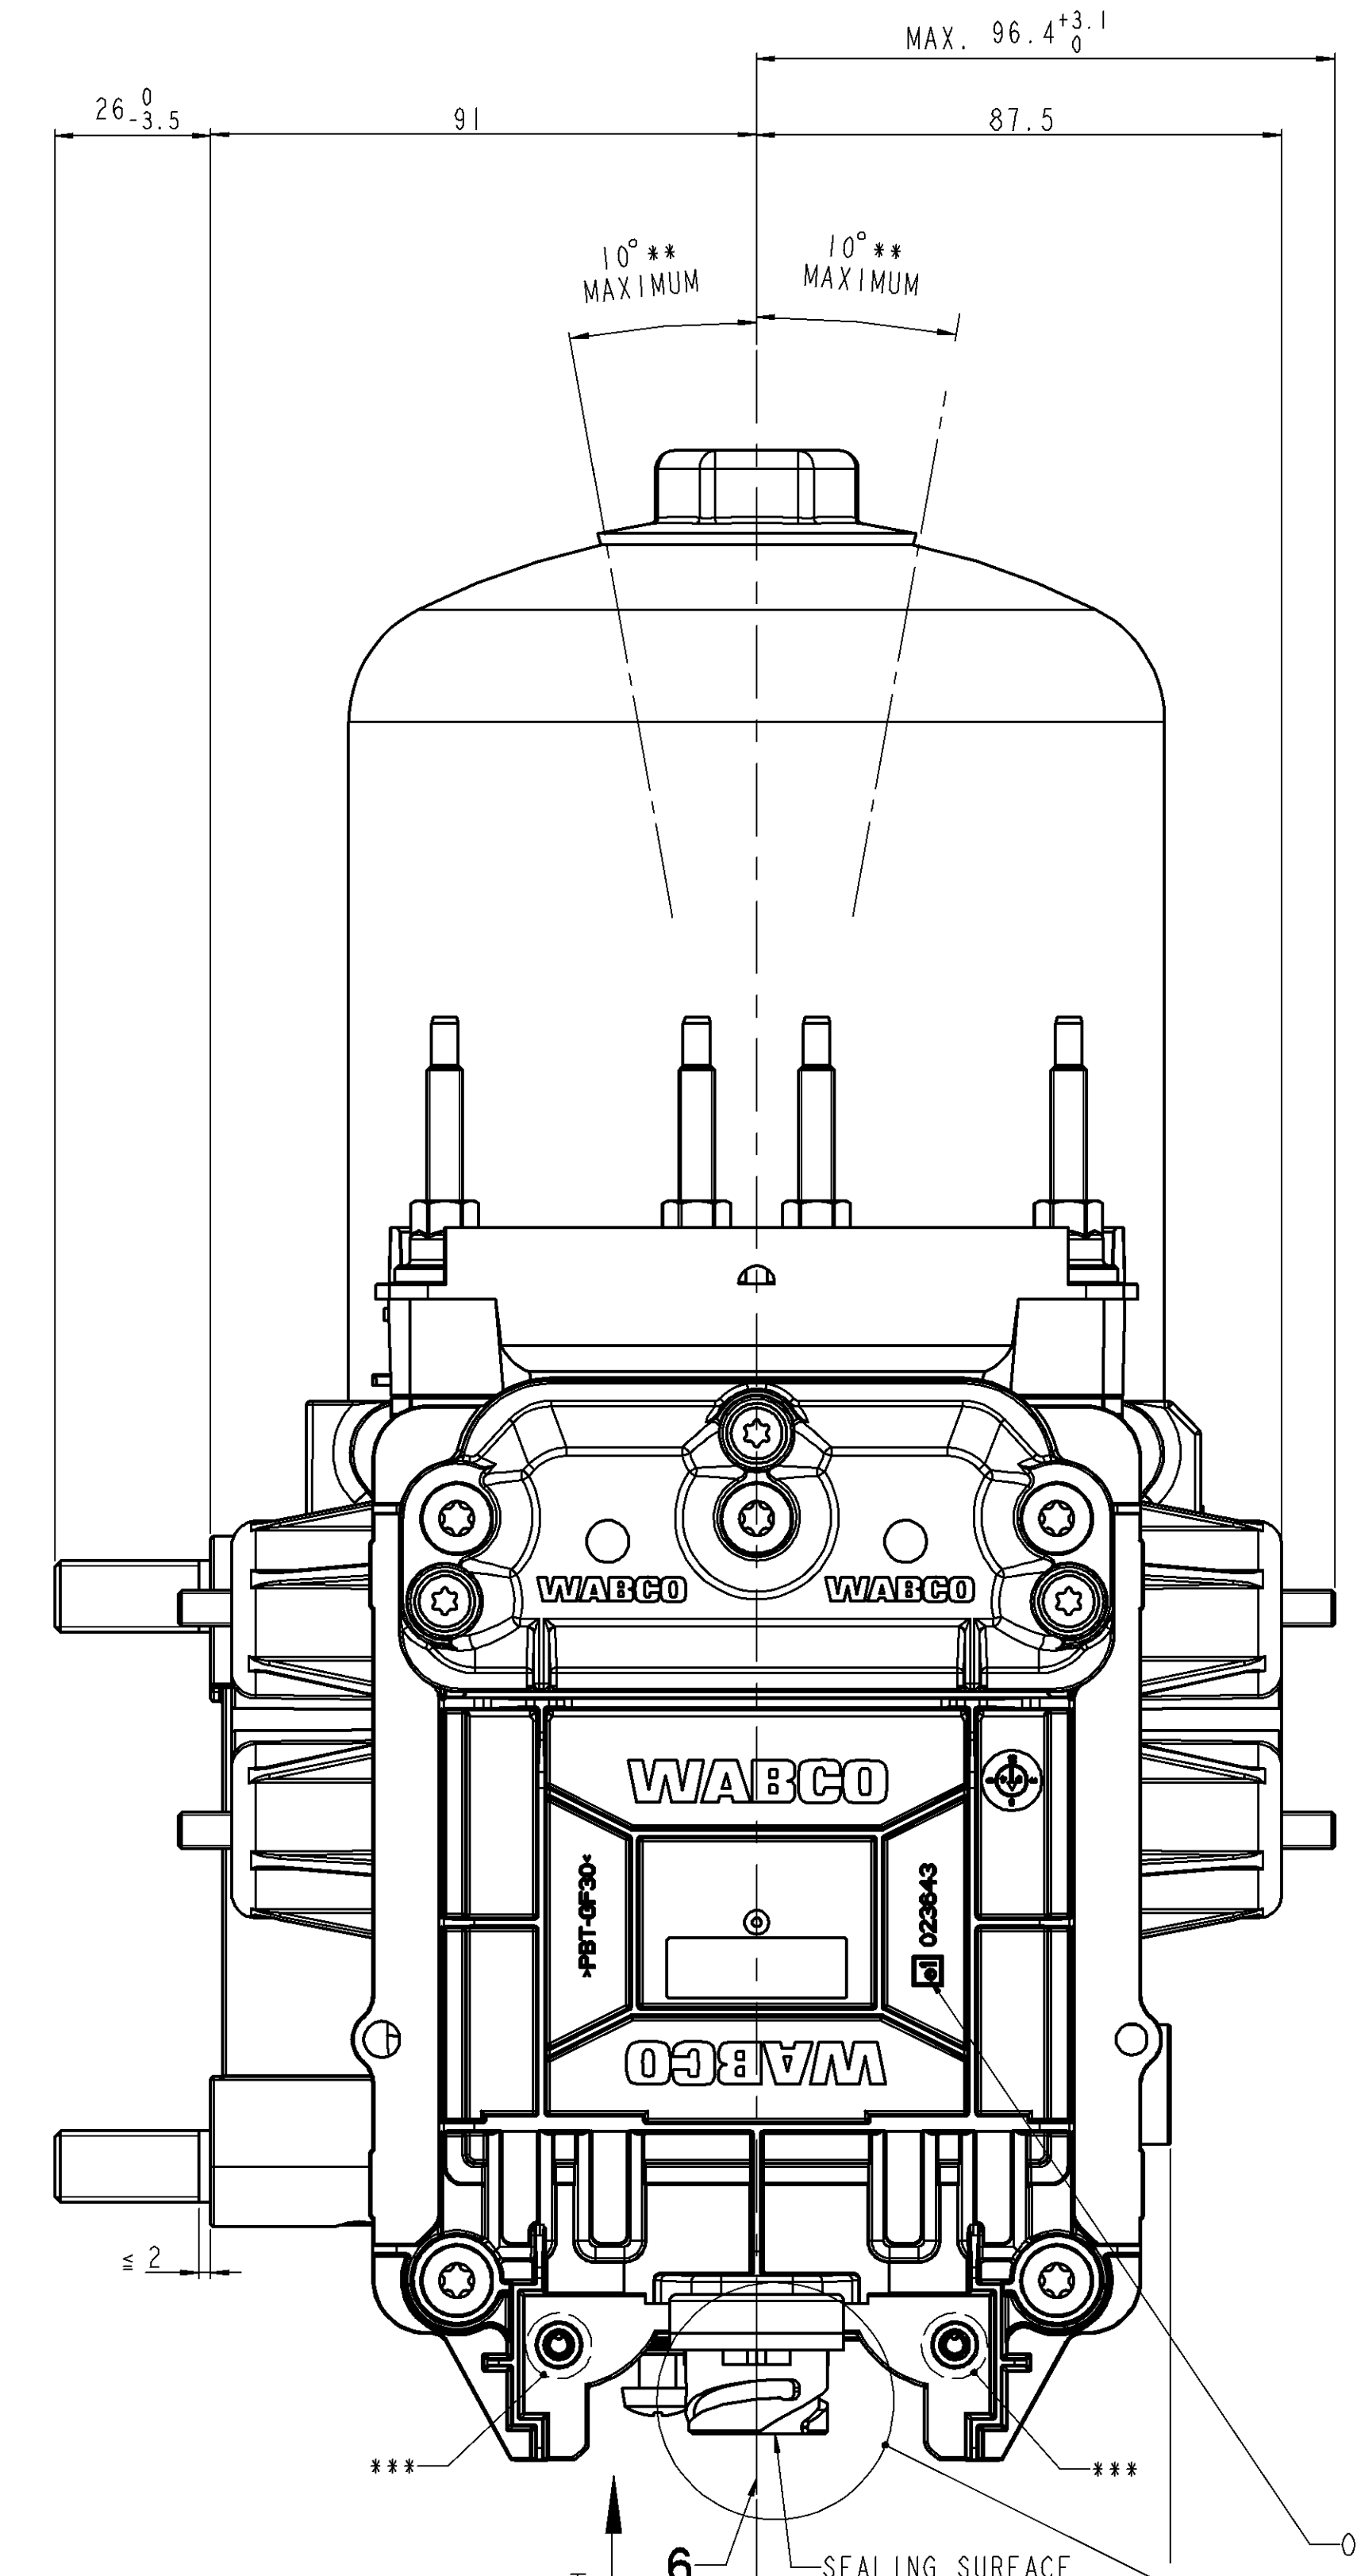


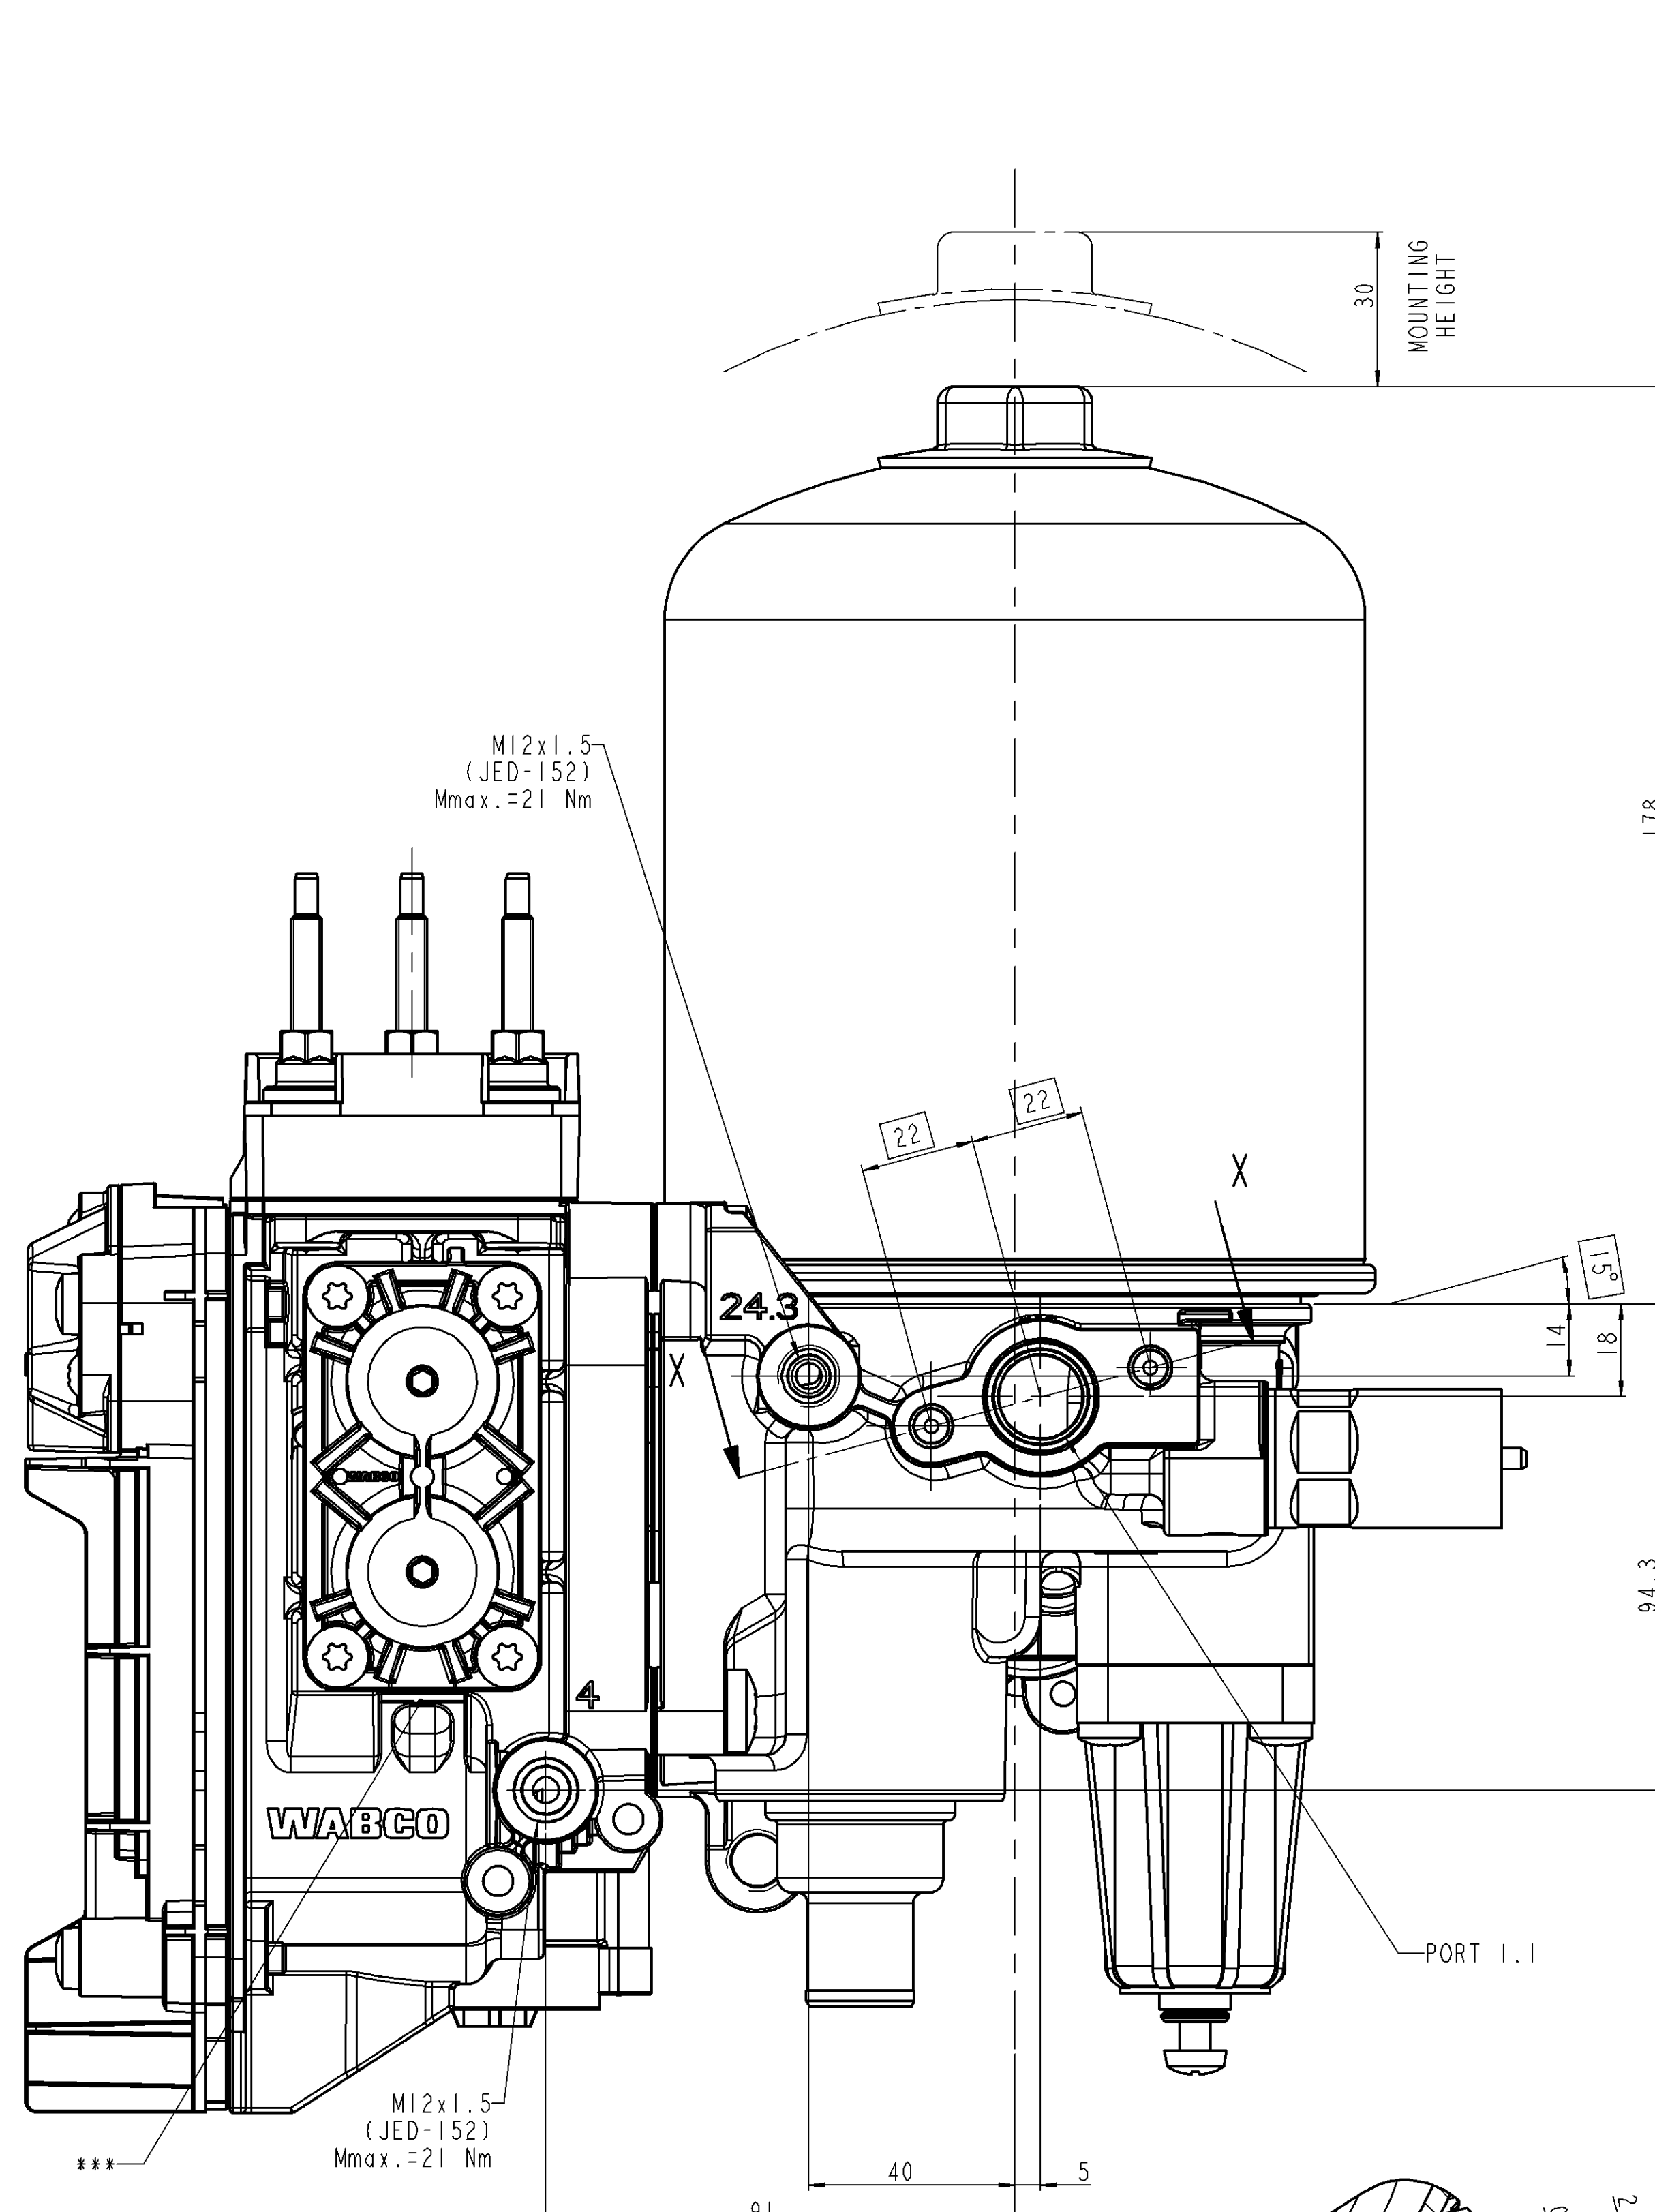

WABCO: 894 110 772 4		VIEW OF T
(DIN72585-A1-2H-Sn/V2 CONNECTOR)		
PIN NUMBER	FUNCTION	
6.1	Vcc, BATTERY (24V)	
6.2	GROUND	
6.3	Vcc, IGNITION (24V)	
6.4	CAN HIGH	
6.5	CAN LOW	
6.6	N.C.	
6.7	N.C.	

DETAIL Q

PORT 3 (REGENERATION EXHAUST)

SCALE 2:1

GENERAL NOTES:

OPTIMUM THERMAL RANGE OF CONTINUOUS APPLICATION: -40°C....+65°C

RESISTANCE TO HEAT: +80°C MAXIMUM

INSTALLATION POSITION: AS DRAWN** (divation only with WABCO agreement)



WORKING PRESSURE : 12.5bar MAXIMUM

MEDIUM : COMPRESSED AIR

BREATHING/EXHAUSTING AREAS MARKED: *** MUST NOT BE OBSTRUCTED

PLEASE DO NOT TOUCH THE MALE MULTIPOINT CONNECTOR CONTACTS

FURTHER NOTES SEE PRODUCT SPECIFICATION DOC. CODE 435

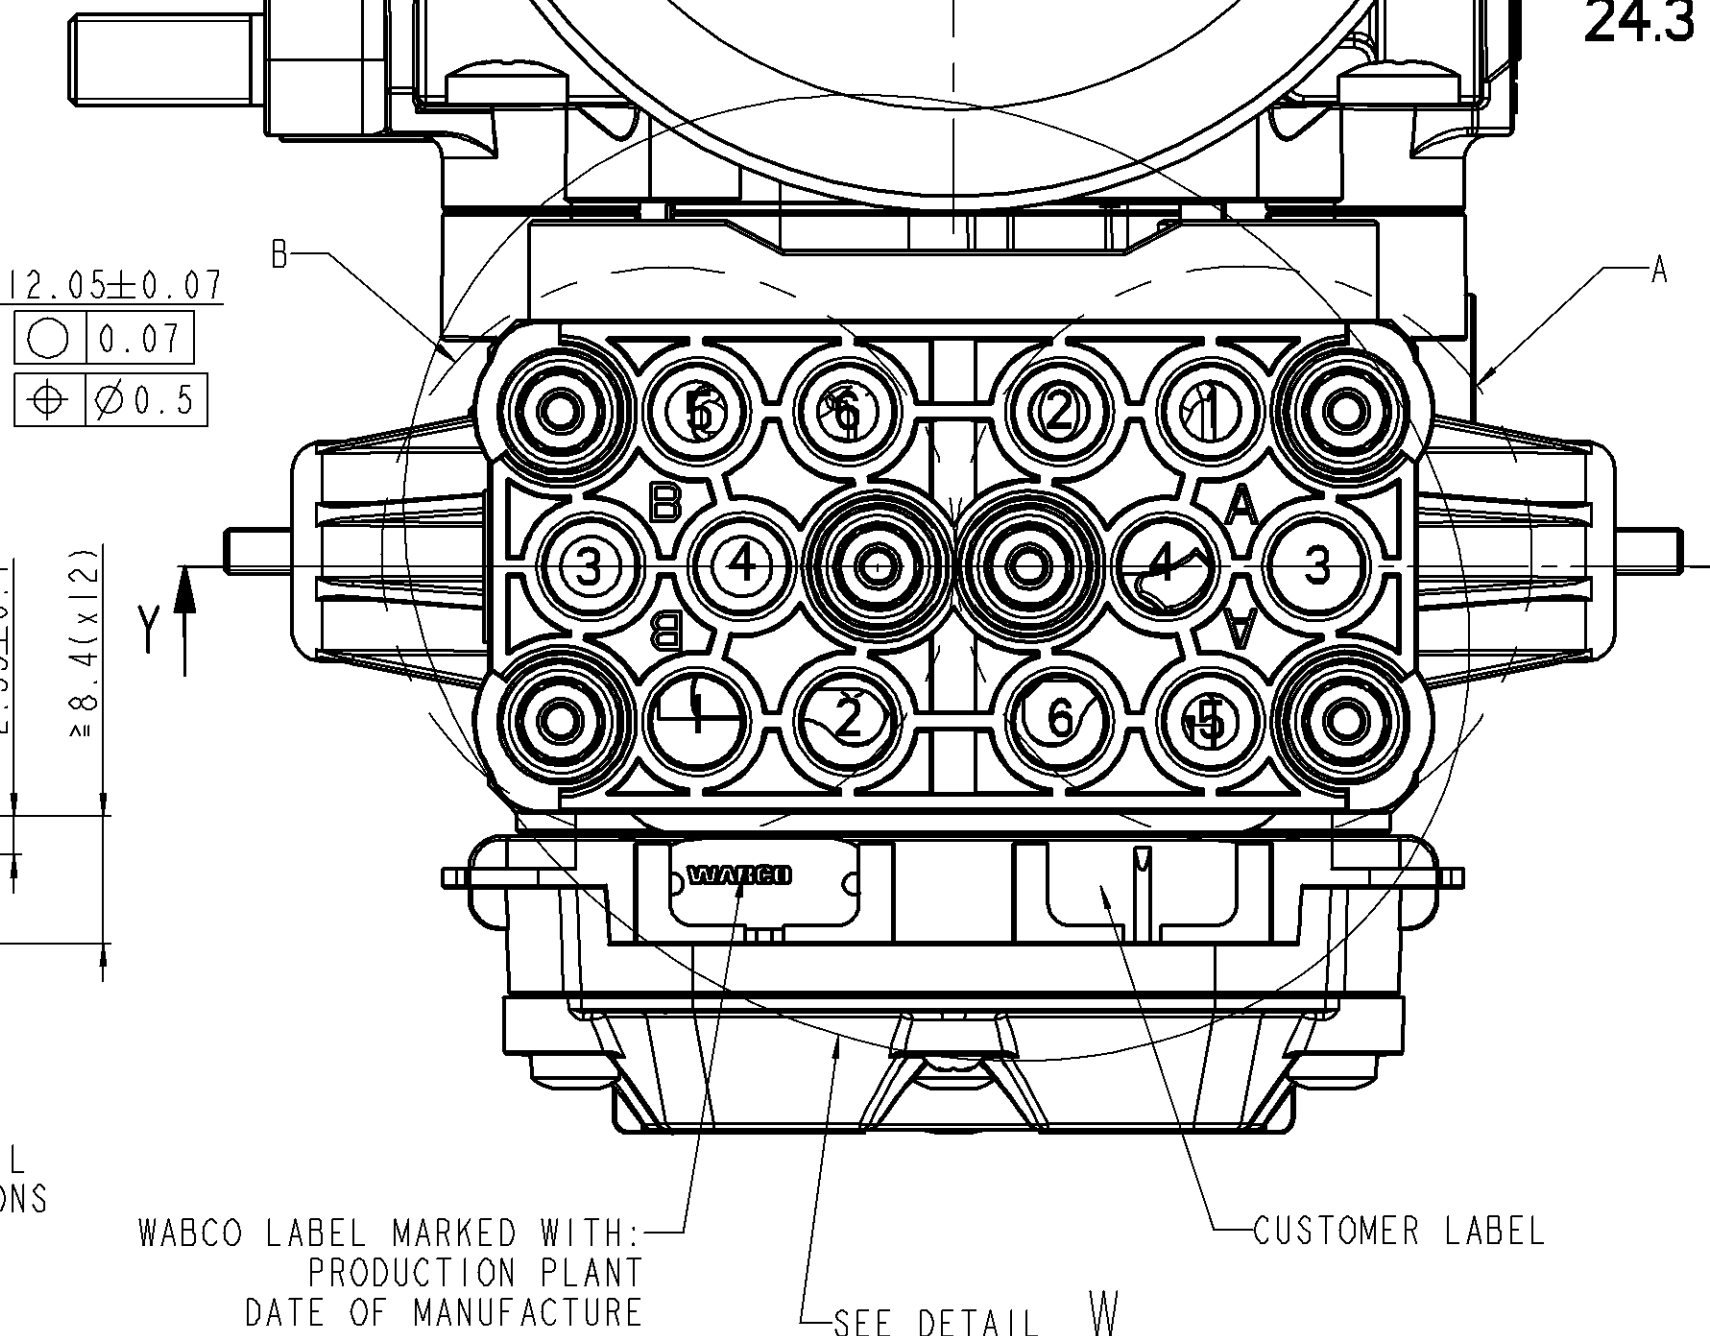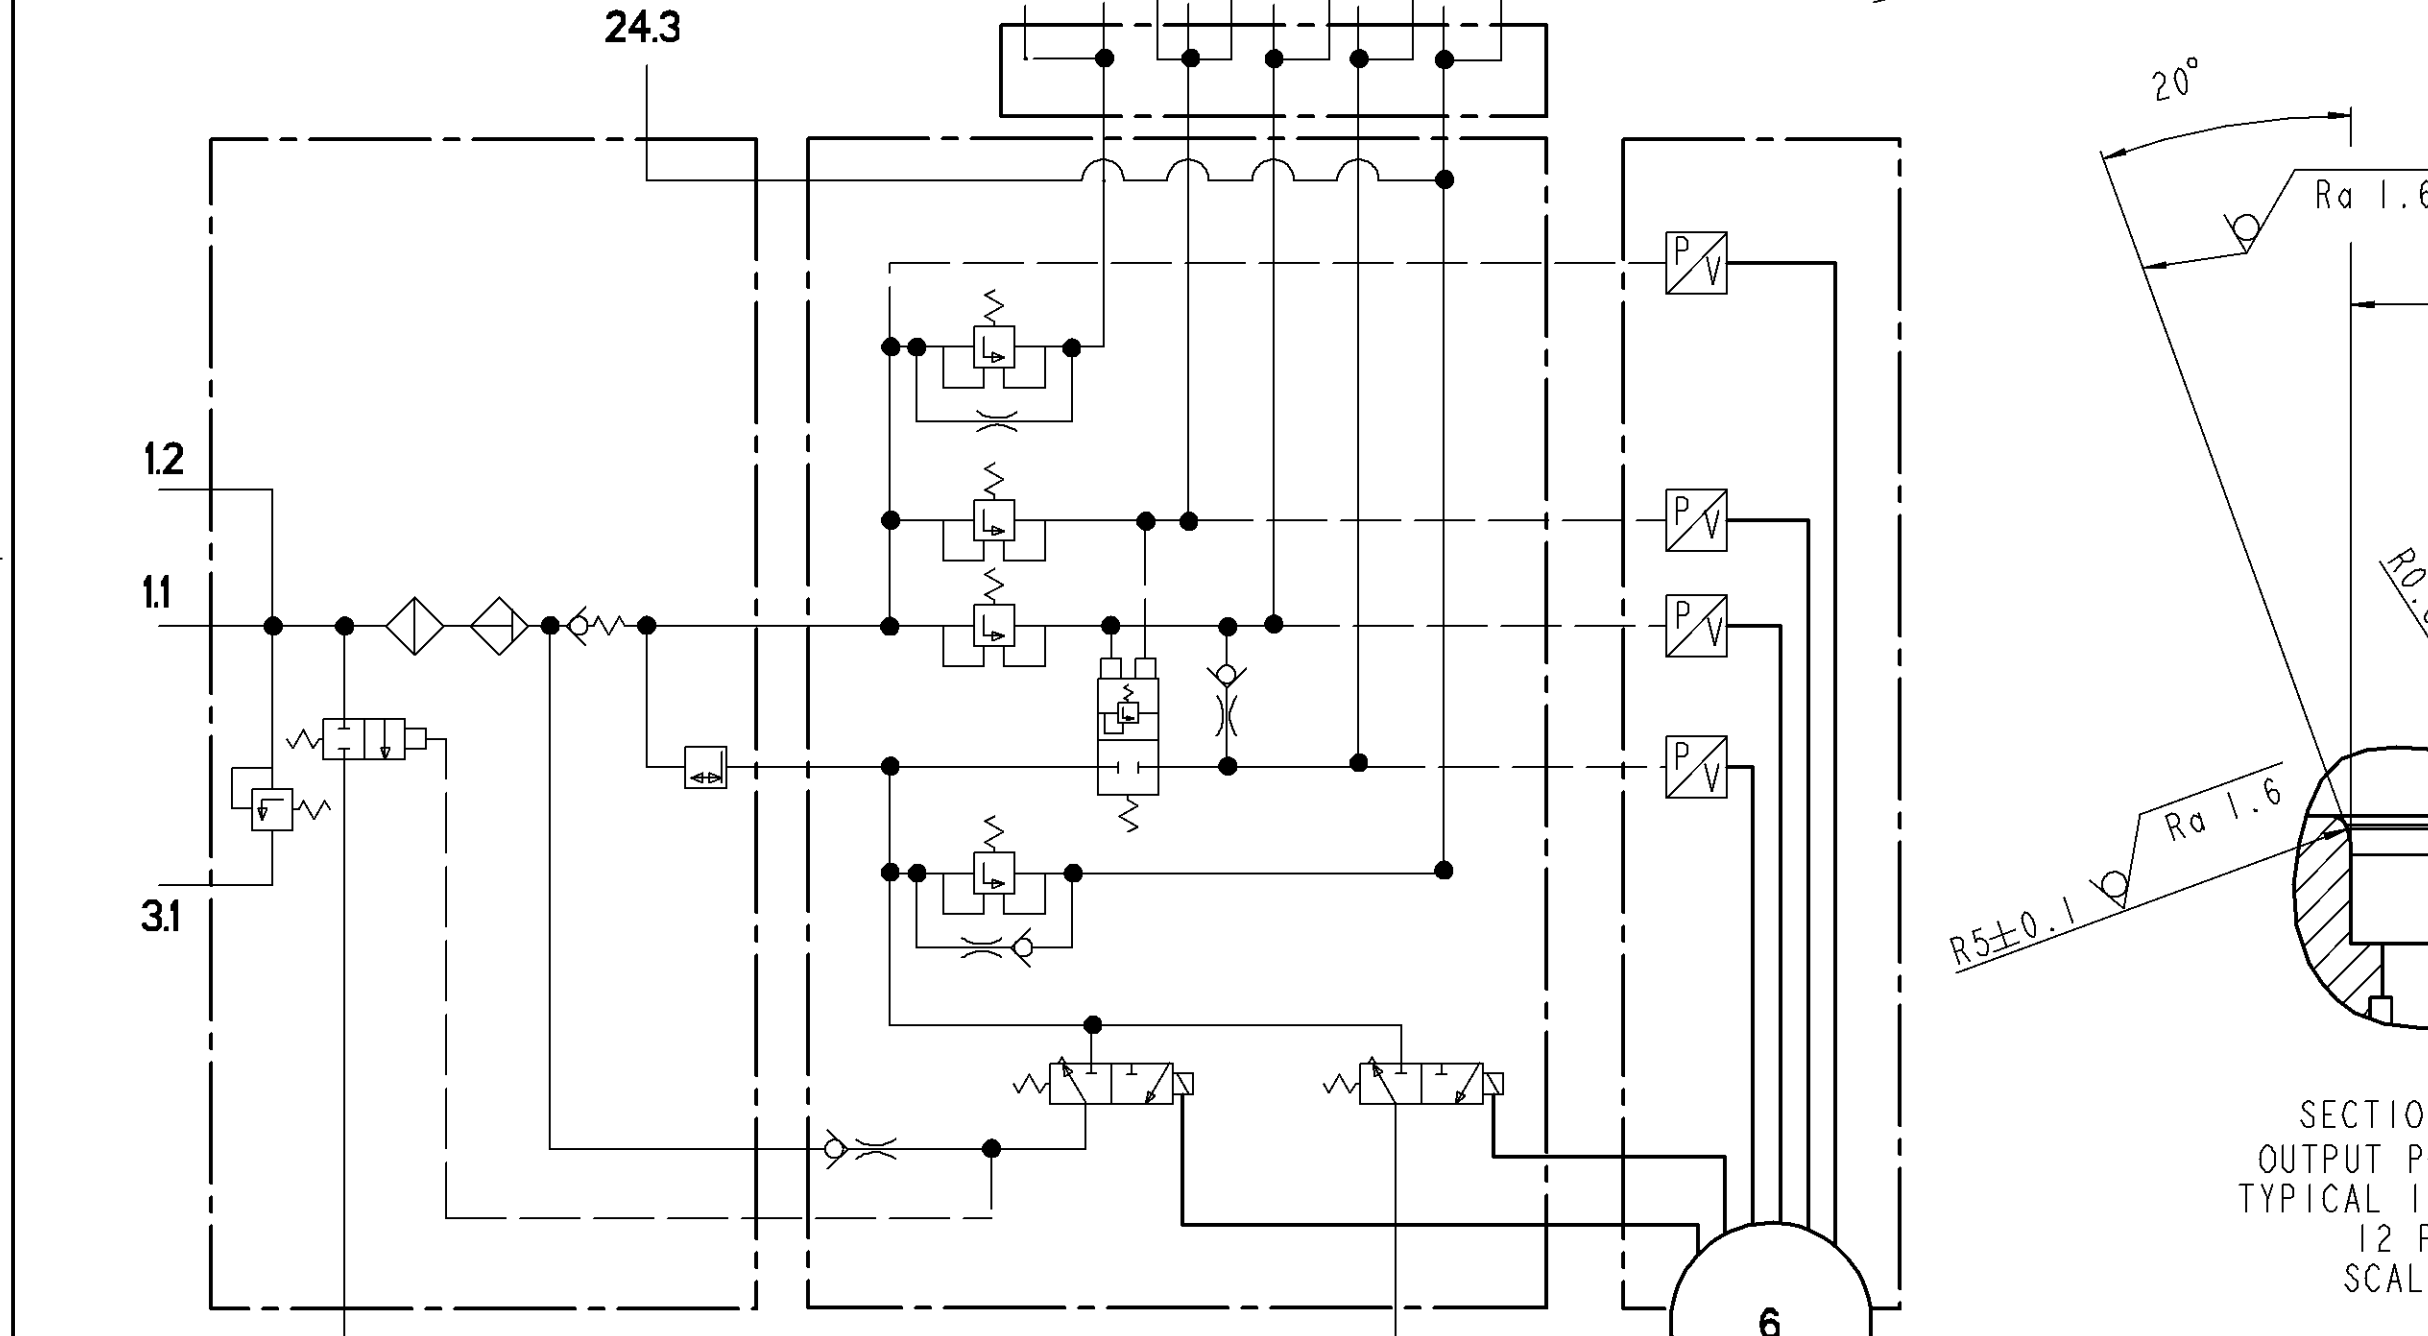

AIRDRIYER				
PORT	FUNCTION	OPENING PRESSURE bar		
1.1	FROM COMPRESSOR	-		
1.2	EXTERNAL FILLING	-		
24.3	AUXILIARIES	-		
3	EXHAUST	-		
3.1	EXHAUST FOR SAFETY VALVE	14.5 +0/-1.5		

Five CIRCUIT PROTECTION VALVE				
PORT	FUNCTION	REF.	CIRCUIT	DYNAMIC OPENING bar (+0/-0.3)
25.1	AIR SUSPENSION	B5	5	8.5
21.1	SERVICE BRAKE	B3	1	7.5
21.2	SERVICE BRAKE	B1	1	7.5
25.2	AIR SUSPENSION	B6	5	8.5
23.1	PARKING BRAKE/ TRAILER	B4	3	6.5±0.5 AND 21+22>OR=7.2bar
21.3	SERVICE BRAKE	B2	1	7.5
24.1	AUXILIARIES	A2	4	7.5
22.1	SERVICE BRAKE	A4	2	7.5
22.2	SERVICE BRAKE	A6	2	7.5
24.2	AUXILIARIES	A1	4	7.5
NC	-	A3	-	-
23.2	PARKING BRAKE/ TRAILER	A5	3	6.5±0.5 AND 21+22>OR=7.2bar
4	COMPRESSOR CONTROL	-	-	-

General Specifications		Copyright WABCO		WABCO	
Doc. Code	Sheet	Date	Signature	Doc. Code	Sheet
894223	1	2004-01-08	Chetani	894223	1
Rev.	Rev.	Rev.	Rev.	Rev.	Rev.
1	1	1	1	1	1
2	2	2	2	2	2
3	3	3	3	3	3
4	4	4	4	4	4
5	5	5	5	5	5
6	6	6	6	6	6
7	7	7	7	7	7
8	8	8	8	8	8
9	9	9	9	9	9
10	10	10	10	10	10
11	11	11	11	11	11
12	12	12	12	12	12
13	13	13	13	13	13
14	14	14	14	14	14
15	15	15	15	15	15
16	16	16	16	16	16