
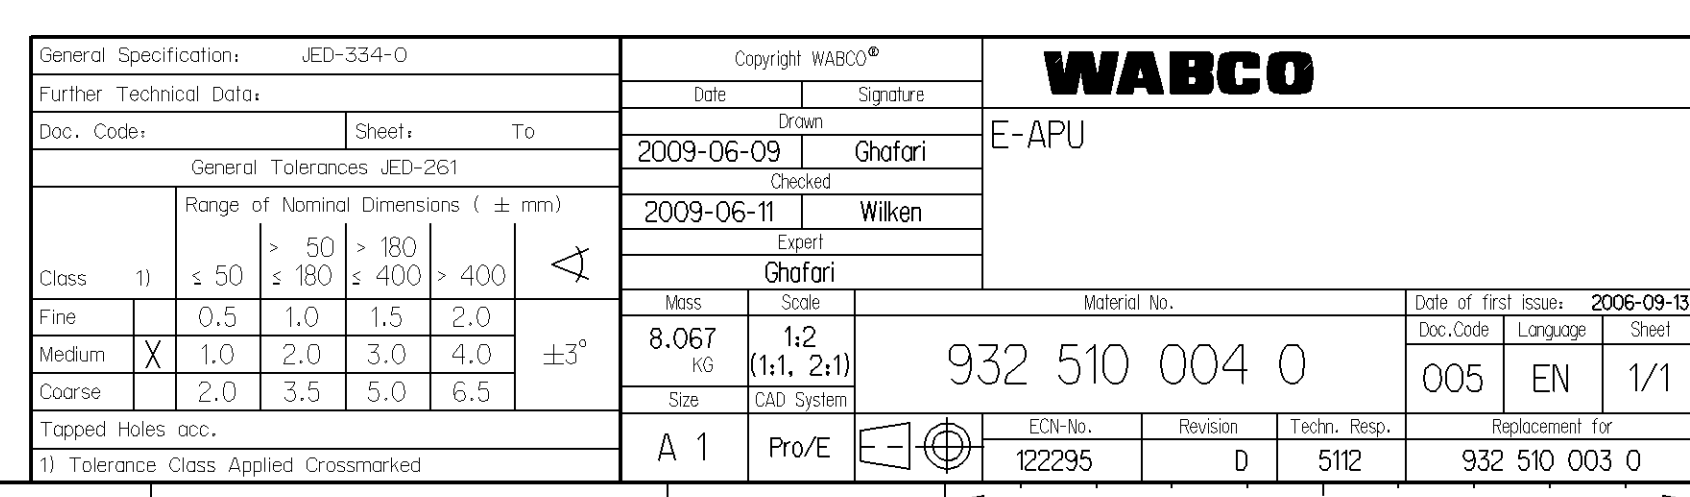
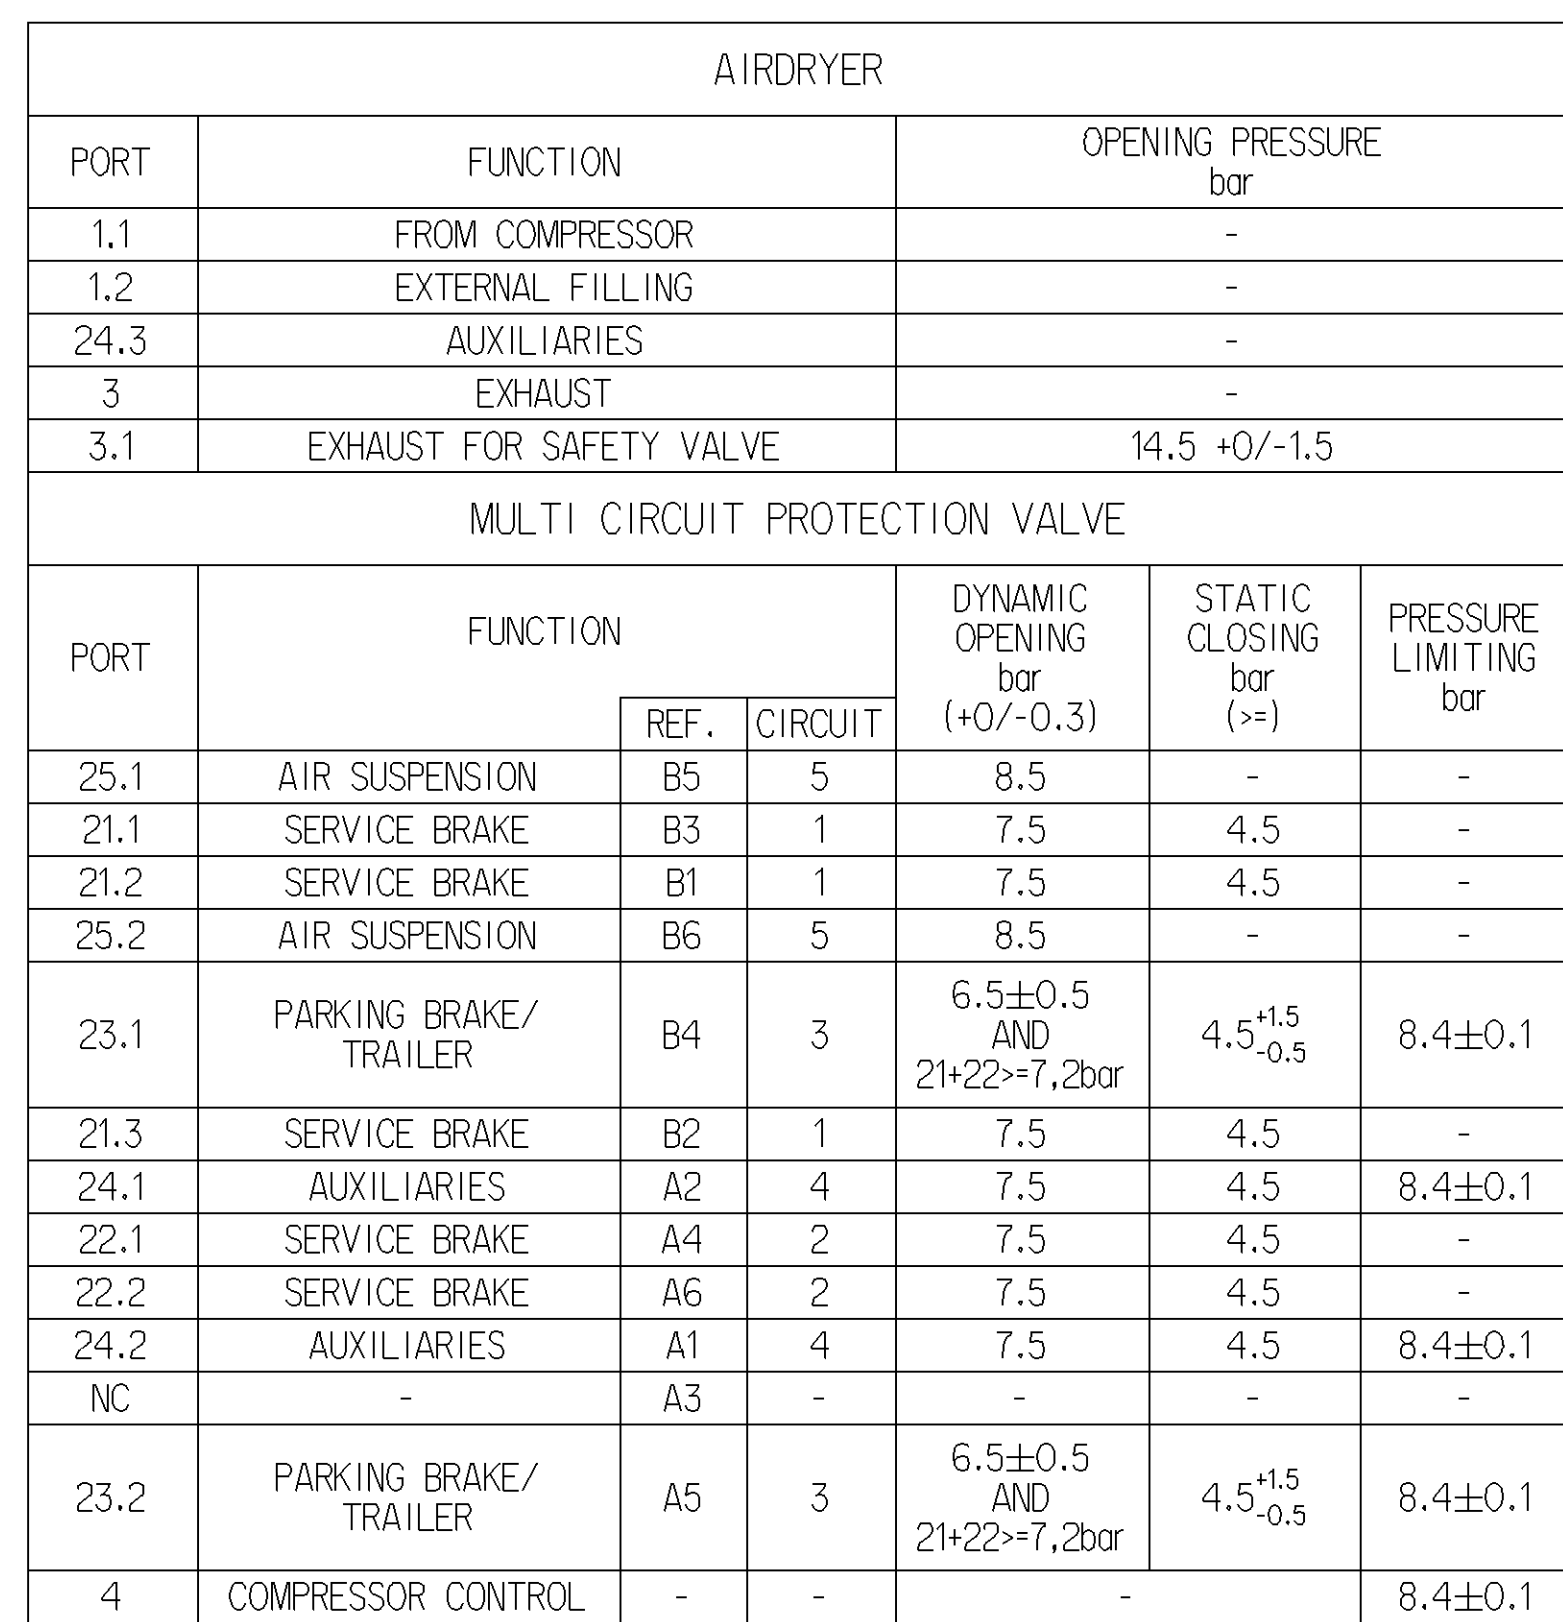
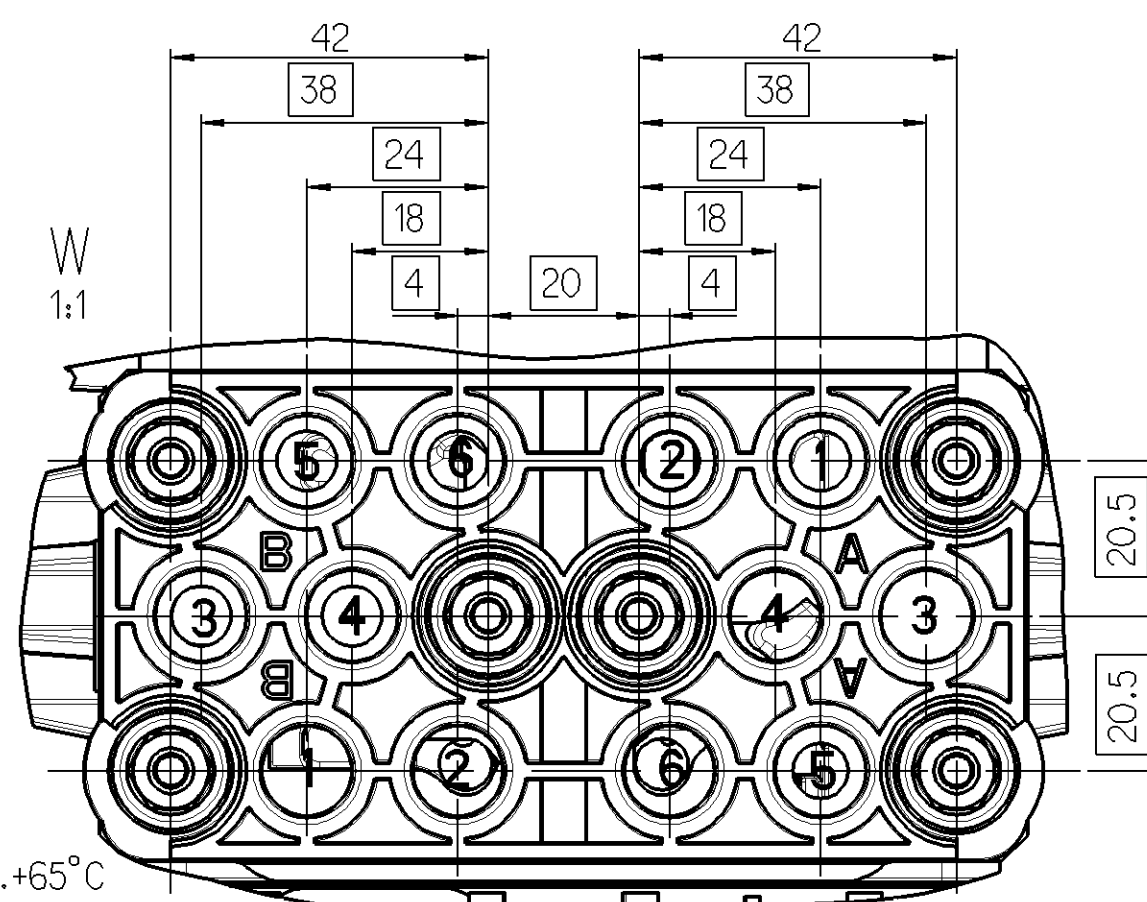
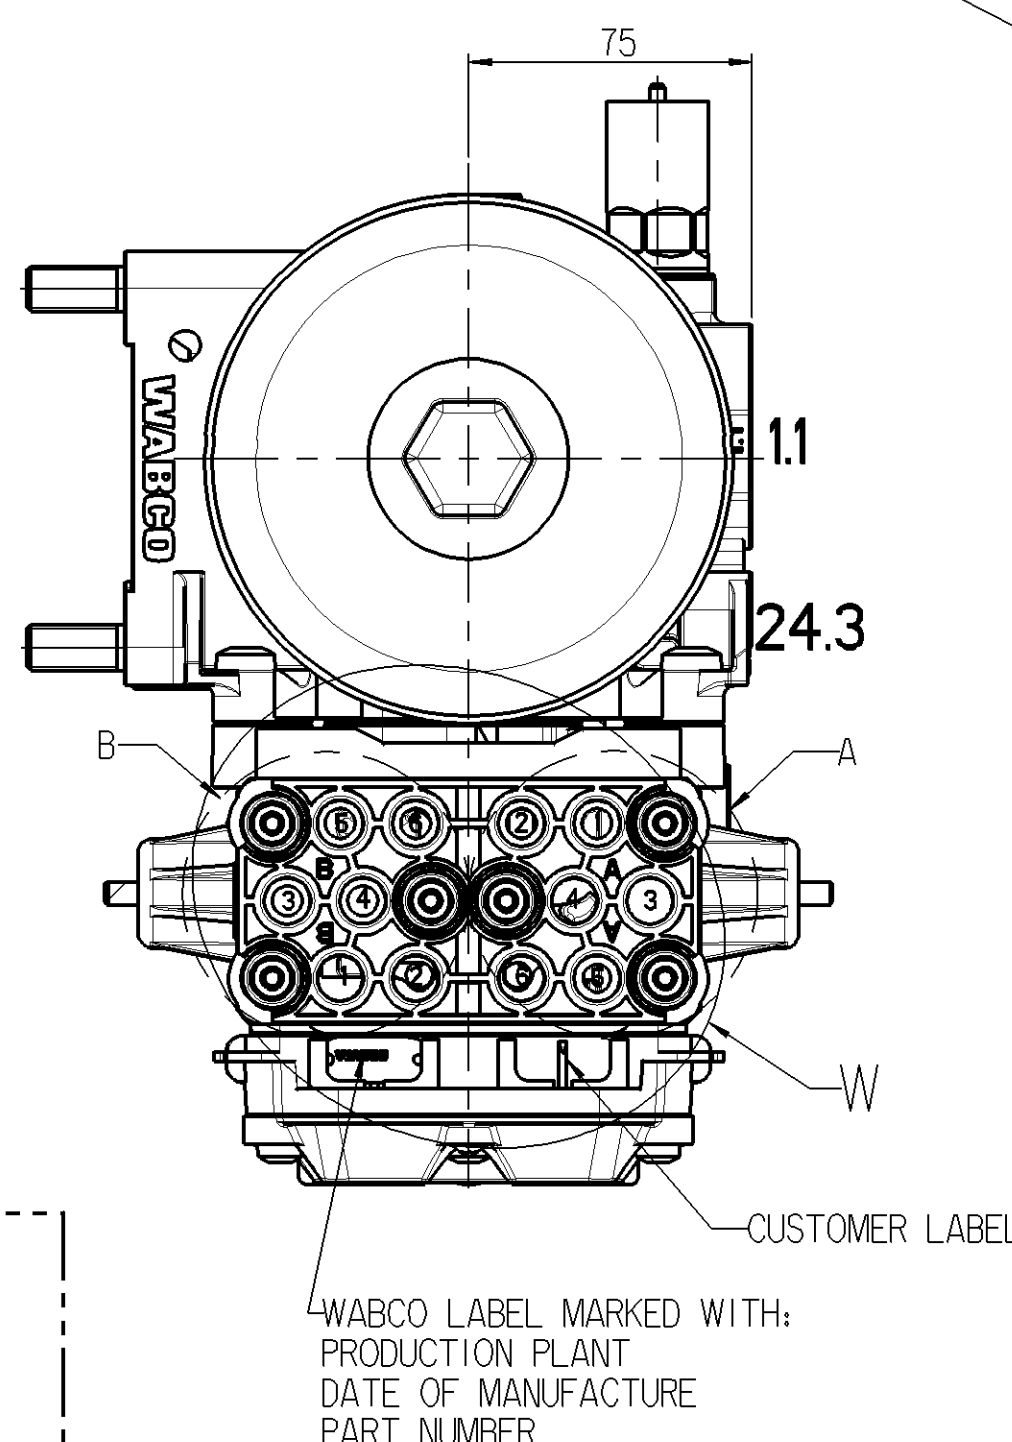


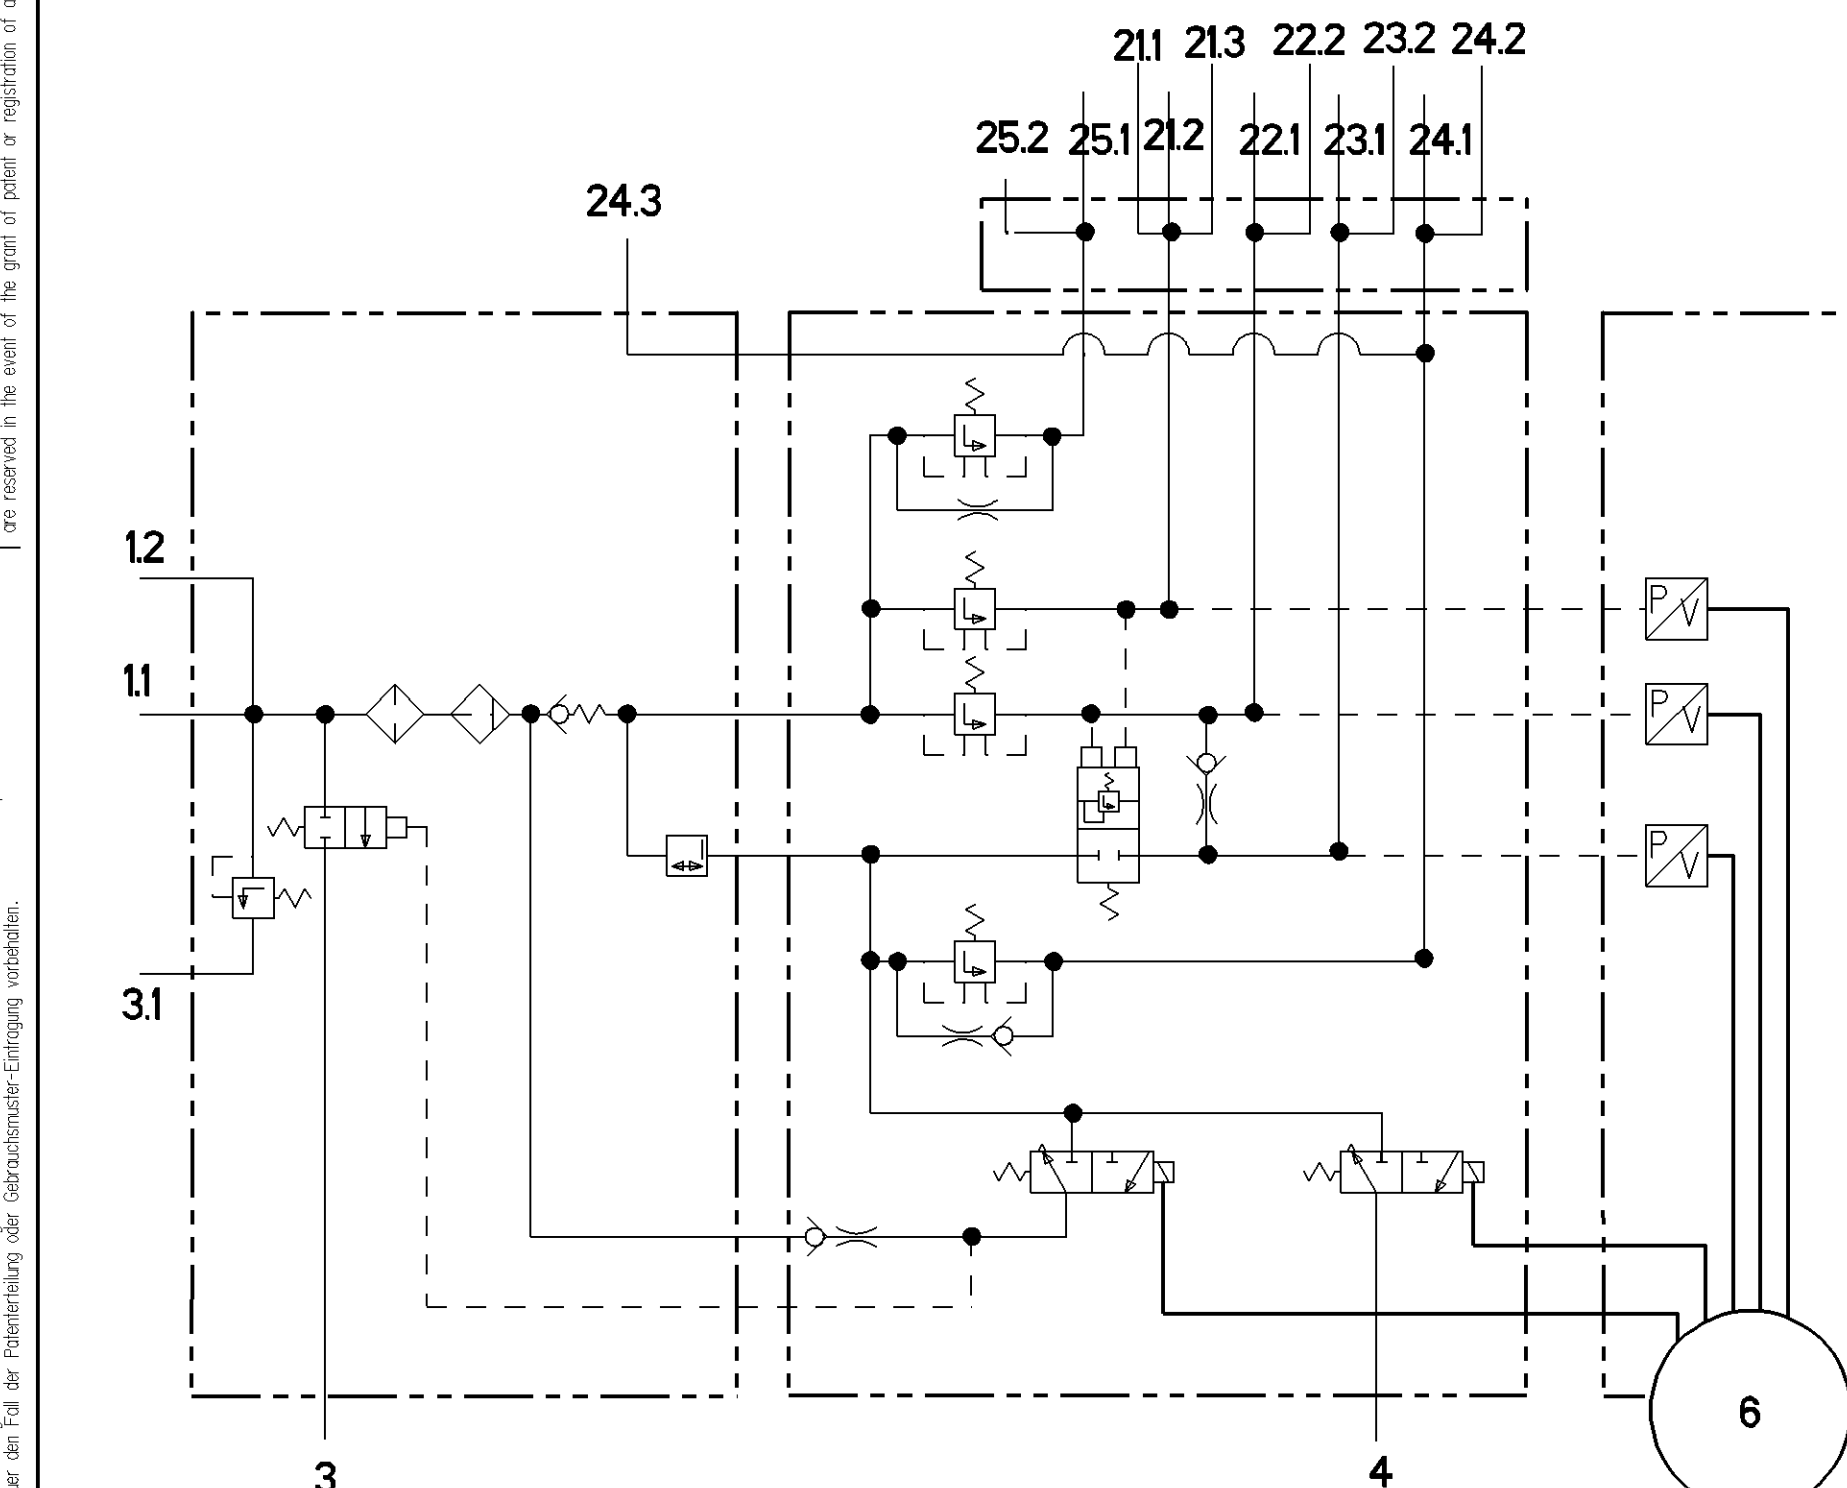

OPTIMUM THERMAL RANGE OF CONTINUOUS APPLICATION: -40°C....+65°C
RESISTANCE TO HEAT: +80°C MAXIMUM

INSTALLATION POSITION: AS DRAWN (deviation only with WABCO agreement)

WORKING PRESSURE: 12.5bar MAXIMUM

MEDIUM: COMPRESSED AIR

BREATHING/EXHAUSTING AREAS MARKED: MUST NOT BE OBSTRUCTED

PLEASE DO NOT TOUCH THE MALE MULTIPOINT CONNECTOR CONTACTS

BOOTLOADER-SW (VERSION 1.0.0): 246 260 004 2

APLIKATION-SW (VERSION 7.0.0): 246 260 006 2

FURTHER NOTES SEE PRODUCT SPECIFICATION DOC. CODE 435

TO KEEP TRACEABILITY OF PARTS SEE DOC. CODE 987