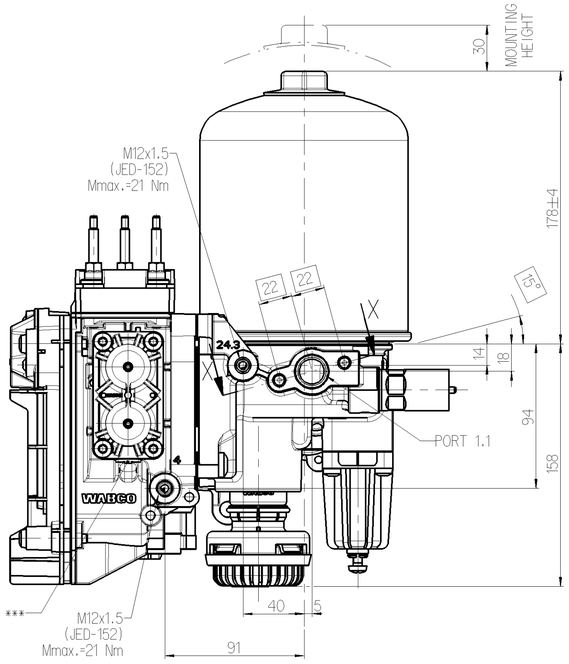

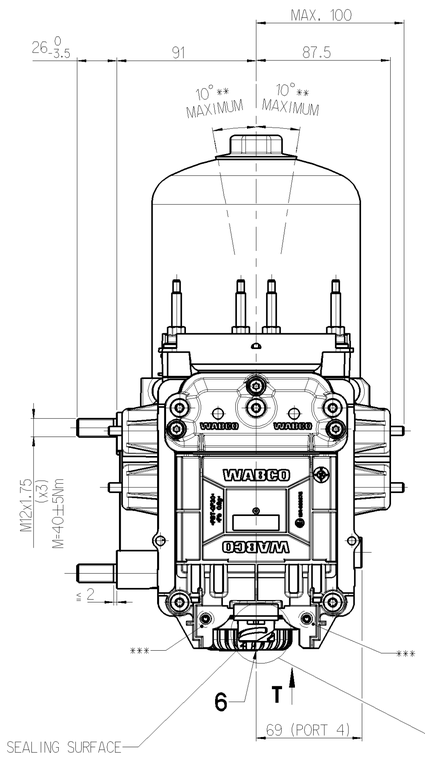

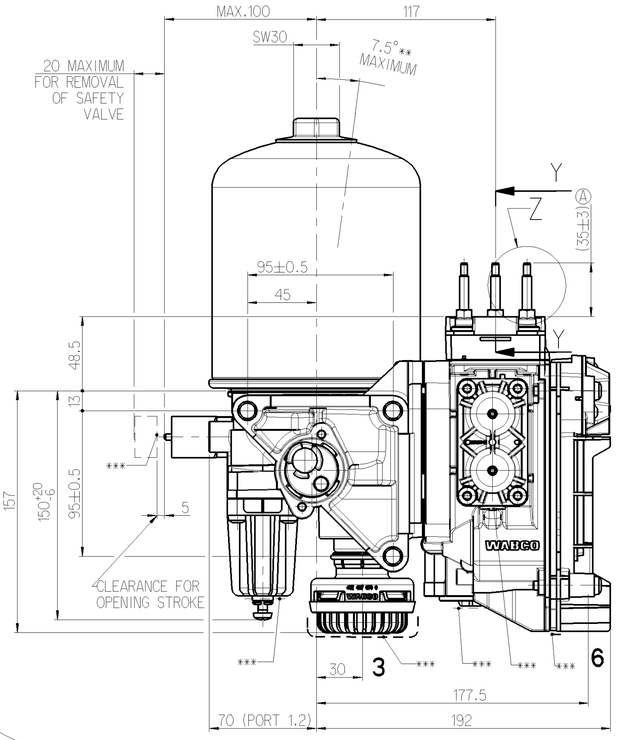



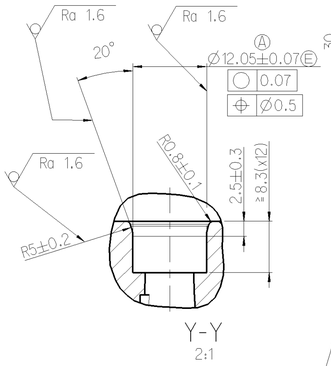

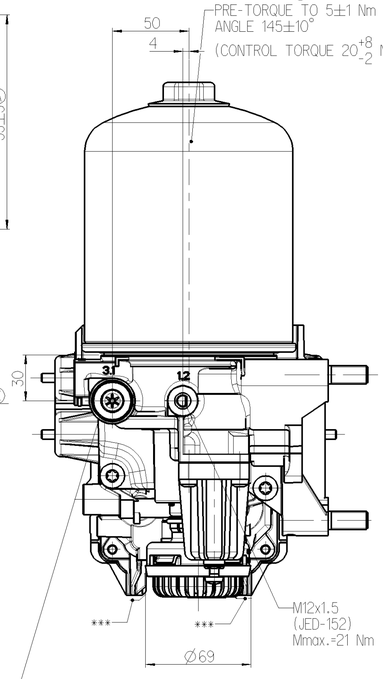

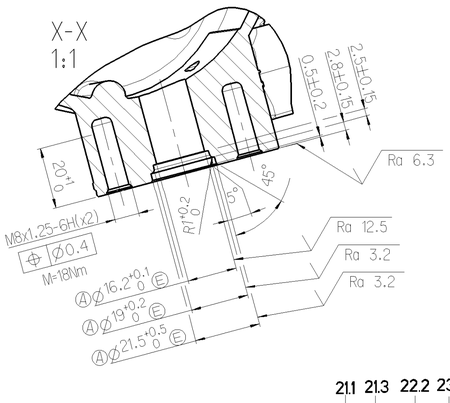

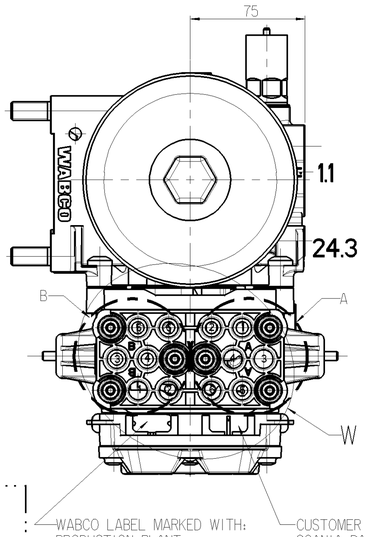

WABCO: 894 110 772 4	
(DIN72585-A1-2.1-1-Sn/k2 CONNECTOR)	
PIN NUMBER	FUNCTION
6.1	Vcc, BATTERY (24V)
6.2	GROUND
6.3	Vcc, IGNITION (24V)
6.4	CAN HIGH
6.5	CAN LOW
6.6	N.C.
6.7	N.C.

VIEW OF T

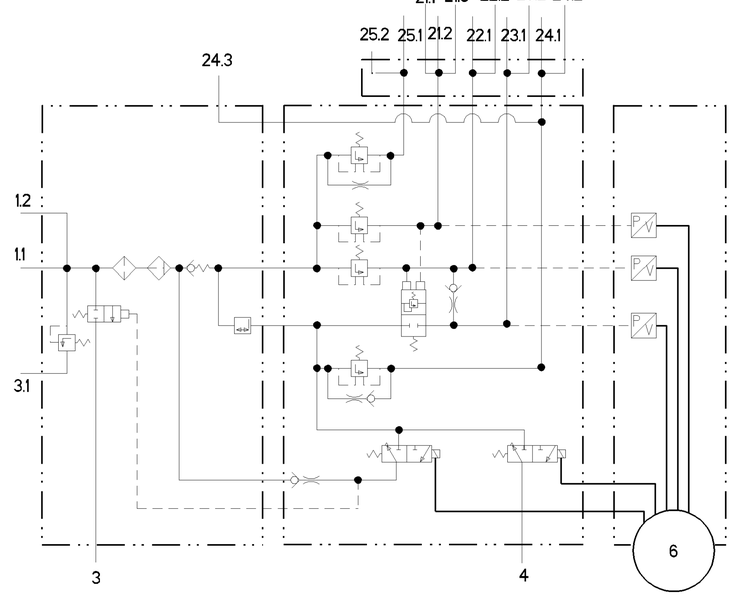

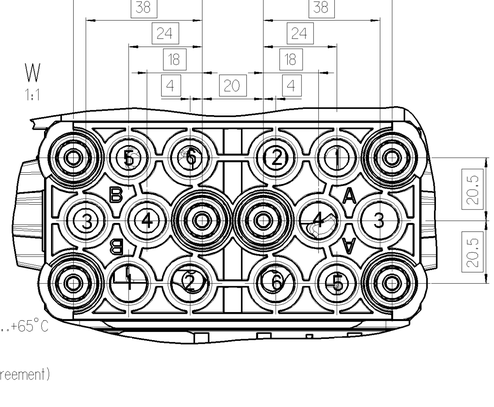

WABCO LABEL MARKED WITH:
PRODUCTION PLANT
DATE OF MANUFACTURE
PART NUMBER

CUSTOMER LABEL
SCANIA PART NUMBER 2308777
SCANIA ECU HW NUMBER 2153854

GENERAL NOTES:

OPTIMUM THERMAL RANGE OF CONTINUOUS APPLICATION: -40°C....+65°C
RESISTANCE TO HEAT: +80°C MAXIMUM

** INSTALLATION POSITION: AS DRAWN (deviation only with WABCO agreement)

WORKING PRESSURE: 12.5bar MAXIMUM

MEDIUM: COMPRESSED AIR

*** BREATHING/EXHAUSTING AREAS MARKED: MUST NOT BE OBSTRUCTED

**** PLEASE DO NOT TOUCH THE MALE MULTIPOINT CONNECTOR CONTACTS

BOOTLOADER-SW (VERSION 1.0.0): 246 260 004 2

APPLICATION-SW (VERSION 9.0.0): 246 260 012 2

FURTHER NOTES SEE PRODUCT SPECIFICATION DOC. CODE 435

TO KEEP TRACEABLITY OF PARTS SEE DOC. CODE 987

AIRDRYER		
PORT	FUNCTION	OPENING PRESSURE bar
1.1	FROM COMPRESSOR	-
1.2	EXTERNAL FILLING	-
24.3	AUXILIARIES	-
3	EXHAUST	-
3.1	EXHAUST FOR SAFETY VALVE	14.5 +0/-1.5

MULTI CIRCUIT PROTECTION VALVE

PORT	FUNCTION	REF.	CIRCUIT	DYNAMIC OPENING bar (+0/-0.3)	STATIC CLOSING bar (>=)	PRESSURE LIMITING bar
25.1	AIR SUSPENSION	B5	5	8.5	-	-
21.1	SERVICE BRAKE	B3	1	7.5	4.5	-
21.2	SERVICE BRAKE	B1	1	7.5	4.5	-
25.2	AIR SUSPENSION	B6	5	8.5	-	-
23.1	PARKING BRAKE/ TRAILER	B4	3	6.5±0.5 AND 21+22>=7,2bar	4.5 +1.5 -0.5	8.4±0.1
21.3	SERVICE BRAKE	B2	1	7.5	4.5	-
24.1	AUXILIARIES	A2	4	7.5	4.5	8.4±0.1
22.1	SERVICE BRAKE	A4	2	7.5	4.5	-
22.2	SERVICE BRAKE	A6	2	7.5	4.5	-
24.2	AUXILIARIES	A1	4	7.5	4.5	8.4±0.1
NC	-	A3	-	-	-	-
23.2	PARKING BRAKE/ TRAILER	A5	3	6.5±0.5 AND 21+22>=7,2bar	4.5 +1.5 -0.5	8.4±0.1
4	COMPRESSOR CONTROL	-	-	-		8.4±0.1

Trade Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Non è permesso consegnare o fare a chiunque questo documento, né utilizzarne il contenuto o renderlo comunque noto a terzi senza espressa autorizzazione. Ogni violazione obbliga al risarcimento dei danni. Tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

General Specification: JED-334-1 , Size ISO 14405 LP								Copyright WABCO®		WABCO	
Further Technical Data:								Date	Signature		
Doc. Code:				Sheet:		To		Drawn		E-APU	
General Tolerances JED-261								2018-08-06	Biernat		
		Range of Nominal Dimensions (± mm)						Checked			
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400			2018-08-09	Kraus		
Fine		0.5	1.0	1.5	2.0			Expert			
Medium	X	1.0	2.0	3.0	4.0	±3°		Biernat			
Coarse		2.0	3.5	5.0	6.5			Mass	Scale	Material No.	Date of first issue: 2014-04-02
Tapped Holes acc. -								8.139 KG	1:2 (1:1, 2:1)	932 510 010 0	Doc.Code 005 / Language EN / Sheet 1/1
1) Tolerance Class Applied Crossmarked								Size A 1	CAD System CREO		
										EON-No. 173629 / Revision 8 x A / Techn. Resp. 5112 / Replacement for 932 510 006 0	

Dwg. 9325000_009 A.6 in Work
Dwg. 9325000_002 A.2