
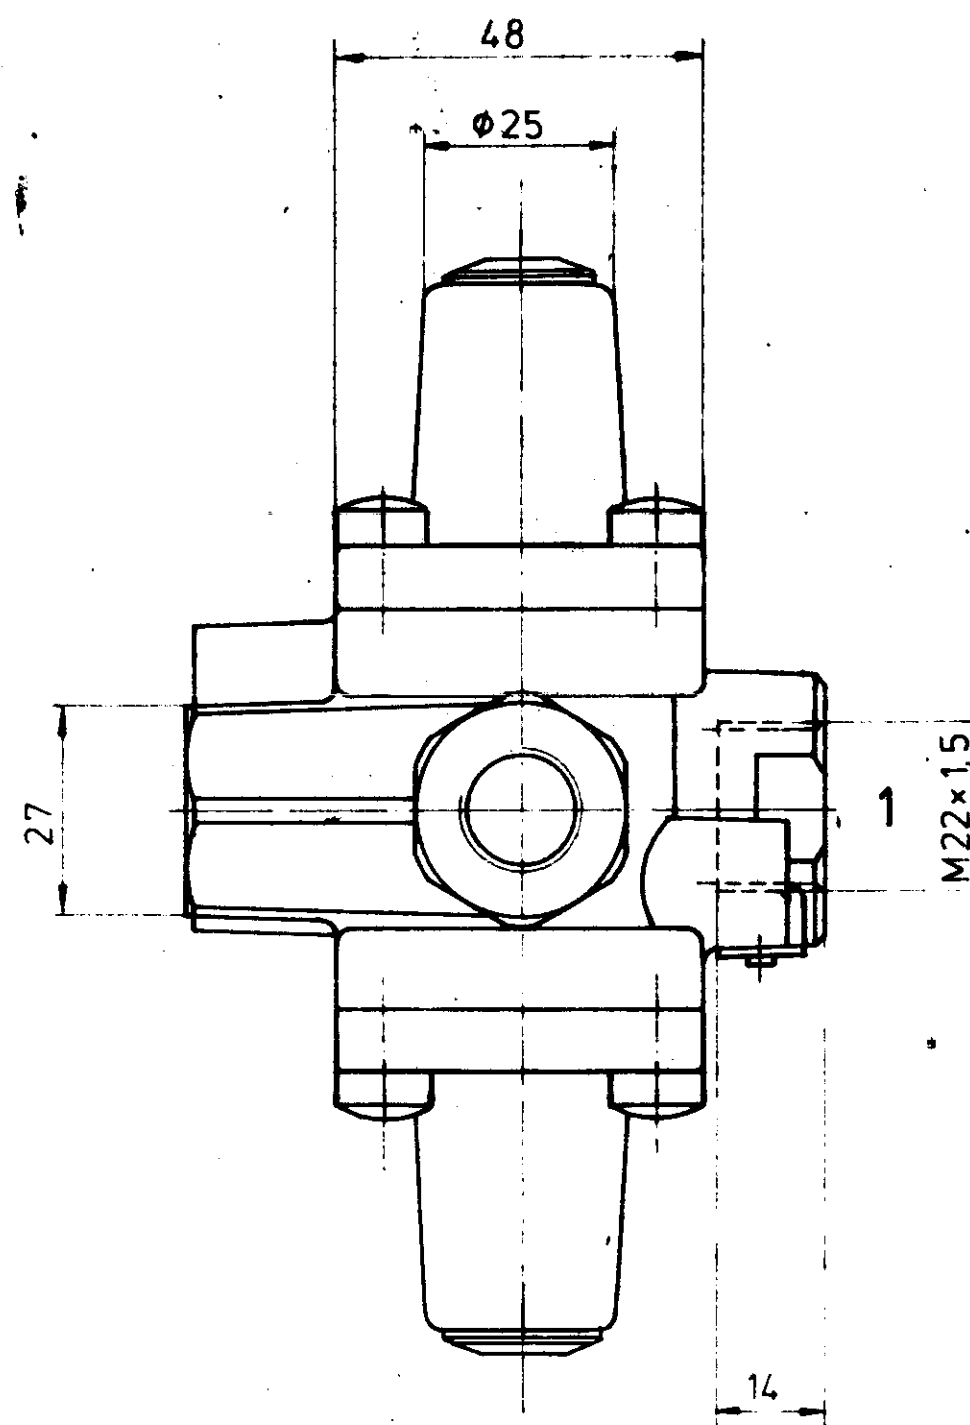


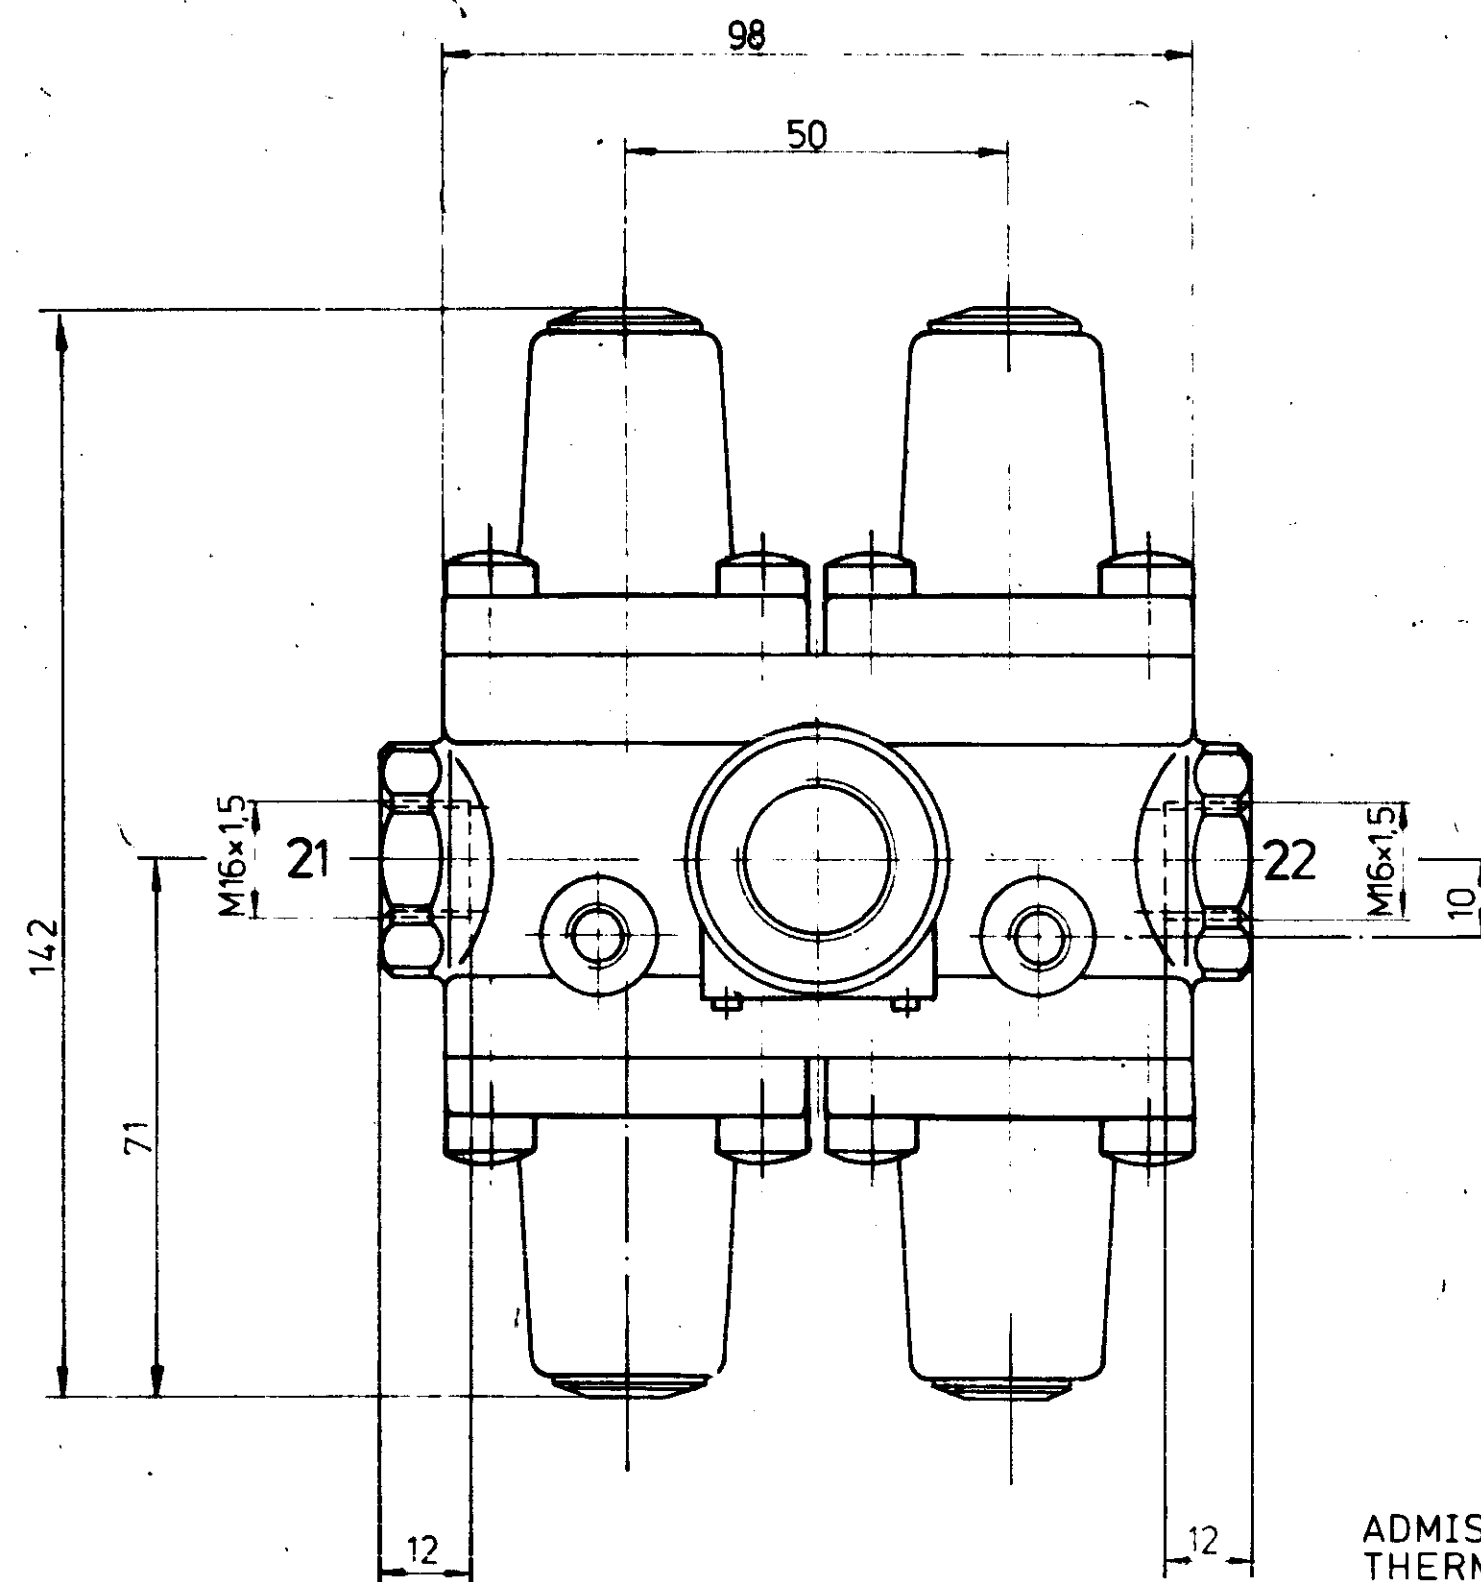

CONNECTIONS: - SUPPLY
ANSCHLUESSE: 1 - LUFTEINTRITT
ORIFICES: - ALIMENTATION
ORIFIZI: - ALIMENTAZIONE

MEDIUM: AIR
MEDIUM: LUFT
MILIEU: AIR
FLUIDO: ARIA



WEIGHT: 0.9 da N
GEWICHT:
POIDS:
PESO

SERVICE PRESSURE: MAX. 10 bar
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO

- 21 = CIRCUIT 1
= KREIS 1
= CIRCUIT 1
= CIRCUITO 1
- 22 = CIRCUIT 2
= KREIS 2
= CIRCUIT 2
= CIRCUITO 2
- 23 = CIRCUIT 3
= KREIS 3
= CIRCUIT 3
= CIRCUITO 3
- 24 = CIRCUIT 4
= KREIS 4
= CIRCUIT 4
= CIRCUITO 4

ADMISSIBLE TEMPERATURES
THERMISCHER ANWENDUNGSBEREICH -40°C...+90°C
TEMPERATURE DE SERVICE
TEMPERATURA D'ESERCIZIO

* OPENING PRESSURE = MAINTAINED PRESSURE
OEFFNUNGSDRUCK = GESICHERTER DRUCK
PRESSION D'OUVERTURE = PRESSION MAINTENUE
PRESSIONE DI APERTURA = PRESSIONE MANTENUTA

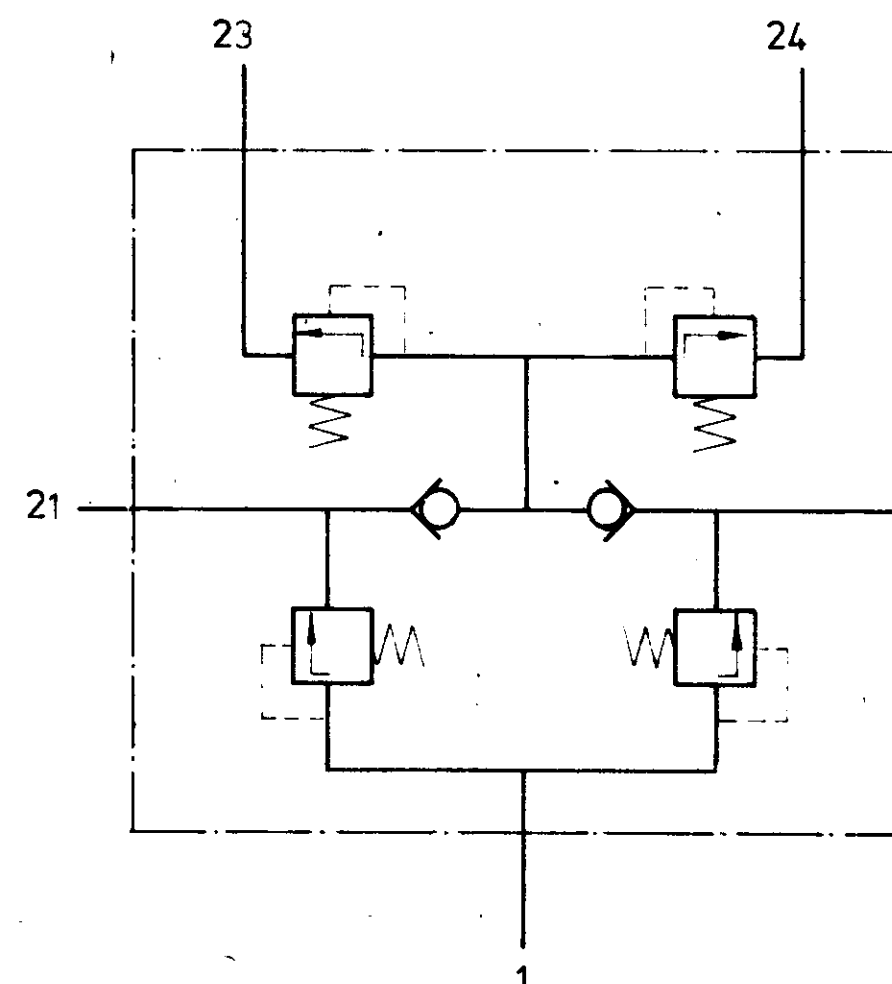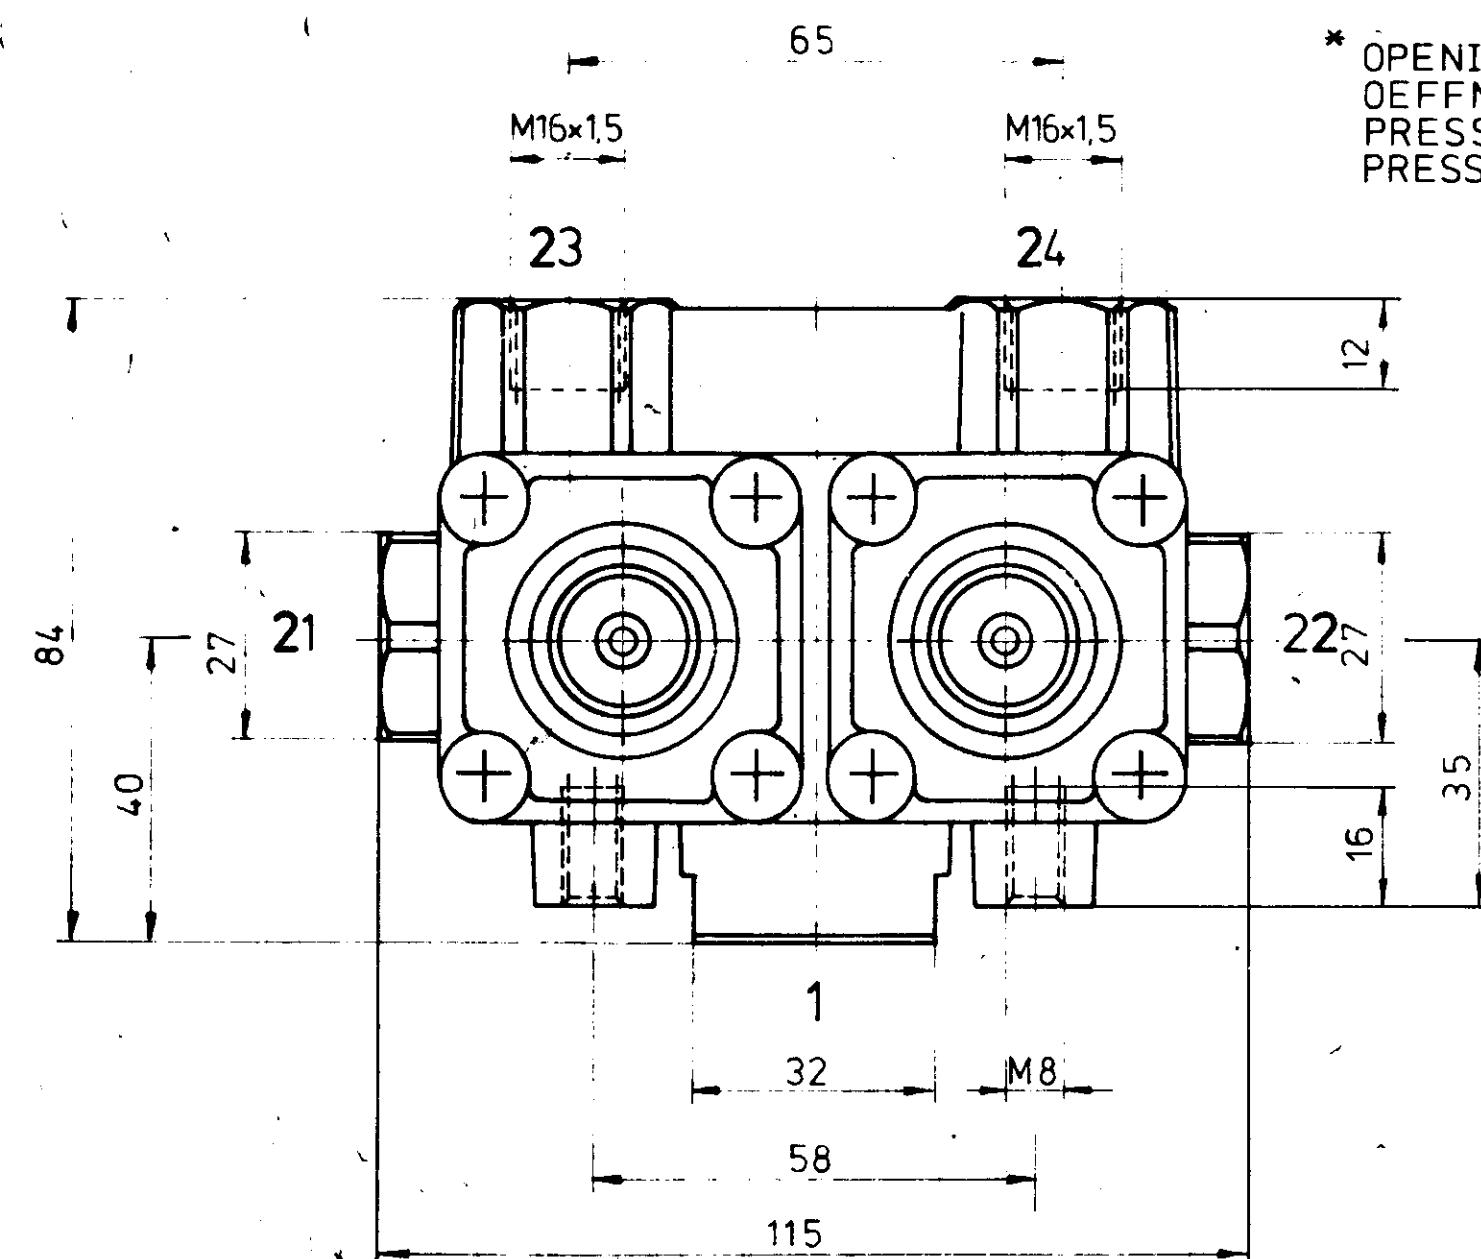

CIRCUIT KREIS CIRCUIT CIRCUITO	21	22	23	24
OPENING PRESSURE [bar] OEFFNUNGSDRUCK [bar] PRESSION D'OUVERTURE [bar] PRESSIONE DI APERTURA [bar]	7			
CLOSING PRESSURE STATIC [bar] AT FAILURE OF CIRCUIT SCHLIESSDRUCK STATISCH [bar] BEI AUSFALL VON KREIS PRESSION DE FERMETURE STAT [bar] EN CAS DE DEFAILLANCE DU CIRCUIT PRESSIONE DI CHIUSURA STATICO [bar] IN CASO DI DIFETTO DEL CIRCUITO	0	≥ 5,5	≥ 67	≥ 67
	≥ 5,5	0	≥ 67	≥ 67
	≥ 5,5		≥ 5,5	≥ 5,5
	≥ 5,5		≥ 5,5	0

Tolerances not marked Formattoleranzen Tolerances generales Tolleranze generali	Material Werkstoff Materie Materiale	Surface protection Oberflächenschutz Protection Protezione	Treatment Behandlung Trattamento
Scale Maßstab Echelle Scala	1:1	PROTECTION VALVE (FOR 4 CIRCUITS) SCHUTZVENTIL (FÜR 4-KREIS-ANLAGE) VALVE DE PROTECTION (A 4 CIRC) VALVOLA DI PROTEZIONE (A 4 CIRC)	934 702 102 0
36827 1x A 10.9.87 C.N. No. Letter Date Revisions Änderungen Modifications Modifiche	86.05.06 Wepf Checked Approved	WESTINGHOUSE JOINT ENGINEERING DEPARTMENT	605