
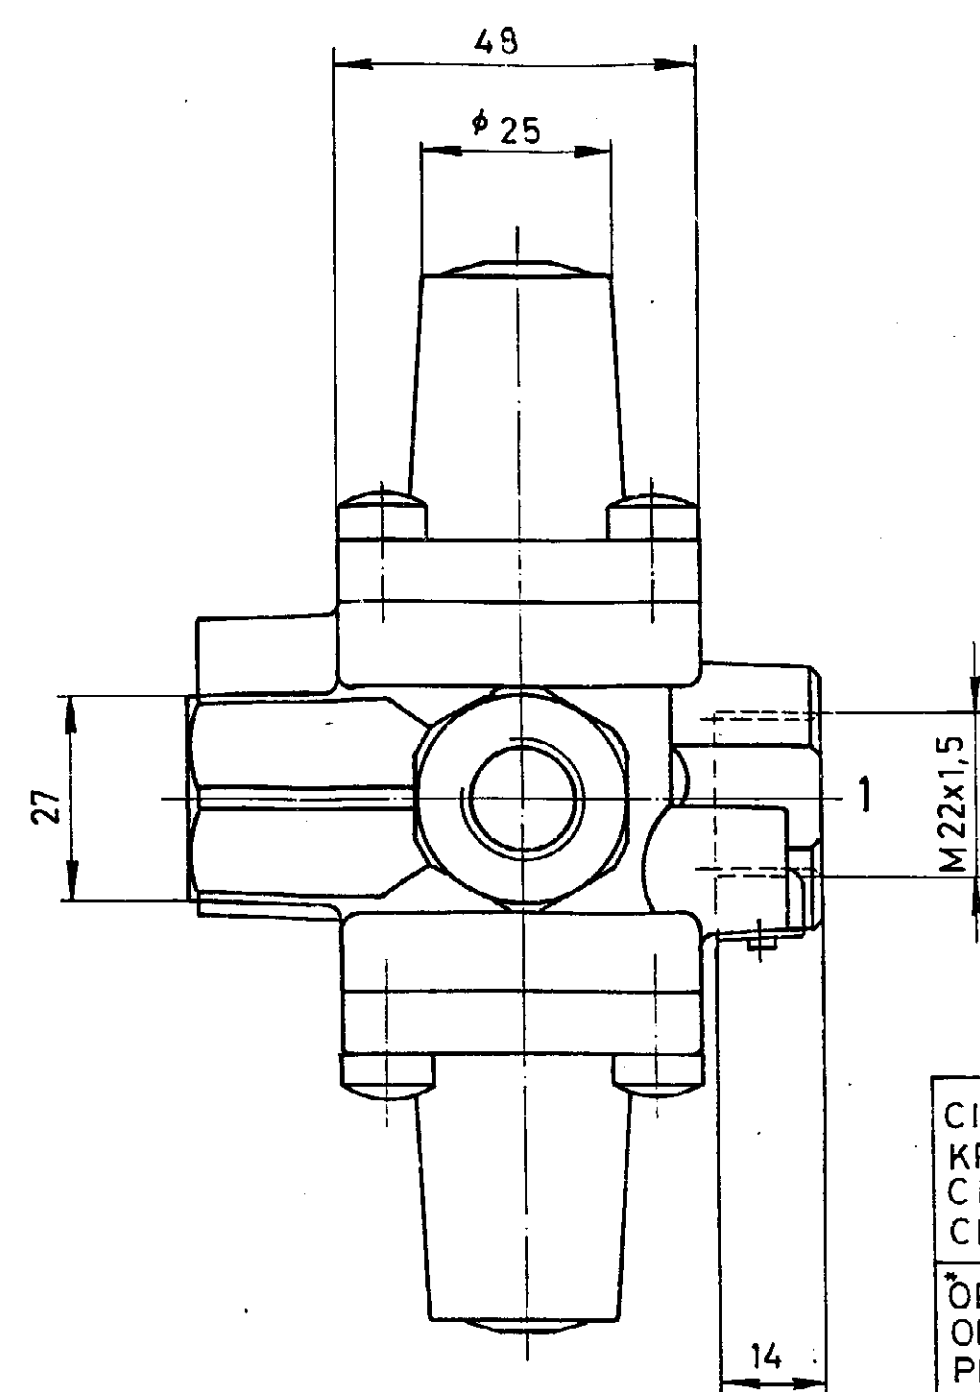


[illegible]

ADMISSIBLE TEMPERATURES
 THERM. ANWENDUNGSBEREICH
 TEMPERATURE DE SERVICE -40.....+90 °C
 TEMPERATURA D'ESERCIZIO

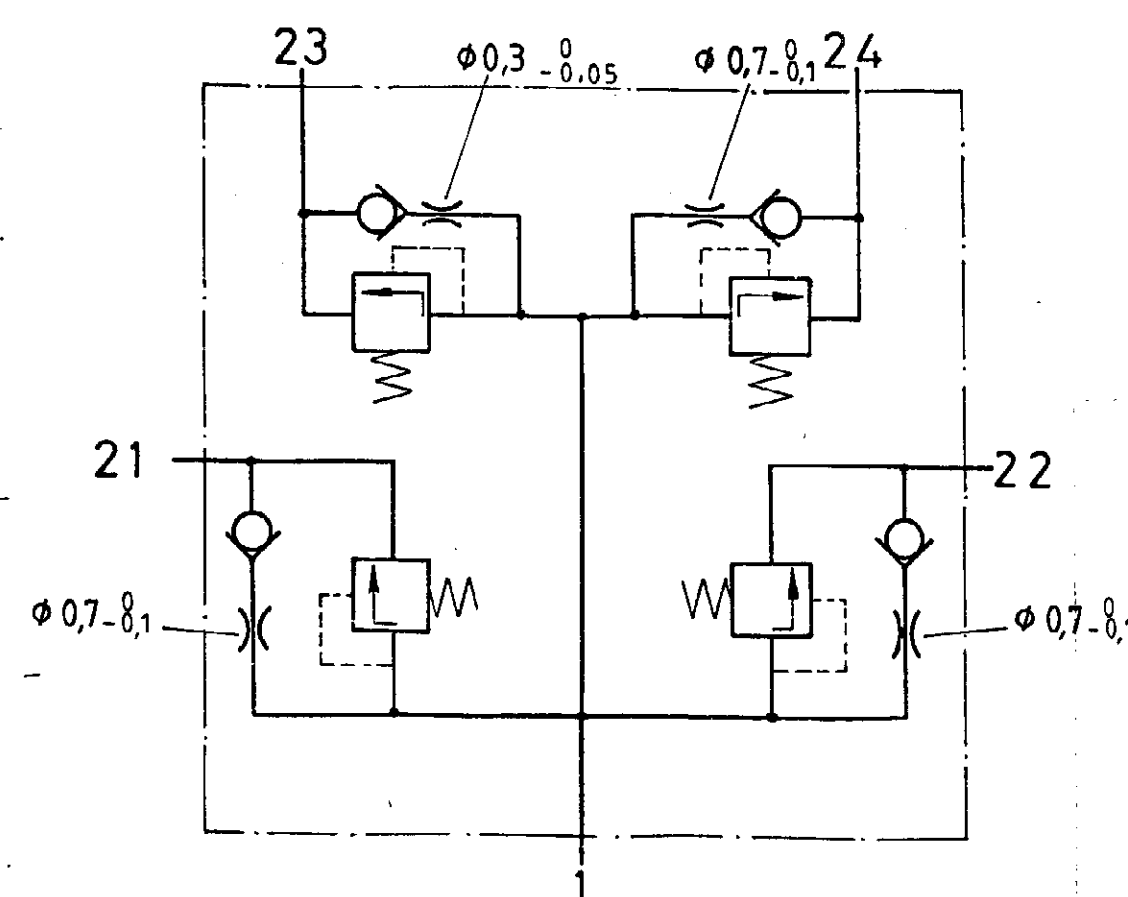

MEDIUM: AIR
MEDIUM: LUFT
MILIEU: AIR
FLUIDO: ARIA

CIRCUIT KREIS CIRCUIT CIRCUITO	21	22	23	24
ÖPNING PRESSURE [bar] ÖFFNUNGSDRUCK [bar] PRESSION D'OUVERTURE [bar] PRESSIONE DI APERTURA [bar]	6,5 ⁰ _{-0,3}	6,5 ⁰ _{-0,3}	7,5 ⁰ _{-0,3}	6,5 ⁰ _{-0,3}
CLOSING PRESSURE DYNAMIC [bar] SCHLIESSDRUCK DYNAMISCH [bar] PRESSION DE FERMETURE DYNAM. [bar] PRESSIONE DI CHIUSURA DINAM. [bar]	≅ 4,5			
CLOSING PRESSURE STATIC [bar] AT FAILOR OF CIRCUIT.... SCHLIESSDRUCK STATISCH [bar] BEI AUSFALL VON KREIS.... PRESSION DE FERMETURE STAT. [bar] EN CAS DE DEFAILLANCE DU CIRCUIT.... PRESSIONE DI CHIUSURA STATICO [bar] IN CASO DI DIFETTO DEL CIRCUITO	0	≅ 4,0	≅ 4,0	
	≅ 4,0	0	≅ 4,0	
	≅ 4,0		0	≅ 4,0
	≅ 4,0		≅ 4,0	0

FURTHER TECHNICAL DATA SEE										L	COPYRIGHT		WABCO 4-CIRCUIT PROTECTION VALVE 4-KREIS-SCHUTZVENTIL VALVE DI PROTEZIONE A 4-CIRCUITS VALVOLA DI PROTEZIONE A 4-CIRCUITI	
IDENTIFICATION No.										K	DATE	SIGNATURE		
CODE FOR DOCUMENT: 605 SHEET: TO										J	93-11-13	DRAWN		
GENERAL TOLERANCES										H	93-11-25	CHECKED		
RANGE OF NOMINAL DIMENSIONS (± mm)										F	STANDARDIZATION VIA		38-11-29 38-11-29	
CLASS	1)	> 50 ≤ 180	> 180 ≤ 400	> 400	± 3°	E	MASS		SCALE					
I	X	0,5	1	1,5		D	1 kg	1:1						
II		1	2	3		C	SIZE	TR 1						
III		2	3,5	6,5		B	A 1	140						
TAPPED HOLES ACC. ISO 4039 / JED-152										A	CODE # PROD. GROUP		CODE FOR SHAPE	REPLACEMENT FOR
1) TOLERANCE CLASS ADAPTED CROSSED MARKED										DEC. No.	REV.	DATE		