

SURFACE PROTECTION OBERFLAECHENSCHUTZ PROTECTION DE SURFACE PROTEZIONE SUPERFICIALE	I	JED-259	
	II	JED-256	
	III	JED-352	

A

B

C




D

E

F

G

H

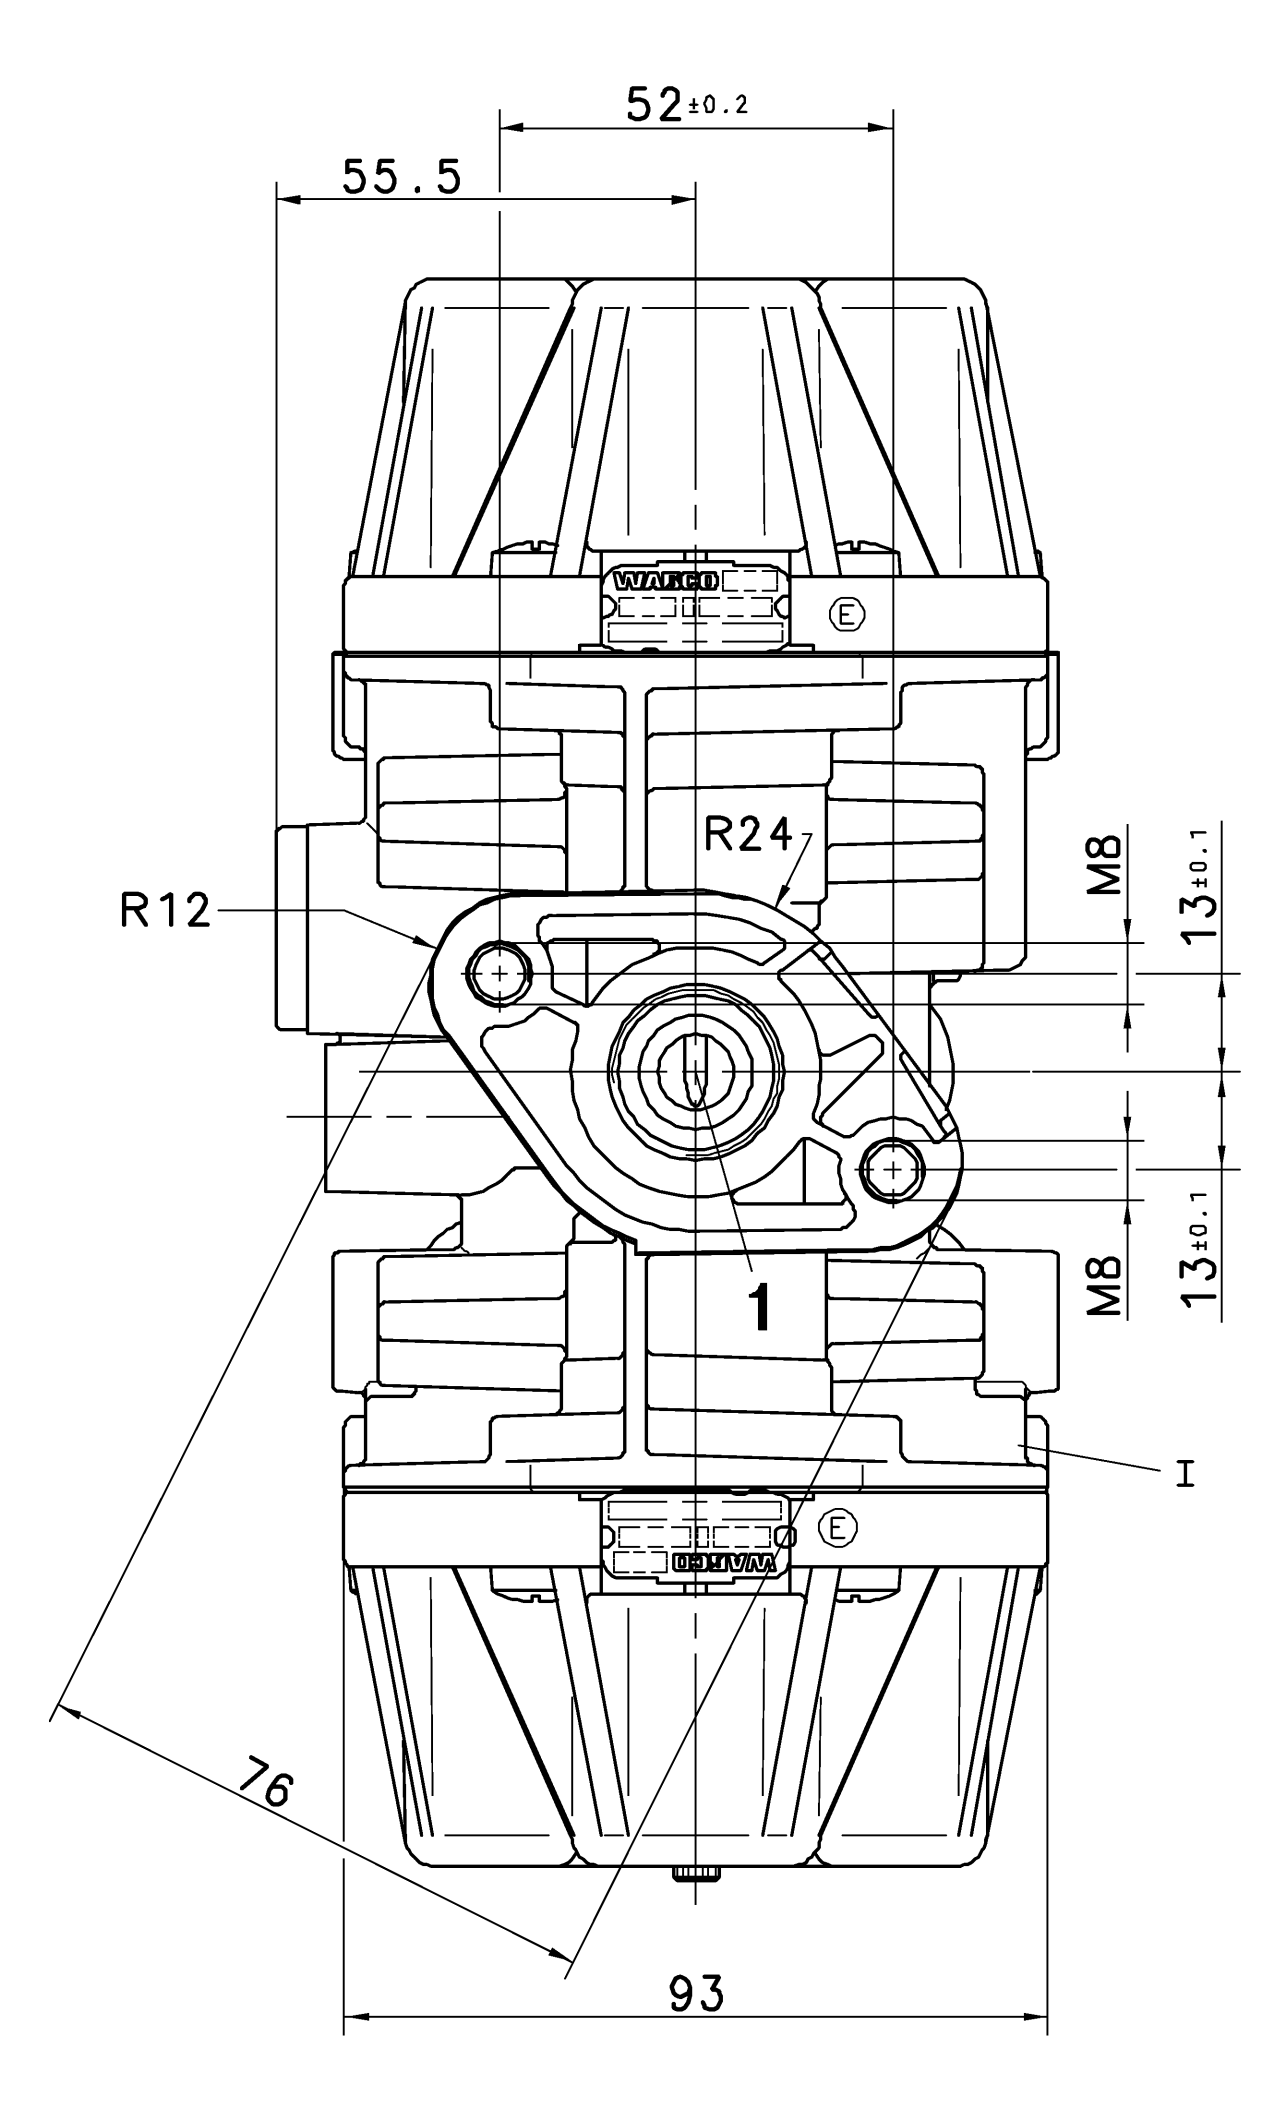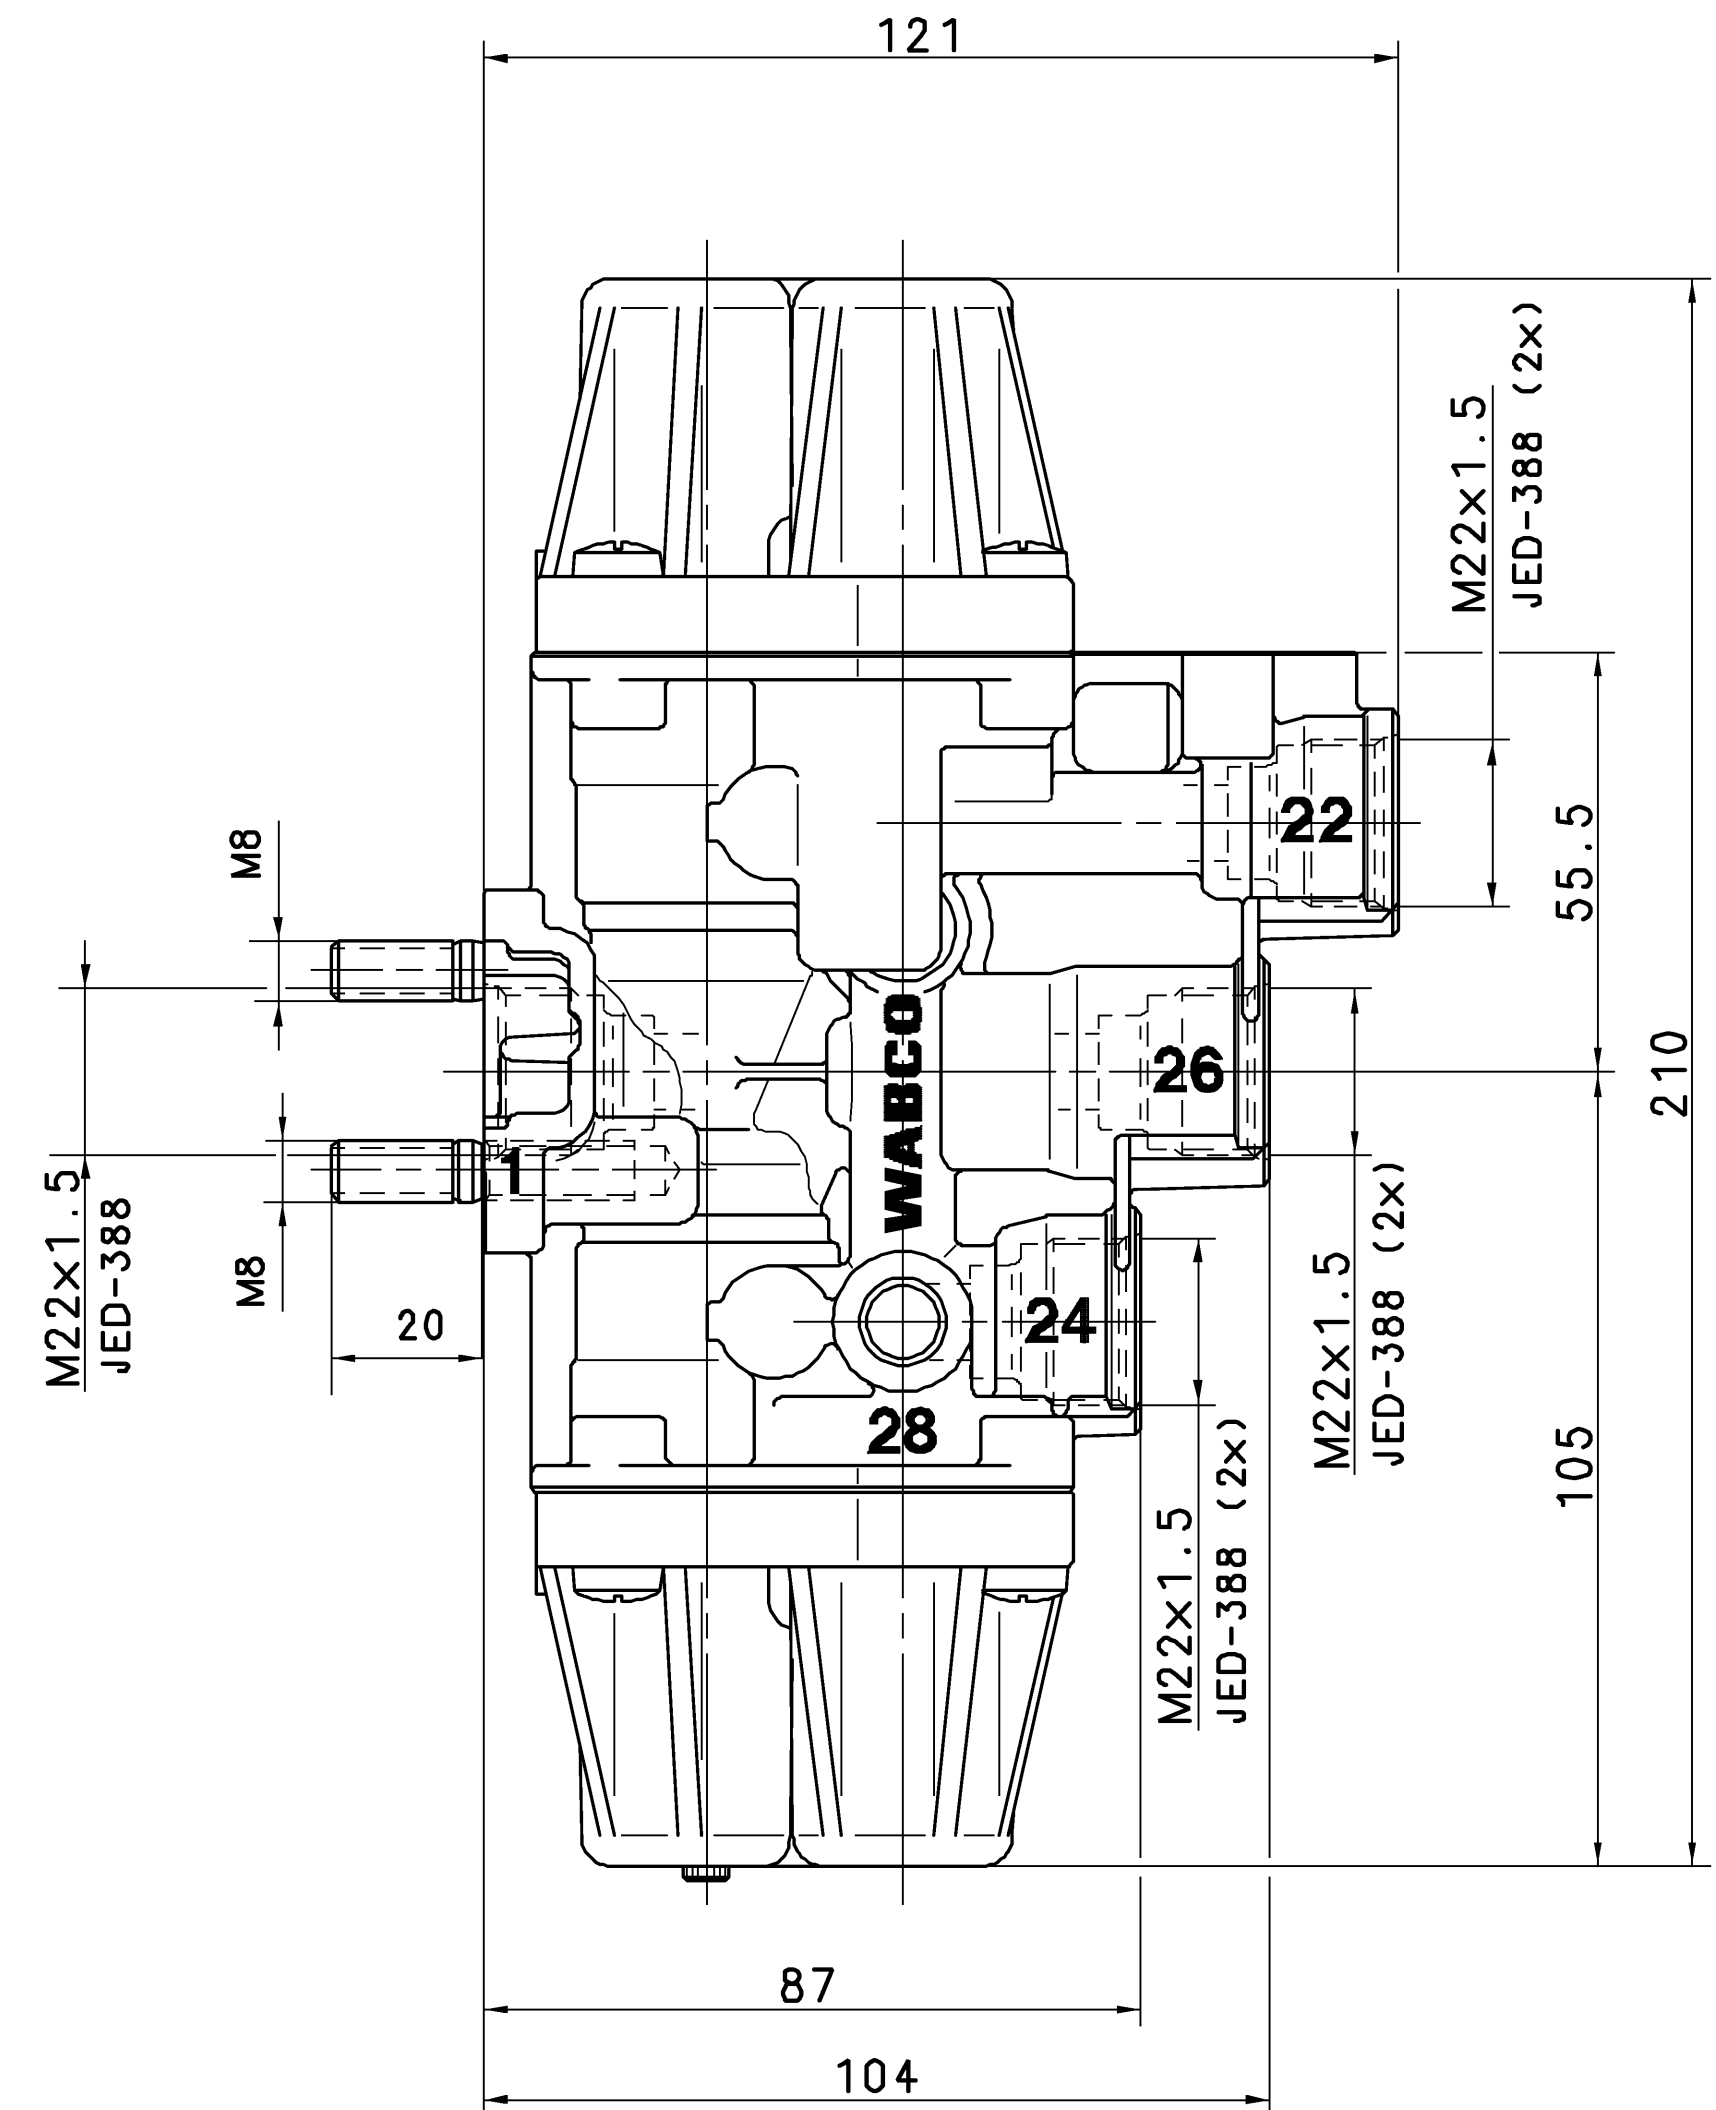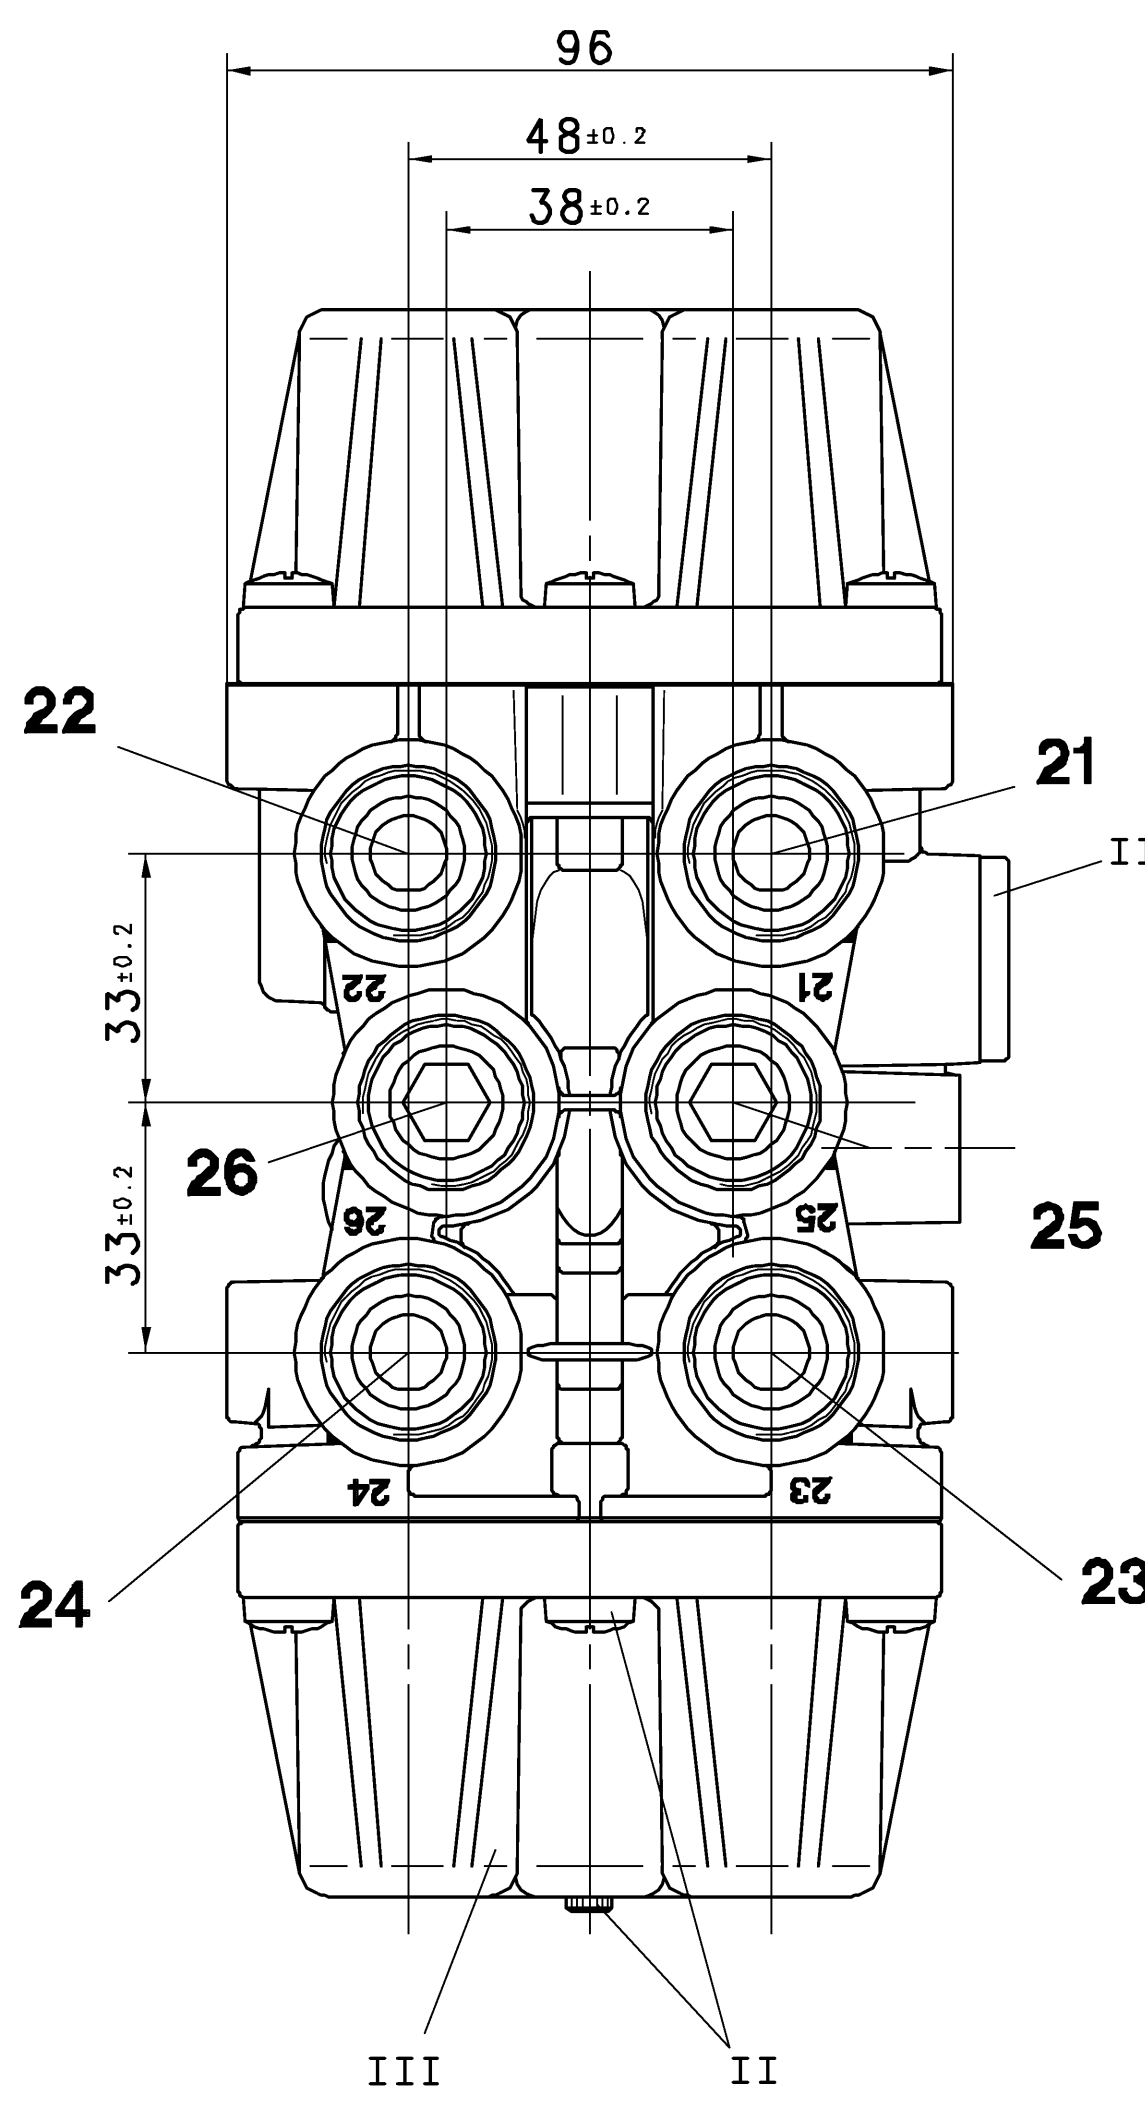


CONNECTIONS: ANSCHLUESSE: ORIFICES: ORIFIZI:	FROM AIR DRYER VOM LUFTTROCKNER DE DESSICATEUR D'AIR ESSICCATORE D'ARIA	
	1	1
	21	2
	22	3
	23, 25	4
CIRCUIT KREIS CIRCUIT CIRCUITO		
PRESSURE DRUCK [bar] PRESSION PRESSIONE		CIRCUIT KREIS 1+2 CIRCUIT CIRCUITO
OPENING PRESSURE : dyn. OEFFNUNGSDRUCK : PRESSION D'OUVERTURE : PRESSIONE DI APERTURA :		9.0 ⁰ _{-0.3}
CLOSING PRESSURE : dyn. SCHLIESSDRUCK : PRESSION DE FERMETURE : PRESSIONE DI CHIUSURA :		≥ 7.0
PRESSURE LIMITING DRUCKBEGRENZUNG LIMITATION DE PRESSION LIMITAZIONE DI PRESSIONE		8.5 ⁰ _{-0.4}

THERMAL RANGE OF CONTINUOUS APPLICATION:
THERMISCHER DAUERANWENDUNGSBEREICH:
PLAGE DE TEMPERATURE EN UTILISATION CONTINUE: -40°C.....+80°C
COMPO DI APPLICAZIONE CONTINUA:

MEDIUM: COMPRESSED AIR
MEDIUM: DRUCKLUFT
FLUIDE: AIR COMPRIME
FLUIDO: ARIA COMPRESSA

WORKING PRESSURE:
BETRIEBSDRUCK: $P_{e\max.} = 13\text{bar}$
PRESSION DE SERVICE:
PRESSIONE D' ESERCIZIO:

INSTALLATION POSITION OPTIONAL
EINBAULAGE BELIEBIG
POSITION D' INSTALLATION A VOLONTE
POSIZIONE DI MONTAGGIO A SCELTA

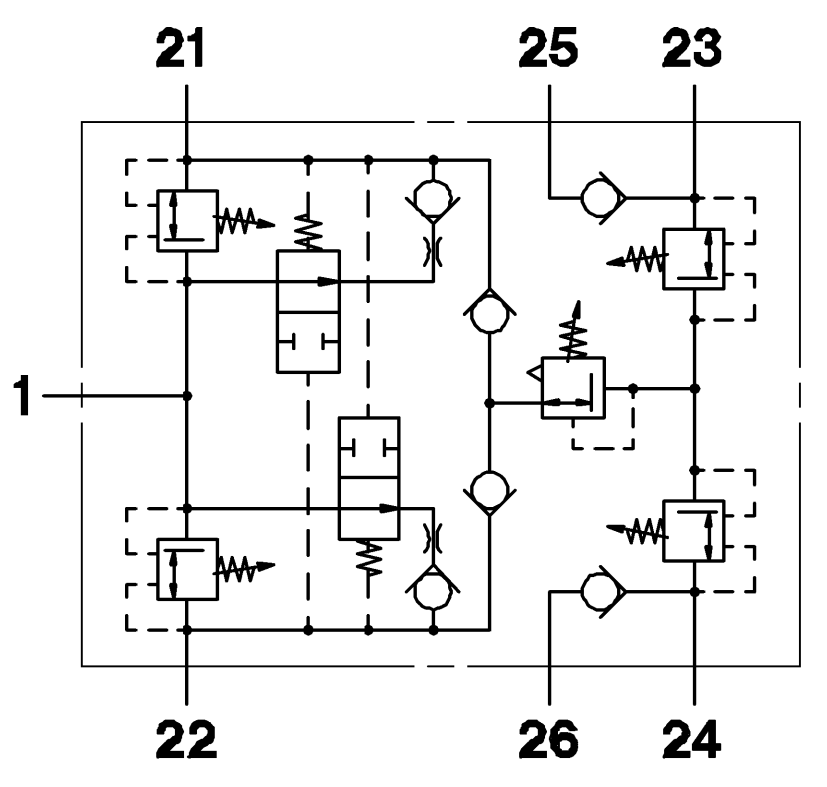

General Specification: JED-324-0				Copyright WABCO		WABCO	
Further Technical Data:				Date	Signature	QUADRUPLE CIRCUIT PROTECTION VALVE	
Doc. Code:		Sheet: 1a		Drawn	Checked	VIERKREIS-SCHUTZVENTIL	
General Tolerances JED-261				2008-07-15	2008-07-16	VALVE DE PROTECTION (A 4 CIRCUITS)	
Range of Nominal Dimensions (± mm)				Expert	REMSKI	VALVOLA DI PROTEZIONE (A 4 CIRC.)	
Class 11				Mass	Scale	Material No.	
Fine				1.45	1:1	934 705 002 0	
Medium				Size	TRI	005 ML 1/1	
Coarse				117920	2xE	117920	
DON-No. Rev. Date				117920	2xE	117920	
State of Revision				117920	2xE	117920	
Tapped Holes acc.				117920	2xE	117920	
1) Tolerance Class Applied Crossmarked				117920	2xE	117920	