


Non è permesso copiare o riprodurre questo documento, né utilizzare il contenuto o i dati contenuti in esso, senza permesso scritto dalla WABCO. È vietata espressamente la ristampa, la traduzione, la copia, la riproduzione, la diffusione o l'uso non autorizzato. Il presente documento è riservato ai soli clienti WABCO. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite de la WABCO. Toute utilisation non autorisée de ce document est formellement interdite. Toute réimpression, toute traduction, toute copie, toute reproduction, toute diffusion ou utilisation non autorisée est formellement interdite. This document is the property of WABCO and contains confidential information. It is not to be distributed, copied, reproduced, or used in any way without the written permission of WABCO. Nachdruck, Vervielfältigung und Verbreitung, auch auszugsweise, ist ohne schriftliche Genehmigung der WABCO AG. All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without prior written permission from WABCO.

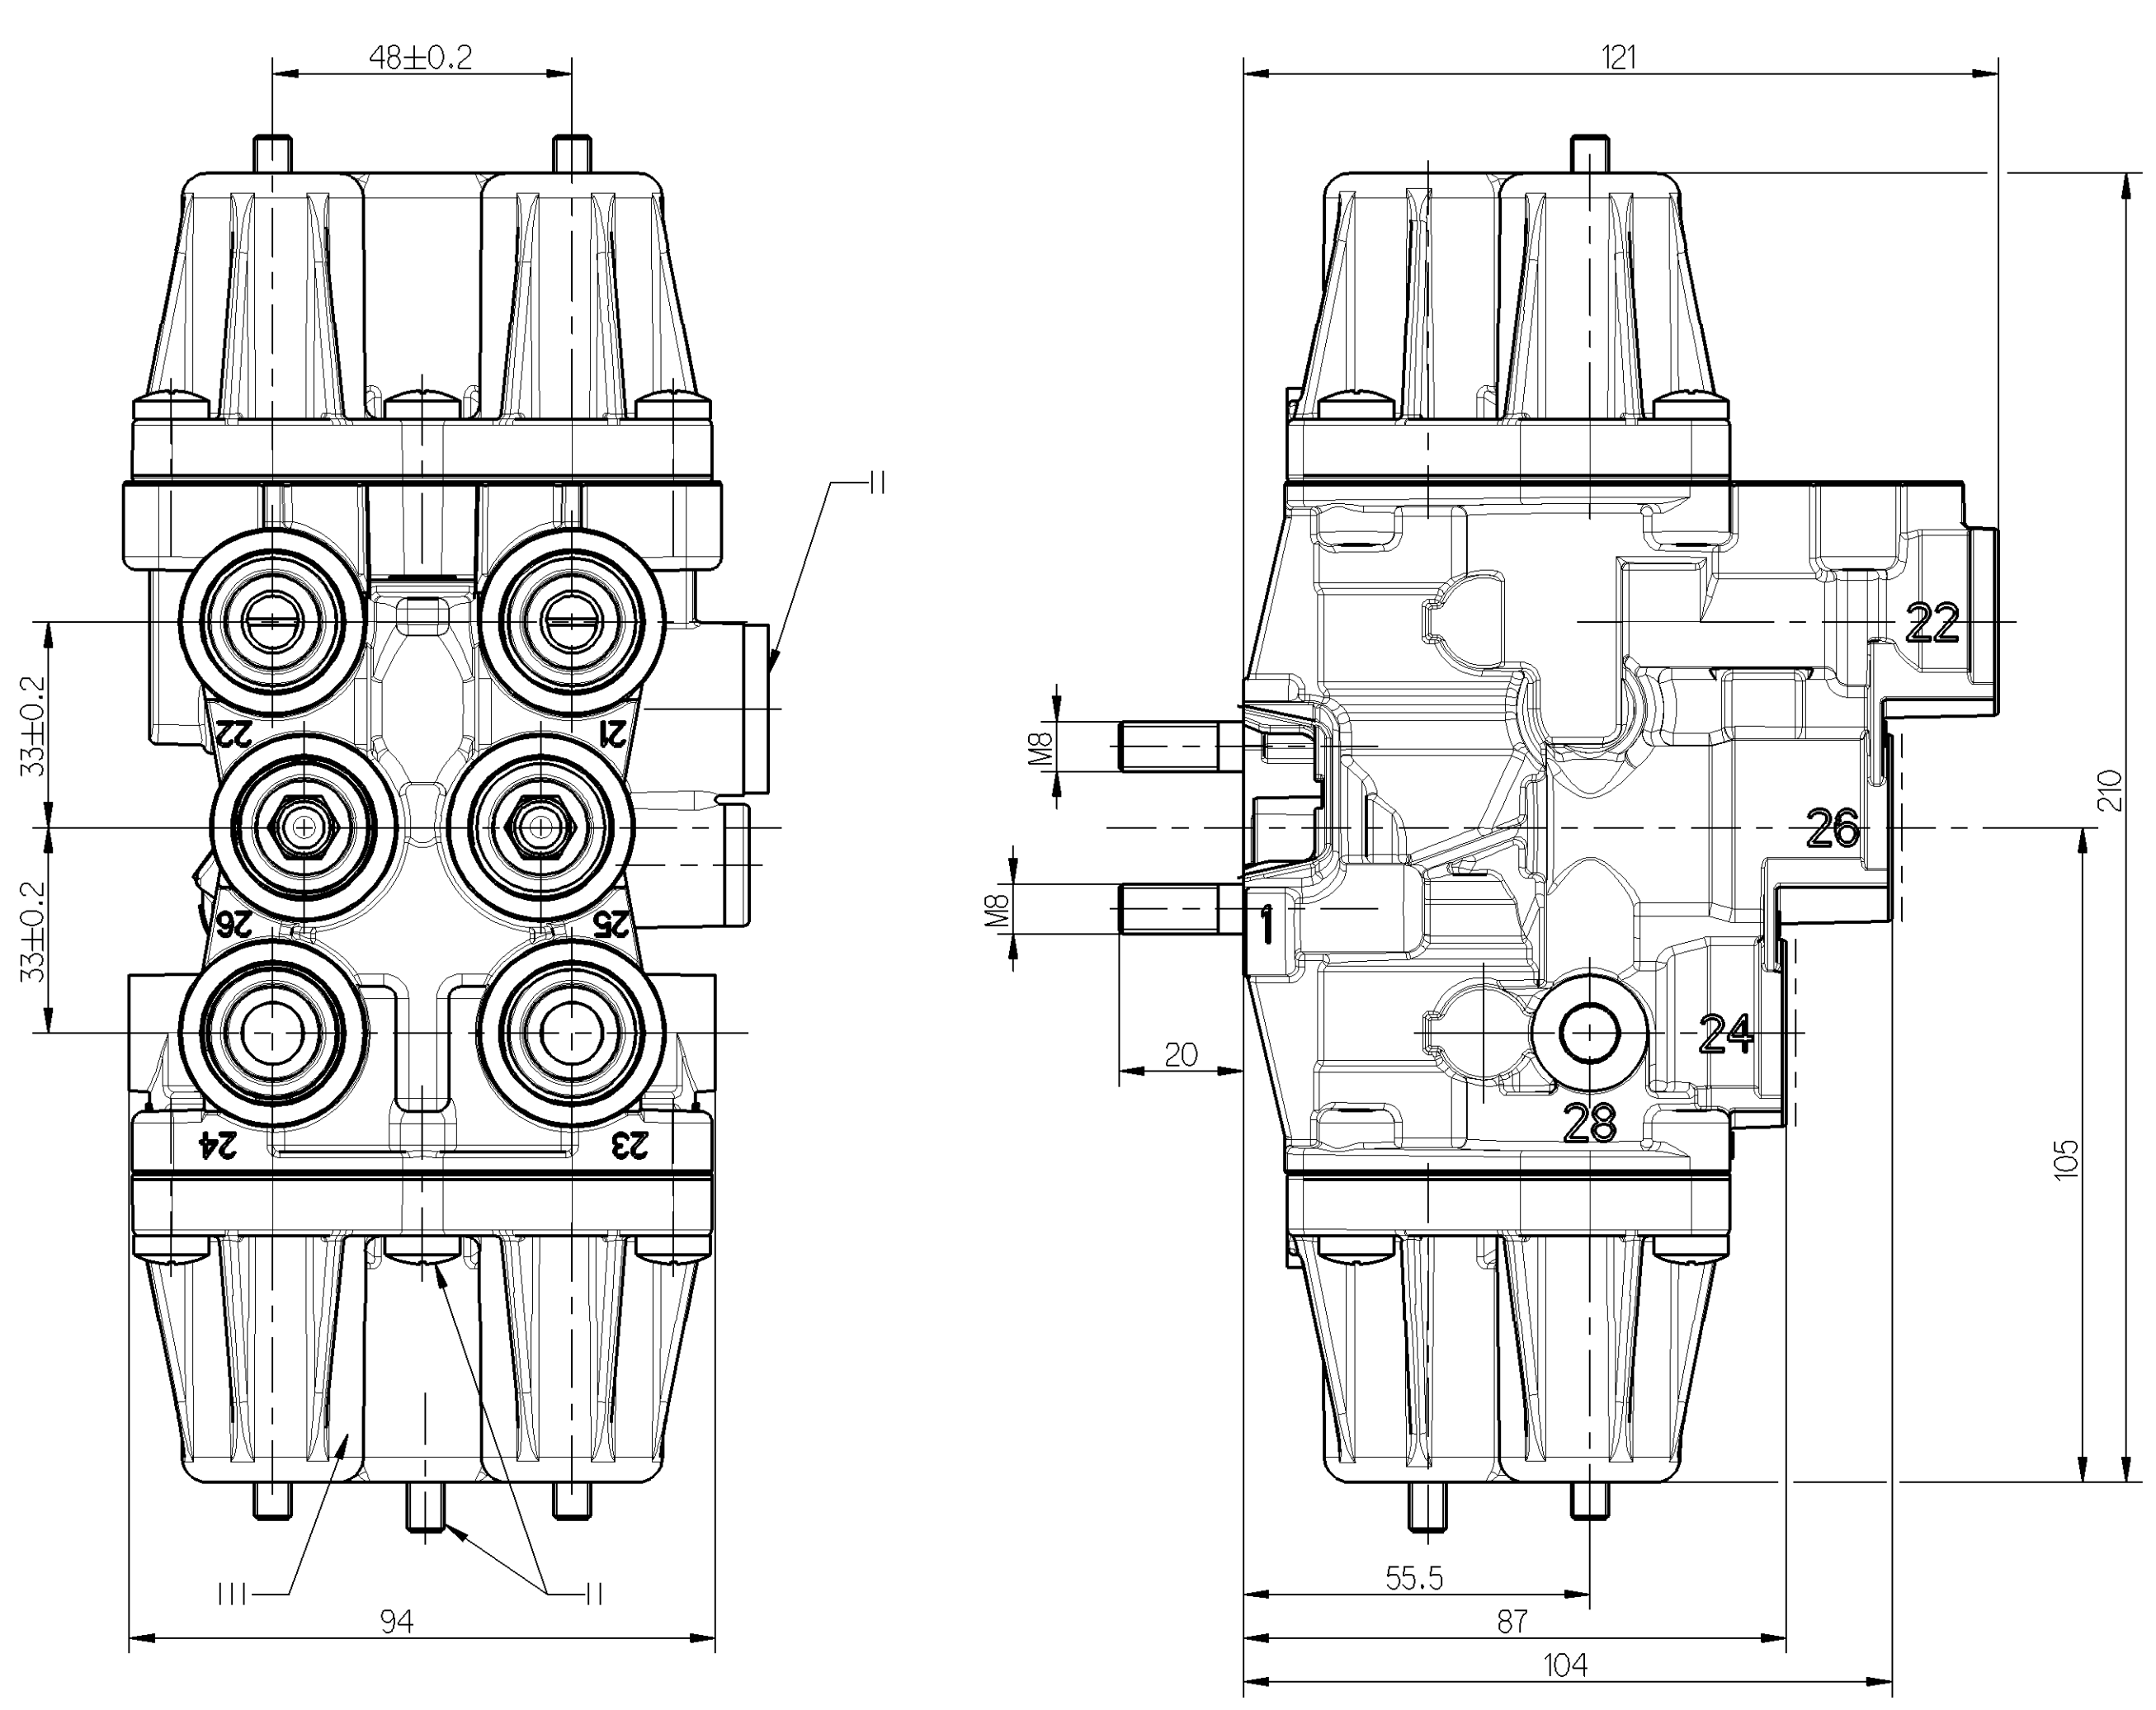

THERMAL RANGE OF CONTINUOUS APPLICATION:
THERMISCHER DAUERANWENDUNGSBEREICH:
PLAGE DE TEMPERATURE EN UTILISATION CONTINUE:
COMPO DI APPLICAZIONE CONTINUA:

MEDIUM: COMPRESSED AIR
MEDIUM: DRUCKLUFT
FLUIDE: AIR COMPRIME
FLUIDO: ARIA COMPRESSA


INSTALLATION POSITION OPTIONAL
EINBAULAGE BELIEBIG
POSITION D'INSTALLATION A VOLONTE
POSIZIONE DI MONTAGGIO A SCELTA

WORKING PRESSURE:
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:

-40°C....+80°C

p_e max.=13bar

SURFACE PROTECTION OBERFLAECHENSCHUTZ PROTECTION DE SURFACE PROTEZIONE SUPERFICIALE	I	JED-259	
	II	JED-256	
	III	JED-352	
	IV	JED-534-1	

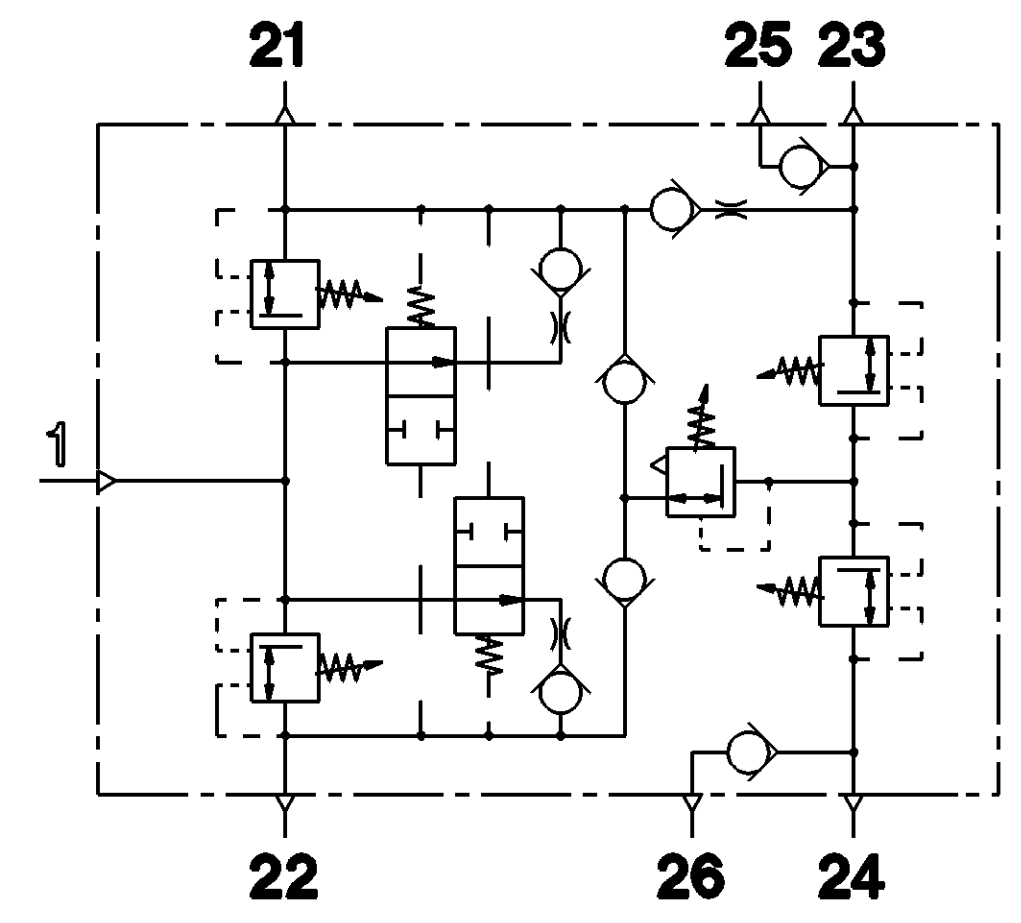

CONNECTIONS: ANSCHLUESSE: ORIFICES: ORIFIZI:	1	M22x1.5, JED-388	FROM AIR DRYER VOM LUFTTROCKNER DE DESSICATEUR D'AIR ESSICCATORE D'ARIA		
	21		CIRCUIT KREIS CIRCUIT CIRCUITO	1	
	22			2	
	23, 25			3	
	24, 26			4	
PRESSURE DRUCK PRESSION PRESSIONE			[bar]		
OPENING PRESSURE OEFFNUNGSDRUCK : dyn. PRESSION D'OUVERTURE : PRESSIONE DI APERTURA:				6.5 -0.3	6.0 -0.3
CLOSING PRESSURE SCHLIESSDRUCK : stat. PRESSION DE FERMETURE : PRESSIONE DI CHIUSURA:				≤ 5.0	≤ 5.0
PRESSURE LIMITING DRUCKBEGRENZUNG LIMITATION DE PRESSION LIMITAZIONE DI PRESSIONE				/	8.5 -0.4

General Specification: JED-334-0		Copyright WABCO ®		Date		Signature	
Further Technical Data:		Date		Drawn		Checked	
Doc. Code:		Sheet:		2007-11-26		2007-11-28	
		To		Cham		Mach	
				Expert		Expert	
				Mach		Mach	
				Mass		Scale	
				1.55		1:1	
				Size		TRI	
				A 1		510	
				Tapped Holes acc.		Function Code	
				1) Tolerance Class Applied Crossmarked		CAD System	
						Prod.Type	
						0 0 X	
						Replacement for	

WABCO

QUADRUPLE CIRCUIT PROTECTION VALVE
VIERKREIS-SCHUTZVENTIL
VALVE DE PROTECTION
VALVOLA DI PROTEZIONE

Material No.

934 705 010 0

WABCO Id. No.: 9347050100

Doc.Code Language Sheet

005 ML 1/1

Function Code

Pro/E

Prod.Type

0 0 X

Replacement for