



Non è permesso copiare o ristampare questo documento, né utilizzarlo in qualsiasi modo, senza permesso scritto dalla WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. The drawing is the property of WABCO and its use or communication to third parties without the written permission of WABCO is prohibited. Nachdruck, Vervielfältigung und Verbreitung, auch auszugsweise, ist ohne schriftliche Genehmigung der WABCO AG. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying and recording, or by any information storage or retrieval system, except as may be permitted in writing by WABCO.

LABEL MARKED WITH :
1. PRODUCTION PLANT
2. DATE OF MANUFACTURE
3. REVISION LEVEL
4. PART NUMBER

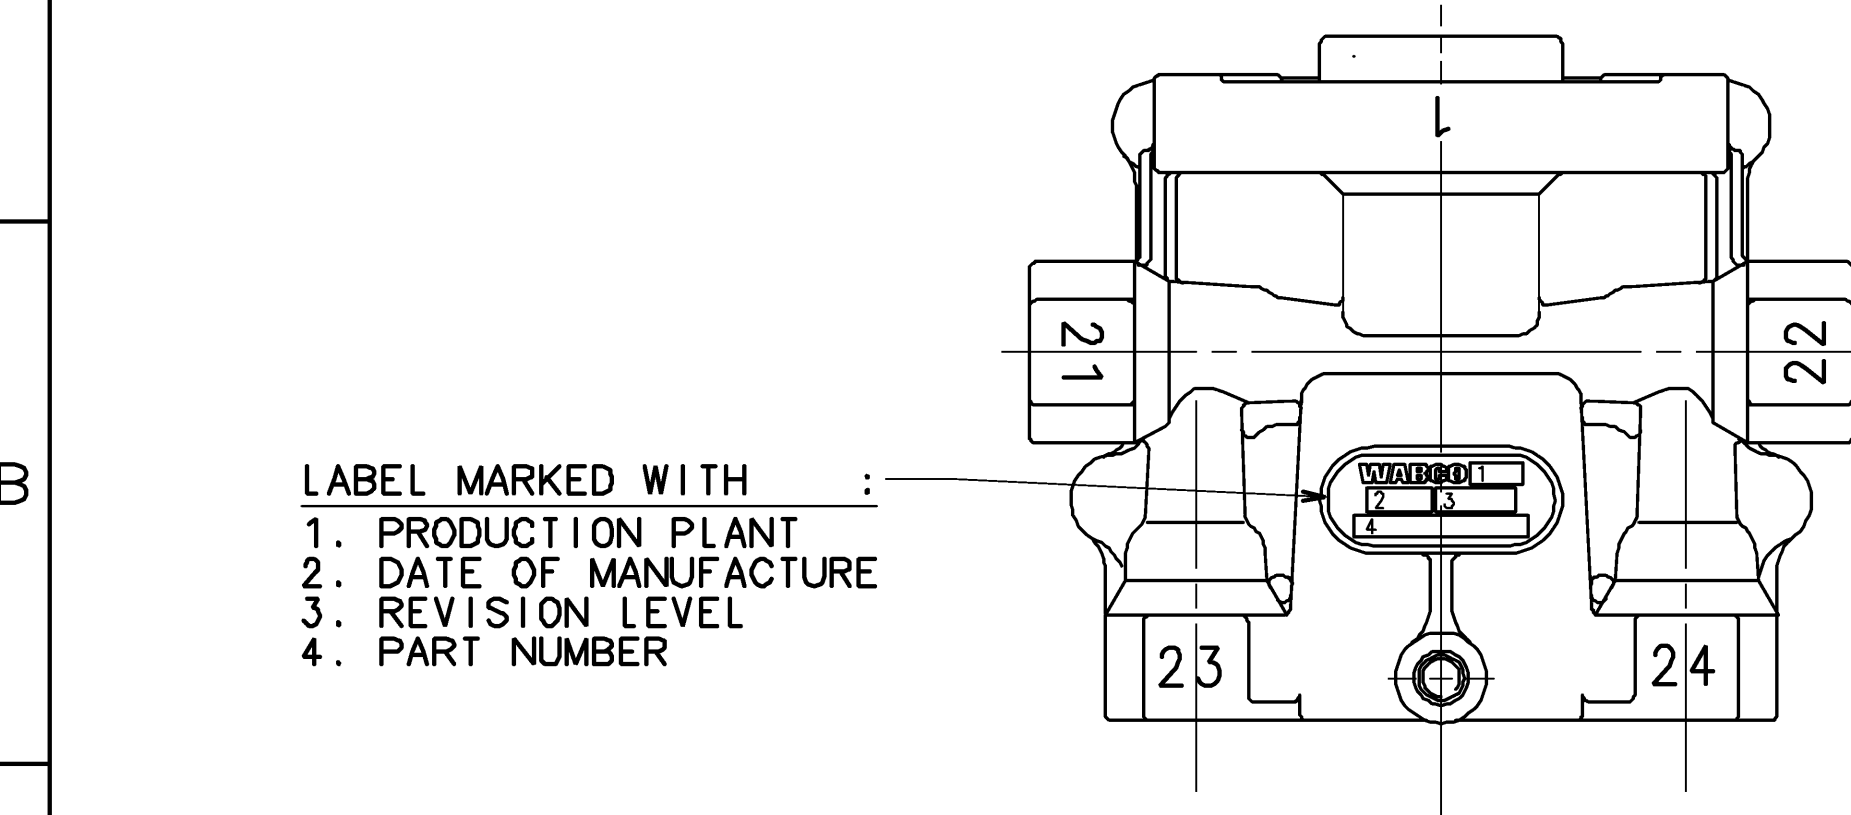

Ø 0.8 ± 0.5 mm
MAX FLOW=35 l/min
AT p=8 bar

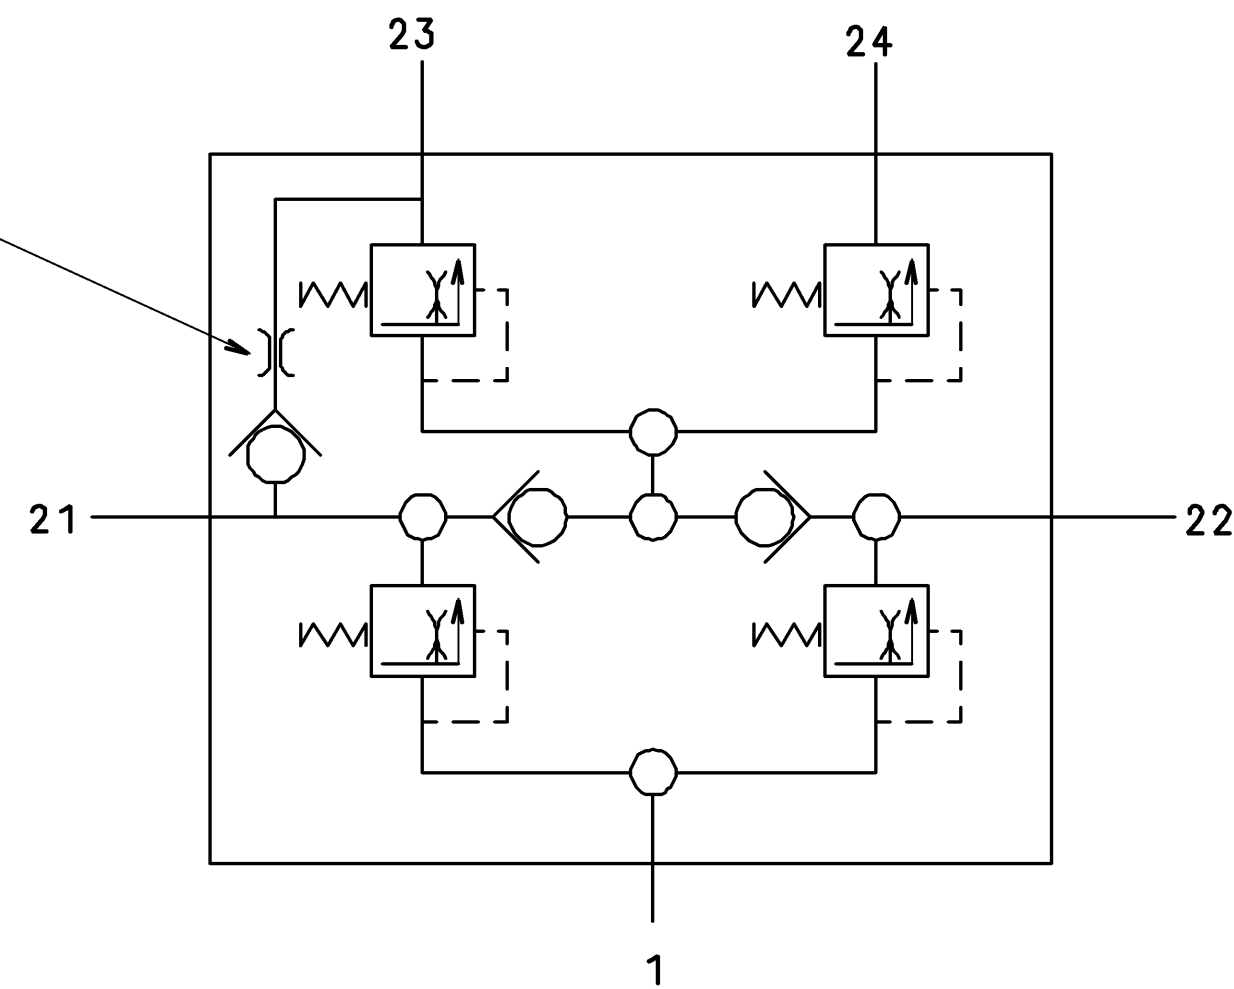

ADMISSIBLE TEMPERATURES.
THERMISCHER ANWENDUNGSBEREICH.
TEMPERATURE DE SERVICE -40°C TO +90°C
TEMPERATURA D'ESERCIZIO.

SERVICE PRESSURE.
BETRIEBSDRUCK. MAX 13 bar.
PRESSION DE SERVICE.
PRESSIONE D'ESERCIZIO.

MEDIUM AIR
MEDIUM LUFT.
MILIEU AIR.
FLUIDO ARIA.

CONNECTIONS
ANSCHLUESSE
ORIFICES
ORIFIZI


1- LUFTEINTRITT
ALIMENTATION
ALIMENTAZIONE

21- CIRCUIT 1
KREIS 1
CIRCUIT 1
CIRCUITO 1

22- CIRCUIT 2
KREIS 2
CIRCUIT 2
CIRCUITO 2

23- CIRCUIT 3
KREIS 3
CIRCUIT 3
CIRCUITO 3

24- CIRCUIT 4
KREIS 4
CIRCUIT 4
CIRCUITO 4

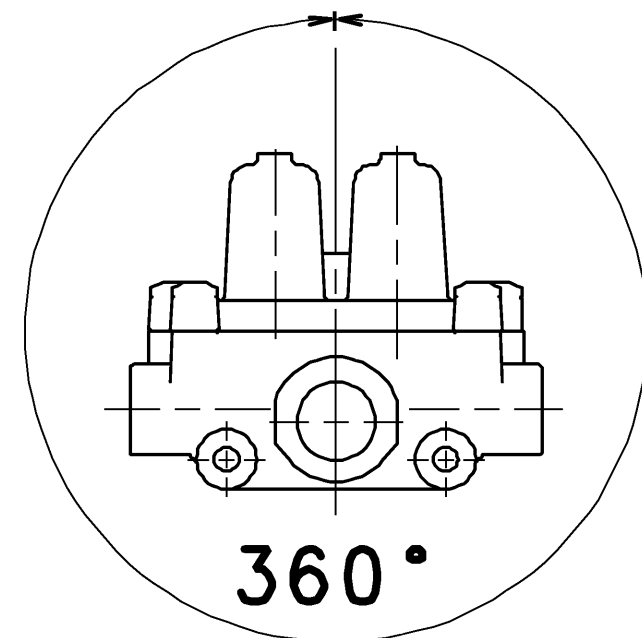


VALVE MAY BE MOUNTED AT ANY ANGLE,
BUT TOWERS POINTING UP PREFERRED

PORTS ORIFICES	ANSHLUESSE ATTACCHI	21	22	23	24
OPENING PRESSURE DYNAMIC OEFFNUNGSDRUCK DYNAMISCH PRESSION DE OUVERTURE DYNAM PRESSIONE DI APERTURA DINAM	P1 BAR	7 ± 0.3	7.5 ± 0.3	7 ± 0.3	
CLOSING PRESSURE DYNAMIC SCHLIESSDRUCK DYNAMISCH PRESSION DE FERMETURE DYNAM PRESSIONE DI CHIUSURA DINAM	BAR	≥ 5			
CLOSING PRESSURE STATIC AT FAILURE OF CIRCUIT SCHLIESSDRUCK STATISCH BEI AUSFALL VON KREIS PRESSION DE FERMETURE STATIQUE EN CAS DE DEFAILLANCE DU CIRCUIT PRESSIONE DI CHIUSURA STATICA IN CASO DI DIFETTO DEL CIRCUITO	BAR	0	≥ 4.5	≥ 6.7 *	
		≥ 4.5	0	≥ 6.7 *	
		≥ 4.5	0	≥ 4.5	
		≥ 4.5	≥ 4.5	0	

* THE PRESSURE IN CIRCUIT 2.3 & 2.4
CAN BLEED DOWN TO THAT IN
CIRCUIT 2.1.

CORROSION PROTECTION:-
ALUMINIUM PARTS CHROMATED
TO JED-259
SCREWS MECHANICALLY ZINC PLATED
AND PASSIVATED
(JED-256-4)

M8x1.25 THRO' (13 DEEP) (x2)
TORQUE 25-30 Nm

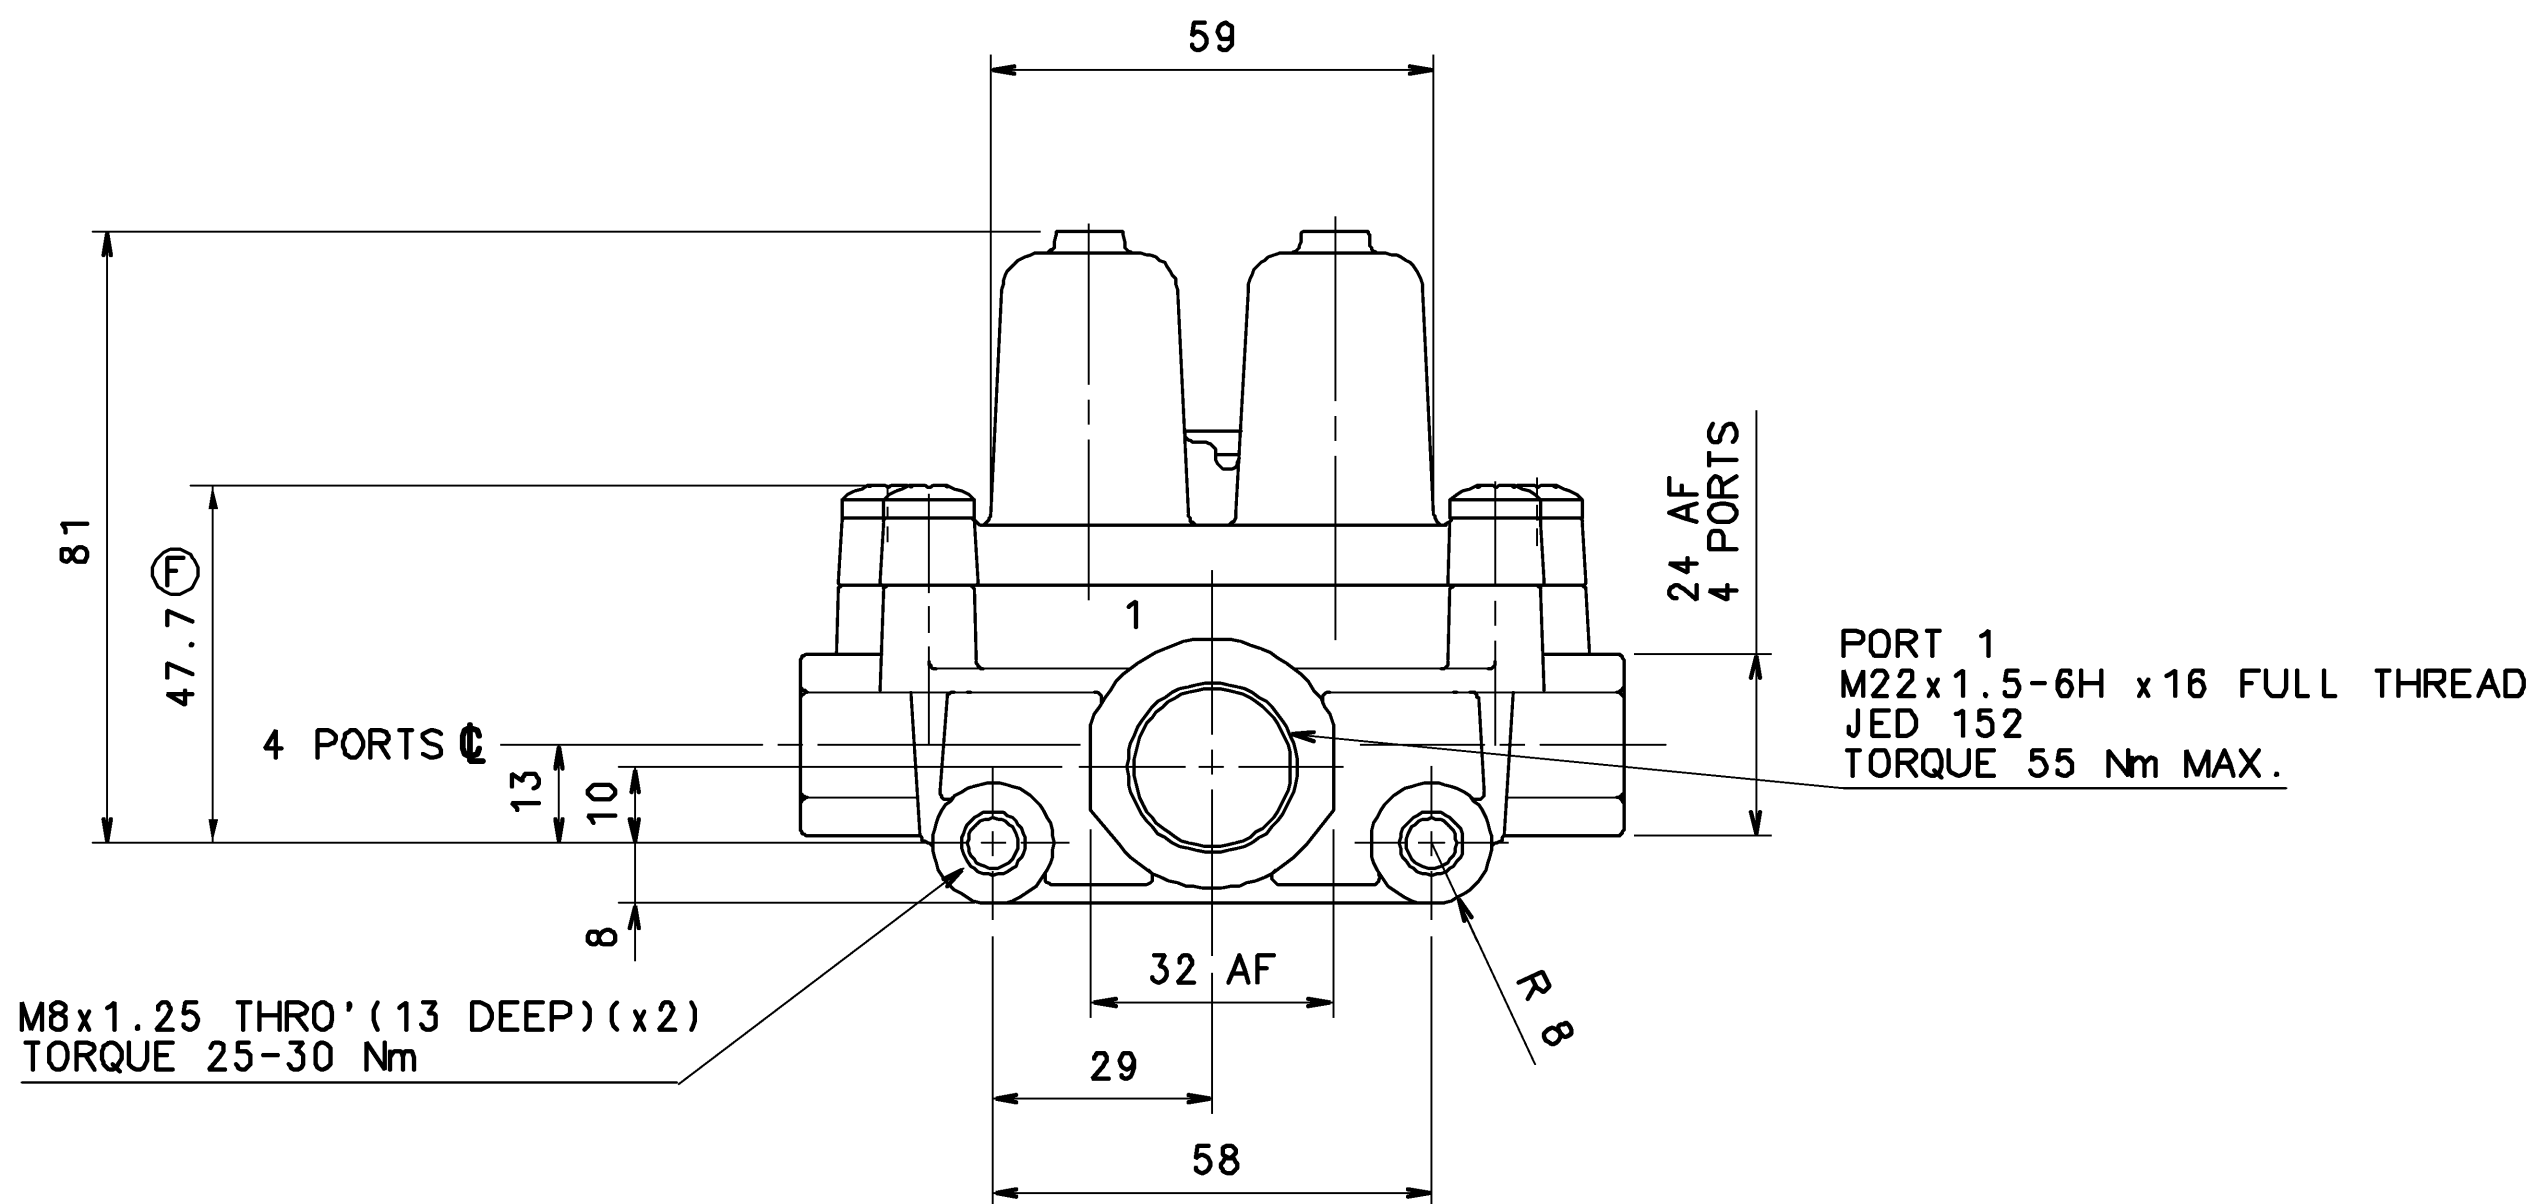


M16x1.5-6H x13 FULL THREAD
JED 152
TORQUE 35 Nm MAX.

4 ADJUSTERS SECURED AGAINST TAMPERING,
WITH LOCTITE AFTER TEST.

DRAWING PRODUCED ON CADAM
MANUAL CHANGES PROHIBITED

DIMENSIONS IN MILLIMETRES

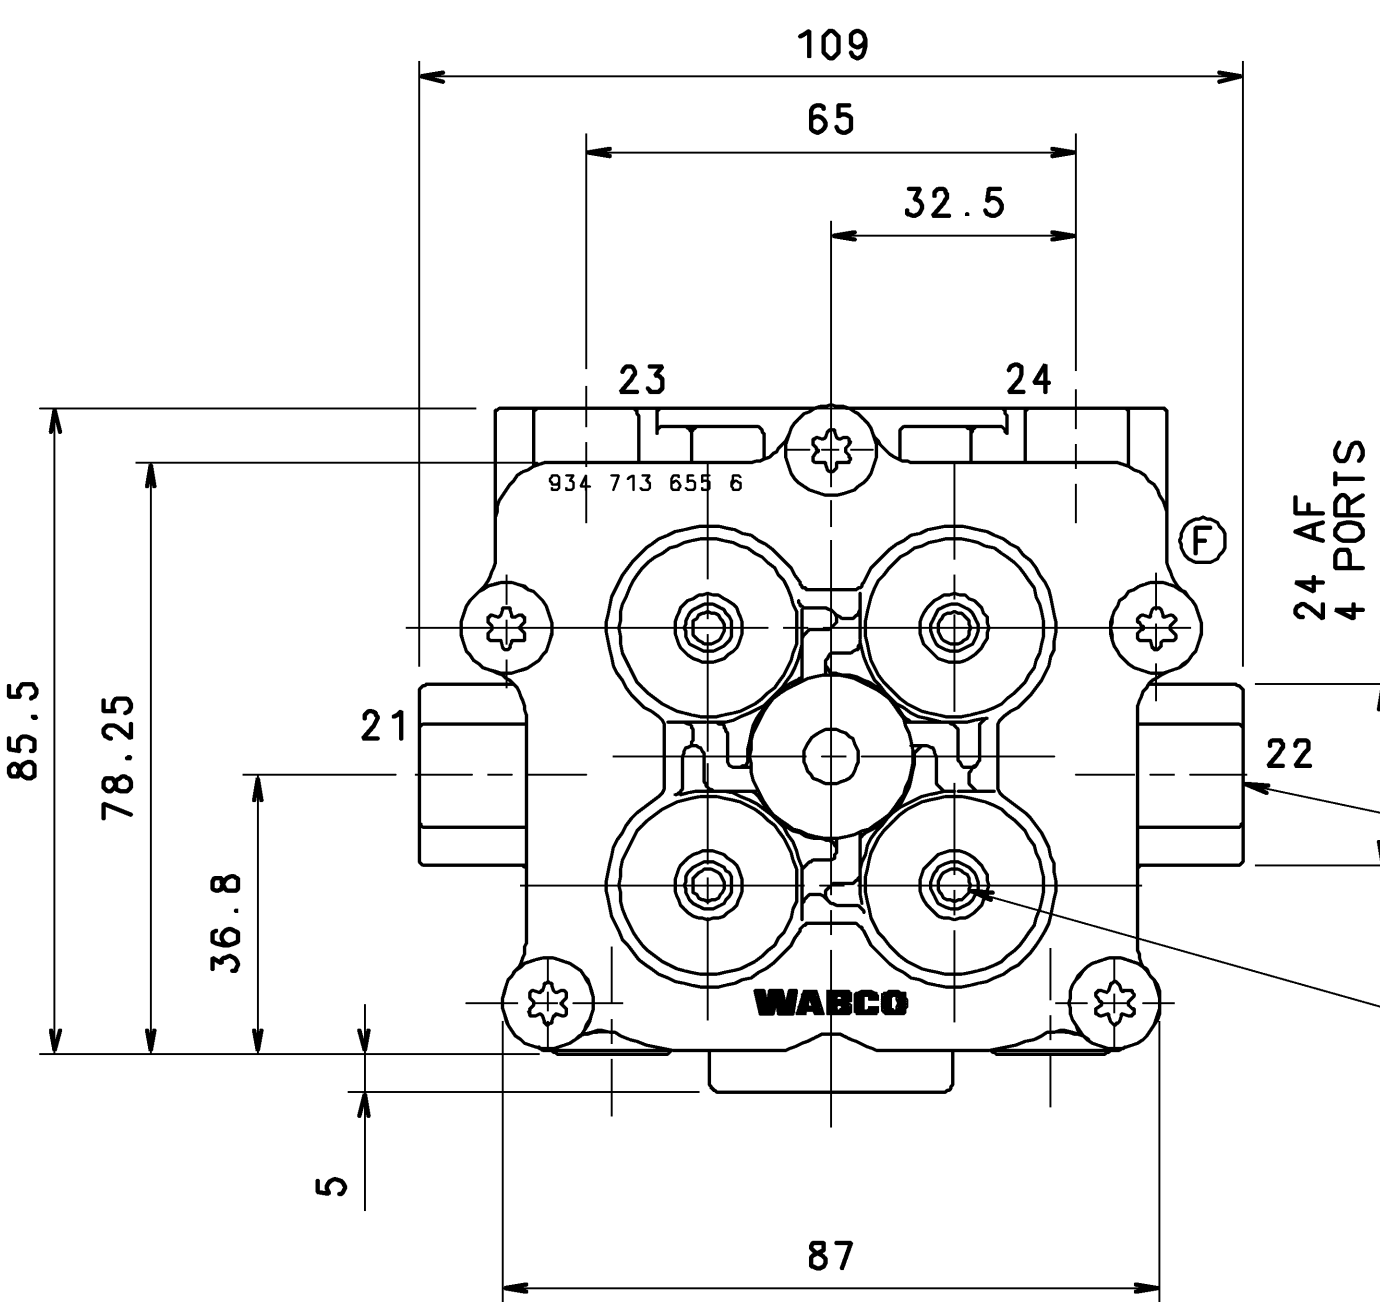

General Specification: JED-334-0		Copyright WABCO		WABCO	
Further Technical Data:		Date	Drawn	Signature	
Doc. Code:		20.04.2009	CHAMOT	Checked	
Sheet: 1		20.04.2009		MACH	
General Tolerances JED-251		Range of Nominal Dimensions (± mm)		MACH	
Class	1)	< 50	> 50 < 180	> 180 < 400	> 400
Fine		0.5	1.0	1.5	2.0
Medium	X	1.0	2.0	3.0	4.0
Coarse		2.0	3.5	5.0	6.5
Tapped Holes acc.		A 1		CCD	
1) Tolerance Class Applied Crossmarked		121685		3F	
		510		Techs. Resp.	
		934 714 125 0		005 ML 1/1	
		Date of first issue: 07.12.95		Replacement for	