
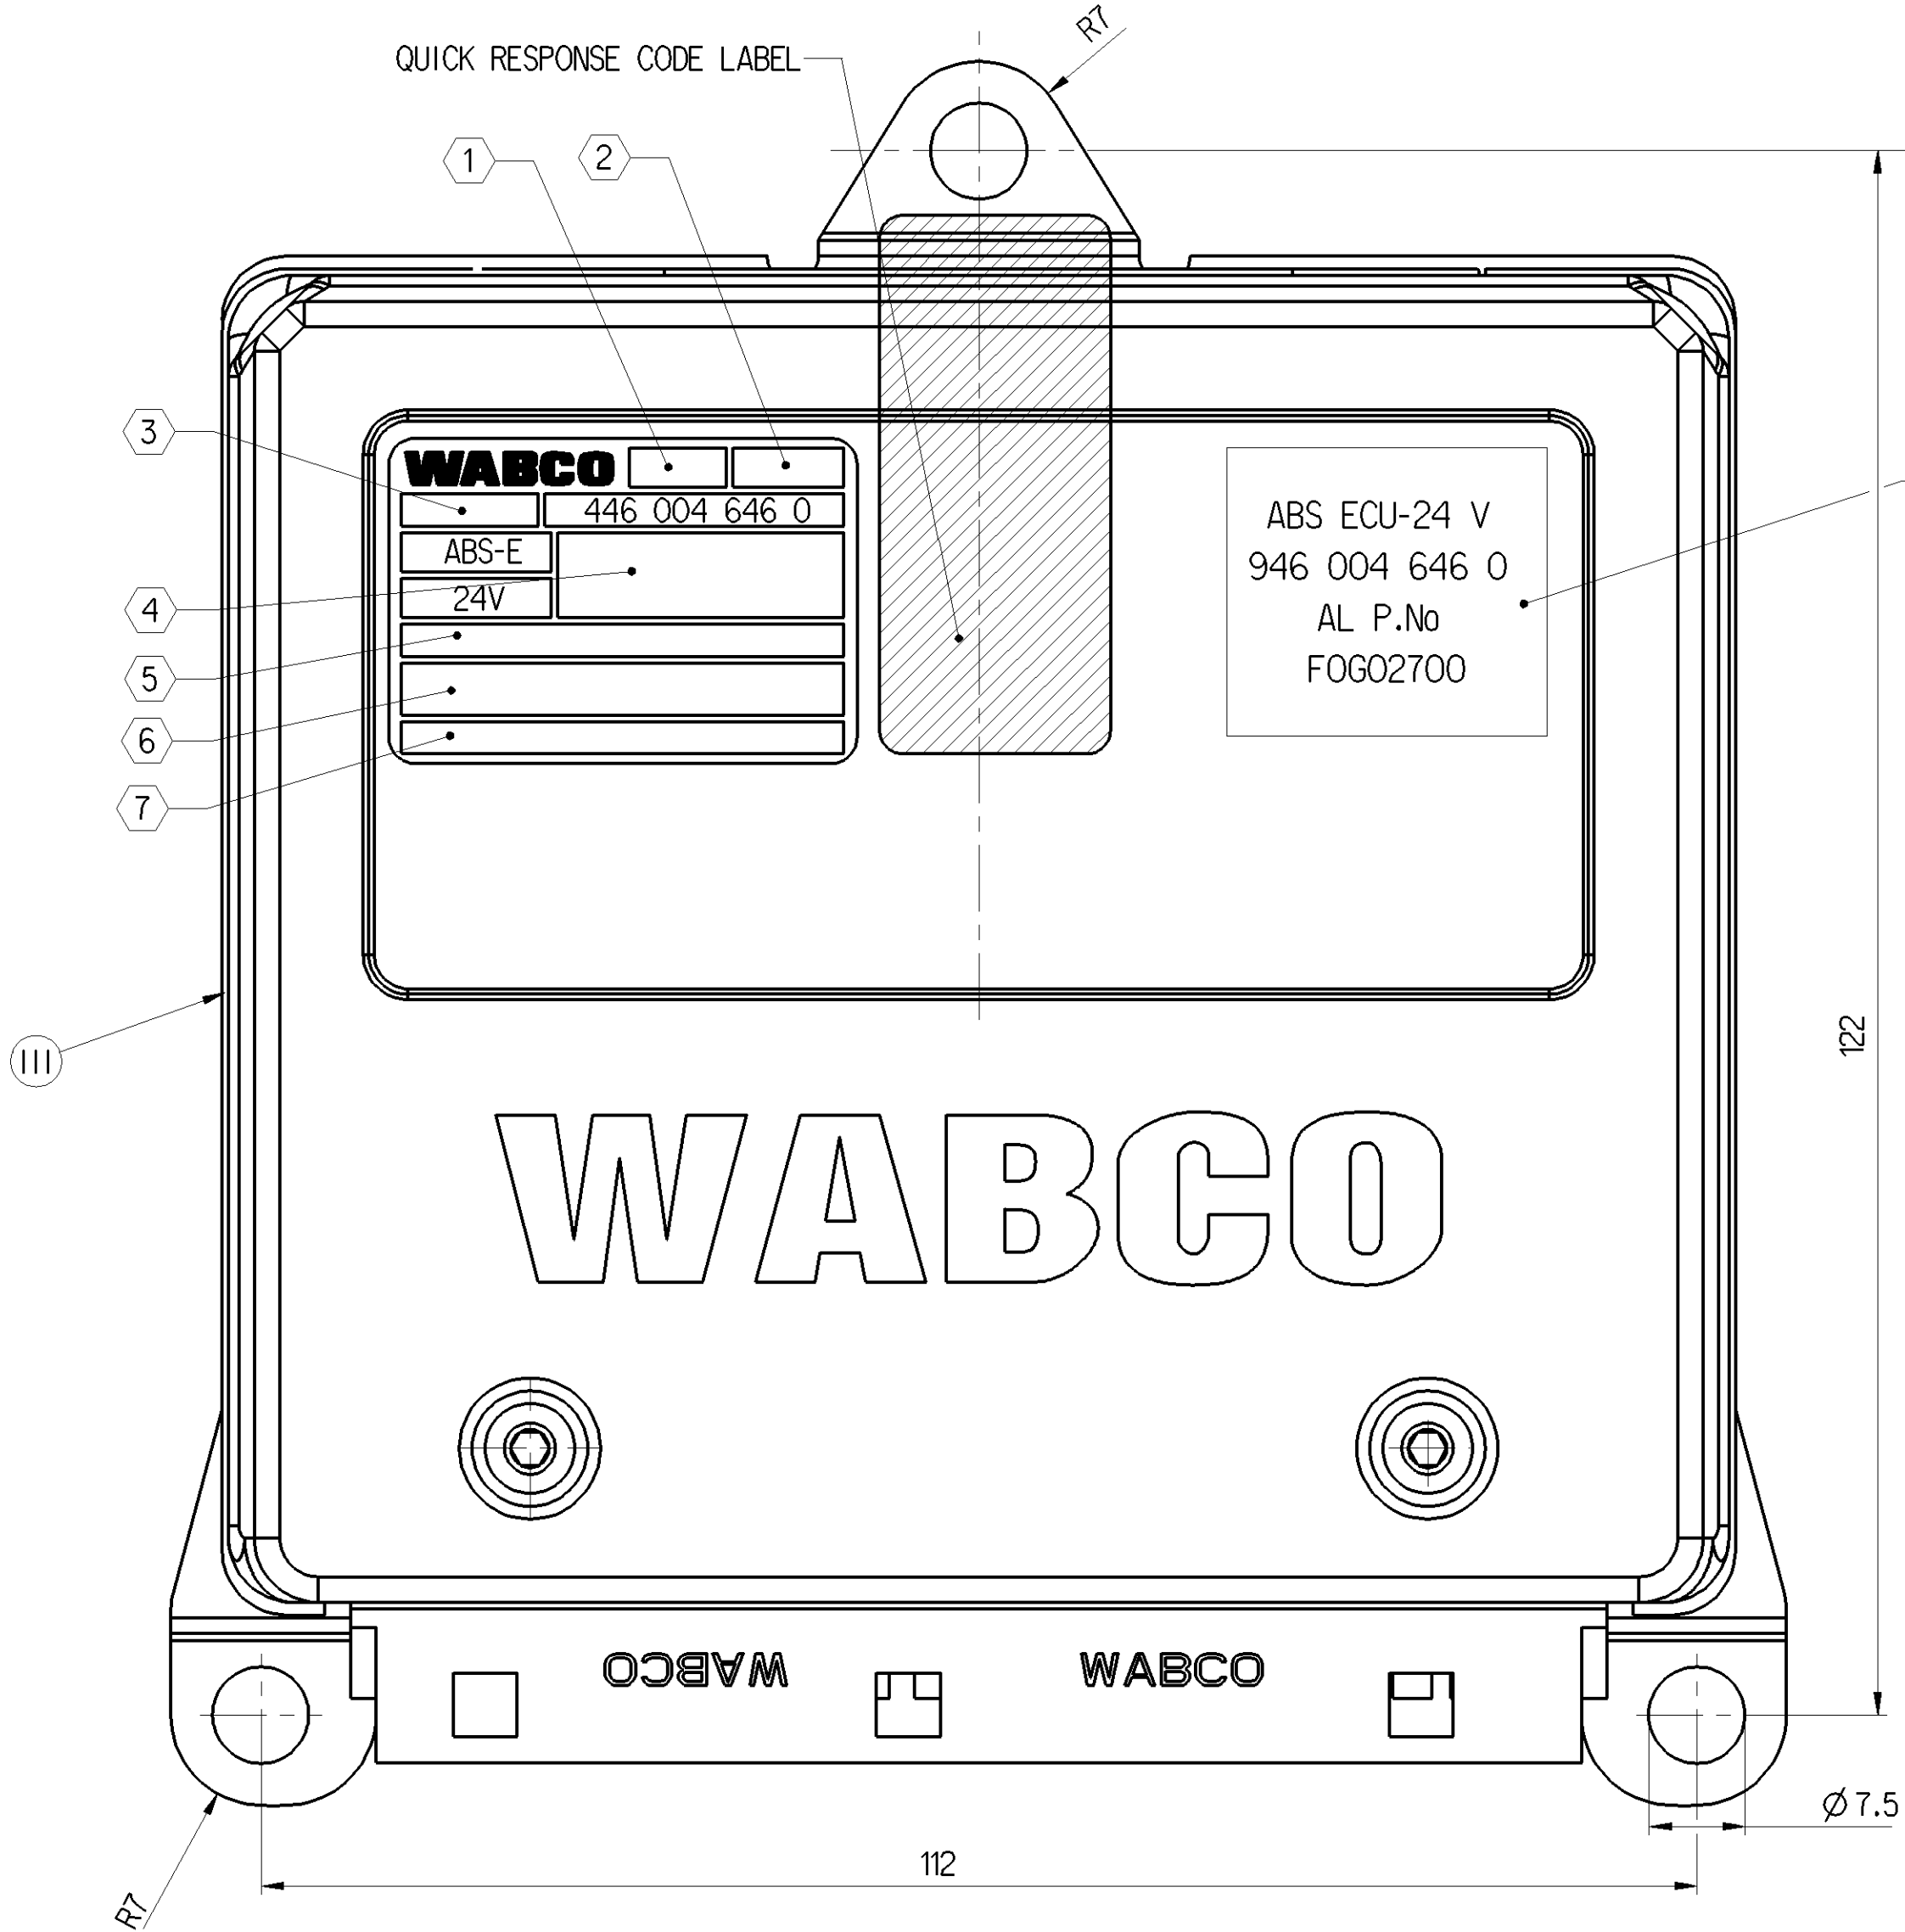
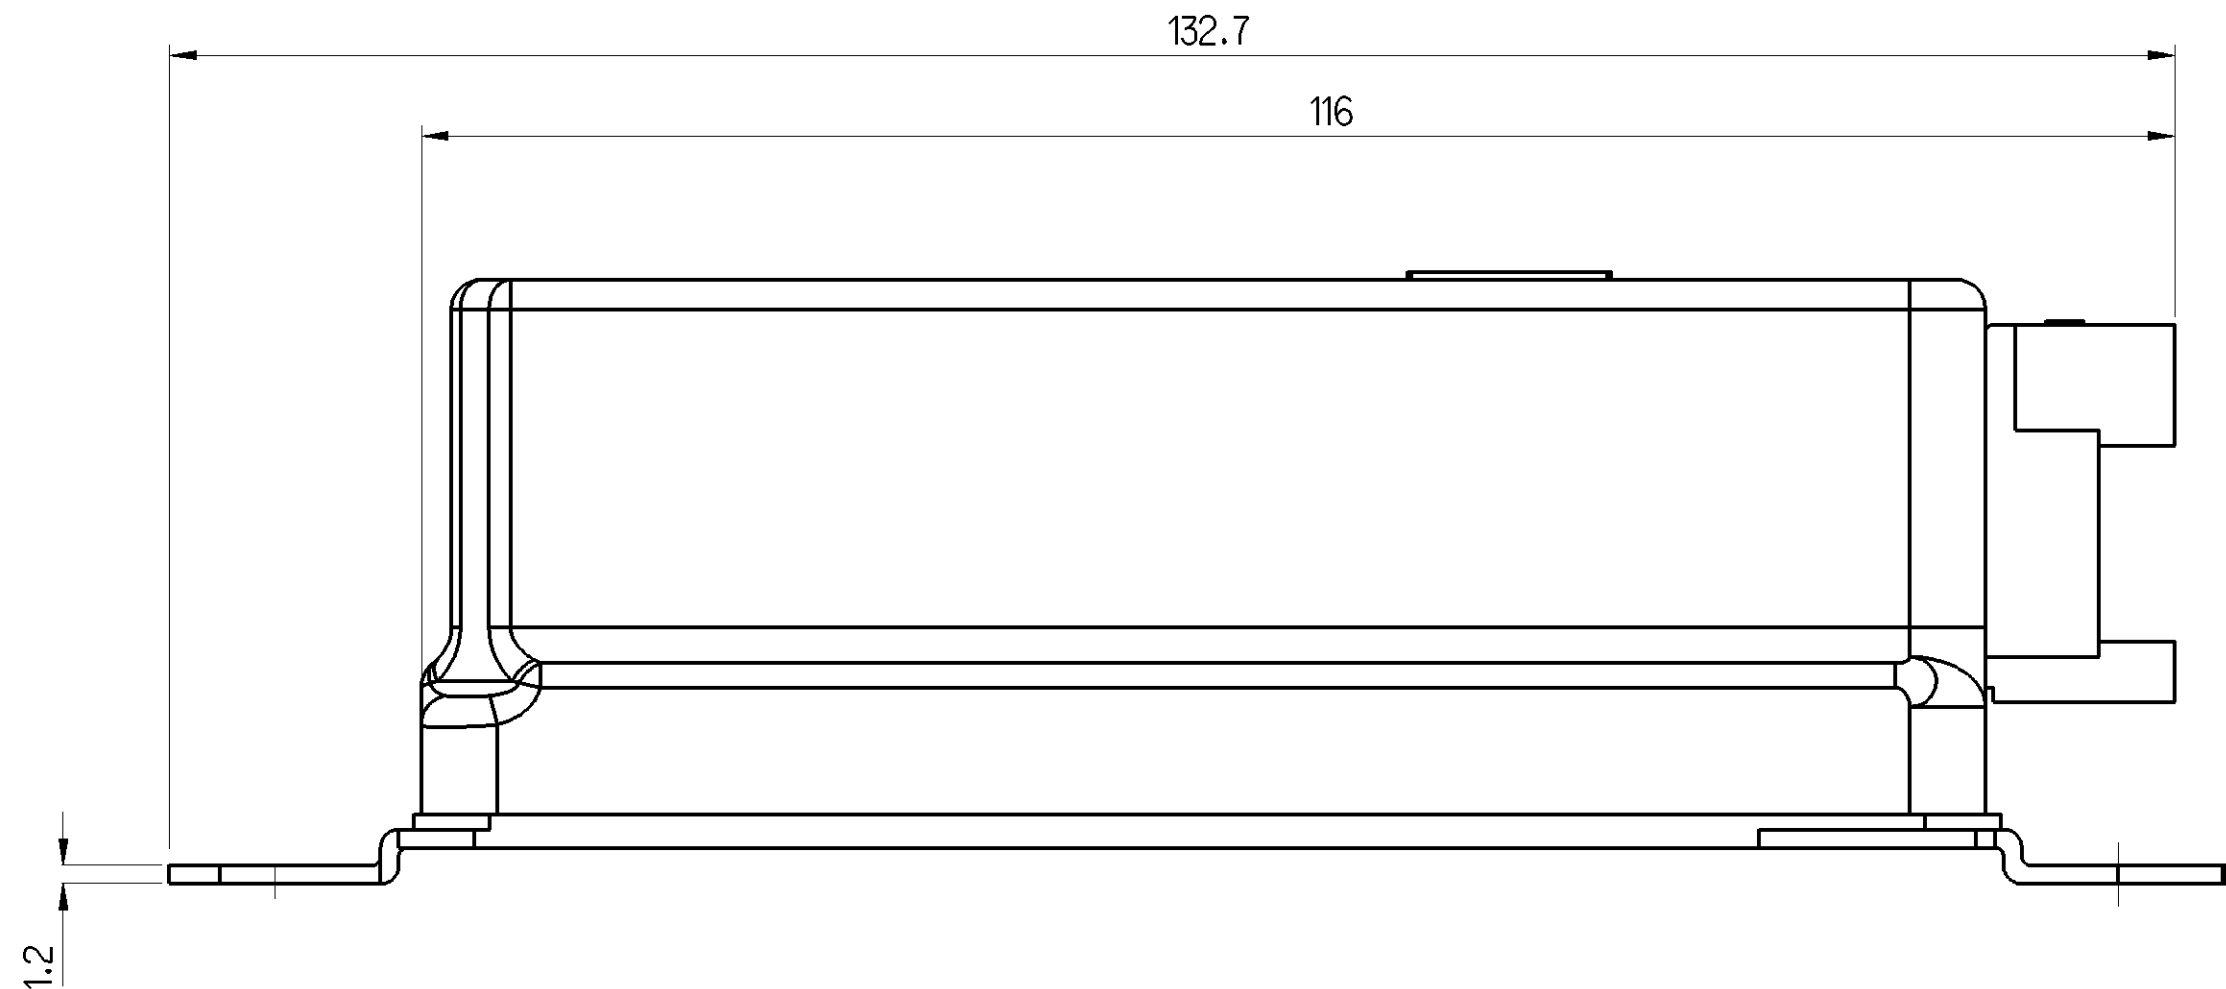


Non e' permesso copiare, a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. Tutti i diritti sono riservati. WABCO e' un marchio registrato di WABCO. Tutti i diritti sono riservati. WABCO e' un marchio registrato di WABCO. Tutti i diritti sono riservati.


Tous droits de reproduction ou de communication de son contenu sont interdits, sauf autorisation écrite de la WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite.

PART CODE	MATERIAL	SURFACE PROTECTION
XVII	STEEL	NO TREATMENT
XVI	CAST IRON	PLATED
XV	STEEL	ZINC-IRON PLATED
XIV	CAST IRON	NO TREATMENT
XIII	ZINC ALLOY	ANODISED
XII	PLASTIC	NO TREATMENT
XI	RUBBER	NO TREATMENT
X	STAINLESS STEEL	NO TREATMENT
IX	BRASS	NO TREATMENT
VIII	ZINC ALLOY	CHROMATED
VII	ALUMINIUM ALLOY	ANODISED
VI	ALUMINIUM ALLOY	CHROMATED
V	CAST IRON	PAINTED
IV	STEEL	POWDER COATED
III	STEEL	PAINTED
II	STEEL	PHOSPHATED
I	STEEL	ZINC PLATED

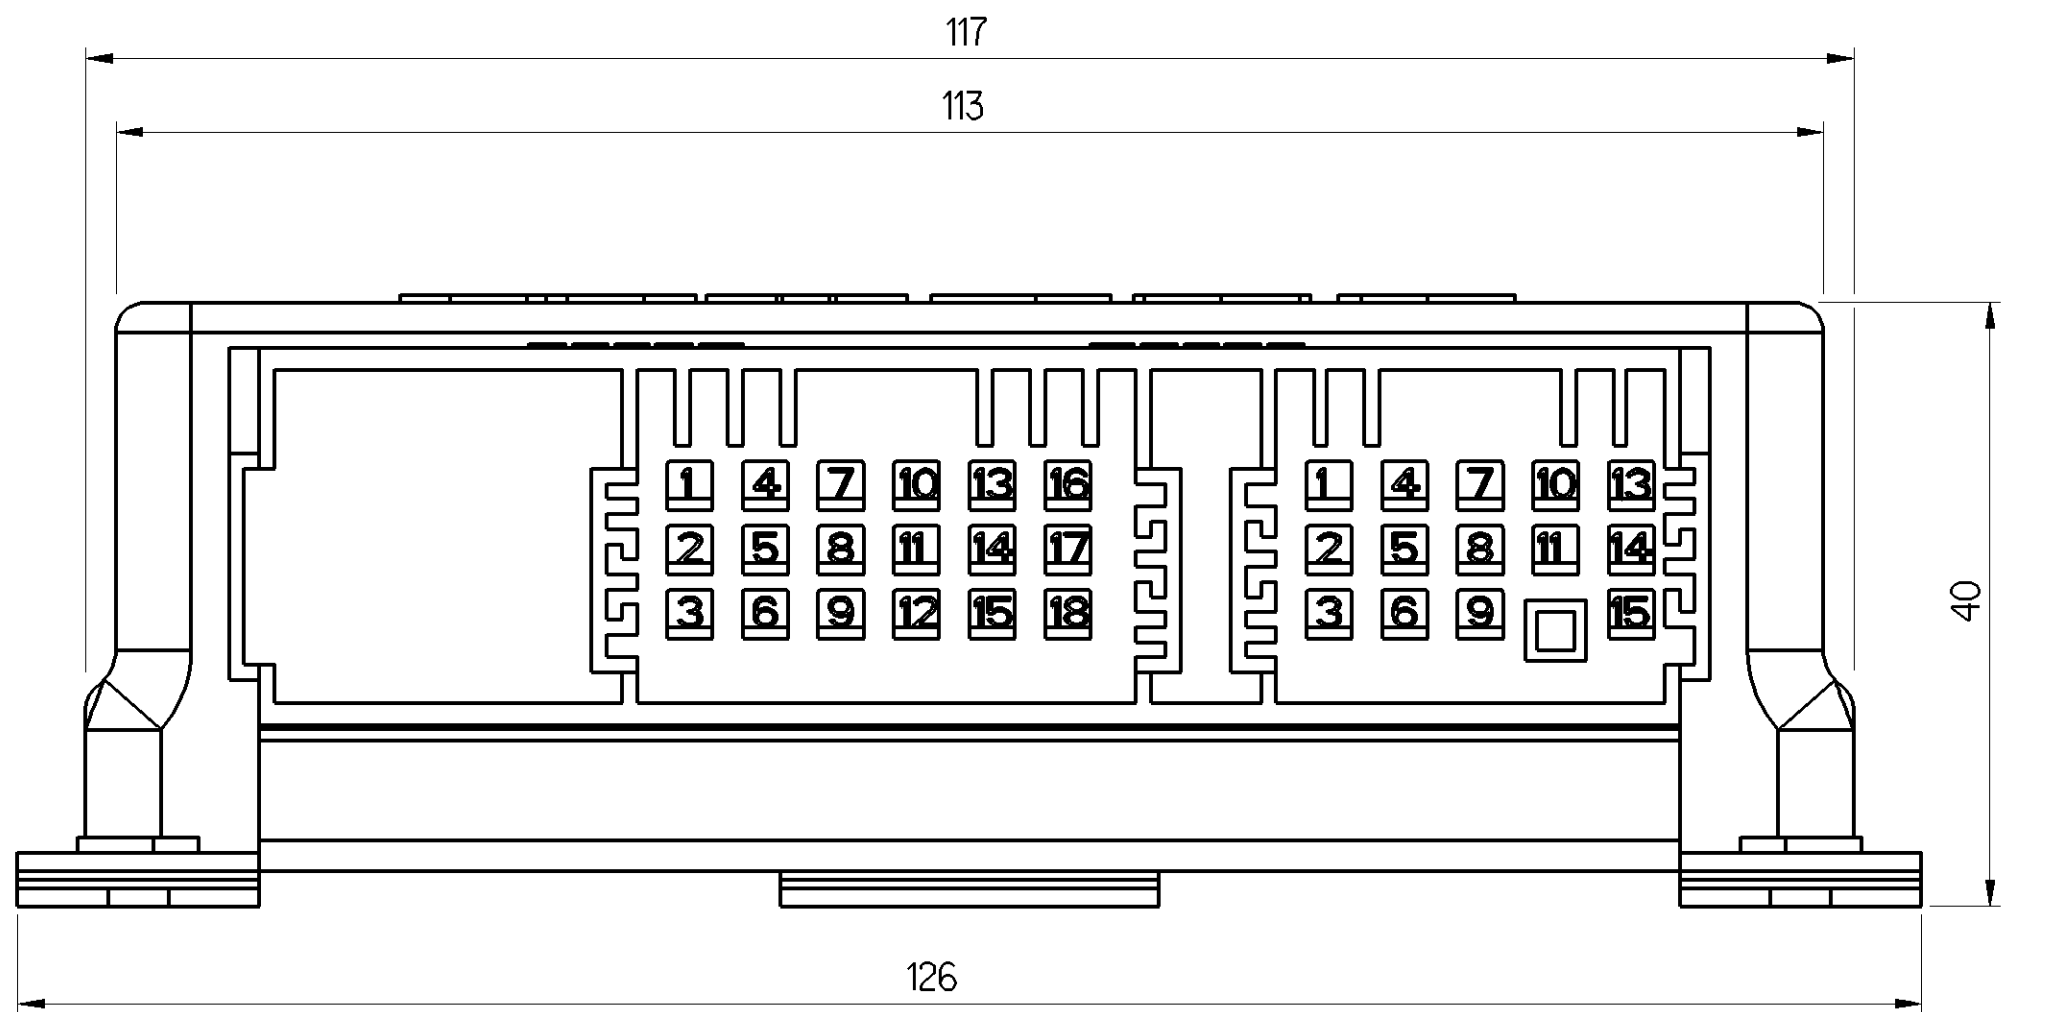

CUSTOMER PART No. LABEL
BLUE BACKGROUND
SHOWN HERE

- 1 PRODUCTION RESPONSIBILITY INDICATION
- 2 DATE OF MANUFACTURE
- 3 SERIAL NUMBER
- 4 EMC HOMOLOGATION MARK : CE 10 R - 031803
- 5 NOT USED
- 6 BARCODE Acc. TO ISO/IEC163920 INTERLEAVE 2 OF 5, WITHOUT CHECK DIGIT BARCODE
- 7 COUNTRY OF ORIGIN

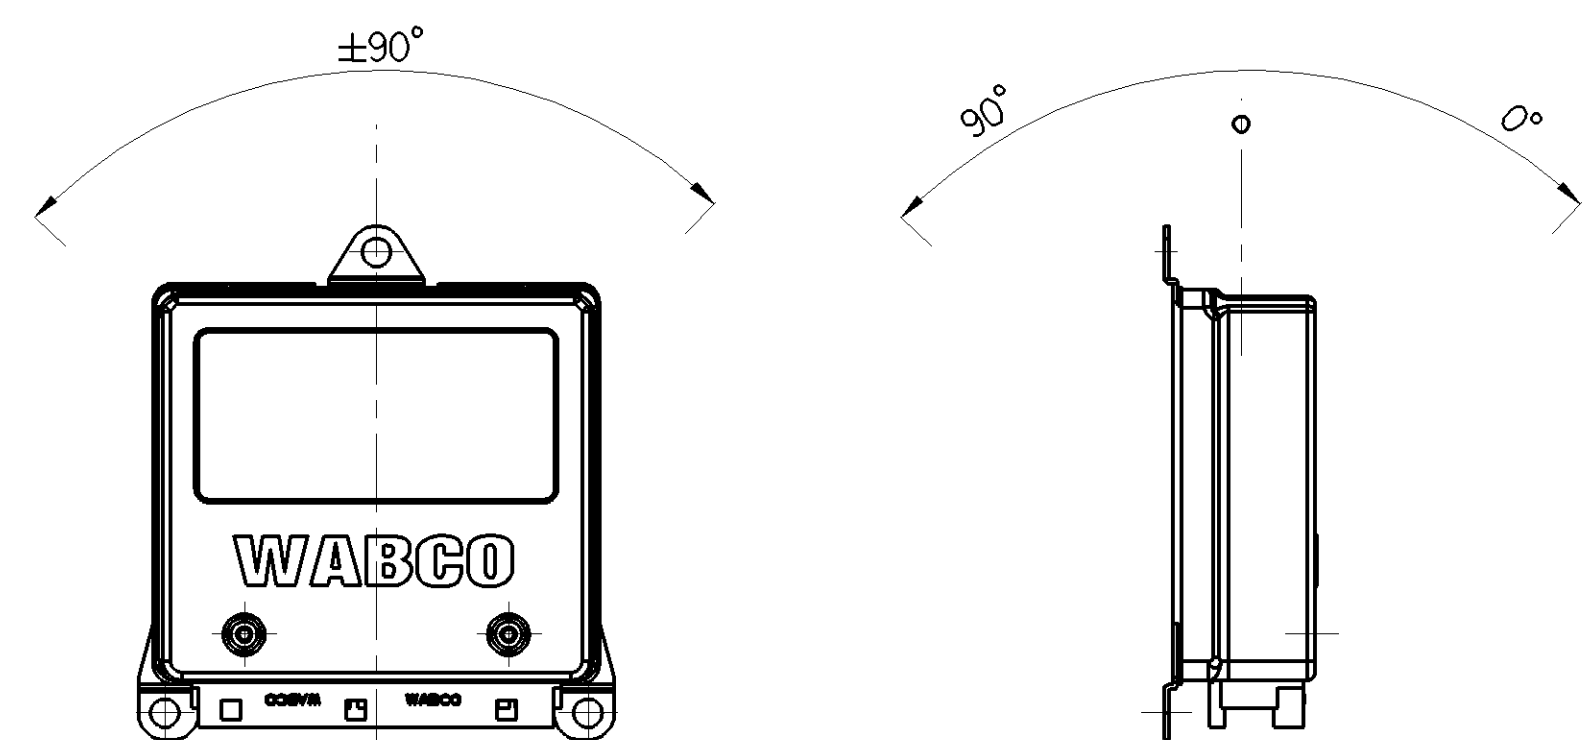

INSTALLATION POSITION

ECU Part No: 446 004 646 0
MODE OF PROTECTION : IP 40 (IEC 529)
THERMAL RANGE OF APPLICATION : -40°C...+75°C
STORING TEMPERATURE : -40°C...+90°C
MALE MULTIPPOINT CONNECTOR : SURFACE PROTECTION : TINNED
FOR TECHNICAL SPECIFICATION REFER WABCO SPECIFICATION 446 004 646 0
ECU TO BE MOUNTED USING M6 SCREW WITH TIGHTENING TORQUE OF 10 $\pm$ 1 Nm
THE ECU IS DESIGNED FOR CAB MOUNTING (DRY ENVIRONMENTAL CONDITION)
THERE IS NO PROTECTION AGAINST WATER OR WATER SPRAY

THE ELECTRONIC HOUSING MUST BE SECURED IN SUCH A WAY, THAT THE PERMISSIBLE ACCELERATION OF 5g IS NOT EXCEEDED. IT IS RECOMMENDED TO MOUNT THE ECU IN VERTICAL POSITION AS SHOWN ABOVE.

THE INSTALLATION HAS TO AVOID PROXIMITY OF HEATING DEVICES SO HOT AIR IS DIVERTED AWAY FROM THE ECU.

General Specification: JED-334-1, Size ISO 14405 LP						Copyright WABCO®		WABCO				
Further Technical Data:						Date		Signature				
Doc. Code:		Sheet:		To		Drawn		2015-08-26 RAJASEKARAN				
General Tolerances JED-261						Checked		ELECTRONIC CONTROL UNIT ABS BASIC E4.5 24V				
Range of Nominal Dimensions (± mm)						2015-09-14		Prabhakaran				
						Expert						
						ANDRE BORK						
Class 1)	≤ 50	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Material No.		Date of first issue: 2015-09-14				
	Fine	0.5	1.0	1.5	2.0	Mass 0.5 kg Size CAD System	NTS 946 004 646 0	Doc.Code 005	Language EN			
	Medium	1.0	2.0	3.0	4.0					Revision -	Tech. Resp. 6300.SS	Sheet 1/1
	Coarse	2.0	3.5	5.0	6.5							
Tapped Holes acc.						-						
1) Tolerance Class Applied Crossmarked						A 1 CREO		