





Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. E' vietato l'uso di tutti i diritti, brevetti, marchi o modelli.

Toutre Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout montage ou autre réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. E' vietato l'uso di tutti i diritti, brevetti, marchi o modelli.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express written permission of WABCO. The information contained herein is confidential and its disclosure to others without the written permission of WABCO is prohibited. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfältigung dieser Unterlagen, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugelassen. Zuwiderhandlungen stellen einen strafrechtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte hier den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.


PART CODE	SURFACE PROTECTION
I	JED-256-5
II	JED-256-0
III	JED-240-5
IV	NO SURFACE PROTECTION

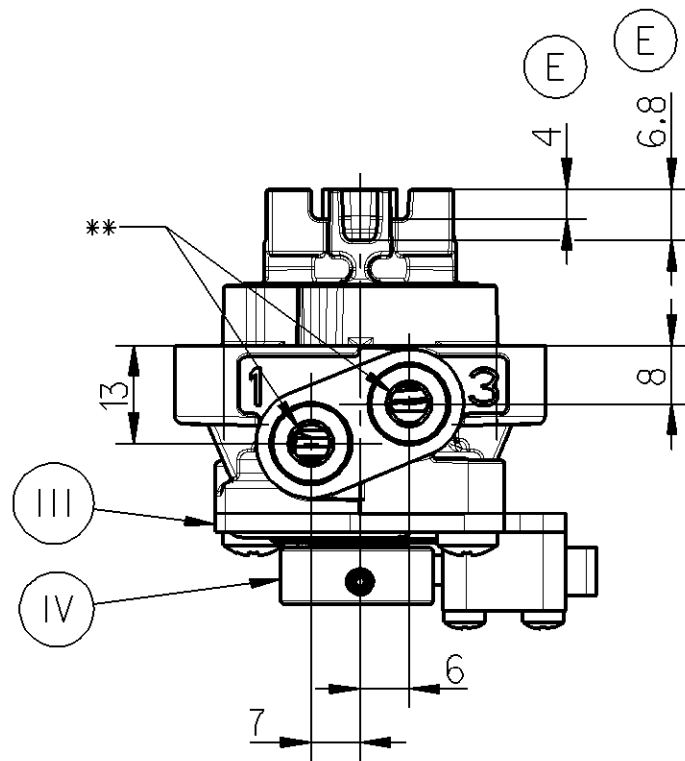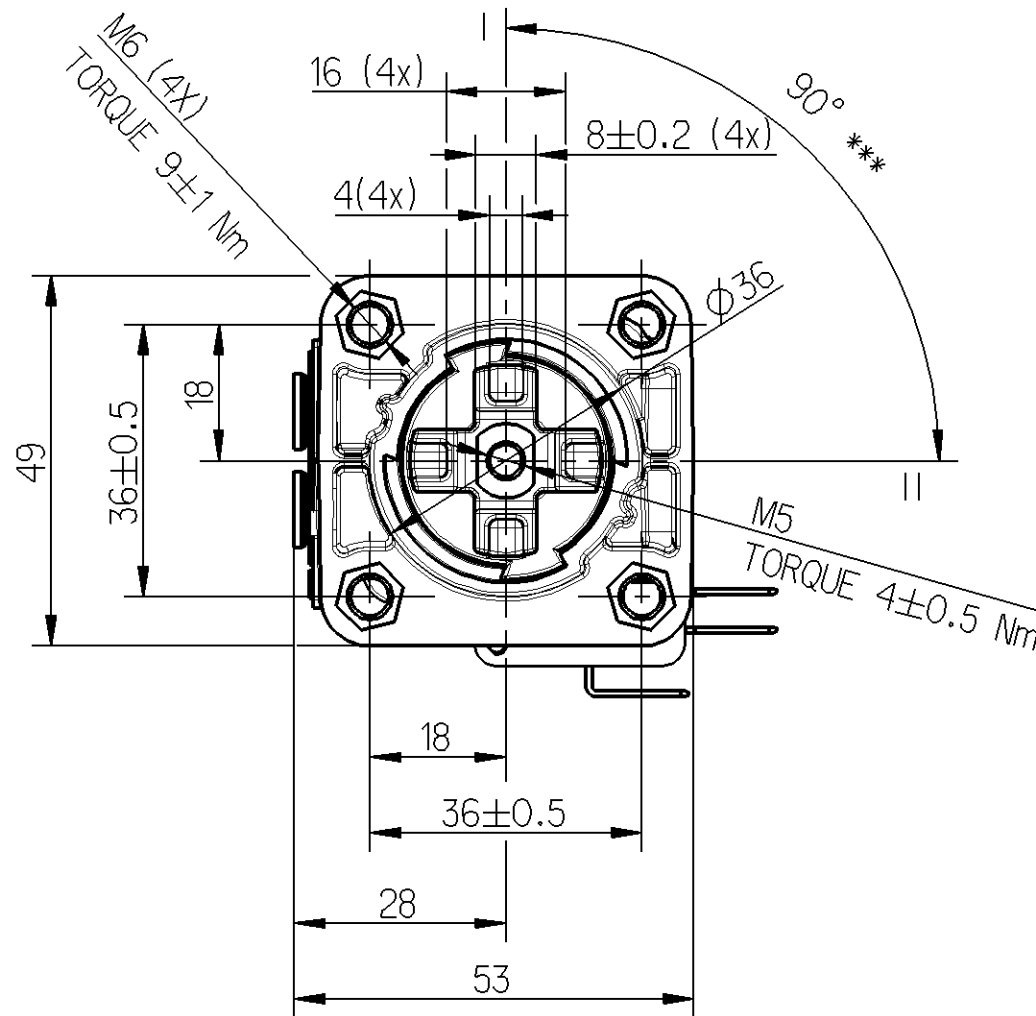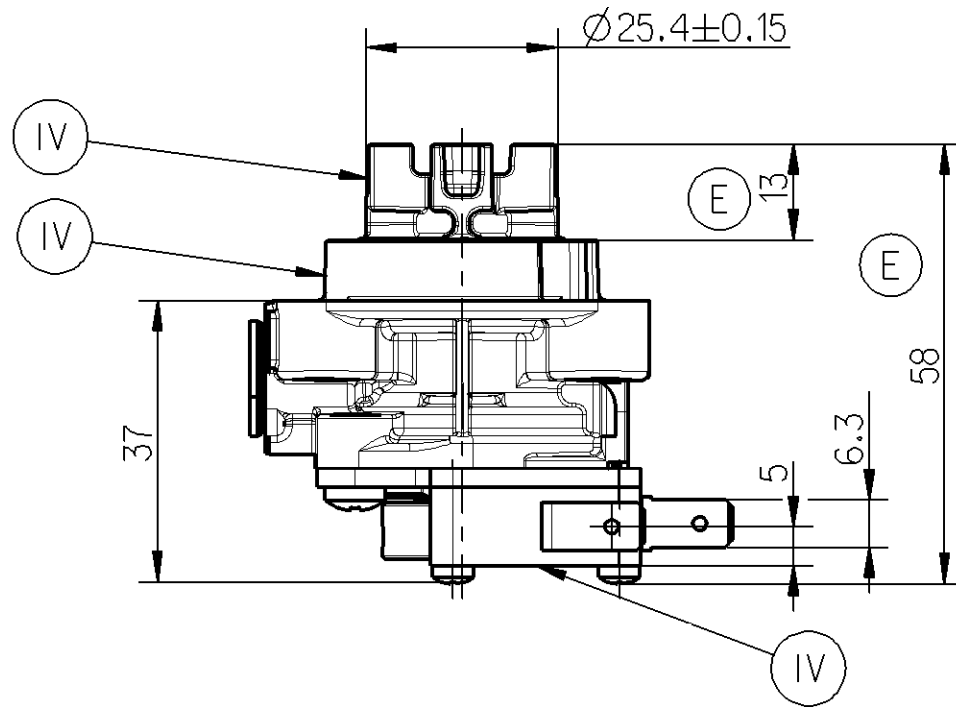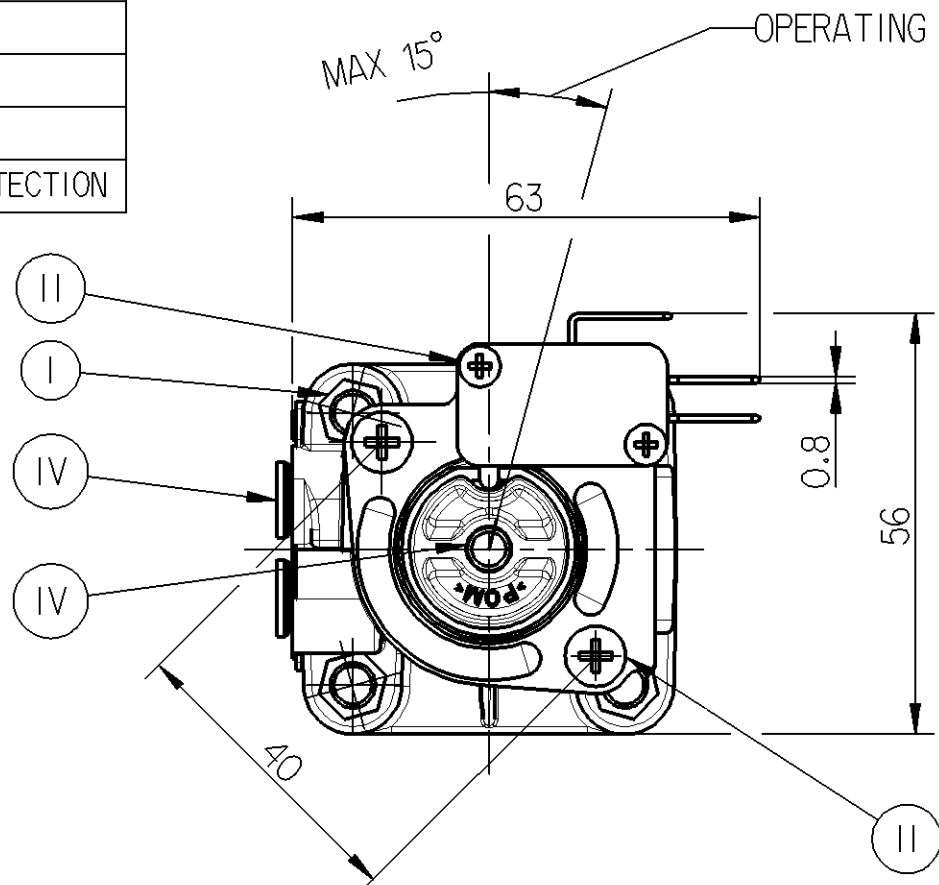

I = CONTROL POSITION
II = SCHALTELLUNG
POSITION DE COMMANDE
POSIZIONE DI COMANDO

1 = SUPPLY PORT
ENERGIEZUFLUSS
ALIMENTATION D'ENERGIE
ALIMENTAZIONE DI ENERGIA

3 = EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

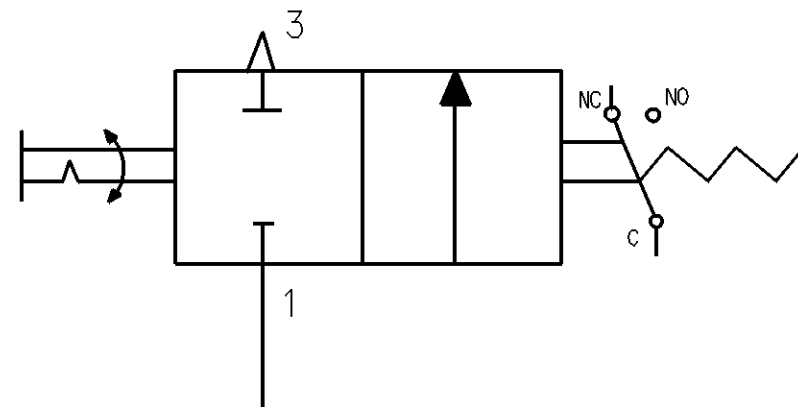

PNEUMATIC SYMBOL

MEDIUM : AIR
MEDIUM : LUFT
FLUIDE : AIR
FLUIDO : ARIA

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE D'ESERCIZIO
pe max 10 bar



THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDBEREICH
APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA
-40°C to +80°C


NOMINAL DIAMETER
NENNWEITE
DIAMETRE NOMINALE
DIAMETRO NOMINALE
3 mm

* SWITCH :
SCHALTER :
INTERRUTTORE :
9INTERRUPTEUR :
~ 250V/ 10 (3)A

** FOR PIPE :
FURE ROHR :
POUR TUBE :
PER TUBE :
PUSH TO FIT CONNECTORS FOR Ø6 mm TUBE

*** OPERATING TORQUE: 1 to 1.5 Nm

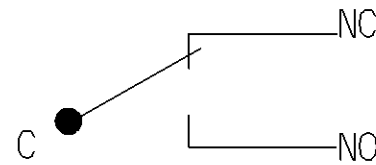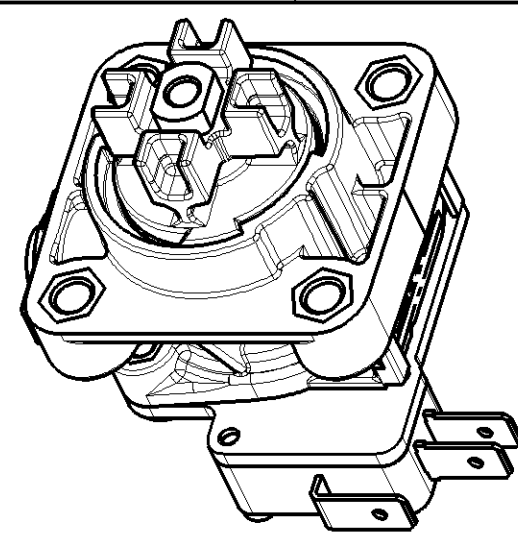

General Specification: JED-334-0					Copyright WABCO®			WABCO 2/2 EMERGENCY COCK					
Further Technical Data: 952 004 001 0					Date		Signature						
Doc. Code: Q35		Sheet: 1 To 5			2013-01-18		Lakshman						
General Tolerances JED-261					Checked								
		Range of Nominal Dimensions (± mm)			2013-01-21		Chowattukunnel						
					Expert								
					Jobin Chowattukunnel								
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	✎							
Fine		0.5	1.0	1.5	2.0			Date of first issue: 2010-12-13					
Medium	X	1.0	2.0	3.0	4.0	±3°		Doc.Code		Language	Sheet		
Coarse		2.0	3.5	5.0	6.5			005		EN	1/1		
Tapped Holes acc. JED-152					Mass		Scale		Material No.				
					0.117 KG		1:1		952 004 001 0				
					Size		CAD System						
					A 2		Pro/E		ECN-No.				
									Revision		Techn. Resp.		
									159640		4 E		
									5620		884 014 151 0		
									Replacement for				
1) Tolerance Class Applied Crossmarked													