
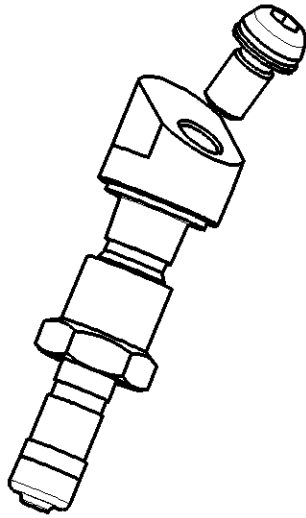
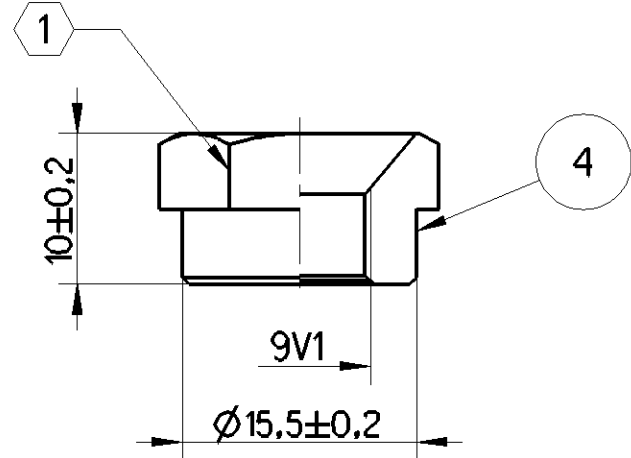
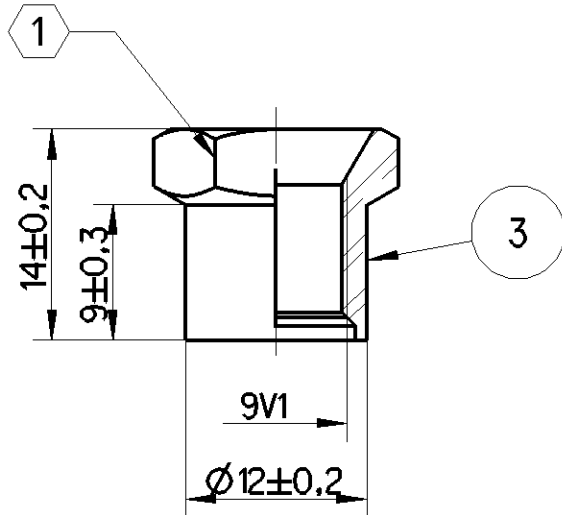
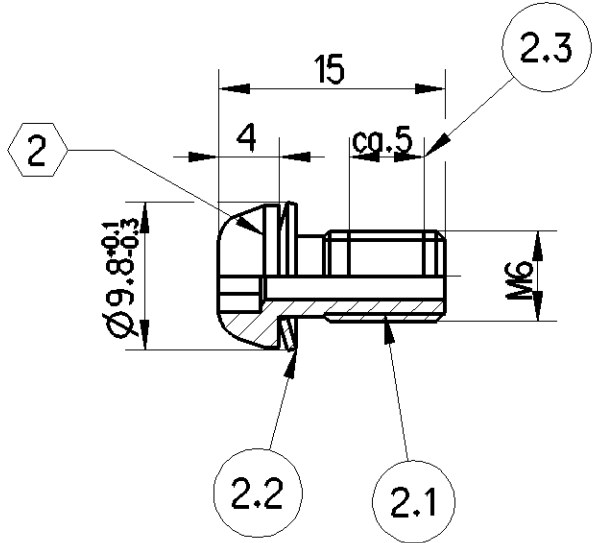
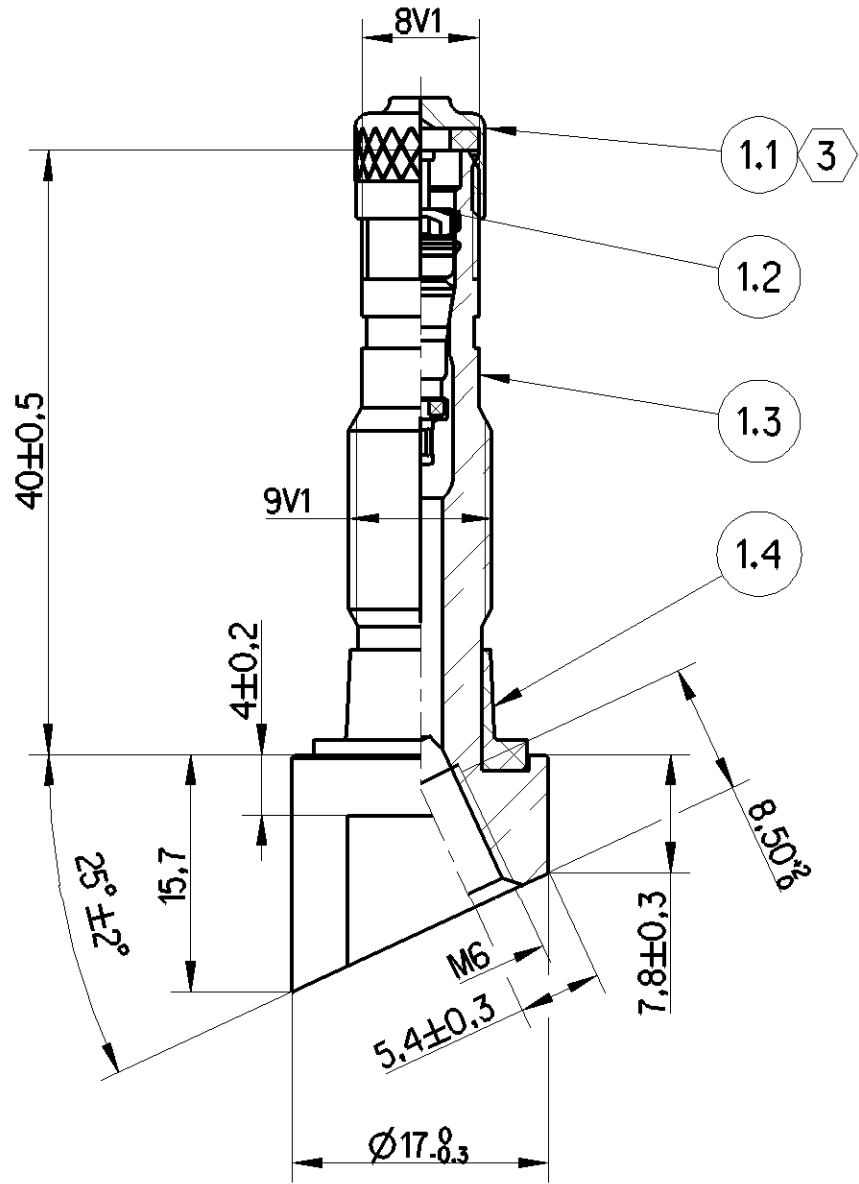


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto a renderlo comunque noto o terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportara il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Wskazanie sowie wykorzystanie tego dokumentu, powielanie oraz rozpowszechnianie jego zawartosci, jakichkolwiek sposobow, bez uprzedniego pisemnego zezwolenia producenta, jest zabronione. Wskazanie, powielanie oraz rozpowszechnianie tego dokumentu, jakichkolwiek sposobow, bez uprzedniego pisemnego zezwolenia producenta, jest zabronione. Wskazanie, powielanie oraz rozpowszechnianie tego dokumentu, jakichkolwiek sposobow, bez uprzedniego pisemnego zezwolenia producenta, jest zabronione.

Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

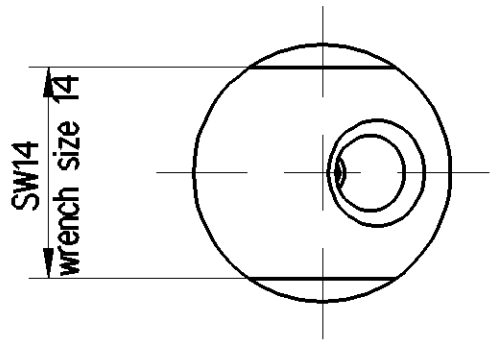

4	HEXAGON NUT	BRASS	NICKEL PLATED
3	HEXAGON NUT	BRASS	NICKEL PLATED
2.3	THREAD LOCK COATING		MIKROENCAPSULATED
2.2	SAFETY WASHER		
2.1	SCREW	STEEL	ZINK FLAKE BASECOAT
1.4	GROMMET	EPDM	--
1.3	VALVE STEM	BRASS	NICKEL PLATED
1.2	VALVE CORE 20	BRASS / PTFE / VMQ / STAINLESS SPRING STEEL	--
1.1	VALVE CAP	BRASS / NBR (B)	NICKEL PLATED
POS.	DESIGNATION	MATERIAL	SURFACE PROTECTION

NOTE		
FOR VALVE HOLE		9.7 ^{+0.3} mm
FOR RIM THICKNESS		3.0 - 6.0 mm
SUITABLE FOR RIM MATERIAL		STEEL AND ALU
PRESSURE RANGE		<14bar
TEMPERATURE RANGE		-40... +100°C
TIGHTNESS IN RESPECT TO	ETRT0 TV3/TV4 (24h AT -40°C 48h AT 100°C)	<0.2 cm ³ /min
1	HEXAGON NUT	INSTALLATION TORQUE 9 - 14 Nm
2	FIXING SCREW	INSTALLATION TORQUE 4 ±0.5 Nm
3	SCREW SHALL BE APPLIED UNIQUELY	
3	TO PREVENT FROM POLLUTION, DUST, CORROSION OR AIR LEAKAGE SEALINGTHE VALVE CAP NEEDS TO BE INSTALLED.	
	SET LOOSE PACKED IN A BAG, NUT AND SCREW UNMOUNTED	

General Specification: JED-334-1, Size ISO 14405 LP				Copyright WABCO®		WABCO VALVE SET TPMS		
Further Technical Data:				Date	Signature			
Doc. Code:		Sheet:	To	2022-10-04	Markuszewski			
General Tolerances JED-261				Checked	Cornelius			
Range of Nominal Dimensions (± mm)				Expert				
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°	Material No.		
	Fine	0.5	1.0	1.5		Mass	Scale	Date of first issue: 2016-06-13
	Medium	1.0	2.0	3.0		0.046 KG	2:1 (1:1)	Doc.Code Language Sheet
	Coarse	2.0	3.5	5.0		Size	CAD System	005 EN 1/1
Tapped Holes acc.				A 2	CREO	ECN-No.	Revision	Techn. Resp.
1) Tolerance Class Applied Crossmarked						508150	1x B	6034
						Replacement for		