
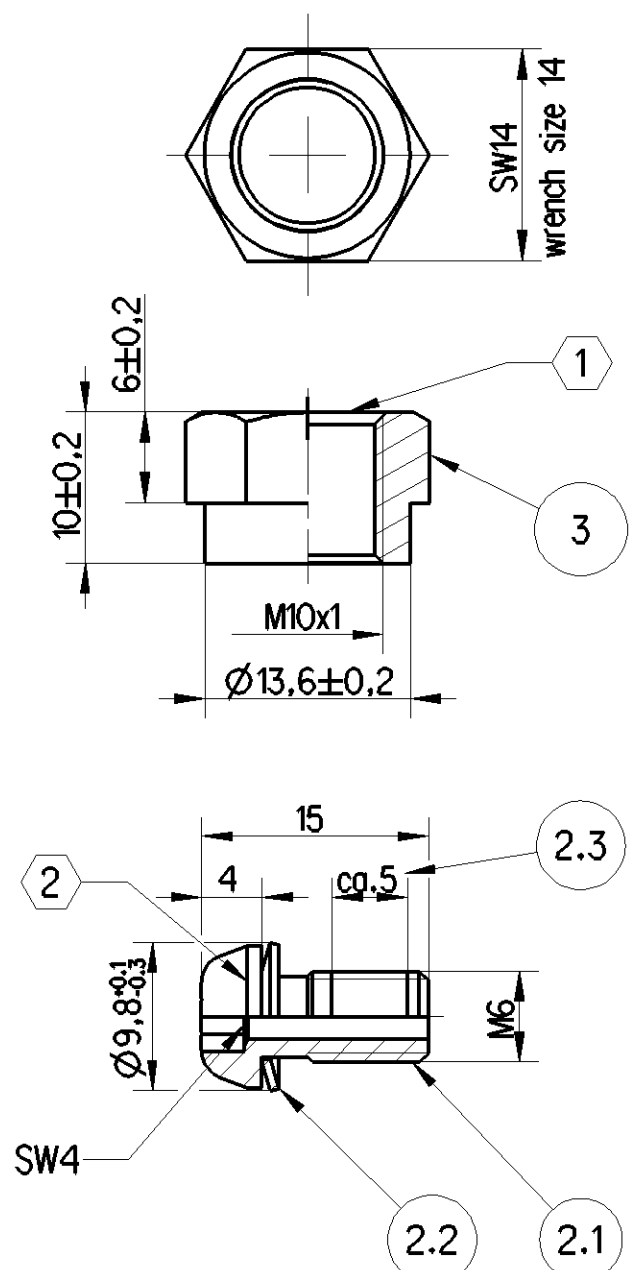


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto a renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti dai brevetti o modelli.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.


Wskazanie sowie wykorzystanie tego dokumentu, jego rozpowszechnienie, wykorzystanie jego zawartosci do przekazania informacji o produkcie lub do innych celow, bez uprzedniego pisemnego zezwolenia WABCO, stanowi naruszenie praw WABCO i moze skutkowac odpowiedzialnoscia prawną. Wskazanie i wykorzystanie tego dokumentu, jego rozpowszechnienie, wykorzystanie jego zawartosci do przekazania informacji o produkcie lub do innych celow, bez uprzedniego pisemnego zezwolenia WABCO, stanowi naruszenie praw WABCO i moze skutkowac odpowiedzialnoscia prawną.

Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

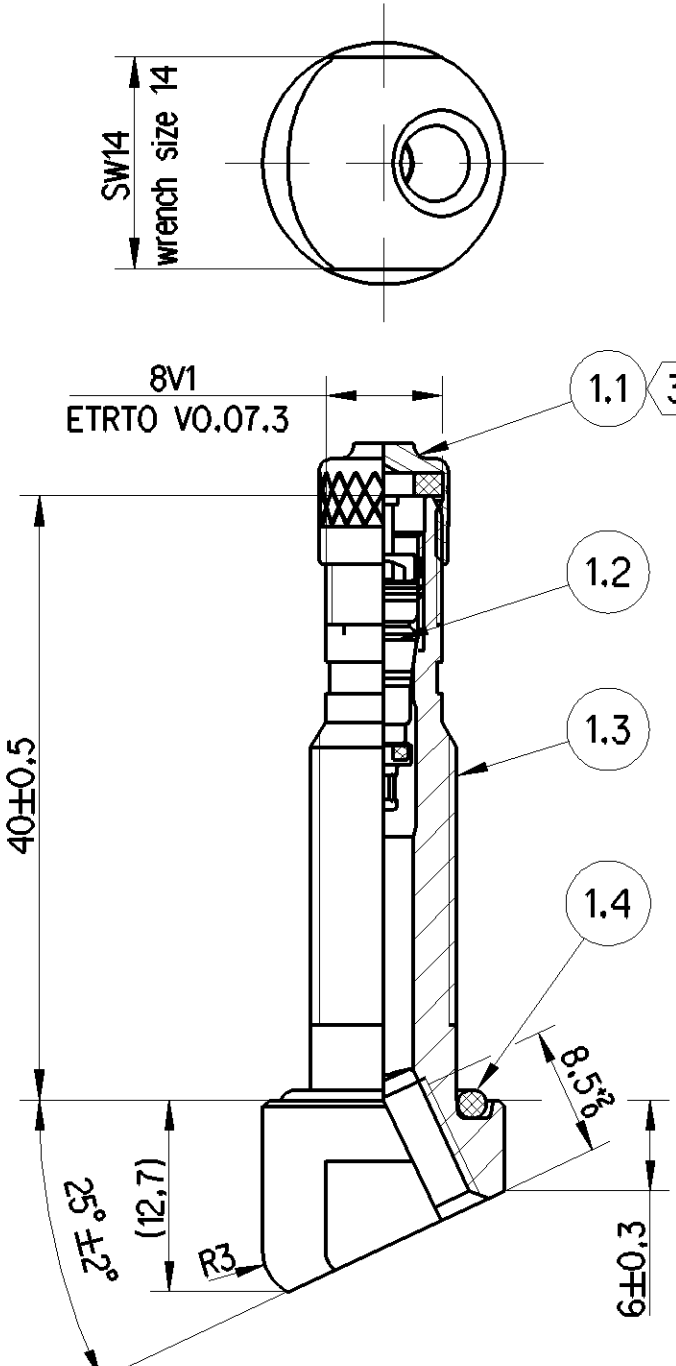

|      |                     |                                             |                     |
|------|---------------------|---------------------------------------------|---------------------|
| 3    | HEXAGON NUT         | BRASS                                       | NICKEL PLATED       |
| 2.3  | THREAD LOCK COATING |                                             | MIKROENCAPSULATED   |
| 2.2  | SAFETY WASHER       | STEEL                                       | ZINK FLAKE BASECOAT |
| 2.1  | SCREW               |                                             | --                  |
| 1.4  | O-RING              | VMQ                                         | --                  |
| 1.3  | VALVE STEM          | BRASS                                       | NICKEL PLATED       |
| 1.2  | VALVE CORE 20       | BRASS / PTFE / VMQ / STAINLESS SPRING STEEL | --                  |
| 1.1  | VALVE CAP           | BRASS / NBR (A)                             | NICKEL PLATED       |
| POS. | DESIGNATION         | MATERIAL                                    | SURFACE PROTECTION  |

|                                                                                   |                                                                                                       |                                                 |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------|
|  | NOTE                                                                                                  |                                                 |
|                                                                                   | FOR VALVE HOLE                                                                                        | Ø9,7 <sup>+0.3</sup> mm                         |
|                                                                                   | FOR RIM THICKNESS                                                                                     | 5.5 - 14.0 mm                                   |
|                                                                                   | SUITABLE FOR RIM MATERIAL                                                                             | STEEL AND ALU                                   |
|                                                                                   | PRESSURE RANGE                                                                                        | <14bar                                          |
|                                                                                   | TEMPERATURE RANGE                                                                                     | -40... +100°C                                   |
|                                                                                   | TIGHTNESS IN RESPECT TO                                                                               | ETRT0 TV3/TV4<br>(24h AT -40°C<br>48h AT 100°C) |
| 1                                                                                 | HEXAGON NUT                                                                                           | INSTALLATION TORQUE                             |
| 2                                                                                 | FIXING SCREW                                                                                          | INSTALLATION TORQUE                             |
|                                                                                   | SCREW SHALL BE APPLIED UNIQUELY                                                                       |                                                 |
| 3                                                                                 | TO PREVENT FROM POLLUTION, DUST, CORROSION OR AIR LEAKAGE SEALINGTHE VALVE CAP NEEDS TO BE INSTALLED. |                                                 |
|                                                                                   | SET LOOSE PACKED IN A BAG, NUT AND SCREW UNMOUNTED                                                    |                                                 |

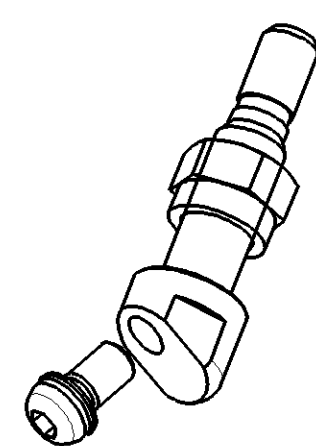

|                                                     |  |        |  |            |  |                  |  |              |                                    |                                                                                       |  |  |
|-----------------------------------------------------|--|--------|--|------------|--|------------------|--|--------------|------------------------------------|---------------------------------------------------------------------------------------|--|--|
| General Specification: JED-334-1, Size ISO 14405 LP |  |        |  |            |  | Copyright WABCO® |  |              | <b>WABCO</b><br><br>VALVE SET TPMS |                                                                                       |  |  |
| Further Technical Data:                             |  |        |  |            |  | Date             |  | Signature    |                                    |                                                                                       |  |  |
| Doc. Code:                                          |  | Sheet: |  | To         |  | Drawn            |  |              |                                    |                                                                                       |  |  |
| General Tolerances JED-261                          |  |        |  |            |  | 2022-10-04       |  | Markuszewski |                                    |                                                                                       |  |  |
| Range of Nominal Dimensions ( ± mm)                 |  |        |  |            |  | Checked          |  |              |                                    |                                                                                       |  |  |
|                                                     |  |        |  |            |  | 2022-10-06       |  | Cornelius    |                                    |                                                                                       |  |  |
|                                                     |  |        |  |            |  | Expert           |  |              |                                    |                                                                                       |  |  |
|                                                     |  |        |  |            |  | Cornelius        |  |              |                                    |                                                                                       |  |  |
| Class 1)                                            |  | ≤ 50   |  | > 50 ≤ 180 |  | > 180 ≤ 400      |  | > 400        |                                    |  |  |  |
| Fine                                                |  | 0.5    |  | 1.0        |  | 1.5              |  | 2.0          |                                    |                                                                                       |  |  |
| Medium                                              |  | X 1.0  |  | 2.0        |  | 3.0              |  | 4.0          |                                    |                                                                                       |  |  |
| Coarse                                              |  | 2.0    |  | 3.5        |  | 5.0              |  | 6.5          |                                    |                                                                                       |  |  |
| Tapped Holes acc.                                   |  |        |  |            |  | Mass             |  | Scale        |                                    | Material No.                                                                          |  |  |
|                                                     |  |        |  |            |  | 0.044<br>KG      |  | 2:1<br>(1:1) |                                    | 960 732 133 0                                                                         |  |  |
|                                                     |  |        |  |            |  | Size             |  | CAD System   |                                    |                                                                                       |  |  |
| 1) Tolerance Class Applied Crossmarked              |  |        |  |            |  | A 2              |  | CREO         |                                    |  |  |  |
|                                                     |  |        |  |            |  |                  |  |              |                                    |                                                                                       |  |  |
|                                                     |  |        |  |            |  | ECN-No.          |  | Revision     |                                    | Techn. Resp.                                                                          |  |  |
|                                                     |  |        |  |            |  | 508150           |  | 1x A         |                                    | 6034                                                                                  |  |  |
|                                                     |  |        |  |            |  | Replacement for  |  |              |                                    |                                                                                       |  |  |