

TIRAGE du :

YELLOW
GELB
JAUNE
GIALLO

M12 x 1
* 10 N.m MAXI

FIXING
SEITLICHE BEFESTIGUNG
FIXATION LATÉRALE
FISSAZIONE

45 x 45

* 20 N.m Maxi

* 20 N.m Maxi

FORCE AT CONTACTEUR
KRAFT AN DEM KONTAKT
EFFORT AU CONTACTEUR
SFORZO AL. CONTATTORE
F = 20N Maxi

LOCKING
VERRASTERUNG
VERROUILLAGE
FISSAGGIO


LEVER POSITON
HEBELSTELLUNG
POSITION DU LEVIER
POSIZIONE DELLA LEVA

P₂ = 0

α = 90°

STROKE
HEBELWEG
COURSE
CORSO


Δ P₂ (Bars)

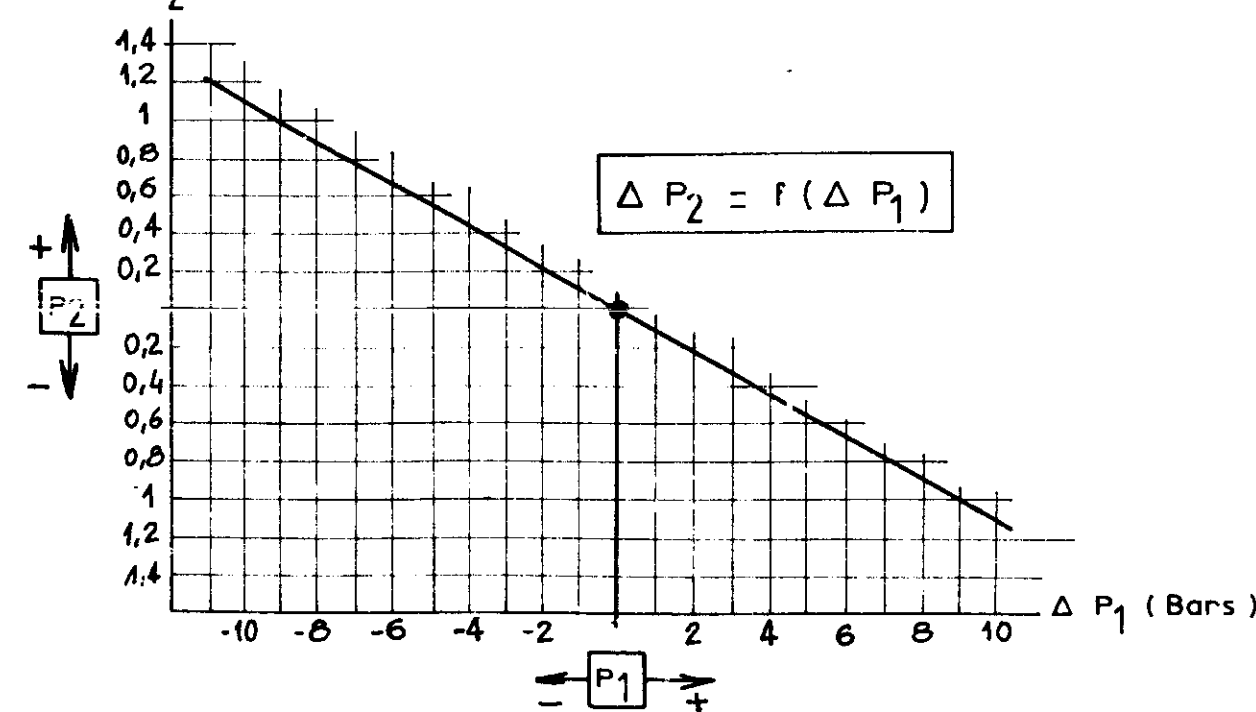

45 x 45


FIXING : 2 HOLES M6
BEFESTIGUNG : 2 LOECHER M6
FIXATION : 2 TROUS M6
FISSAZIONE : 2 ORIFIZIO M6
* 4 N.m Maxi

CHARACTERISTICS PRESSURE, STROKE
KENNLIENEN DRUCK, HEBELWEG
CARACTERISTIQUES PRESSION, COURSE
CARATTERISTICA PRESSIONE, CORSA

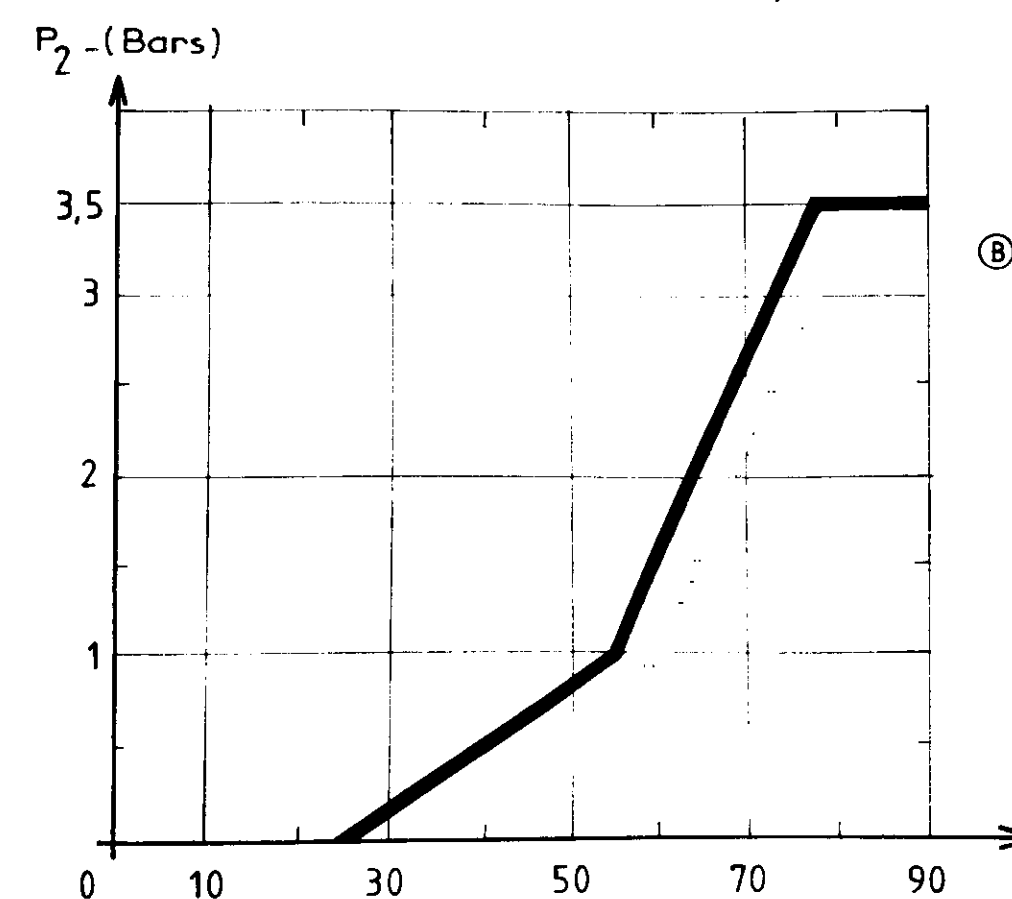

STROKE
HEBELWEG
COURSE
CORSO

SYMBOL
SINNBIELD
SYMBOLE
SIMBOLO

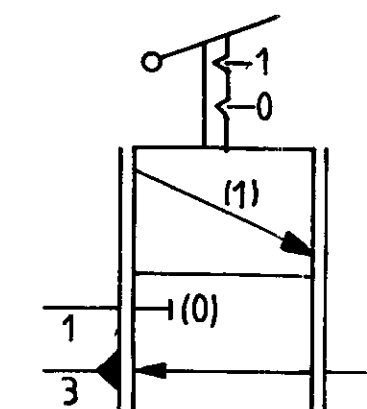

MAXI INLET PRESSURE MAX BETRIEBSDRUCK PRESSION MAXI D'UTILISATION PRESSIONE MASSIMA D'ALIMENTAZIONE	P1 = 20 BAR
WORKING POSITION EINBAULAGE POSITION DE FONCTIONNEMENT POSIZIONE DI FUNZIONAMENTO	UNIMPORTANT BELIEBIG INDIFFERENTE INDIFFERENTE
INLET PRESSURE EINGESTEUERTER DRUCK PRESSION D'ALIMENTATION PRESSIONE D'ALIMENTAZIONE	P1 = 3,5 BAR
DELIVERY PRESSURE AUSGESTEUERTER DRUCK PRESSION DELIVREE PRESSIONE LIBERATA	P2 = 3,5 BAR
WORKING TEMPERATURE THERMISCHER ANWENDUNGSBEREICH TEMPERATURE DE FONCTIONNEMENT TEMPERATURA DI FUNZIONAMENTO	T = -40°.....+ 80° C
MEDIUM MEDIUM FLUIDE FLUIDO	COMPRESSED AIR DRUCKLUFT AIR COMPRIE ARIA COMPRESSA

- 1 AIR INLET
VORRATSLEITUNG
ALIMENTATION
ALIMENTAZIONE
- 2 DELIVERY
AUSGESTEUERTE LUFT
UTILISATION
UTILIZZAZIONE
- 3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE
COPPIA DI SERRAGGIO

WABCO

83-10-17 SANCHEZ HAND BRAKE VALVE
83-10-20 HAND BREMSVENTIL
84-02-09 84-005 ROBINET DE FREINAGE A MAIN
RUBINETTO DI COMANDO A MANO

0732 1:1 961 721 037 0
A 1 210 521

1/1