
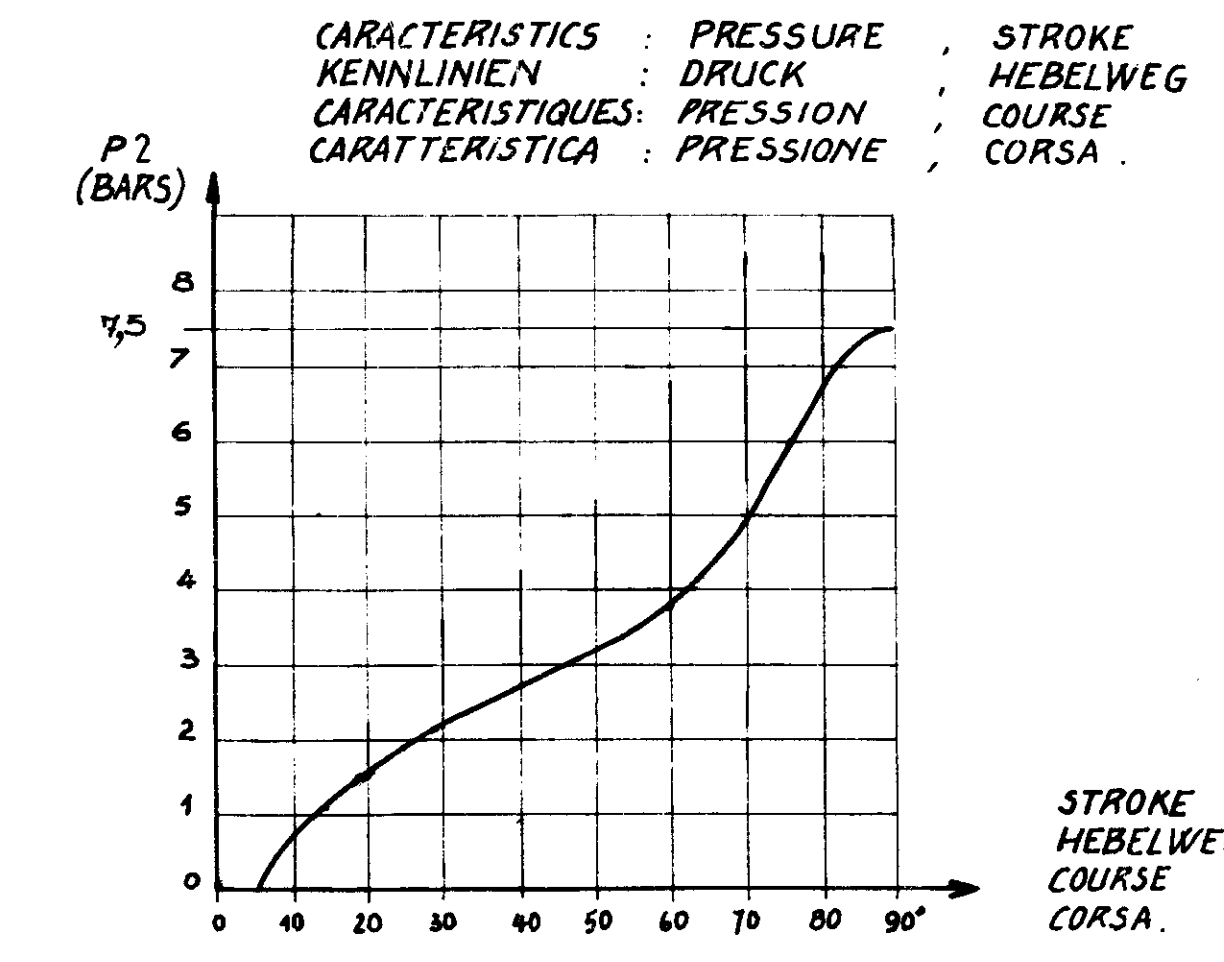
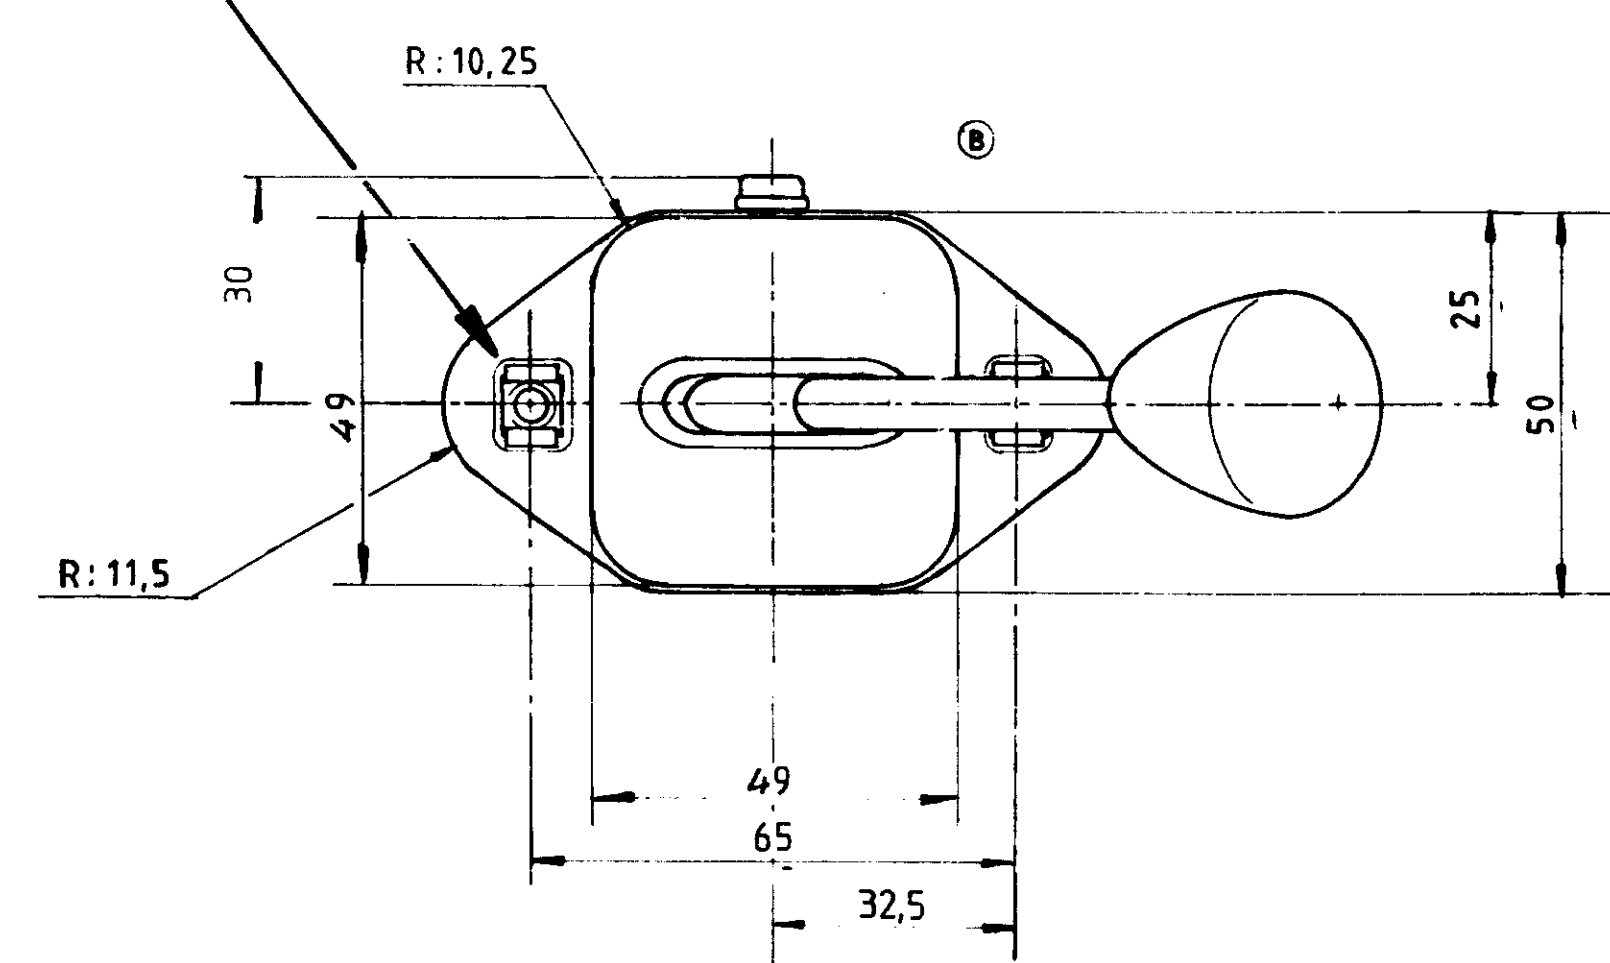
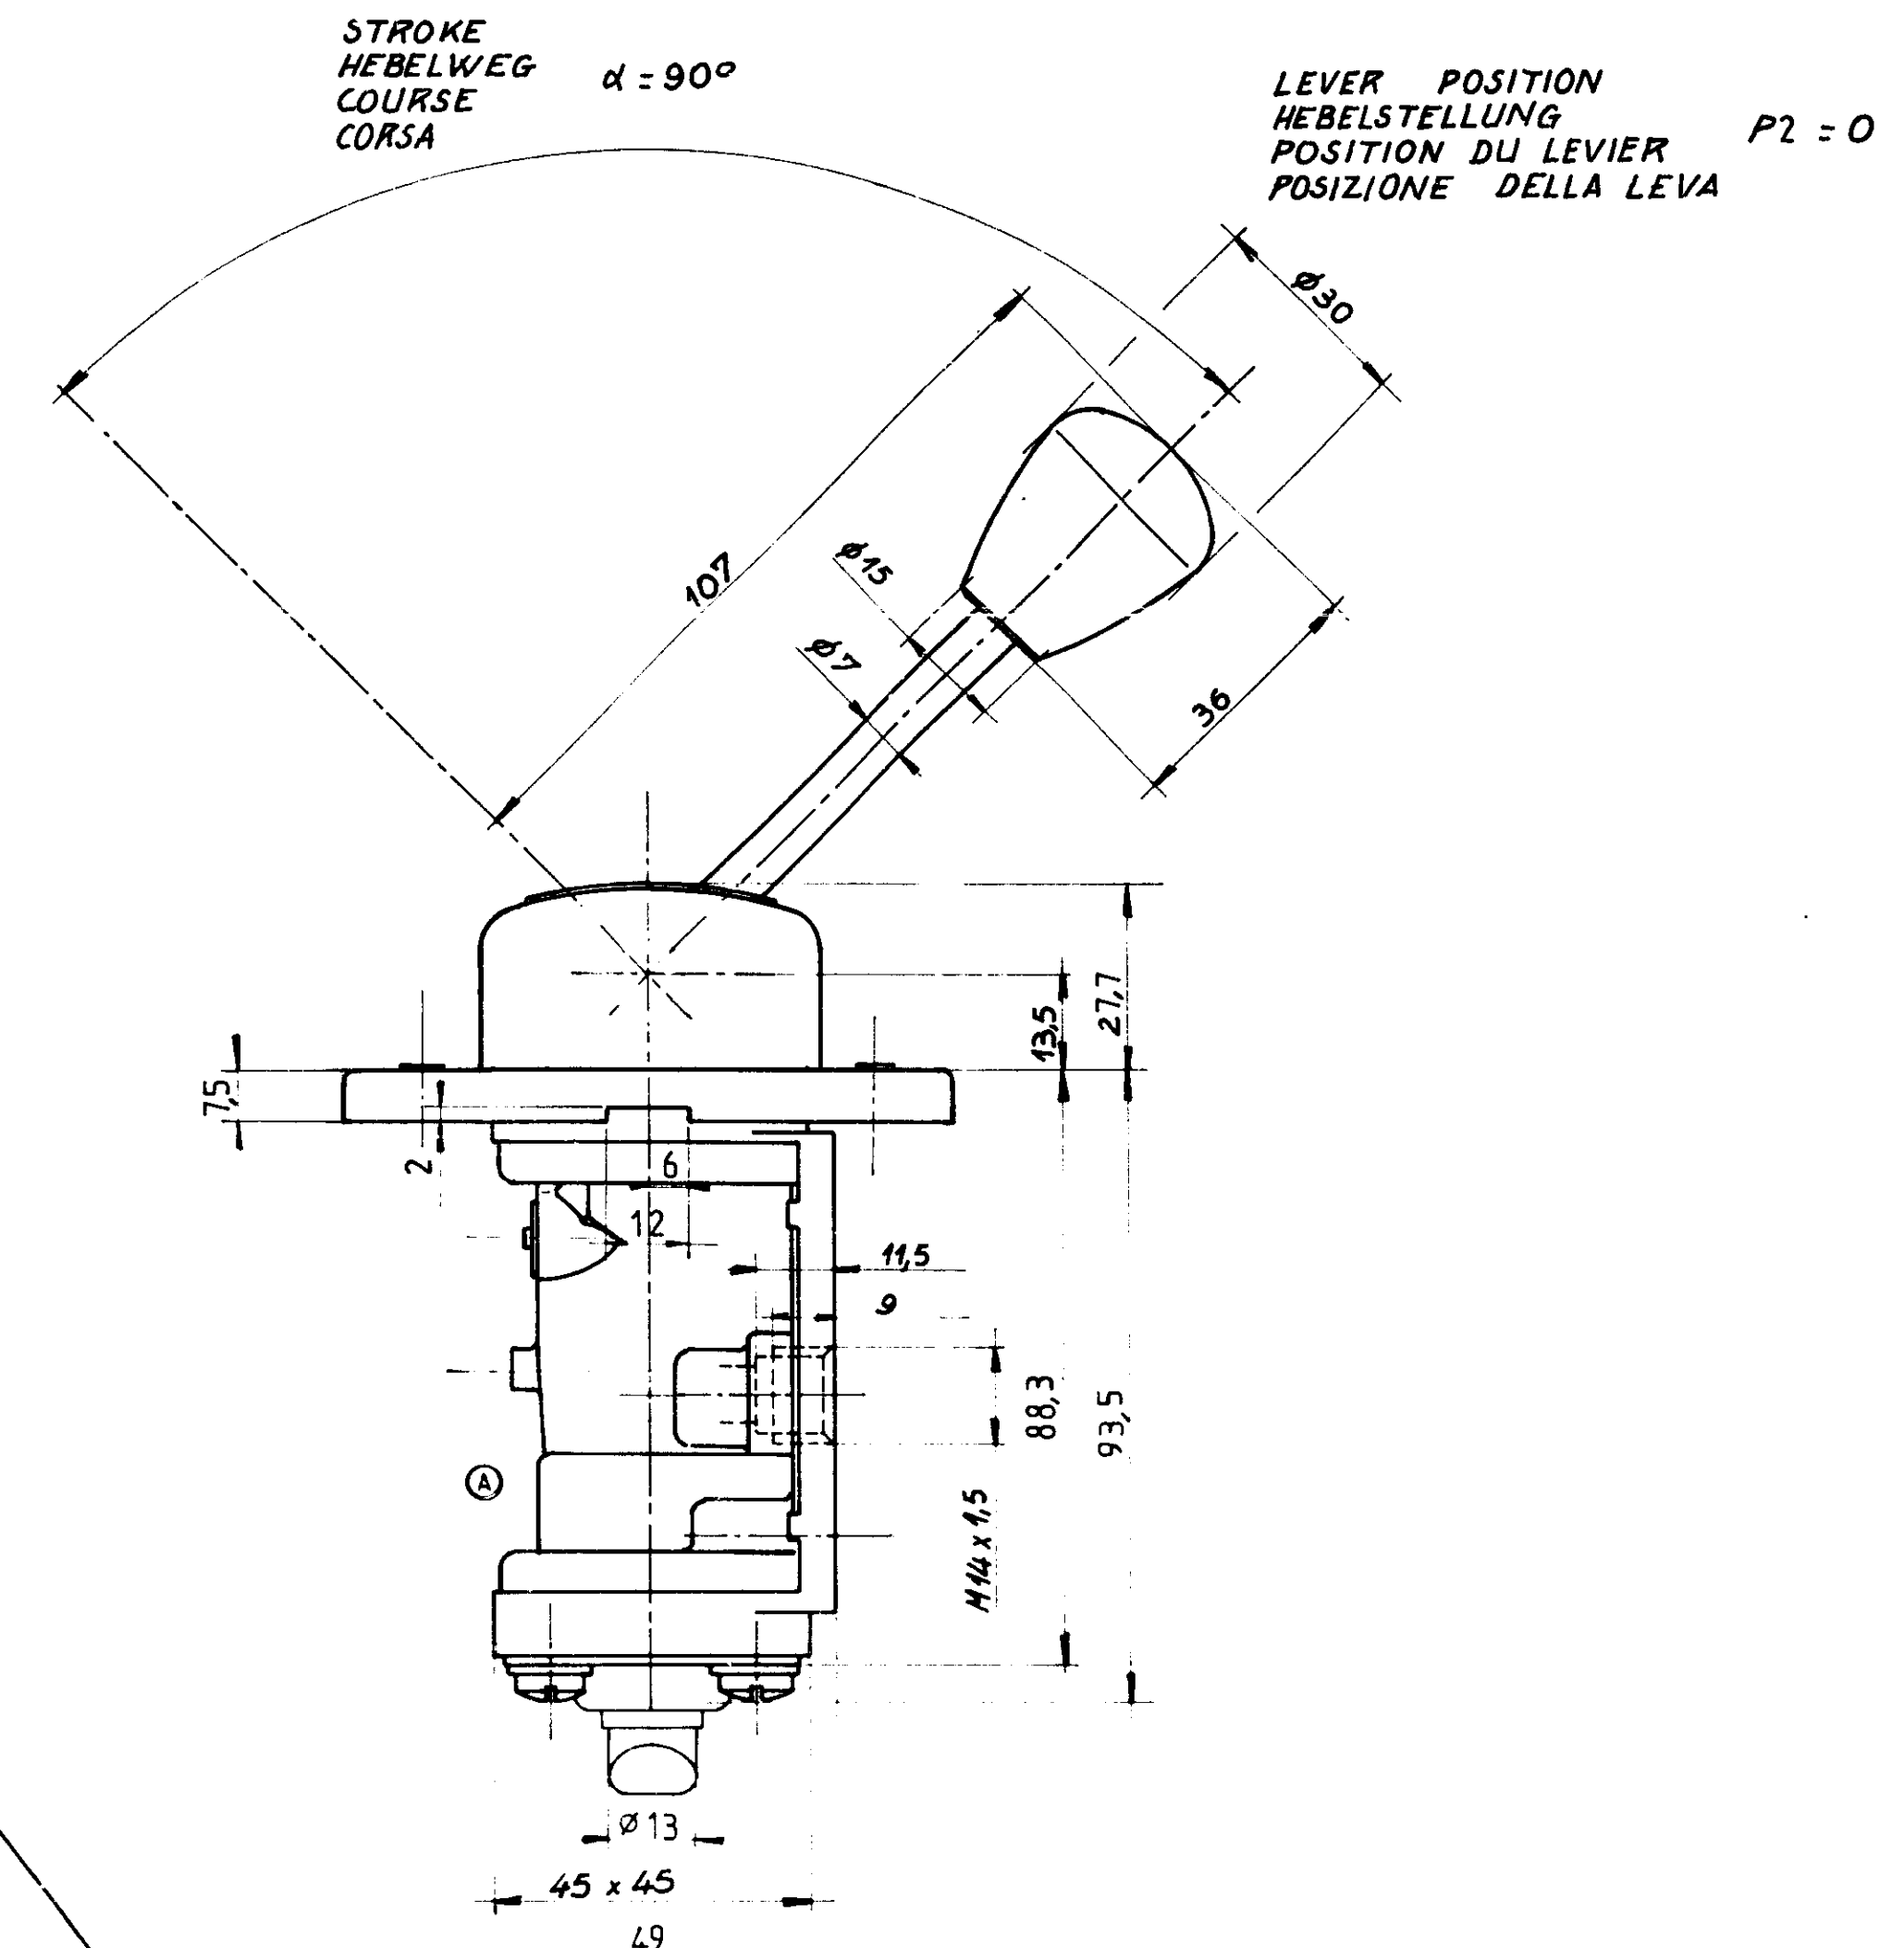


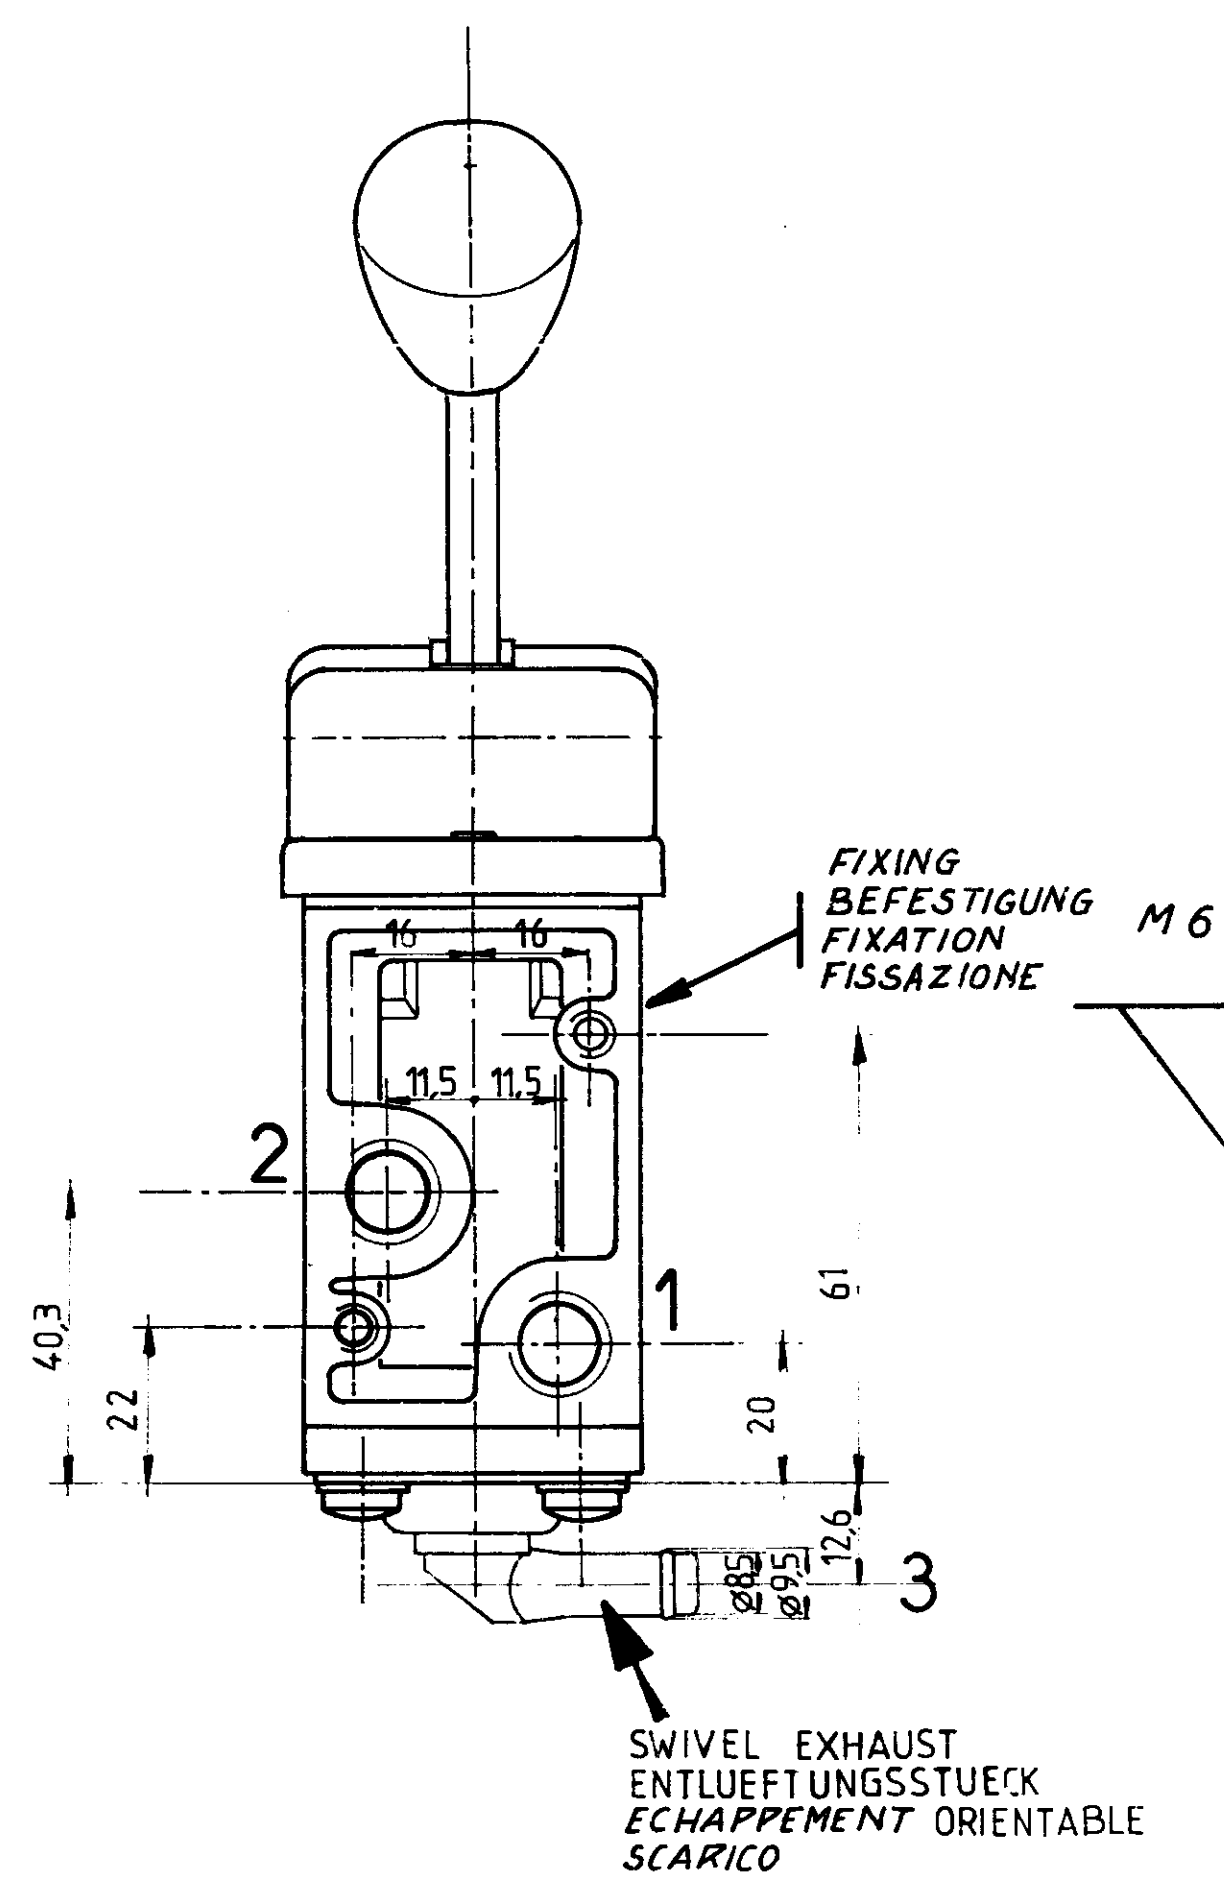

TECNICAL DATA TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES. DATA TECNICI.			
DESIGNATION. BEZEICHNUNG DESIGNATION DESIGNAZIONE	SYMBOL SYMBOLE SIMBOLI	UNIT. EINHEIT UNITA	VALUE WERT VALEUR VALORE
INLET PRESSURE FOR ADJUSTING VORRATSDRUCK BEI DER EINSTELLUNG PRESSION D'ALIMENTATION AU REGLAGE PRESSIONE D'ALIMENTAZIONE ALLA REGOLAZIONE	P1	BAR	8,5 ^{+0,2} ₋₀
WORKING TEMPERATURE THERMISCHER ANWENDUNGSBEREICH TEMPERATURE DE FONCTIONNEMENT TEMPERATURA DI FUNZIONAMENTO.	T	°C	-30° +80
MEDIUM MEDIUM FLUIDE FLUIDO	COMPRESSED AIR DRUCKLUFT AIR COMPRIME ARIA COMPRESSA		
MAXI INLET PRESSURE MAX BETRIESDRUCK PRESSION MAXIMUM D'ALIMENTATION PRESSIONE MASSIMA D'ALIMENTAZIONE	P1 MAX	BAR	10
ADJUSTING OF DELIVERY PRESSURE EINSTELLUNG DES AUSGESTEUERTEN DRUCKES REGLAGE DE LA PRESSION DELIVREE REGOLAZIONE DELLA PRESSION LIBERATA	P2	BAR	7,5 ^{+0,4} _{-0,1}
WORKING POSITION EINBAULAGE POSITION DE FONCTIONNEMENT POSIZIONE DI FUNZIONAMENTO	UNIMPORTANT BELIEBIG INDIFFERENTE INDIFFERENTE		

GENERAL SPEC. ALLEGIEME SPEC. SPEC. GENERALES SPEC. GENERALI		BLANK NO. ROUTENUMMER NO. PREL. RESULT. NO. TRAZZO-RESULT.	
TREATMENT TRATTAMENTO	REWORKING RICOSTRUZIONE	SURFACE PROTECTION PROTEZIONE	MATERIAL MATERIALE
DATE 81-06-22	DRAWN Meauxsoone	CHECKED PICHON	STANDARDIZATION 81-07-06 81072
85102 1x	85.12.05	Q6	1:1
82 061 1x	82-06-26	A1	210
REPLACEMENT FOR		CODE FOR FUNCTION	CODE FOR SHAFT
		521	605
100 mm			

WABCO
HAND BRAKE VALVE
HAND BREMSVENTIL
ROBINET DE FREINAGE A MAIN
ROBINETTO DI COMANDO A MANO

961 721 127 0

1/1