

THE LOCKING DEVICE MUST AUTOMATICLY AND SAFETY LOCK THE HANDLE IN THE PARKING POSITION
LA BUTEE DOIT VERROUILLER AUTOMATIQUEMENT ET DE FACON SECURISEE LA POIGNEE EN POSITION PARKING

EMERGENCY BRAKING
HILFBREMSE
FREIN DE SECOURS
FREINO DI SOCCORSO

AUTOMATIC RETURN
AUTOMATISHER RUECKLAUF
RETOUR AUTOMATIQUE
RITORNO AUTOMATICO

PARKING POSITION ; LOCKED POSITION
RASTSTELLUNG ; VERRIEGELTE STELLUNG
POSITION PARKING ; POSITION VERROUILLEE
POSIZIONE DI STAZONAMENTO ; POSIZIONE BLOCARE

FIRST POINT PRESSURE
DRUCKPUNKT
POINT DUR
PUNTO DI RESISTENZA




TEST POSITION
PRUEFUNGSTELLUNG
POSITION TEST
POSIZIONE TEST

REFERENCE CLIENT : 74 20813845
CUSTOMER REFERENCE

3xM16x1.5
JED 464
TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE 34Nm MAX.
COPPIA DI SERRAGGIO

TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE 4Nm MAX.
COPPIA DI SERRAGGIO

DELIVERED PRESSURE DIAGRAM
AUSGESTEUERTER DRUCKDIAGRAM
DIAGRAMME DES PRESSIONS DELIVREES [2]
DIAGRAMMA PRESSIONE FROGATA

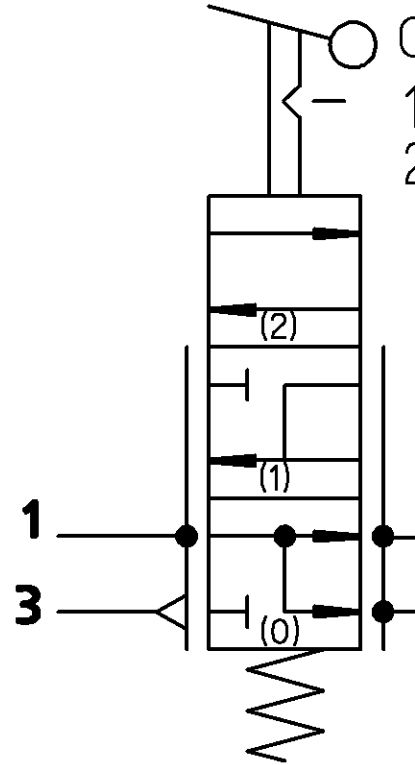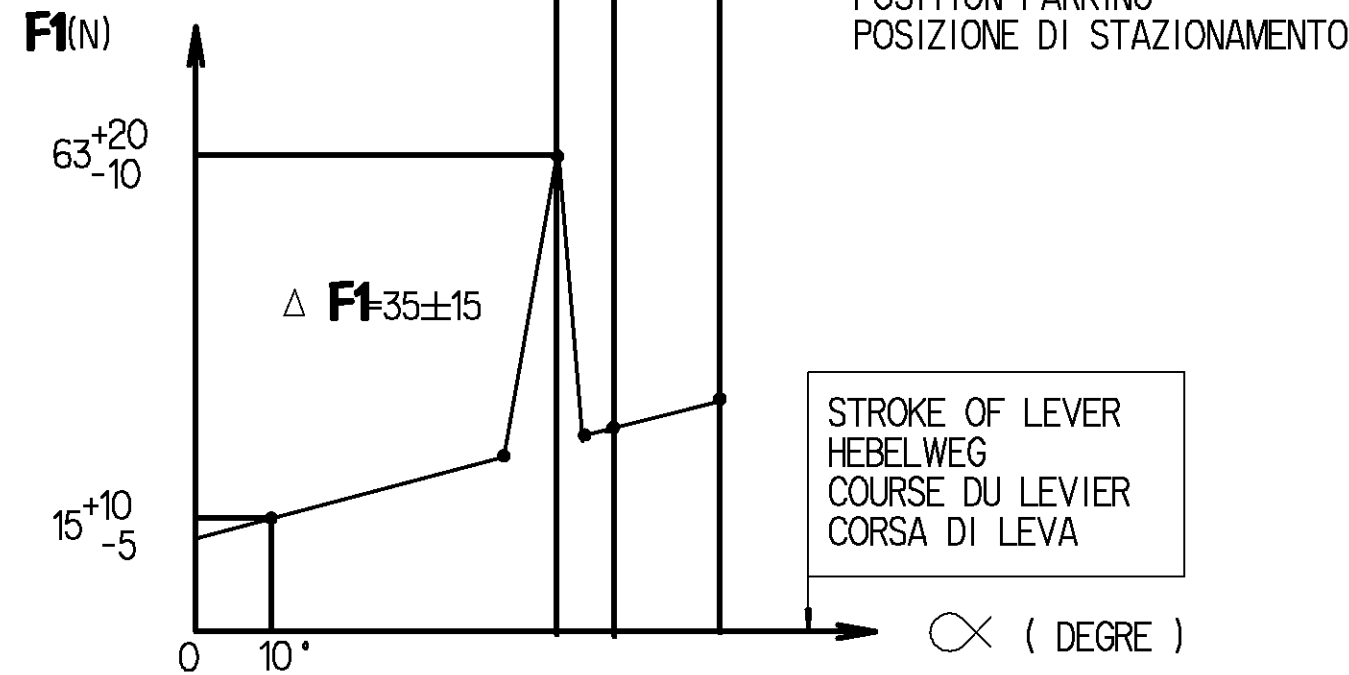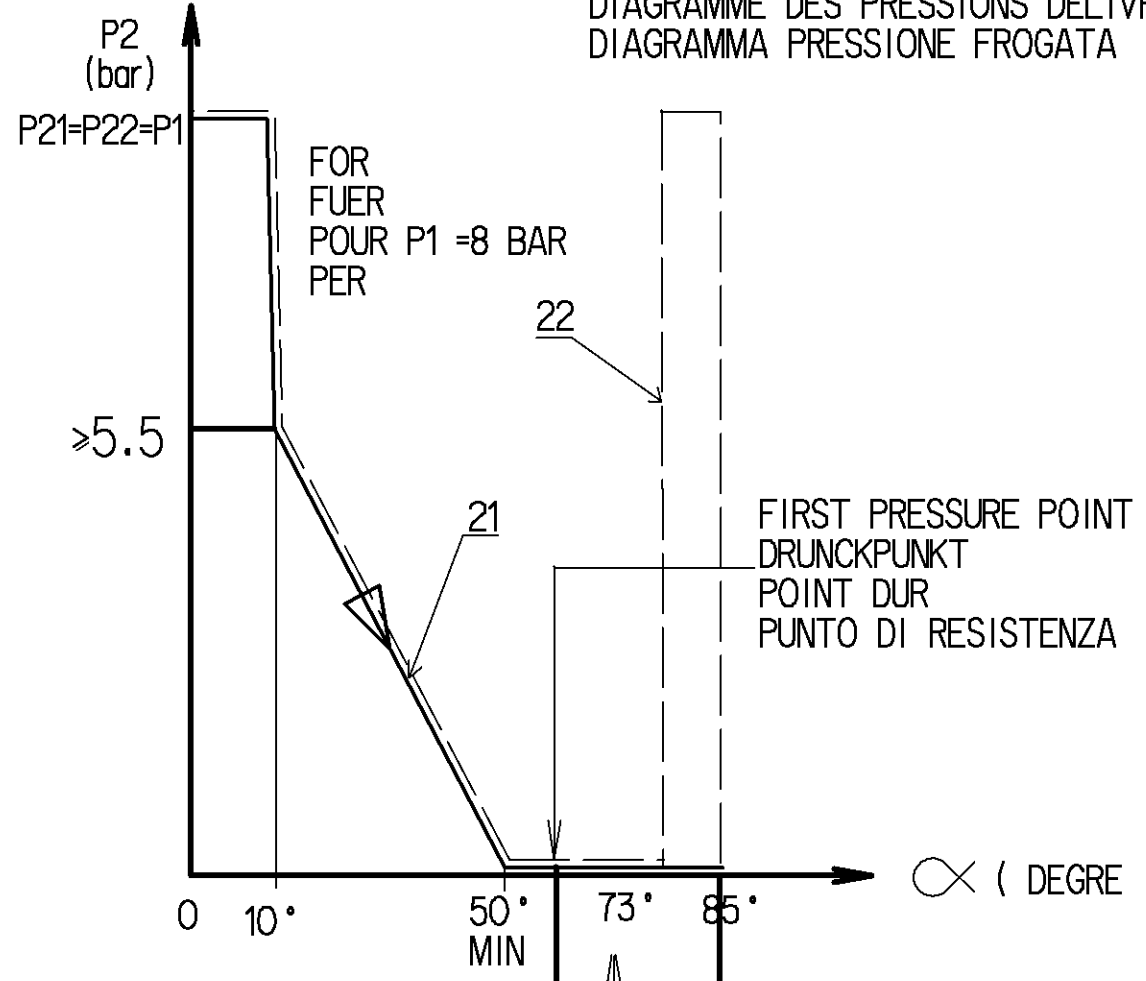

SPECIAL CHARACTERISTICS
2x< > -
CARACTERISTIQUES SPECIALES

	MATERIAL MATIERE	SURFACE PROTECTION PROTECTION DE SURFACE	COLOR COULEUR
I	JED 004M	JED 260	
II	JED 326		
III	ABS TN		BLACK / NOIR
IV	PVC		BLACK / NOIR
V	JED 029M3	JED 259	
VI	JED 679.0	JED 256	
VII	JED 051 M2	JED 257	
VIII	Z CNF 13-09		

SUPPLY VORRAT ALIMENTATION ALIMENTAZIONE	1	
SPRING BRAKE CYLINDER FEDERSPREICHERZYLINDER VALVE DE CONTROLE DE REMORQUE CILINDRO A RESSORT CILINDRO A MOLLA	21	MEDIUM : AIR MEDIUM : LUFT FLUIDE : AIR FLUIDO : ARIA
TRAILER CONTROL VALVE ANHÄNGER STEURVENTIL VALVE DE CONTROLE DE REMORQUE VALVOLA DI CONTROLLO DI REMORCHIO	22	THERMICAL RANGE THERMISCHER ANWENDUNGSBEREICH TEMPERATURE DE FONCTIONNEMENT -40°.....+80°C TEMPERATURA DI UTILIZZAZIONE
EXHAUST ENTLUEFTLUNG ECHAPPEMENT SCARICO	3	SUPPLY PRESSURE VORRATSDRUCK PRESSION PNEUMATIQUE D'ALIMENTATION : P1=10 BAR MAX. PRESSIONE PNEUMATICA DI ALIMENTAZIONE

General Specification: JED-354-0	Copyright WABCO	
Further Technical Data:	Date: 2006-06-10	Signature: BIGOT D
Doc. Code: 2006-06-10	Sheet: 1	To: BARBEAU
General Tolerances JED-261	Checked: BARBEAU	Expert: BARBEAU
Range of Nominal Dimensions (± mm)	Mass: 0.54 kg	Scale: 1:1
Class 1) ≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400	Size: TRI	Product Identification No.: 961 723 139 0
Fine 0.5 1.0 1.5 2.0	Size: TRI	Doc. Code Language Sheet: 605 en/de fr/it 1/1
Medium 1.0 2.0 3.0 4.0	Size: TRI	Prod. Type: 00 X
Coarse 2.0 3.5 5.0 6.5	Size: TRI	Replacement for:
Tapped Holes acc.	Size: TRI	
1) Tolerance Class Applied Crossmarked	Size: TRI	