


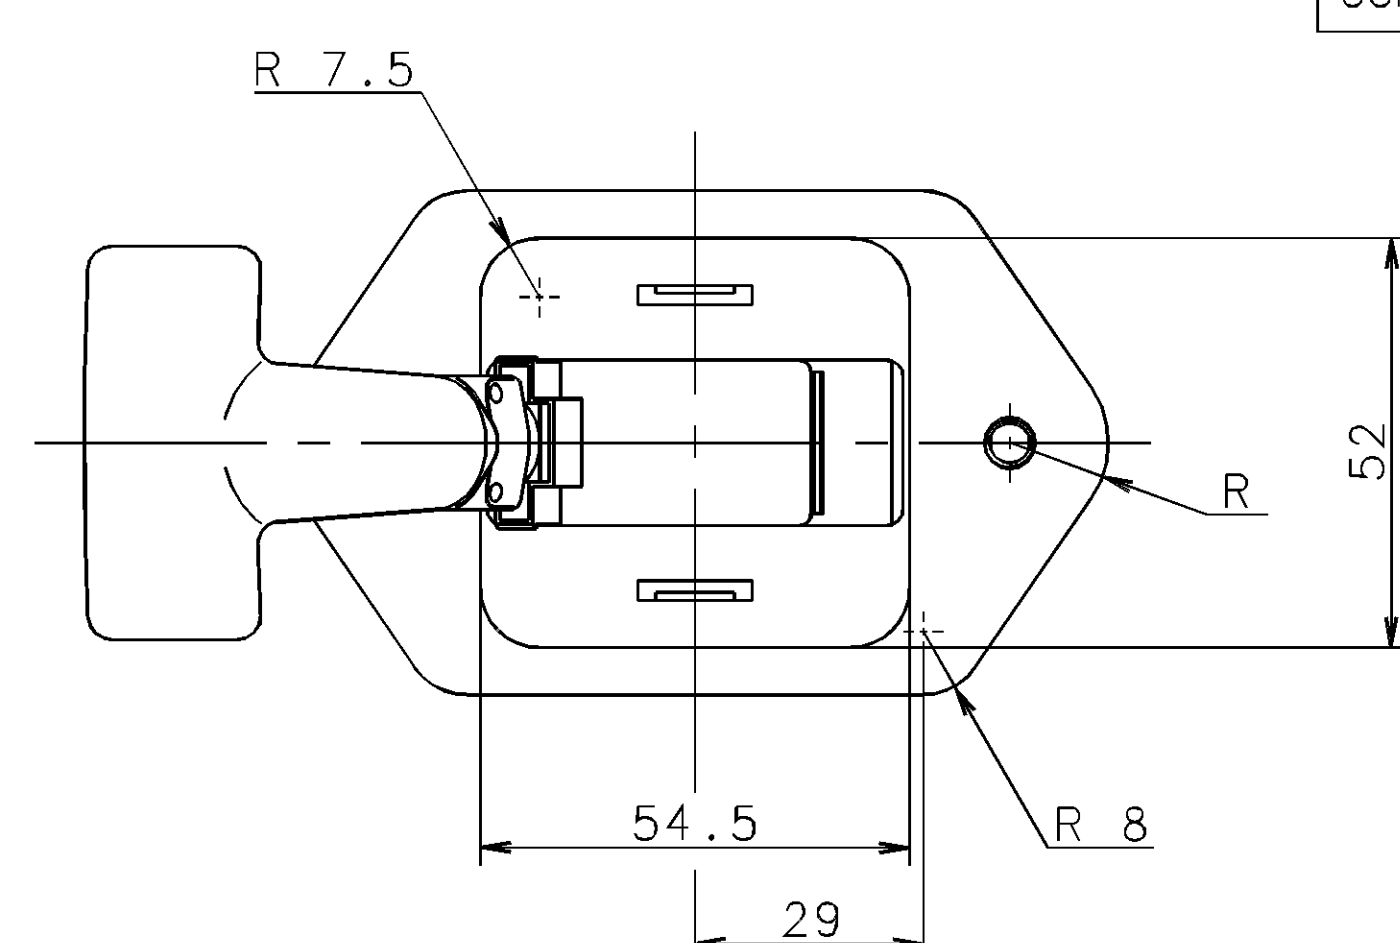
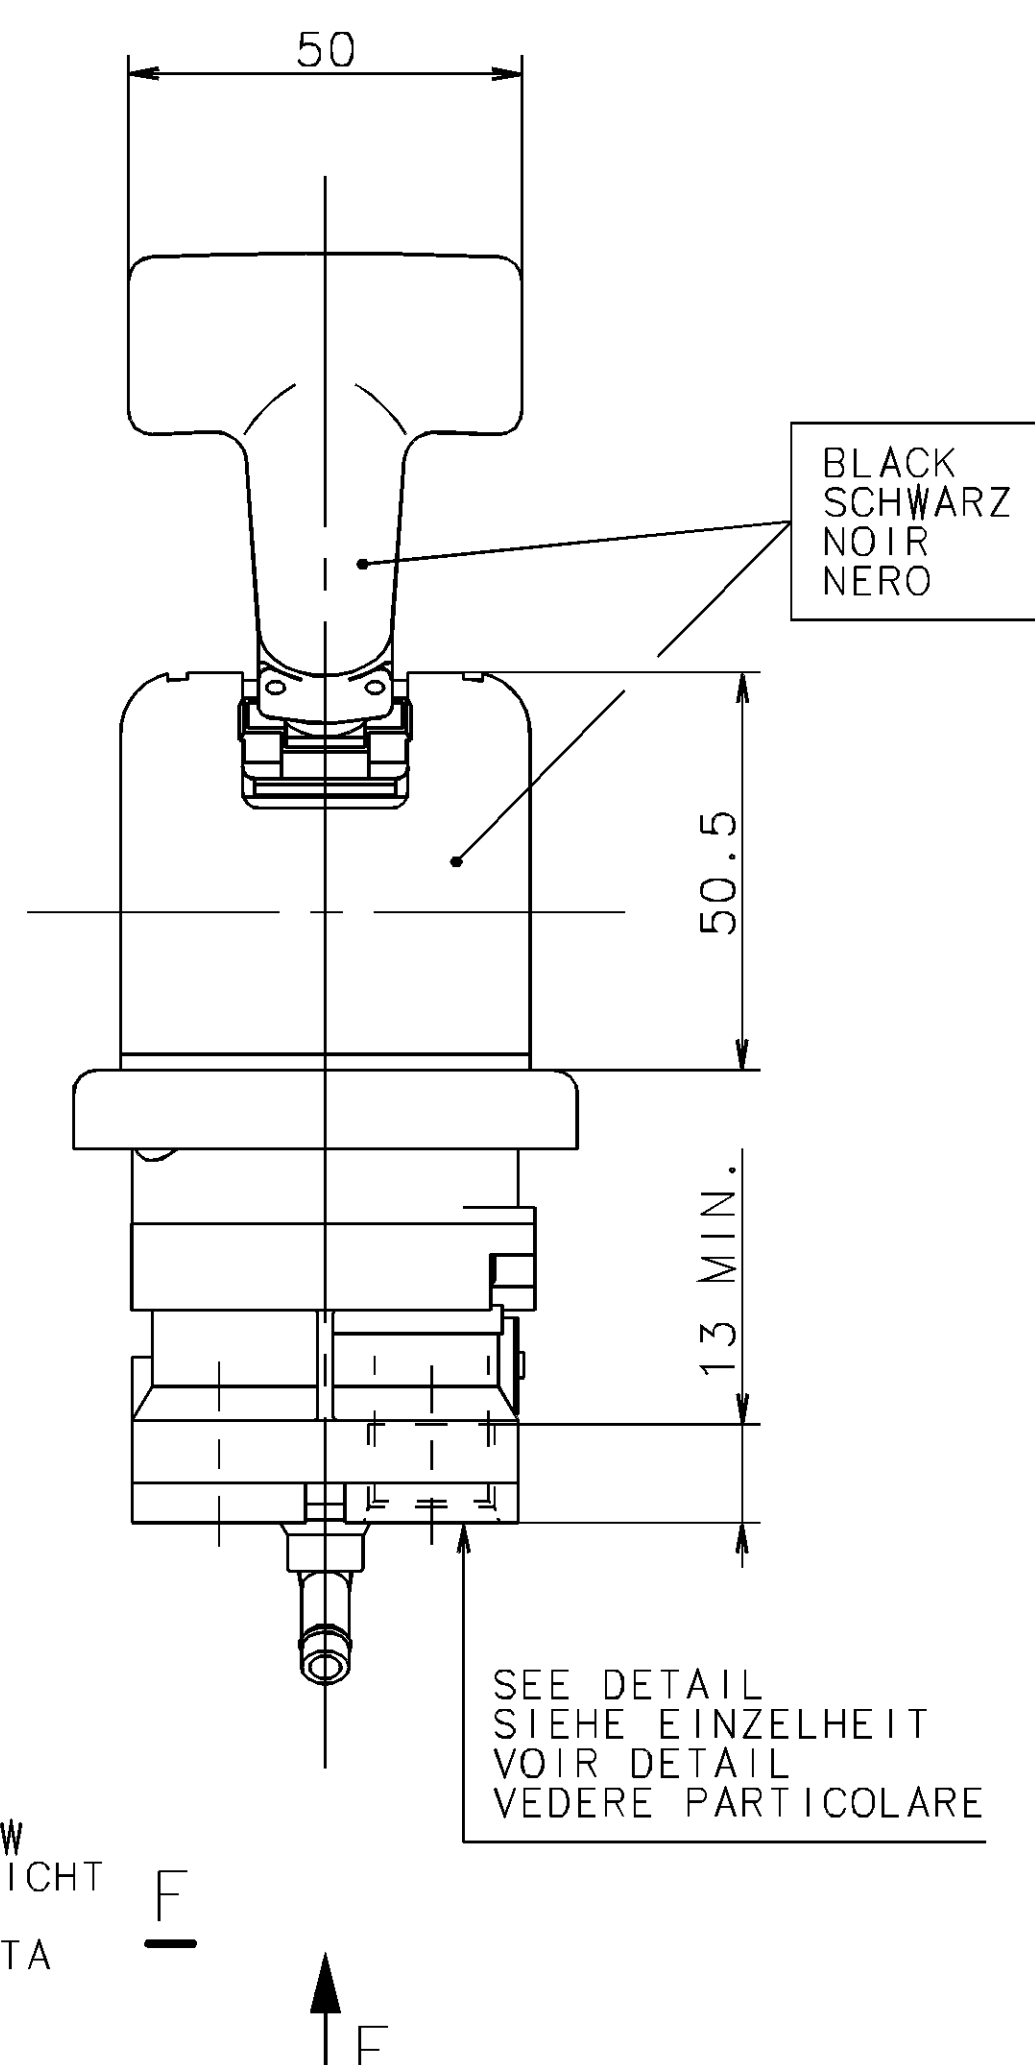
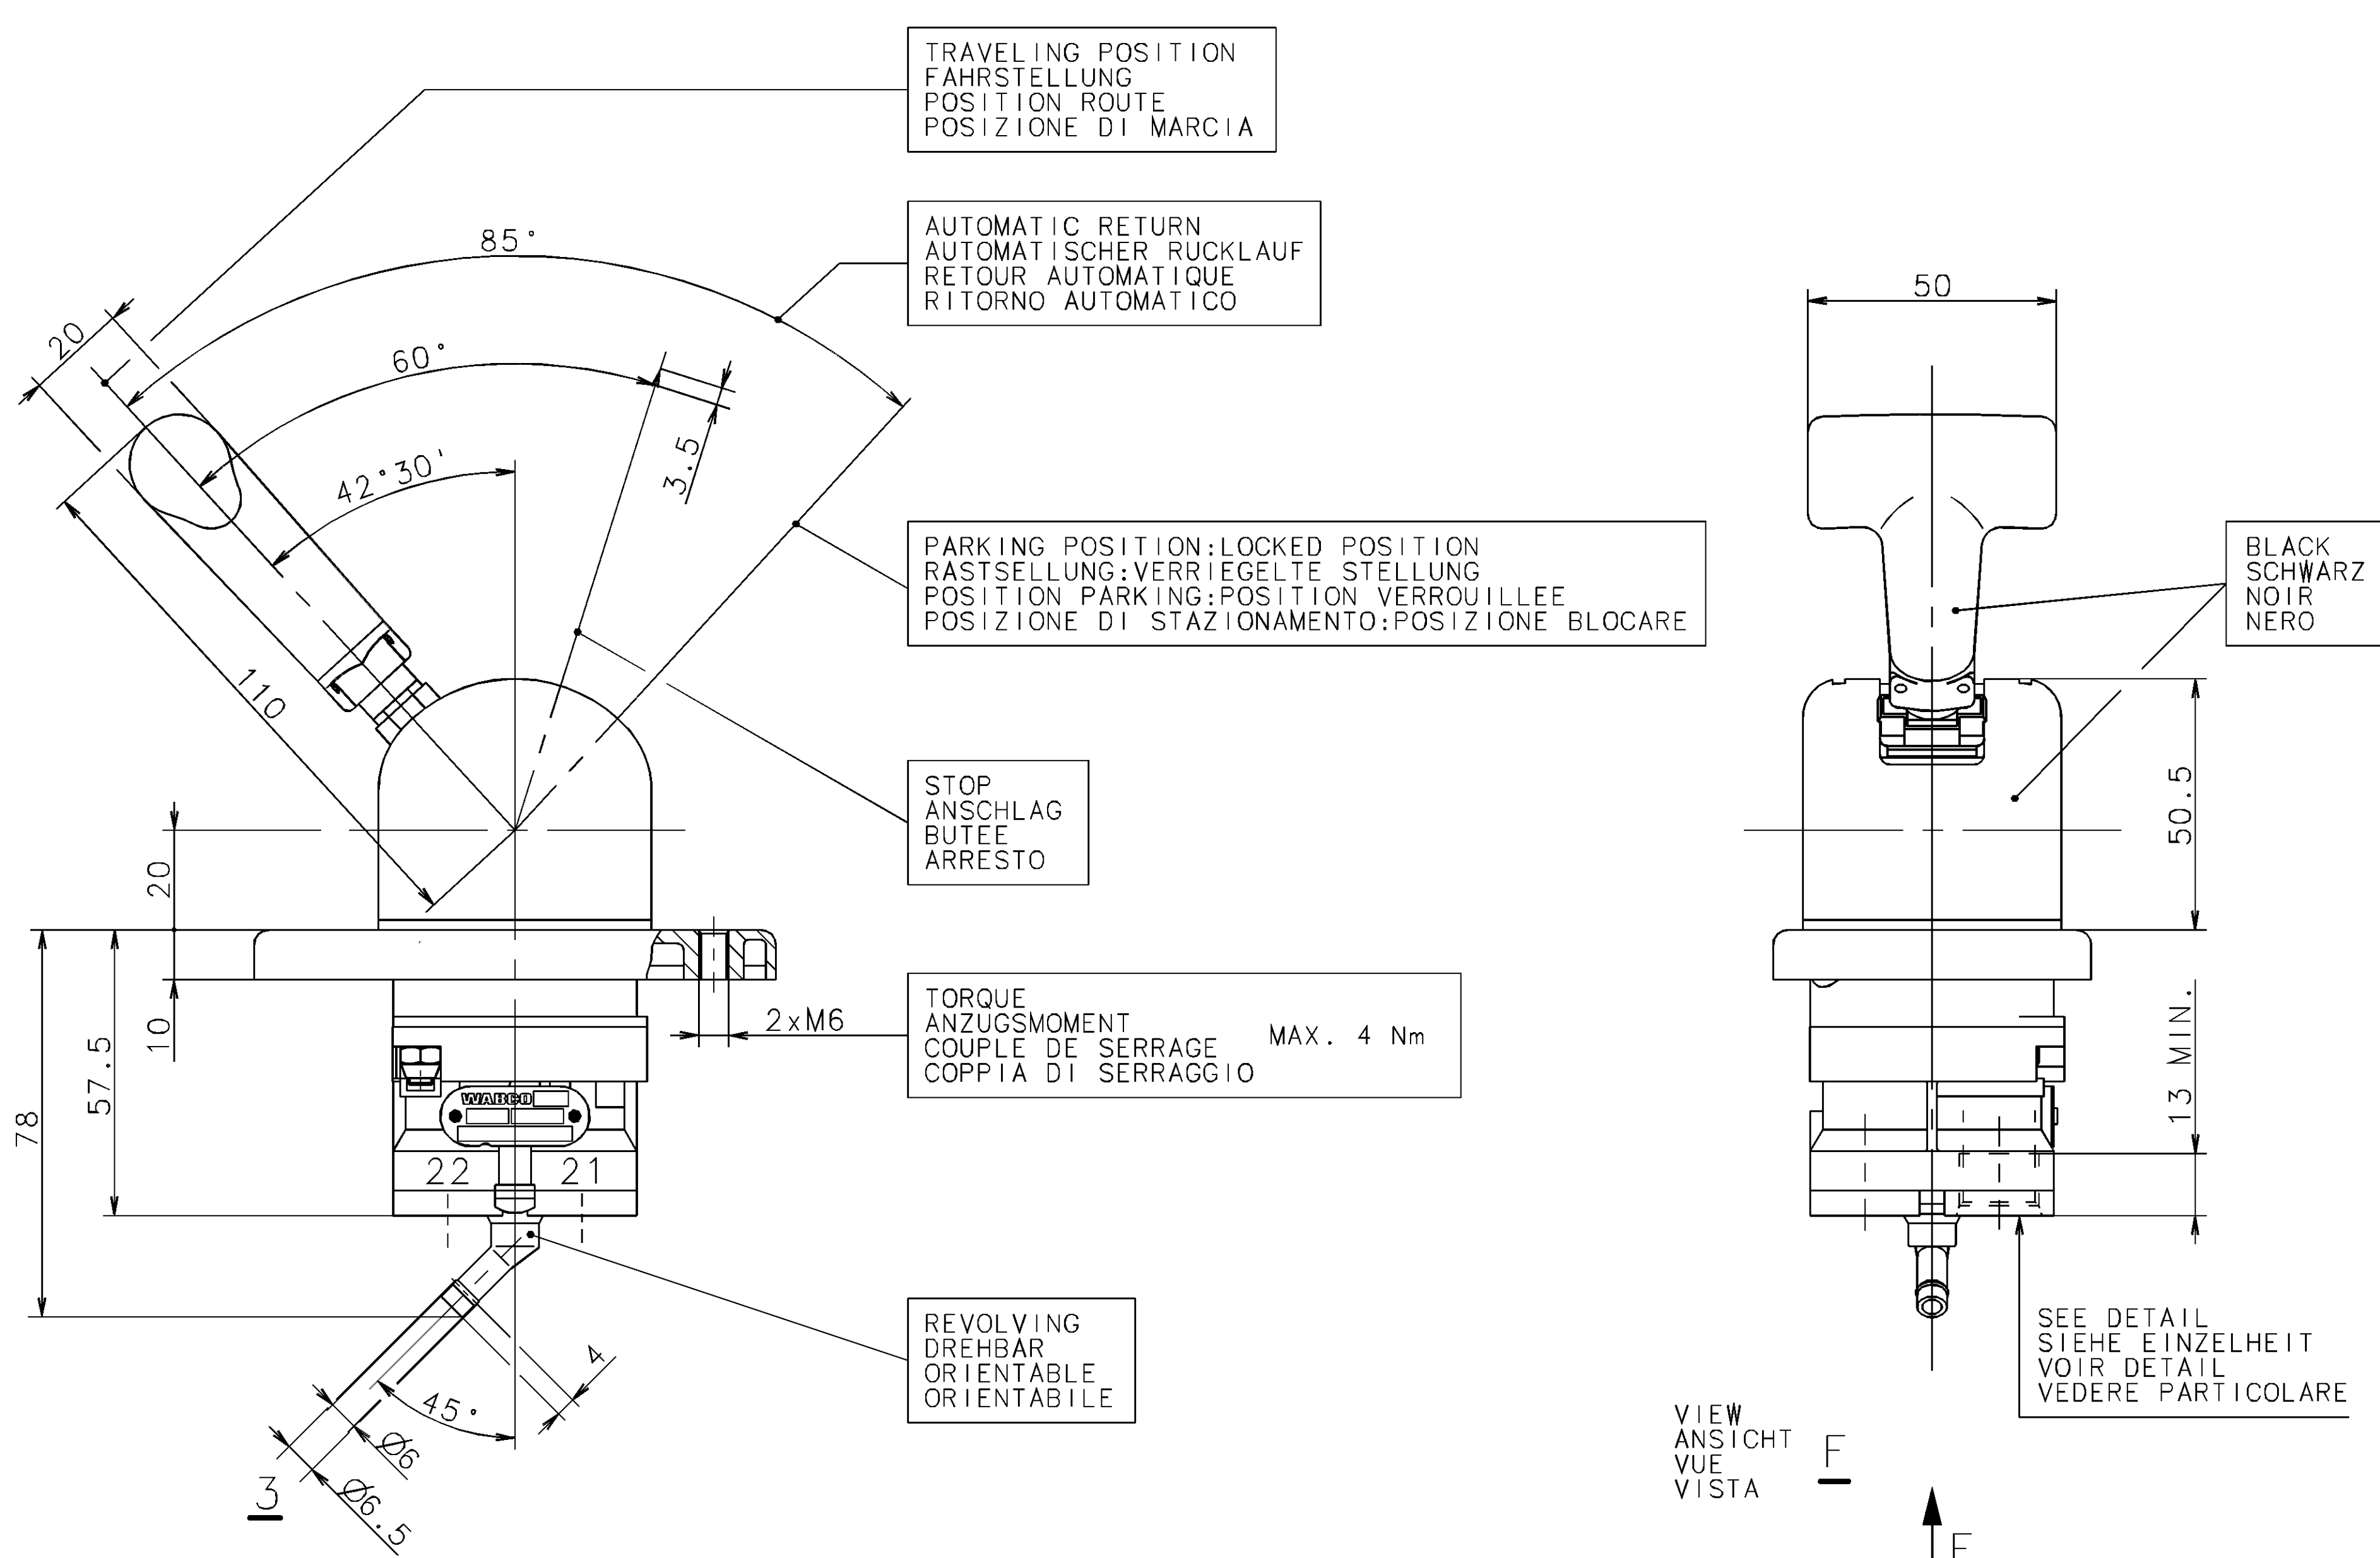
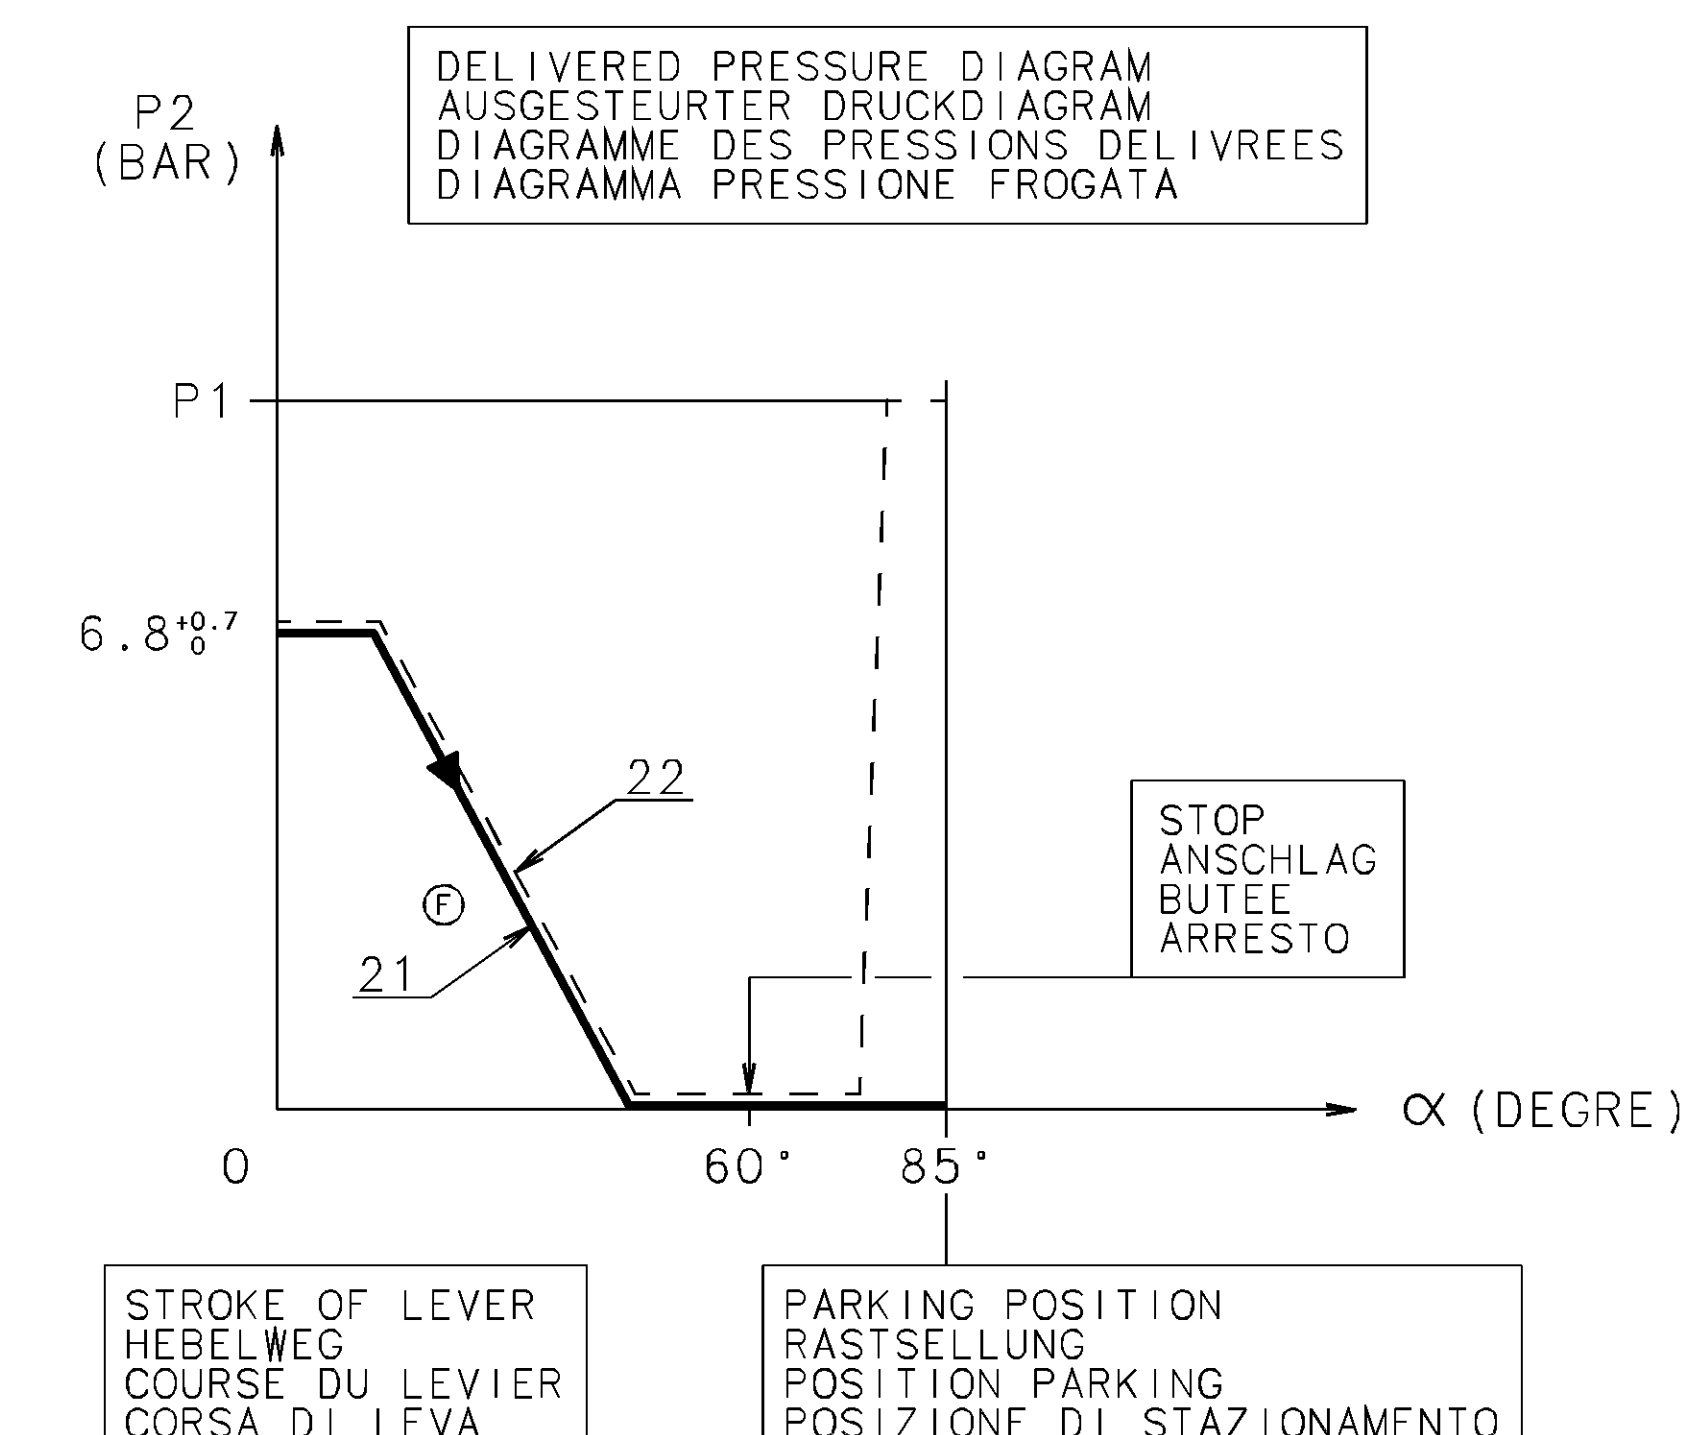


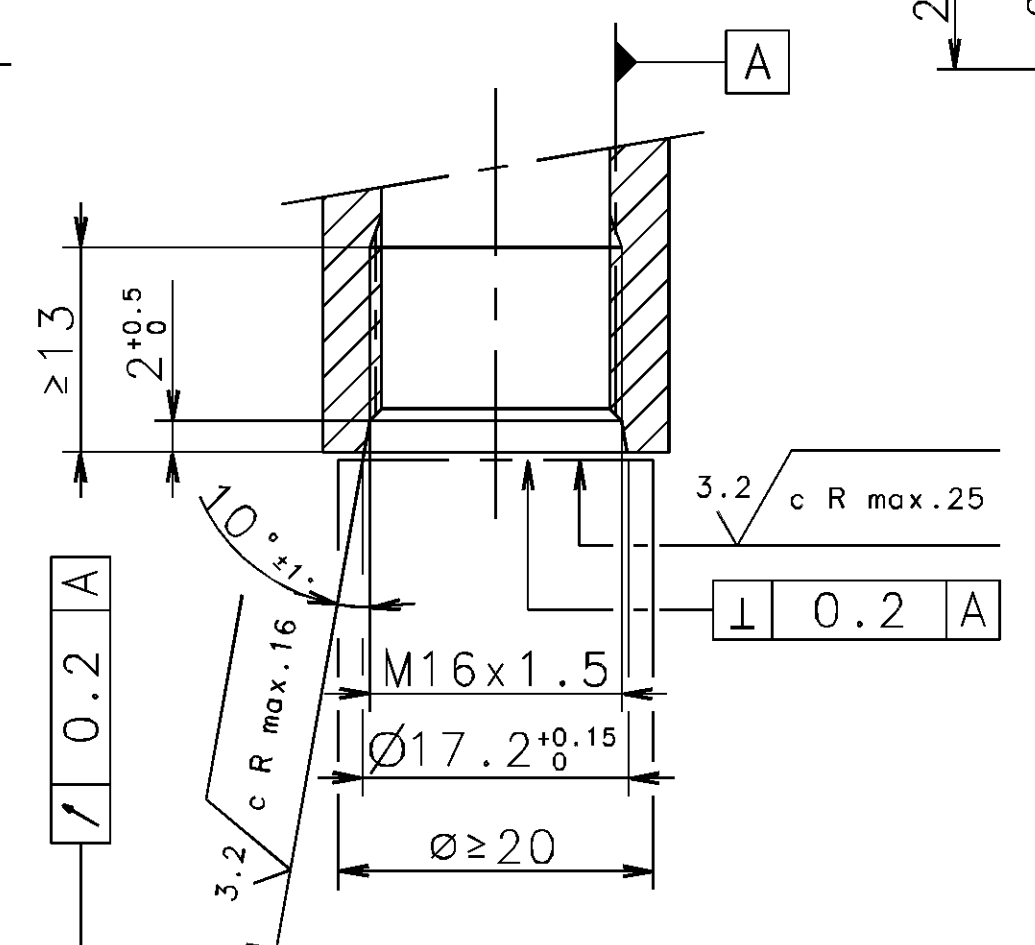

TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE
COPPIA DI SERRAGGIO MAX. 34 Nm

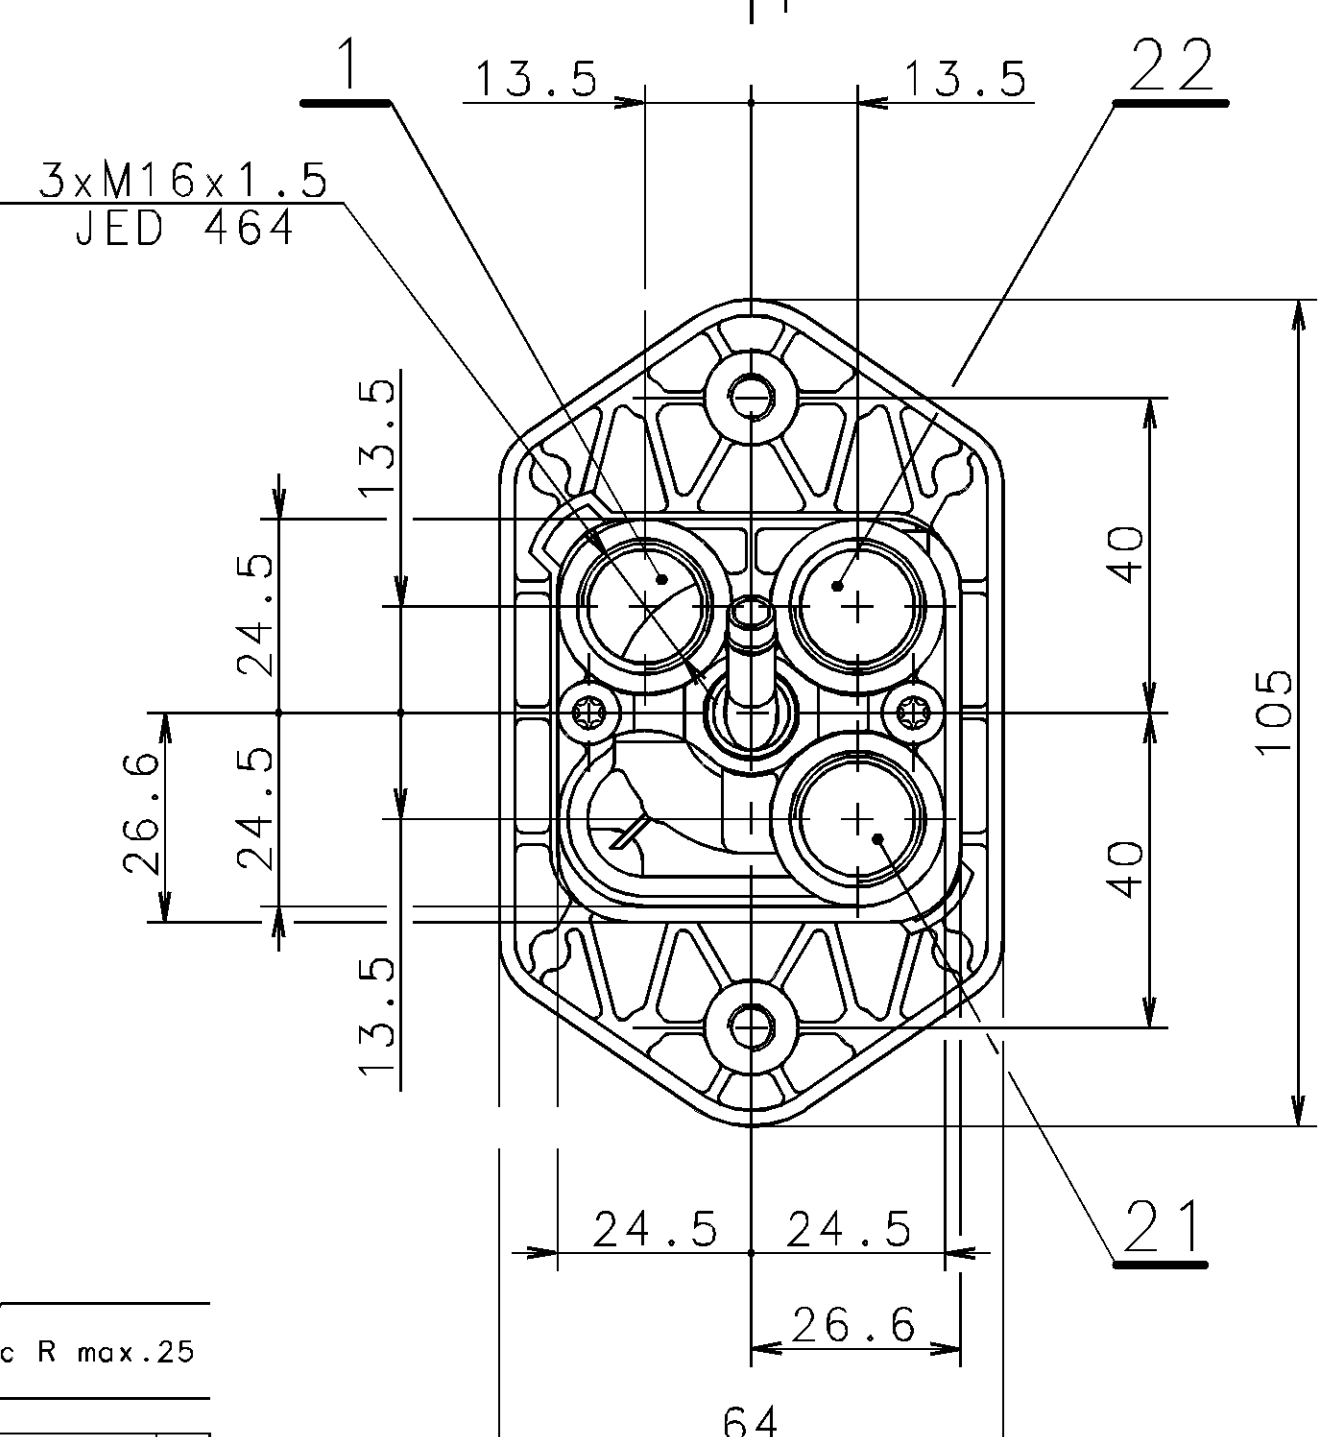

TESTING SCHEME
SYMBOL
SCHEMA DE PRINCIPE
SCHEMA DI PRINCIPIO

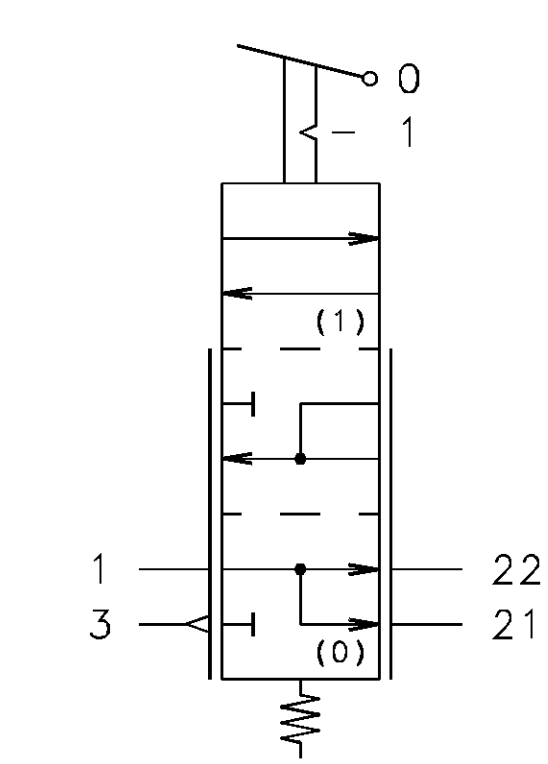

MARKING OF PORTS KENNZEICHNUNG DER ANSCHLUESSE MARQUAGE DES ORIFICES MARCATURA DEGLI ORIFIZI		
1	SUPPLY VORRAT ALIMENTATION ALIMENTAZIONE	
21	SPRING BRAKE CYLINDER FEDERSPEICHERZYLINDER CYLINDRE A RESSORT CILINDRO A MOLLA	
22	TRAILER CONTROL VALVE ANHAENGER STEUVENTIL VALVE DE CONTROLE DE REMORQUE VALVOLA DI CONTROLLO DI RIMORCHIO	
3	EXHAUST ENTLUEFTUNG ECHAPPEMENT SCARICO	
GENERAL DATA ALLGEMEINE DATEN CARACTERISTIQUES GENERALES CARATTERISTICHE GENERALI		
MEDIUM : AIR MEDIUM : LUFT FLUIDE : AIR FLUIDO : ARIA		
THERMICAL RANGE THERM. ANWENDUNGSBEREICH TEMPERATURE D'UTILISATION TEMPERATURA DI UTILIZZAZIONE -40° C.....+80° C		
P1 = 10 BAR MAX.		
P2 = 6.8+0.7 BAR	FOR FÜR POUR PER	P1 = 10 BAR

DETAIL
EINZELHEIT
DETAIL
PARTICOLARE

SCALE
MASSTAB
ECHELLE
SCALA

2:1