

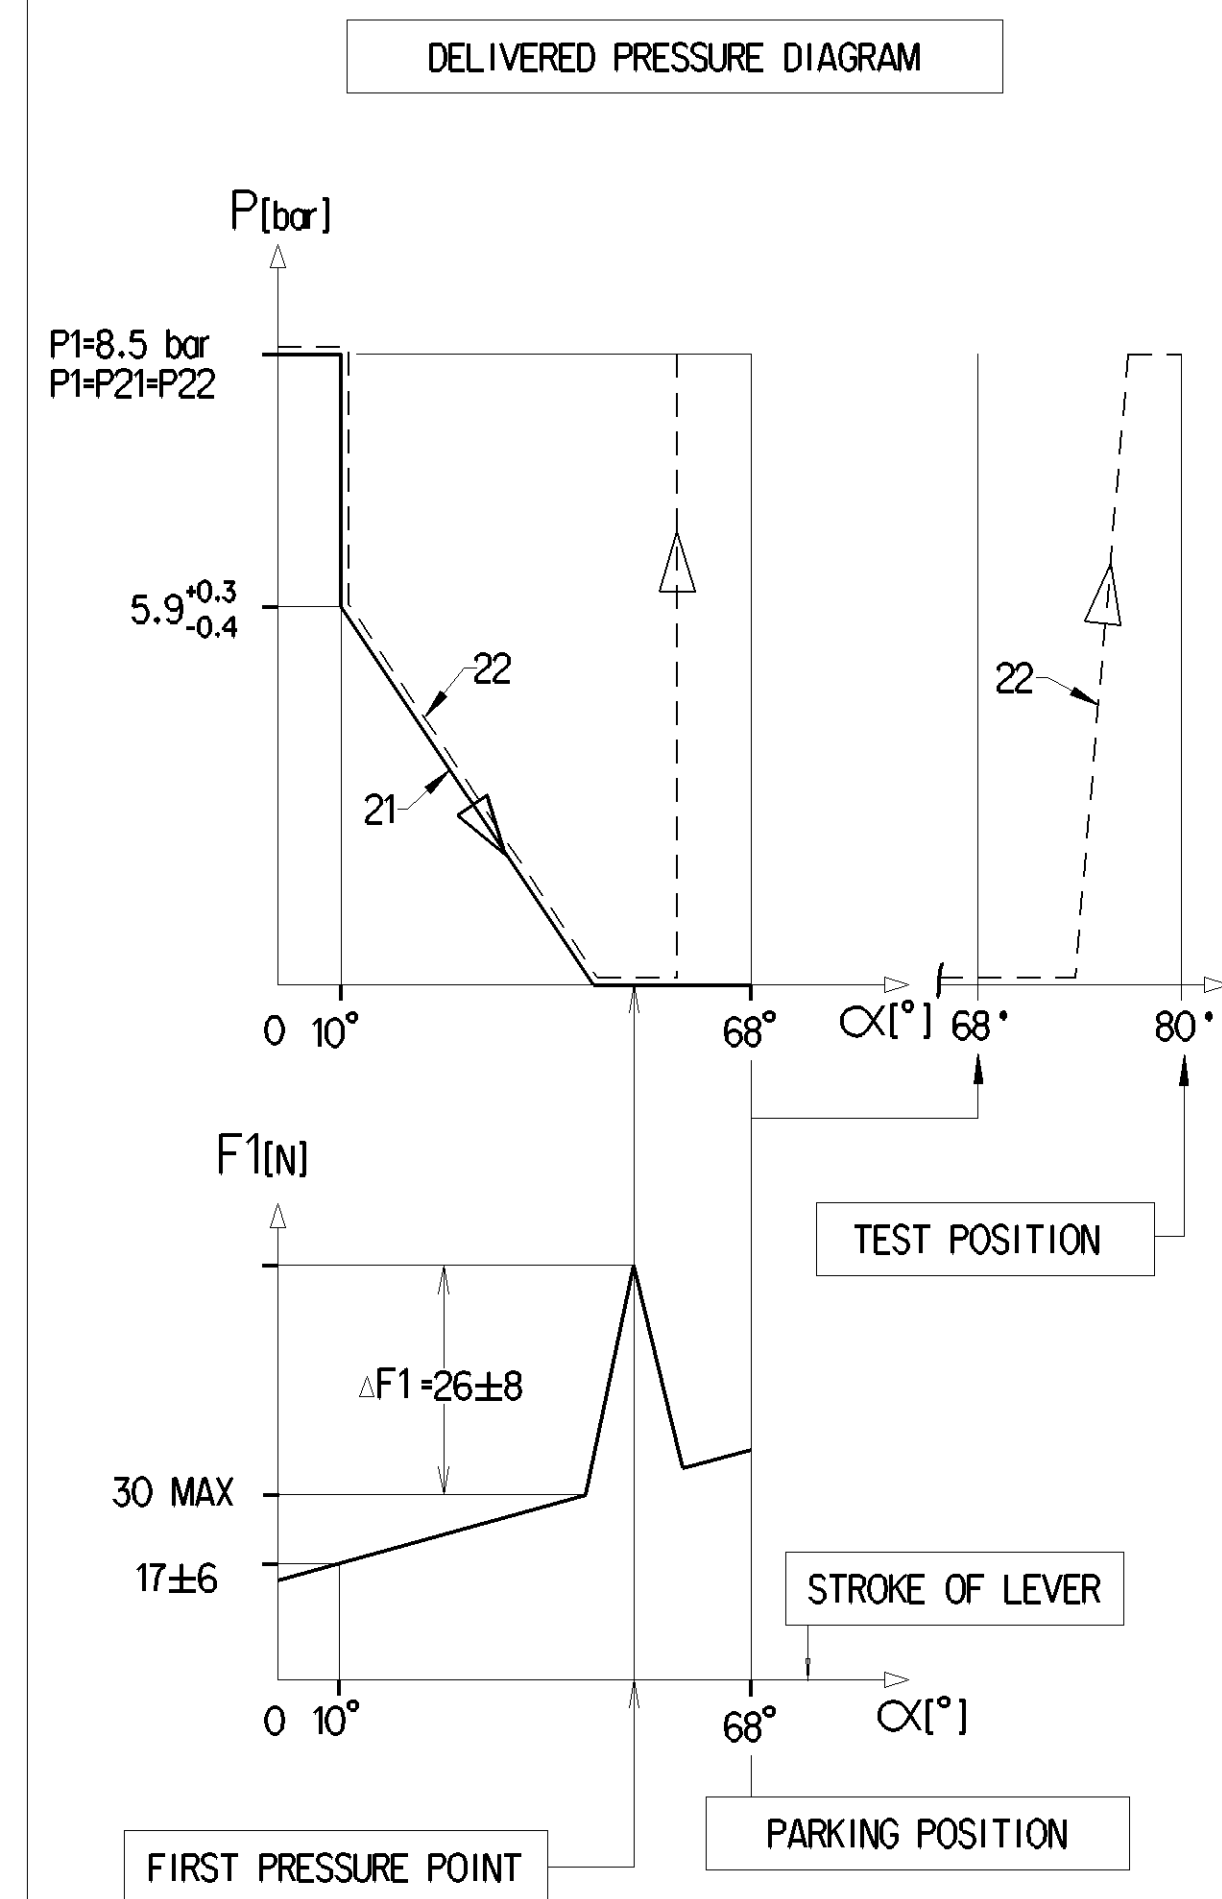
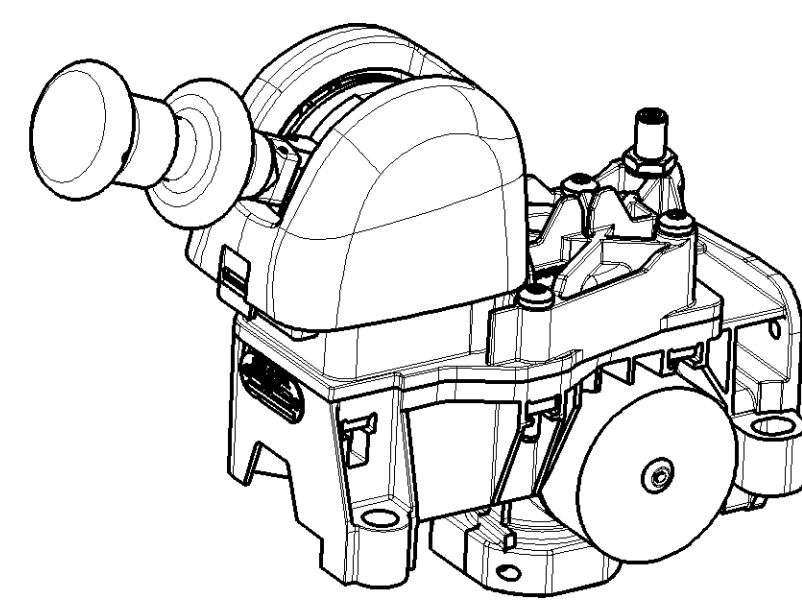
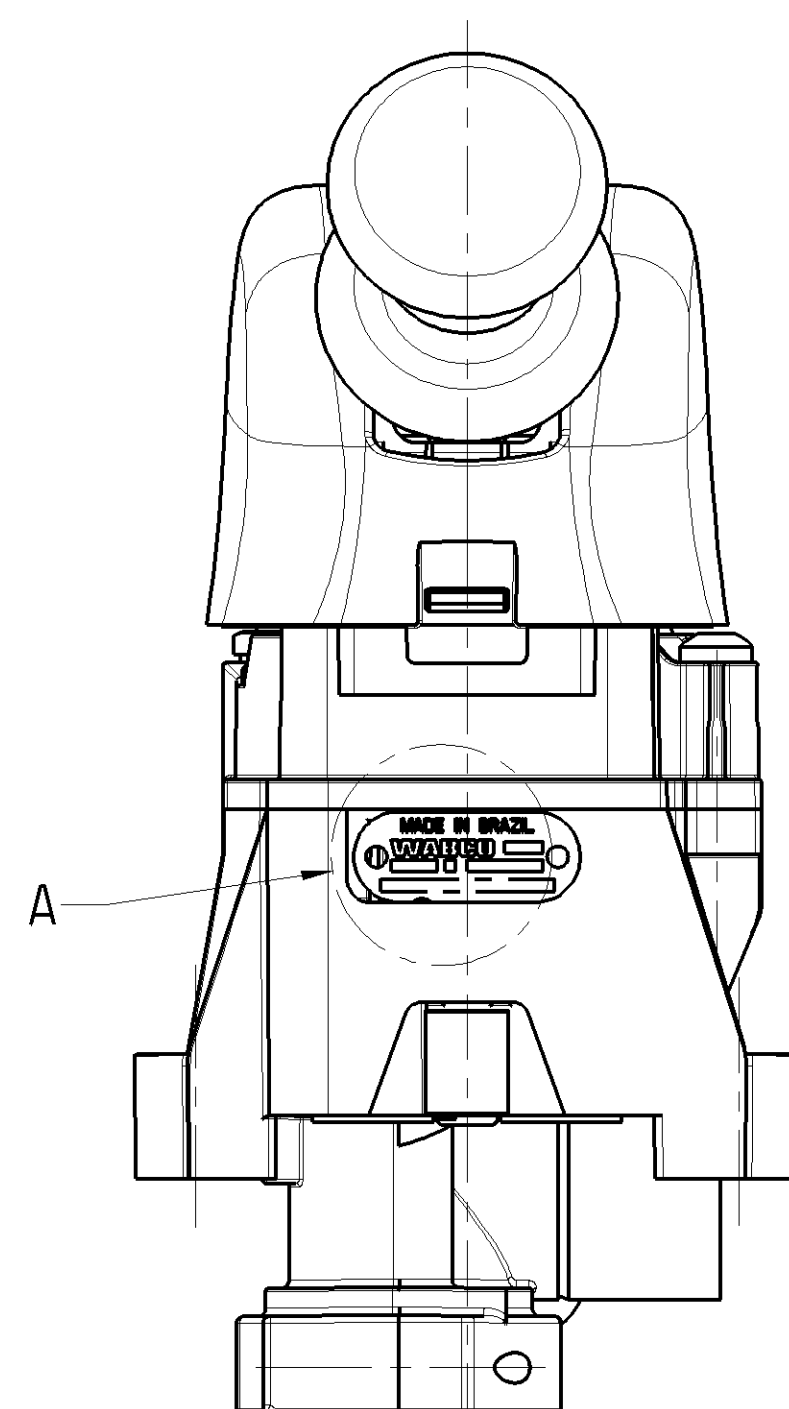
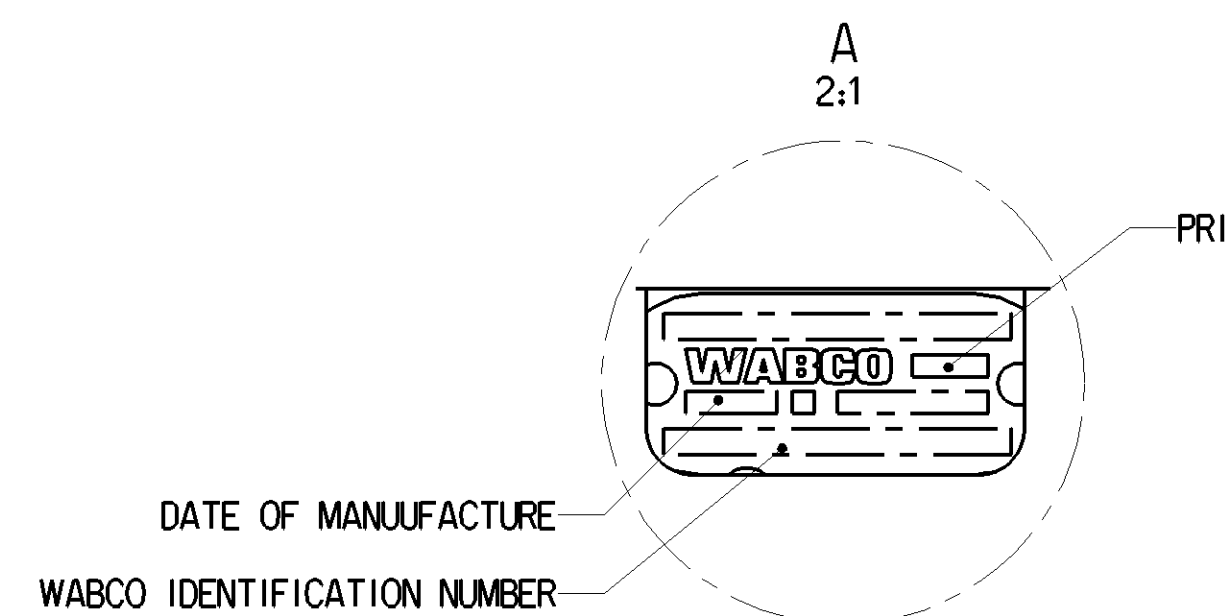
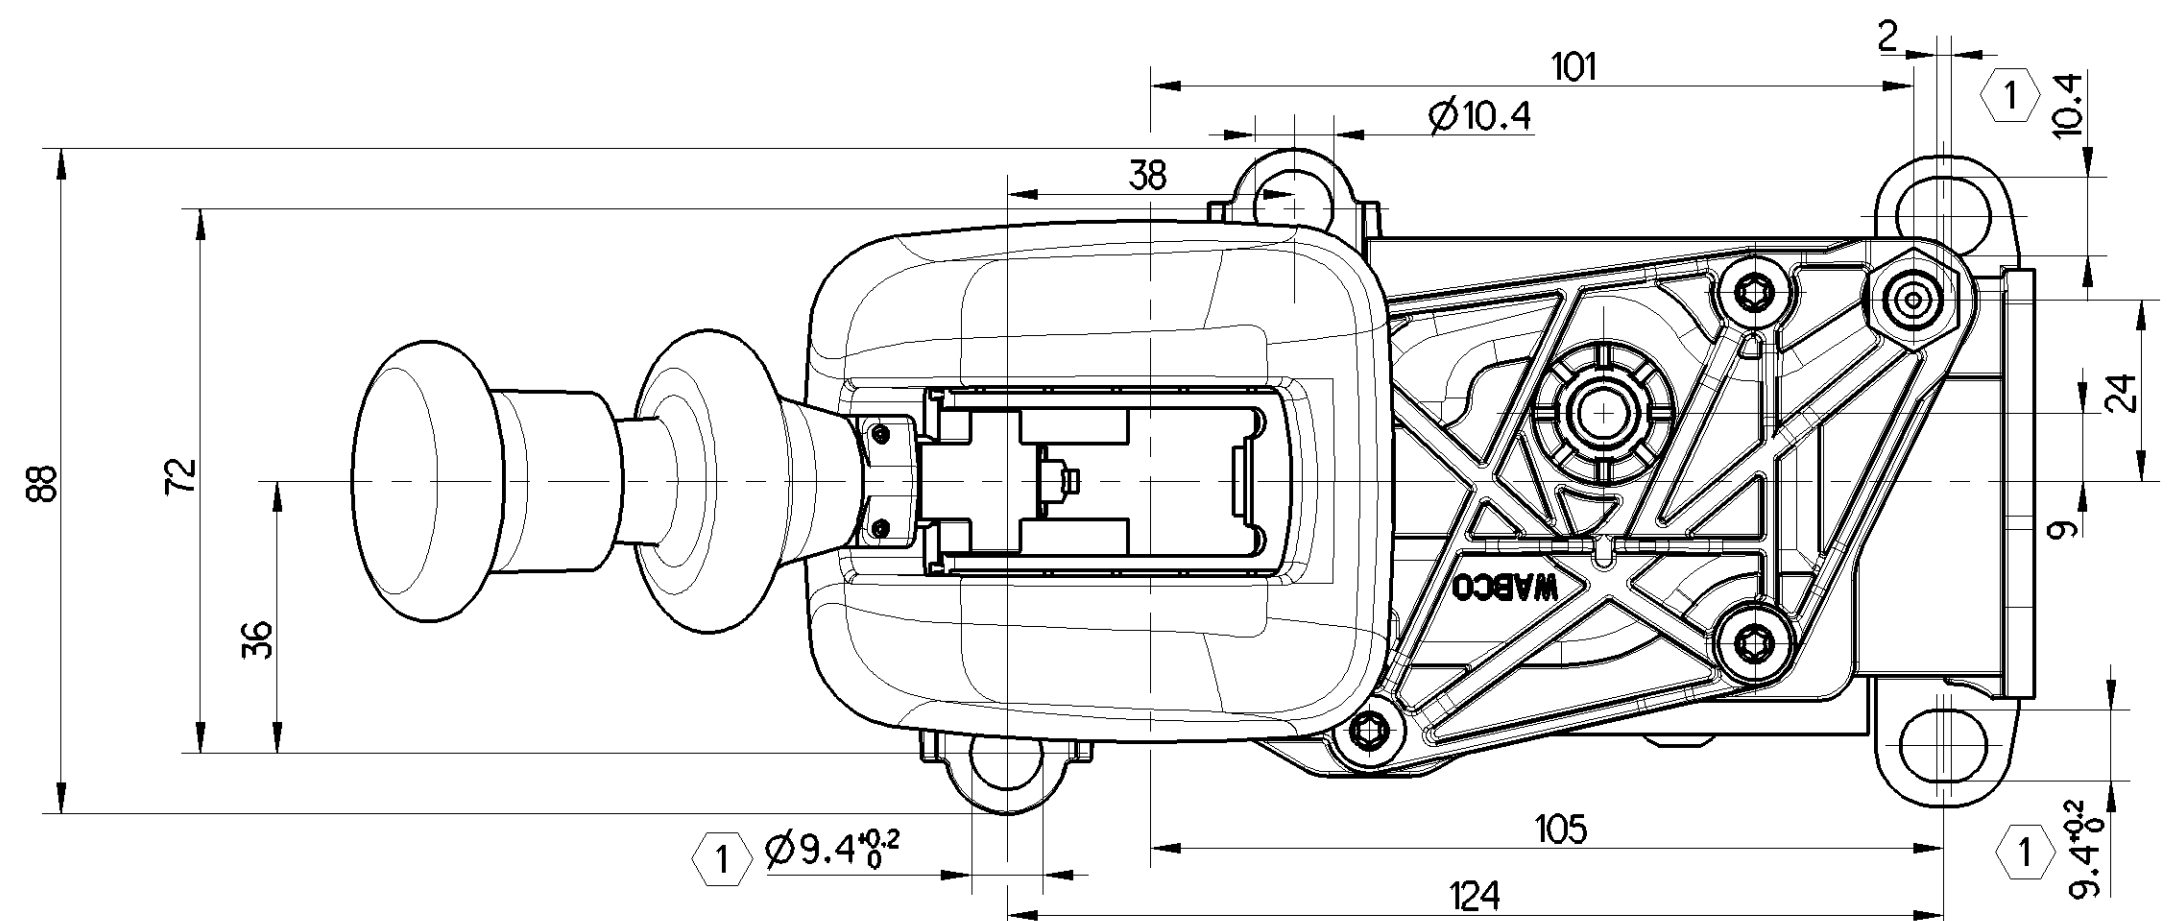
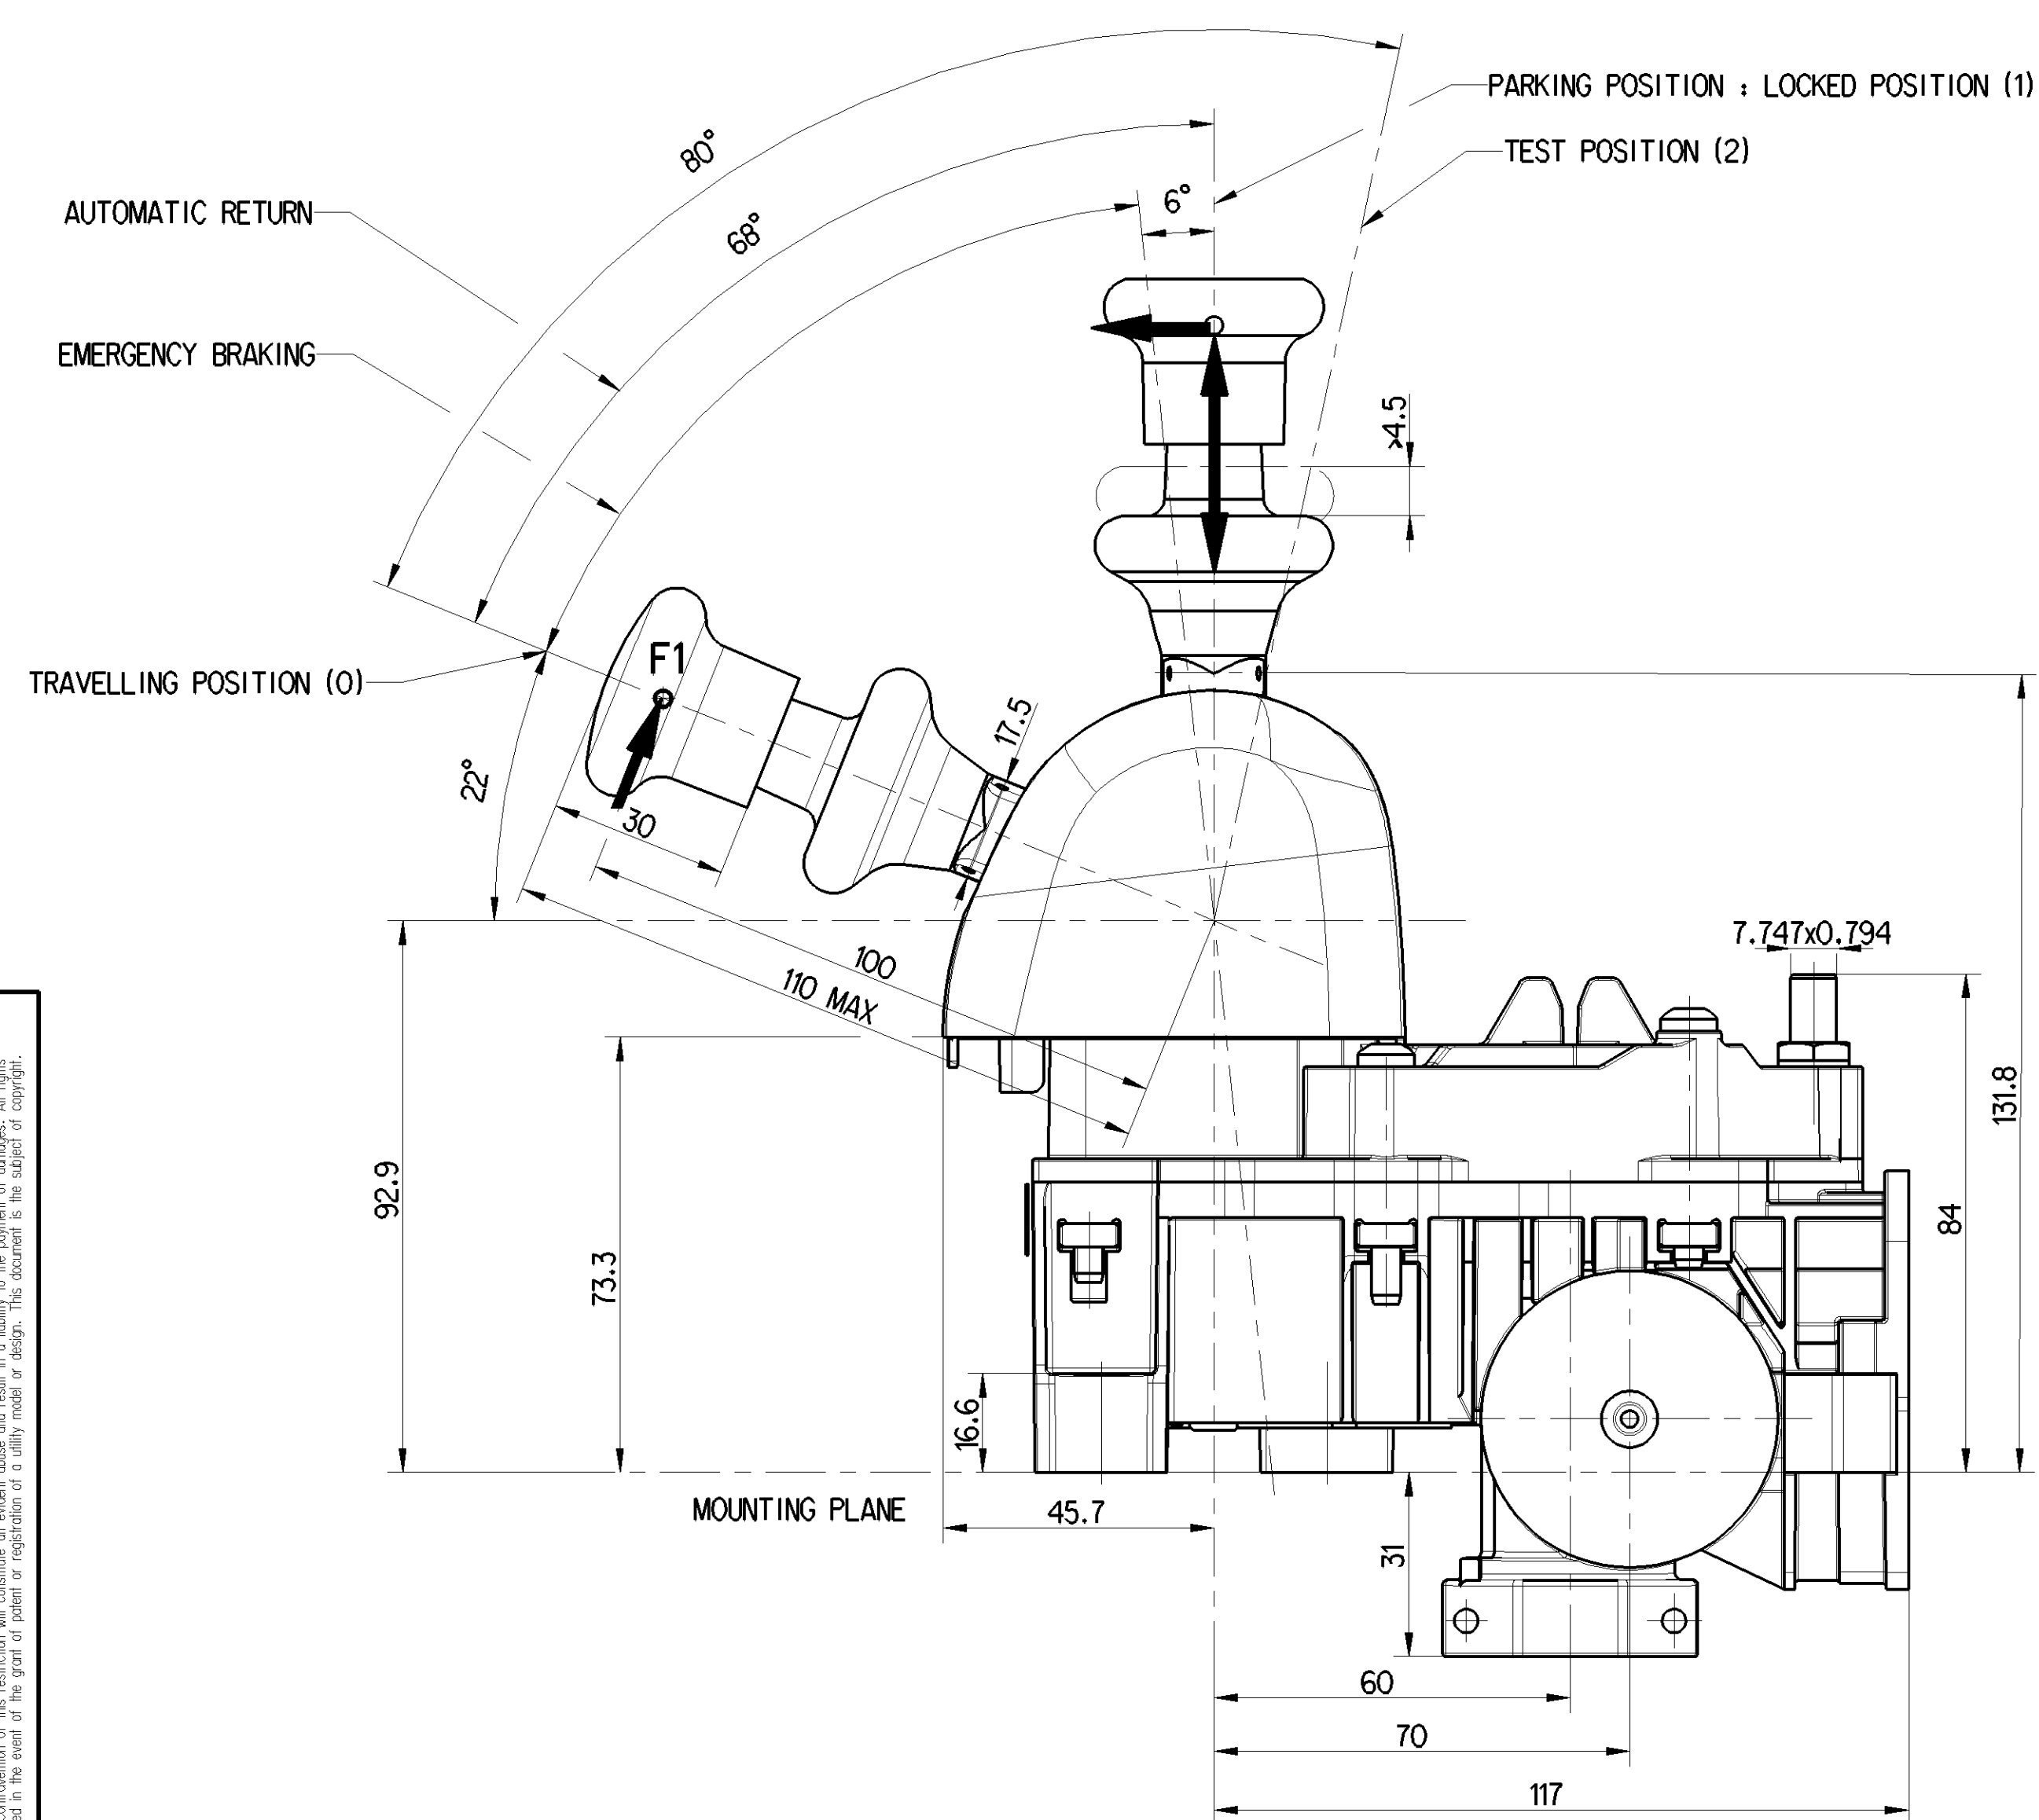


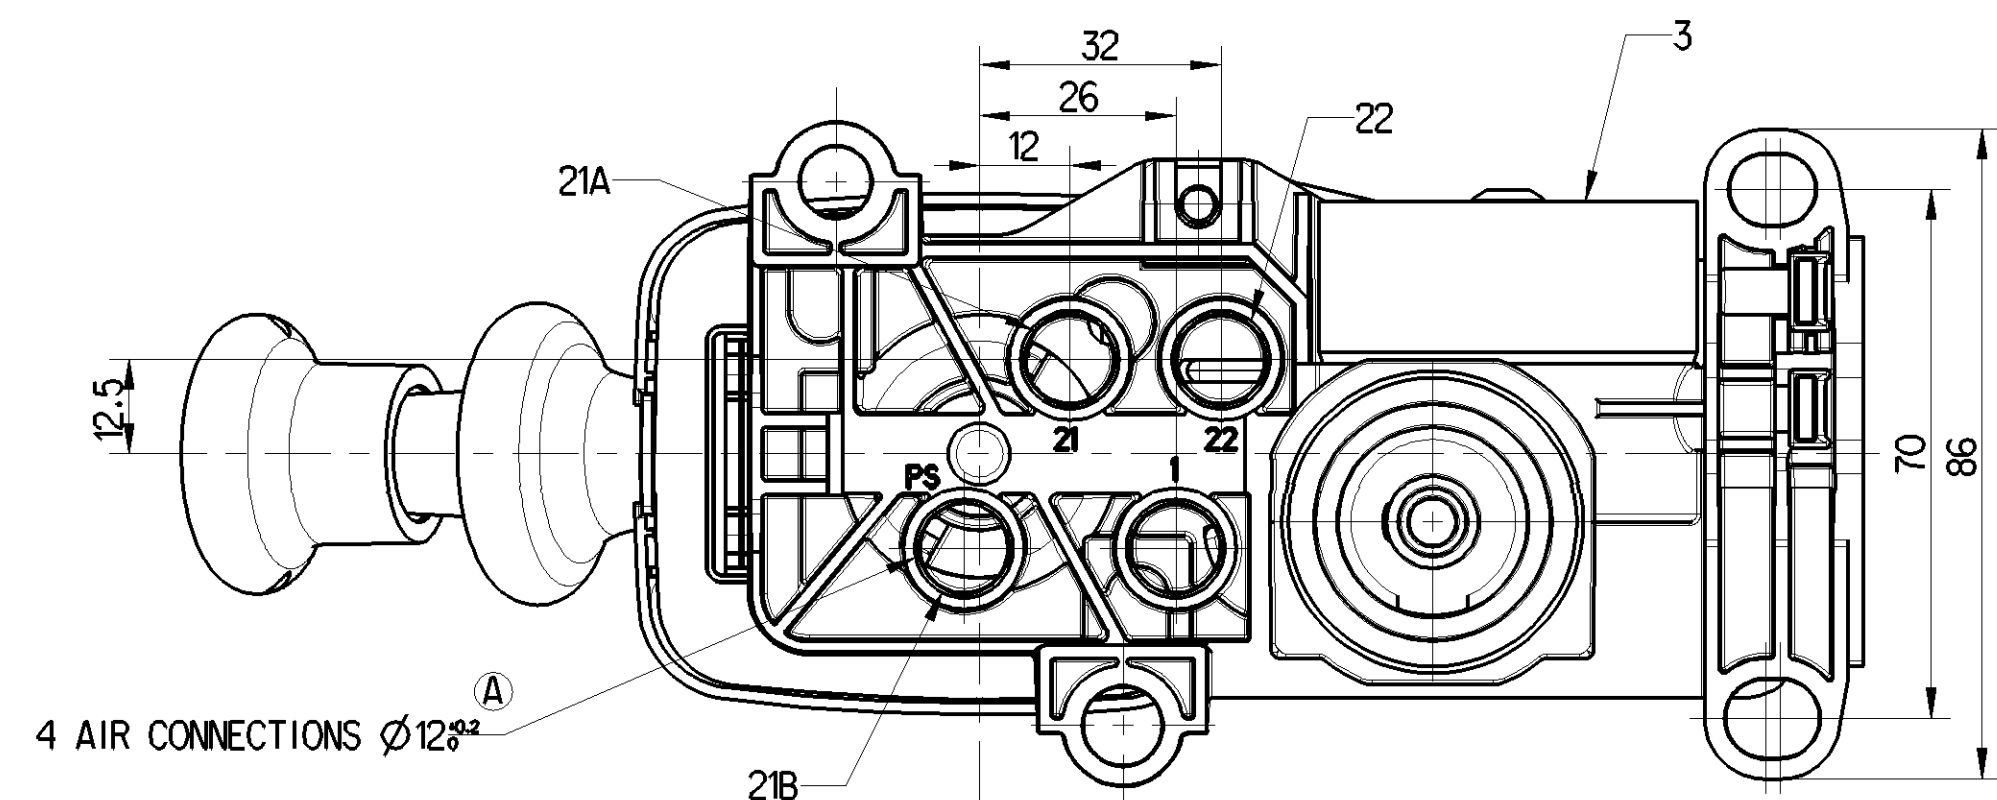

MARKING OF PORTS		GENERAL DATA	
		MEDIUM:	AIR
1	SUPPLY	THERMAL RANGE:	-40°C... +80°C
21A	SPRING BRAKE CYLINDER	OPERATING PRESSURE:	5.9 - 8.5 bar
21B	PRESSURE SWITCH	DELIVERY PRESSURE:	P1 = 13 bar MAX.
22	TRAILER CONTROL VALVE	 TORQUE:	9 Nm MAX.
3	EXHAUST:	SILENCER	

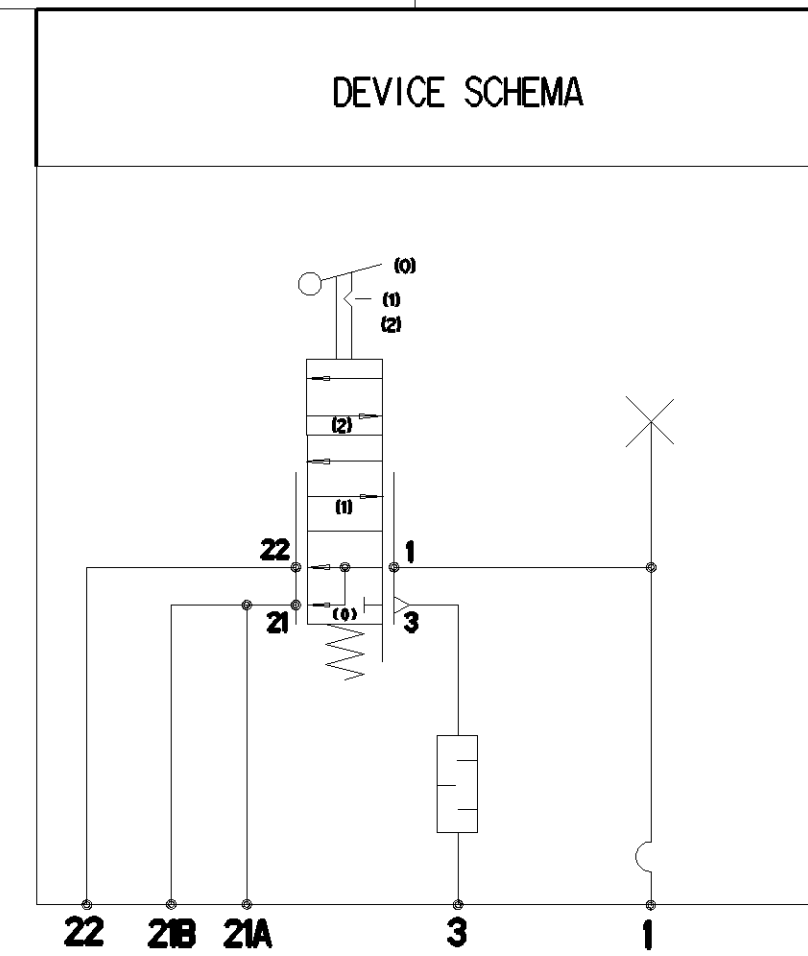

2 THE LOCKING DEVICE MUST AUTOMATICALLY AND SAFELY LOCK THE HANDLE IN THE PARKING POSITION

General Specification: JED-334-1, Size ISO 14405 LP					Copyright WABCO®		WABCO HAND BRAKE VALVE			
Further Technical Data: 961 724 602 O					Date	Signature				
Doc. Code: C05		Sheet: 1 To 7		2020-02-18		Powik		961 724 600 0		
General Tolerances JED-261 Range of Nominal Dimensions (± mm)					2020-02-19		Marcinkiewicz			
					Expert		Powik			
Class 1) ≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400 $\triangleleft$					Mass		Scale			
Fine 1) 0.5 1.0 1.5 2.0 $\pm 3^{\circ}$					0.7 KG		1/1 (1/2, 2/1)			
Medium X 1.0 2.0 3.0 4.0					Size		CAD System		Material No.	
Coarse 2.0 3.5 5.0 6.5					A 1		CREO		Date of first issue: 2019-07-07	
Tapped Holes, acc. -							503924		Revision	
1) Tolerance Class Applied Crossmarked							1 x A		5212JM	
							Techn. Resp.		Replacement for	
									-	