
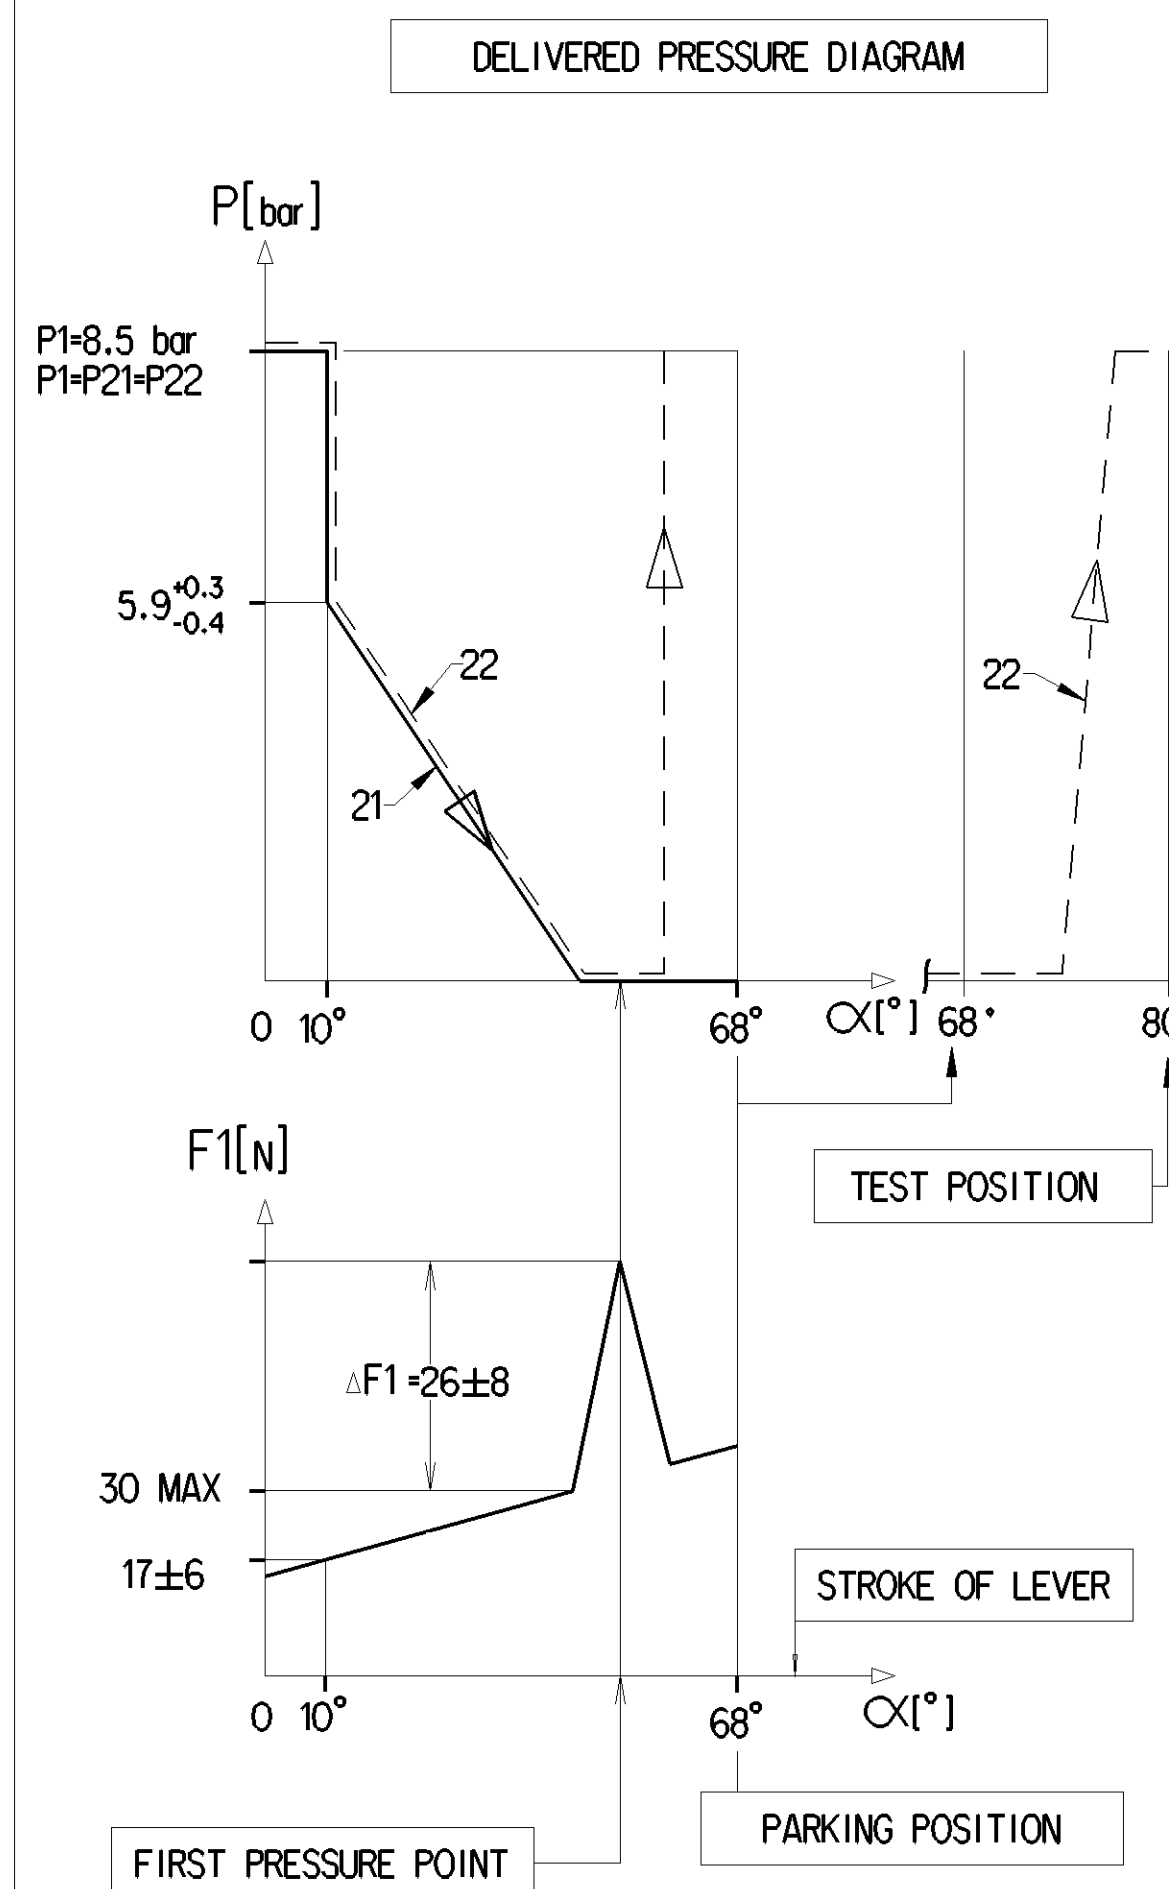
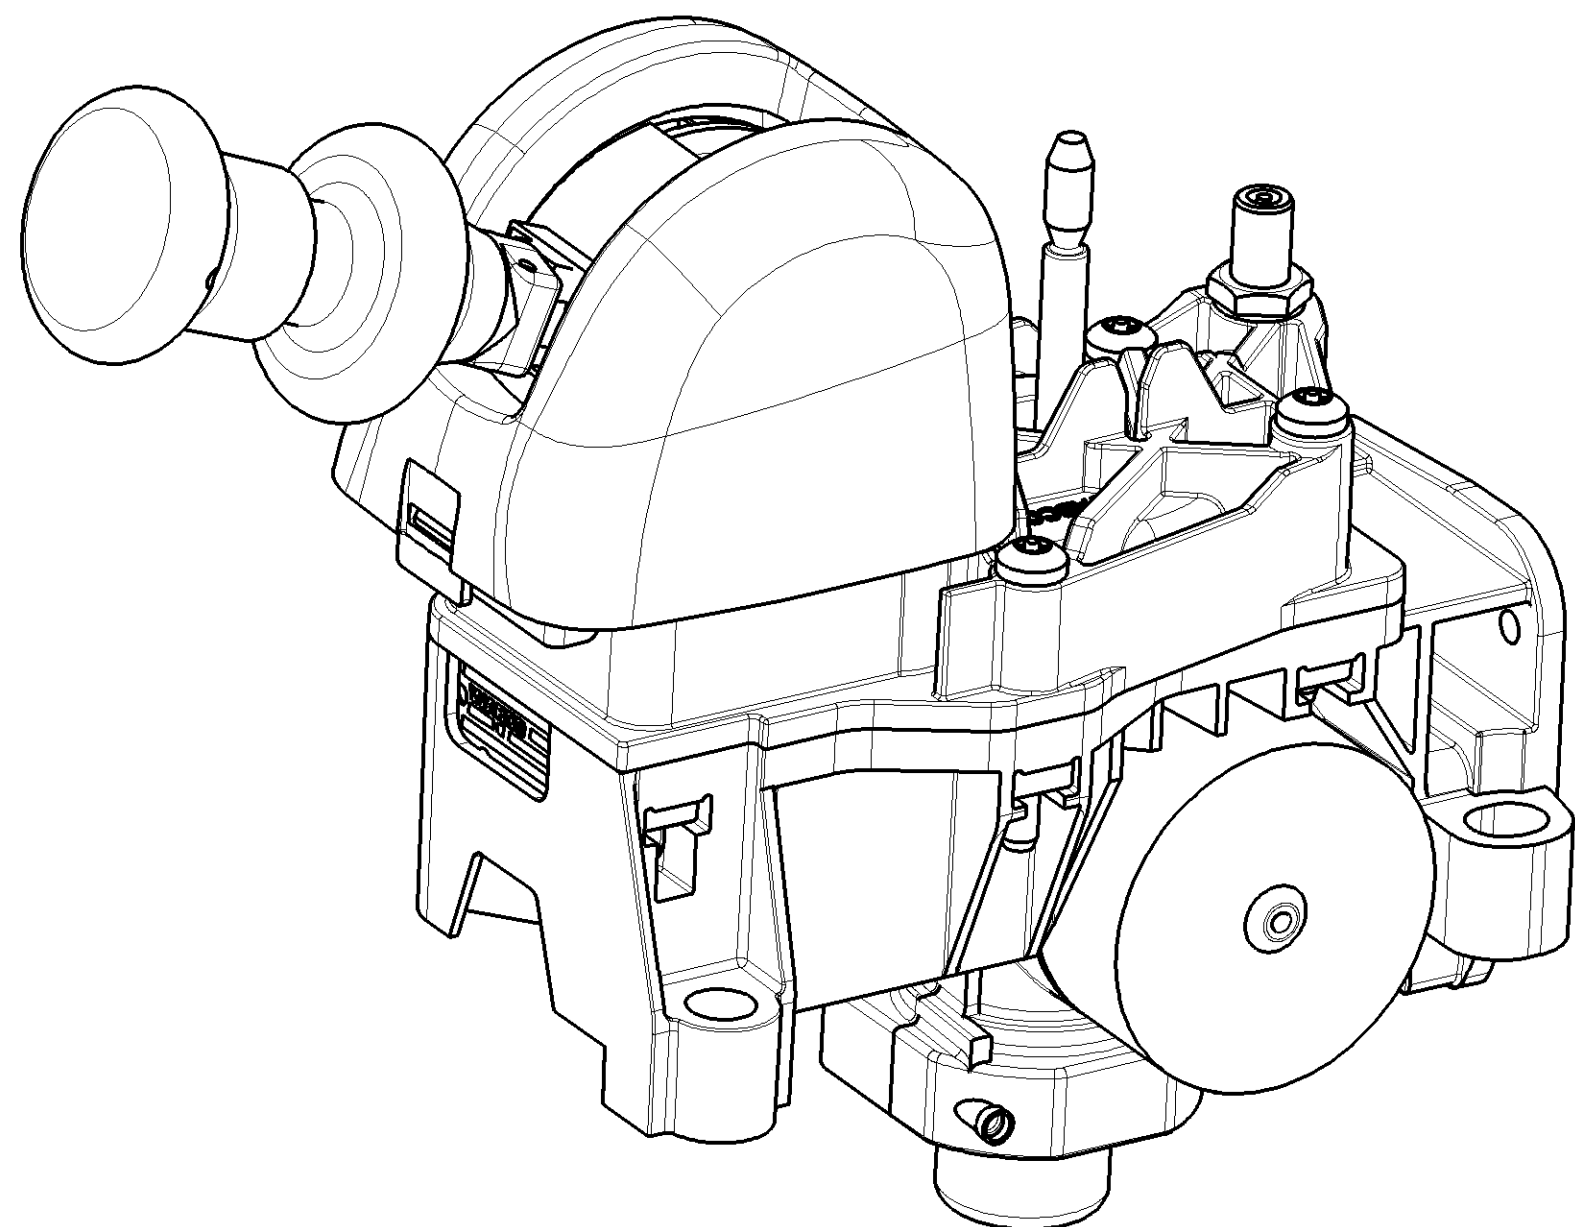
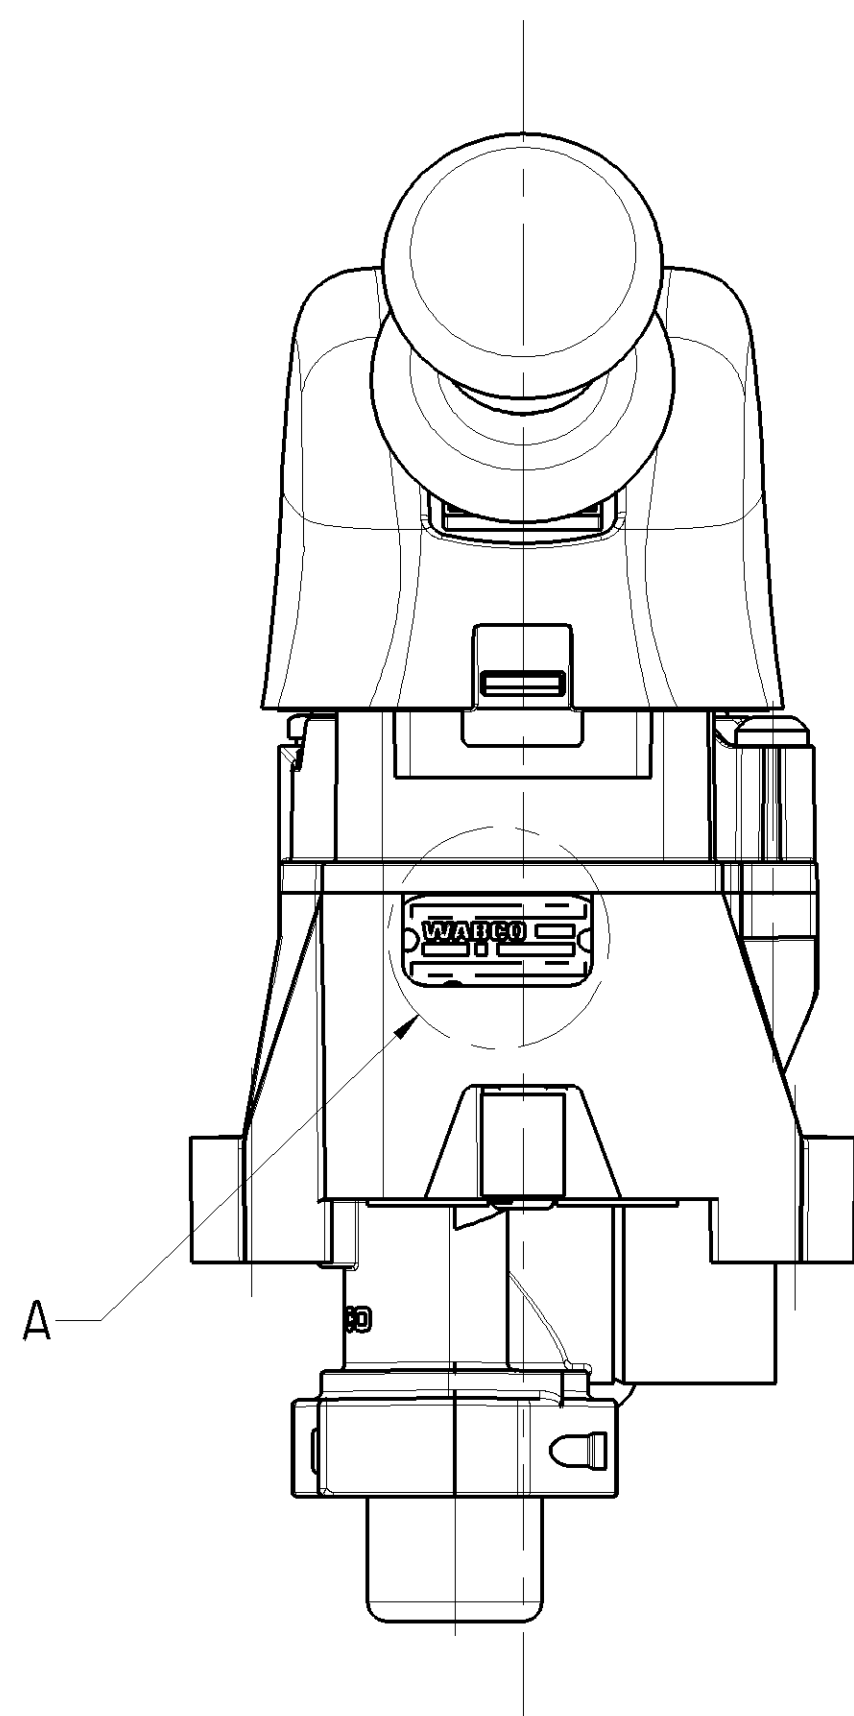
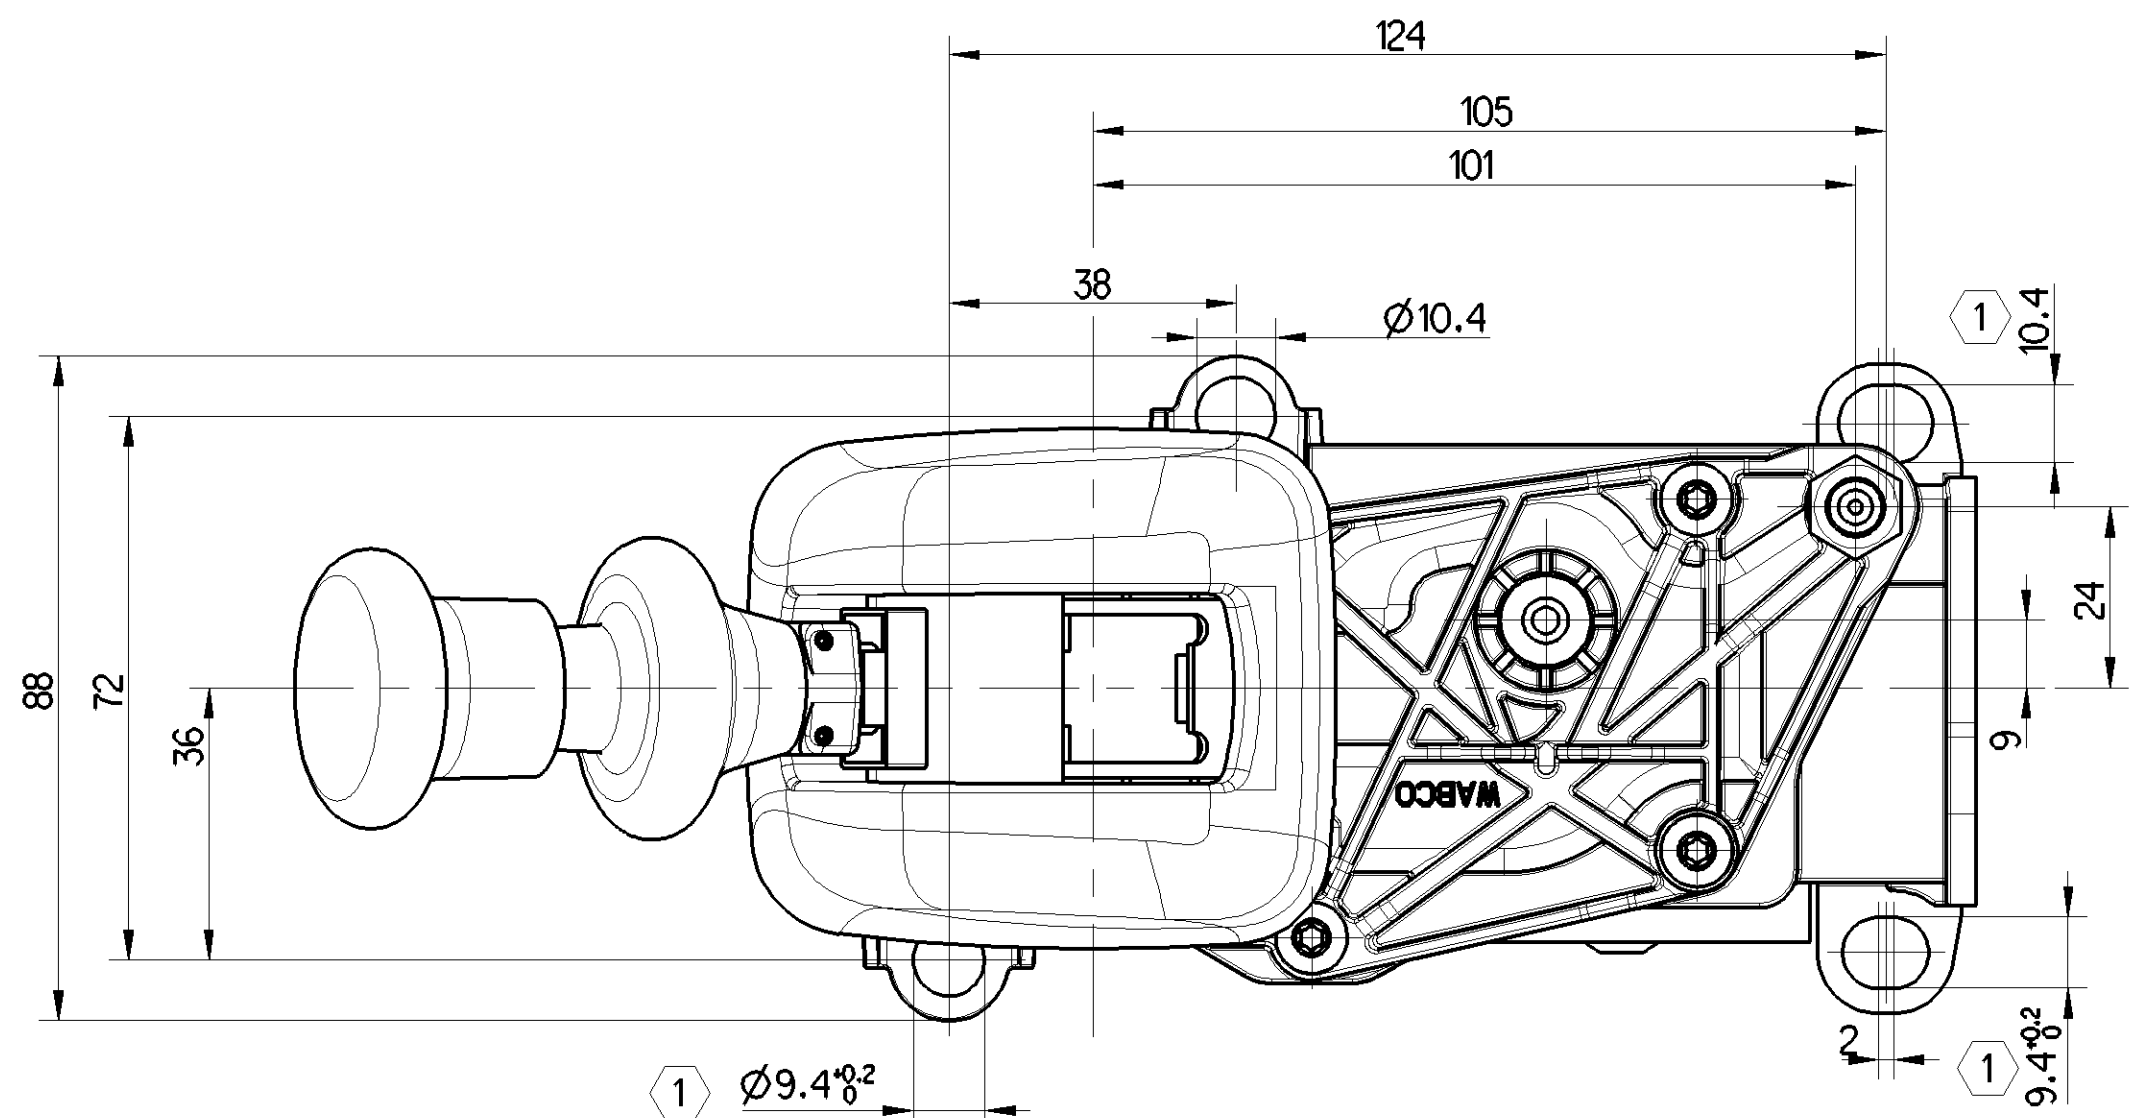
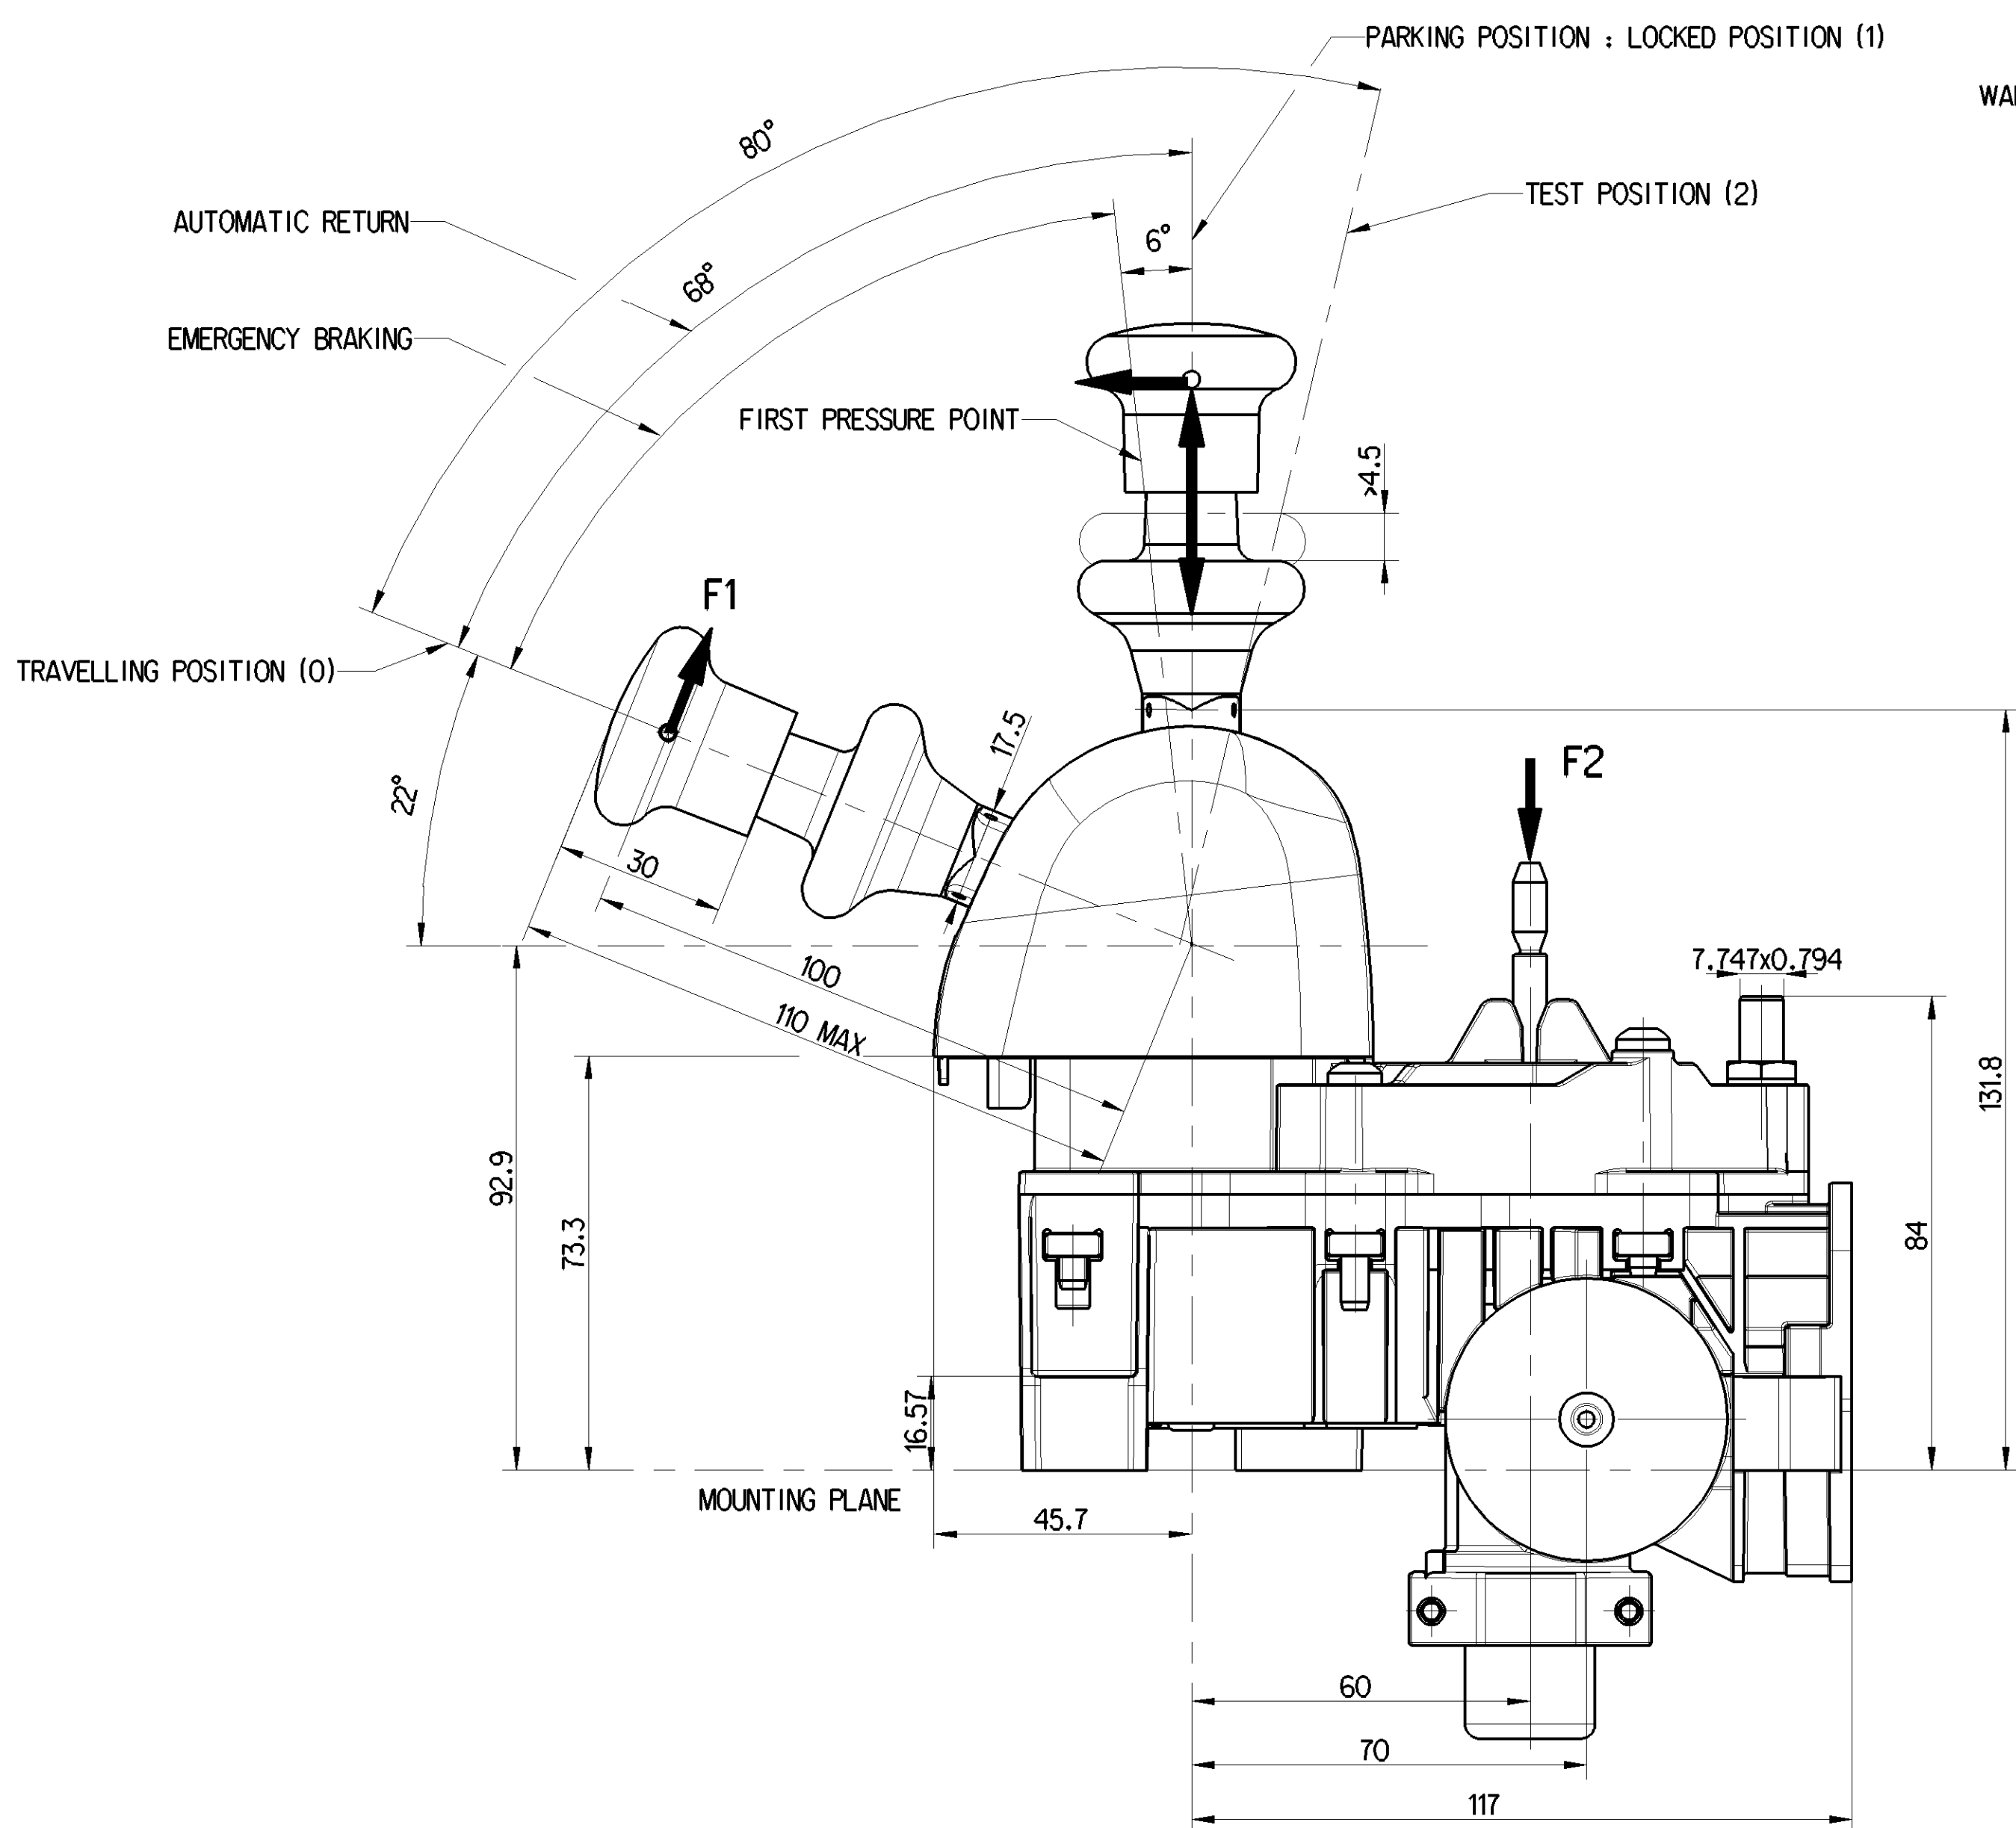
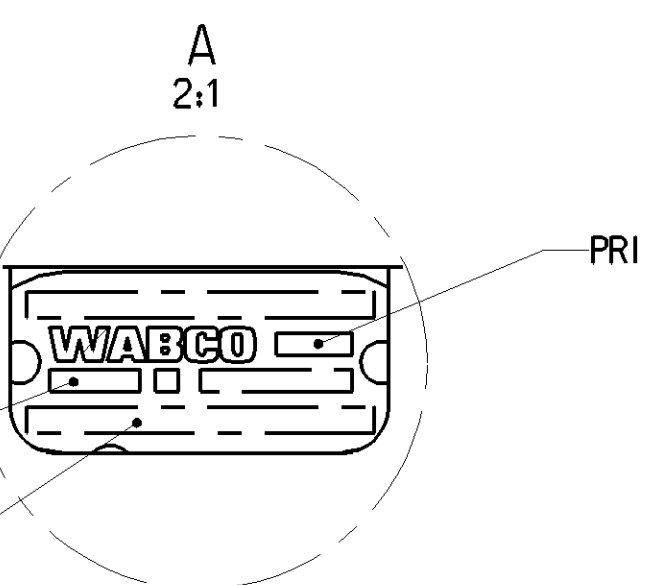


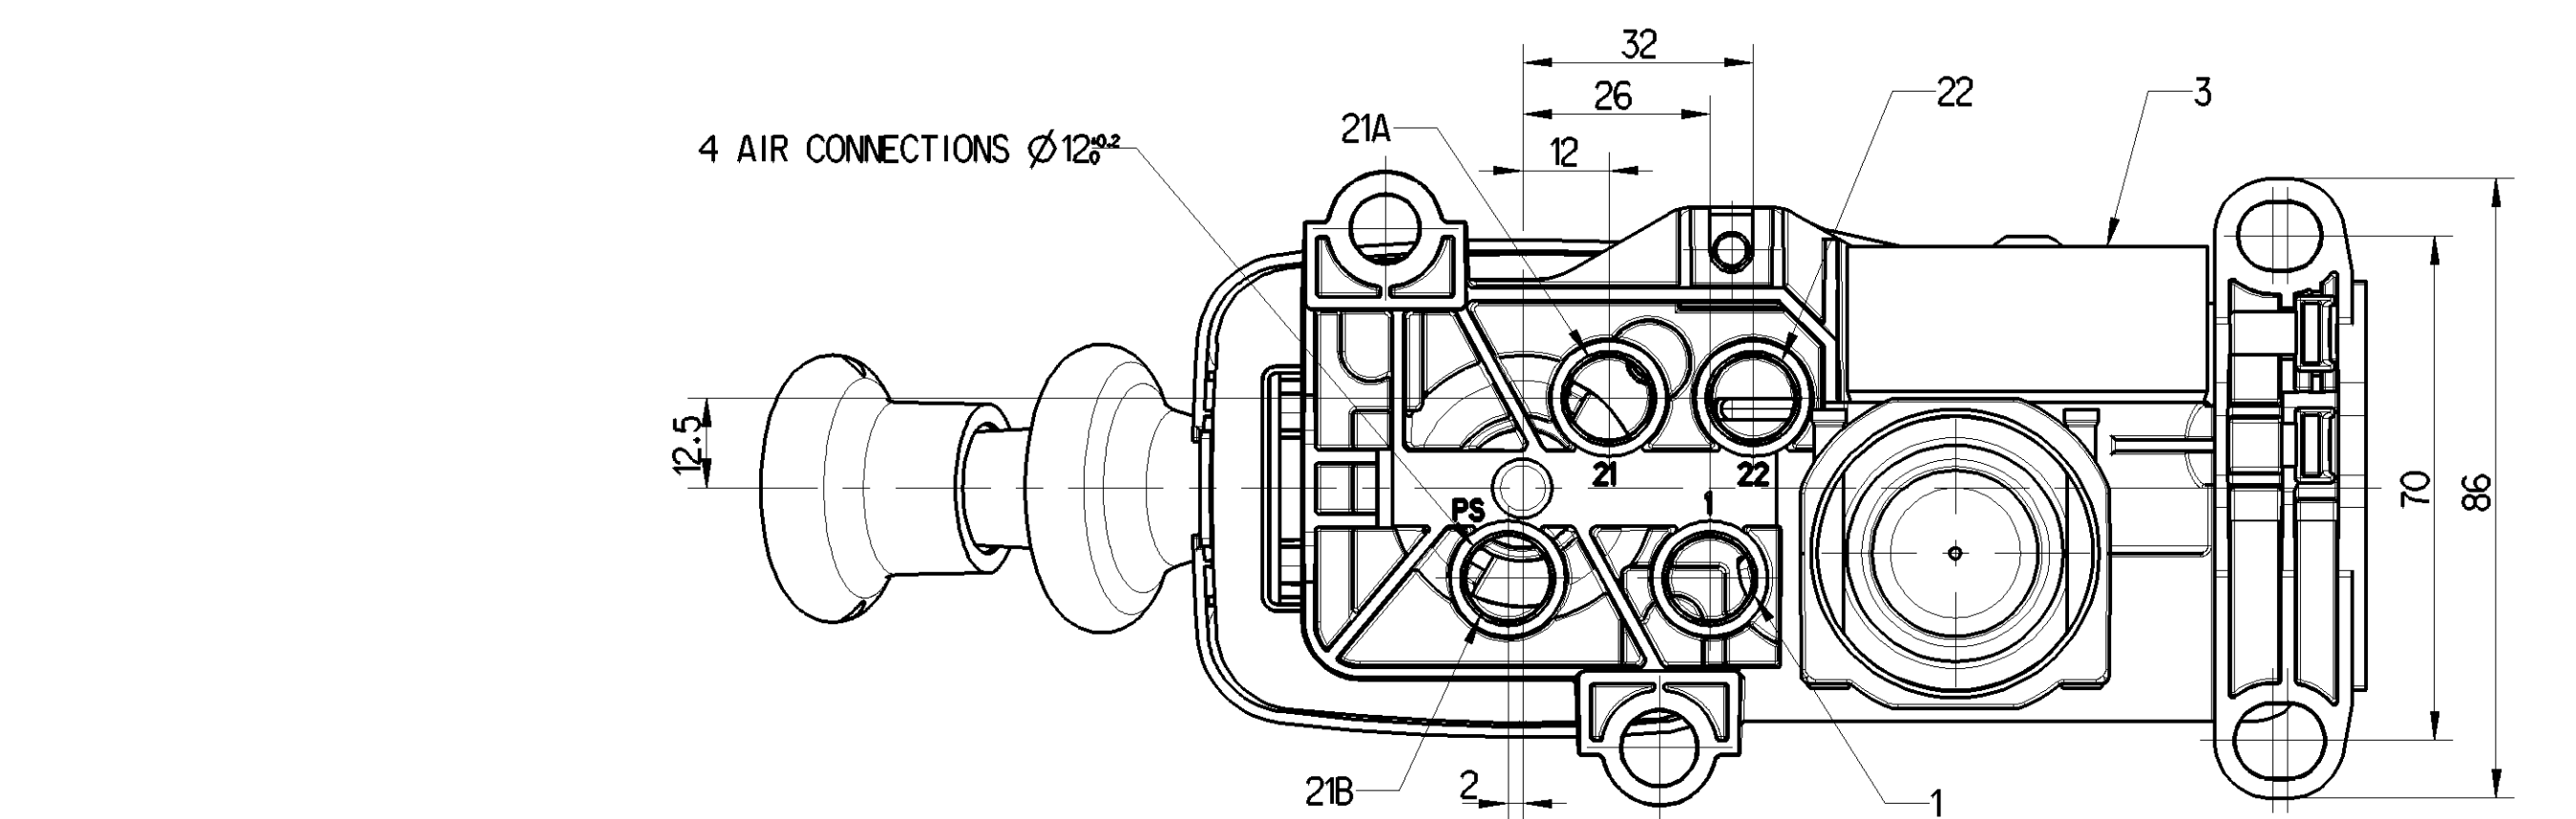


3/2 DIRECTIONAL CONTROL VALVE

FORCE OUTPUT F2=70 N MAX (7 bar)

CHANGE-OVER AT PRESSURE DROP BELOW LINE "1" CLOSED LINE "2" EXHAUSTED 4.0±0.6 bar

IF THE RESERVOIR PRESSURE IS HIGHER THAN 4 bar OPERATING CONDITION MAY BE RESTORED BY PUSHING THE KNOB

MARKING OF PORTS		GENERAL DATA	
		MEDIUM:	AIR
1	SUPPLY	TEMPERATURE RANGE:	-40°C... +80°C
21A	SPRING BRAKE CYLINDER	OPERATING PRESSURE:	5.9 - 8.5 bar
21B	PRESSURE SWITCH	DELIVERY PRESSURE:	P1 = 13 bar MAX.
22	TRAILER CONTROL VALVE	TORQUE:	9 Nm MAX.
3	EXHAUST	SILENCER	

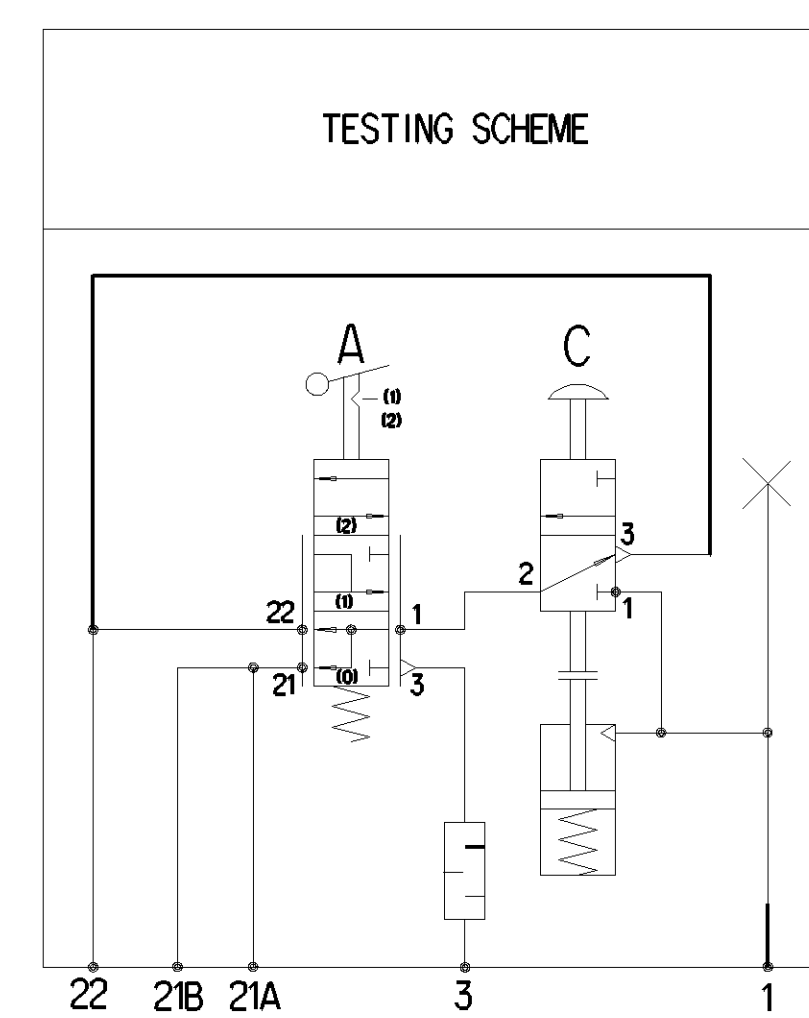

2 THE LOCKING DEVICE MUST AUTOMATICALLY AND SAFELY LOCK THE HANDLE IN THE PARKING POSITION

General Specifications: 4SD-554-1, Size ISO 144/CS LP		Copyright WABCO®		WABCO	
Further Technical Data/Product specification 961 724 801 0		Date: 2019-07-12		Signature: [Signature]	
Doc. Code: 035		Sheet: 1 To 3		Product: [Product]	
General Tolerances: 4SD-201		2019-07-12		Product: [Product]	
Range of Nominal Dimensions (± mm)		1:1		Material No.: 961 724 801 0	
Class II		0.7		Date of first issue: 2019-07-12	
Fine		1:1		Doc. Code: Language: Steel	
Medium		0.7		Revision: [Revision]	
Coarse		0.7		Tolerance: [Tolerance]	
Tapped Holes acc.:		A 0		Replacement for: [Replacement]	
Tolerance Class Applied: [Tolerance Class]		CREO		[Signature]	