

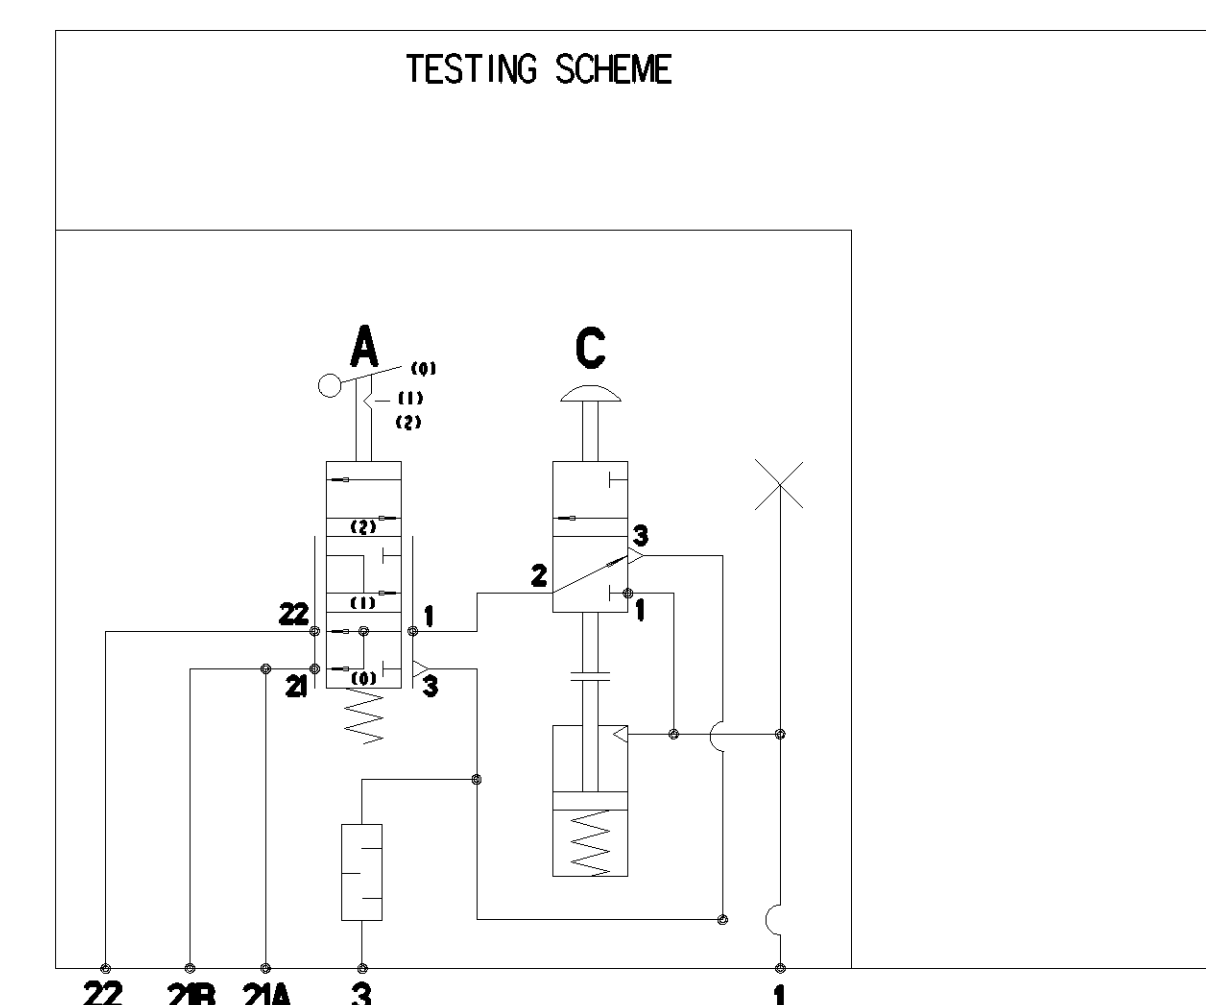
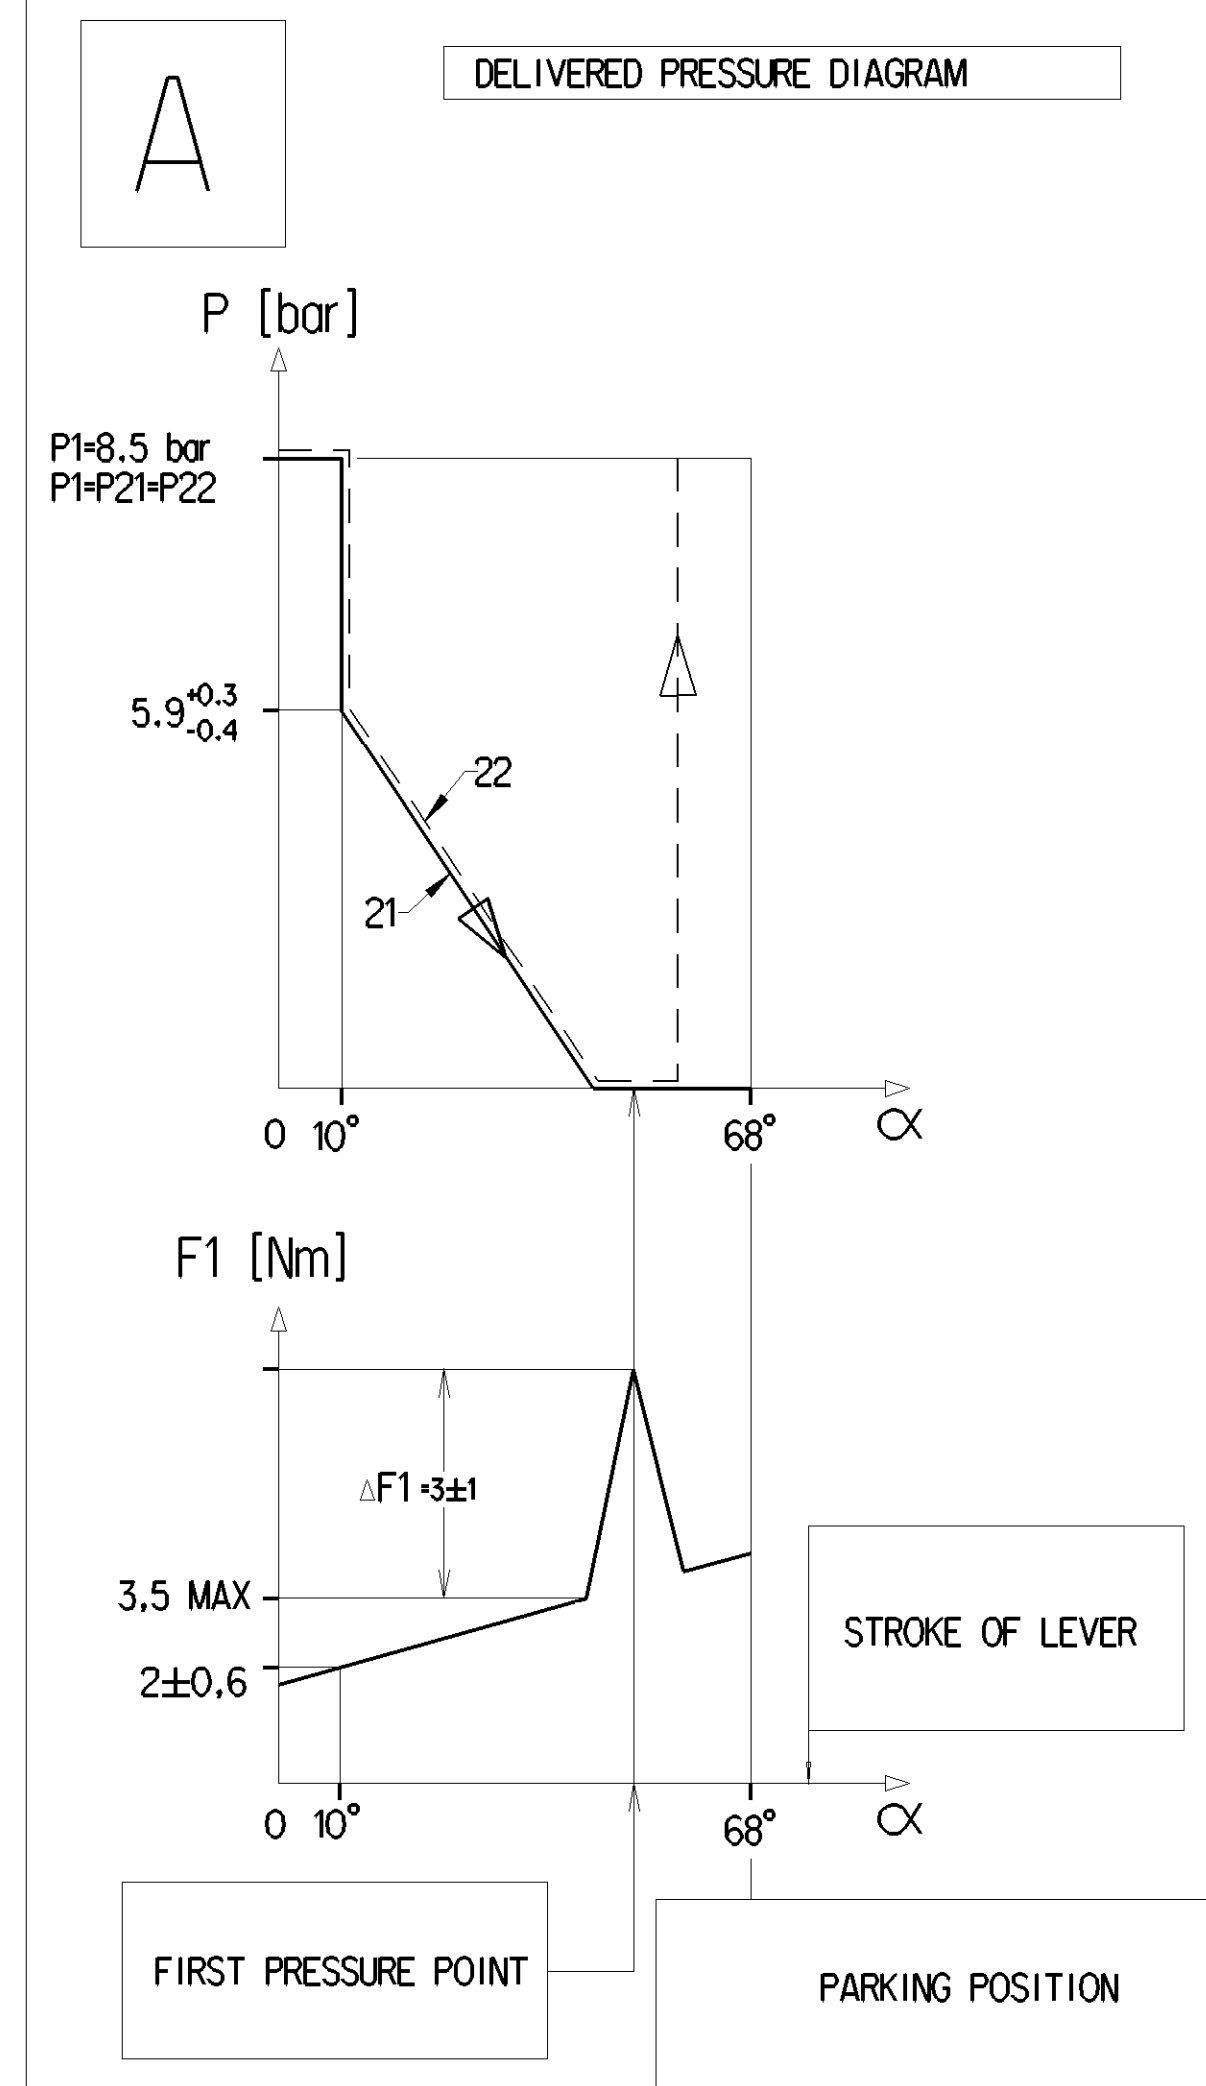
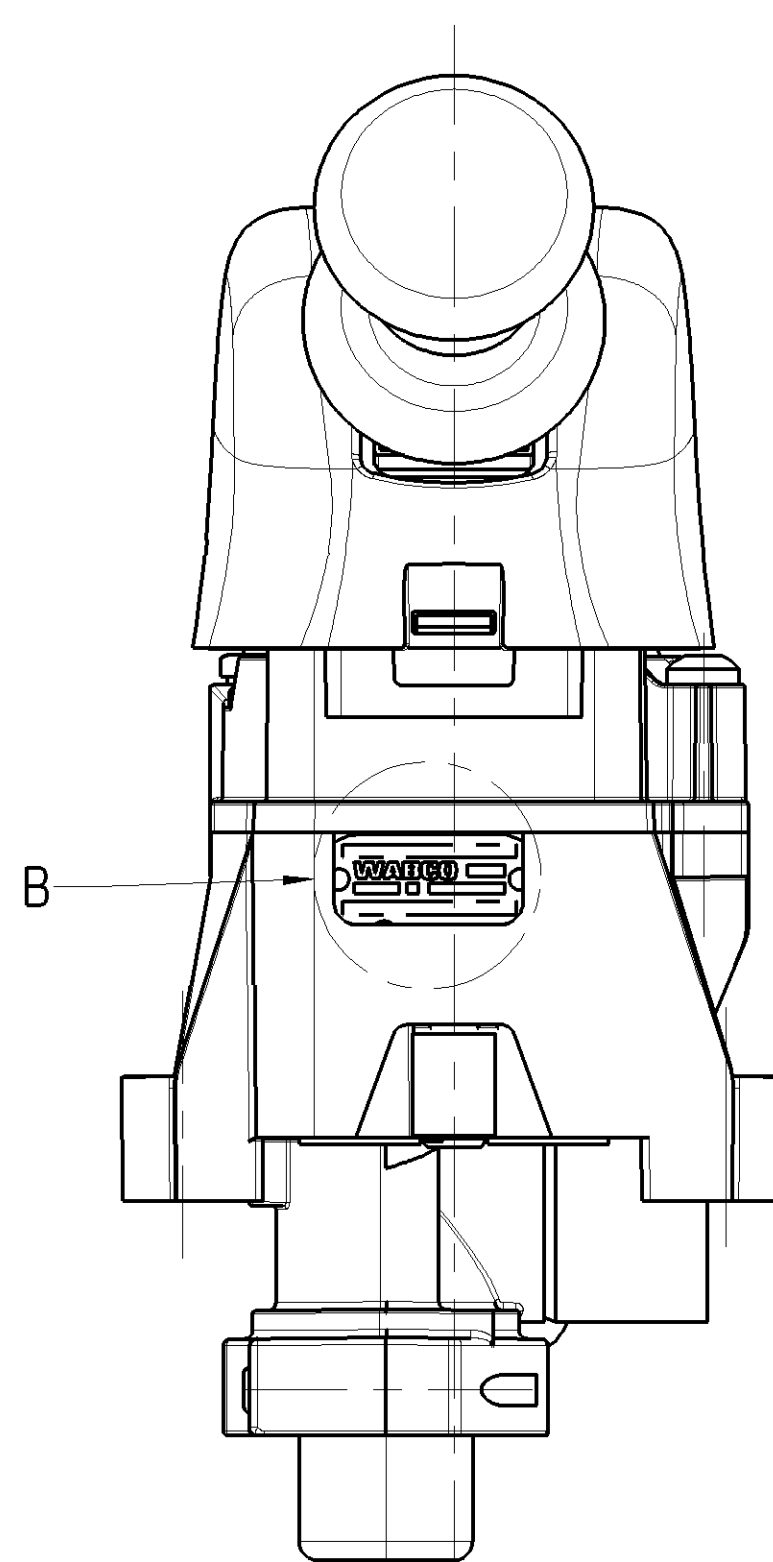
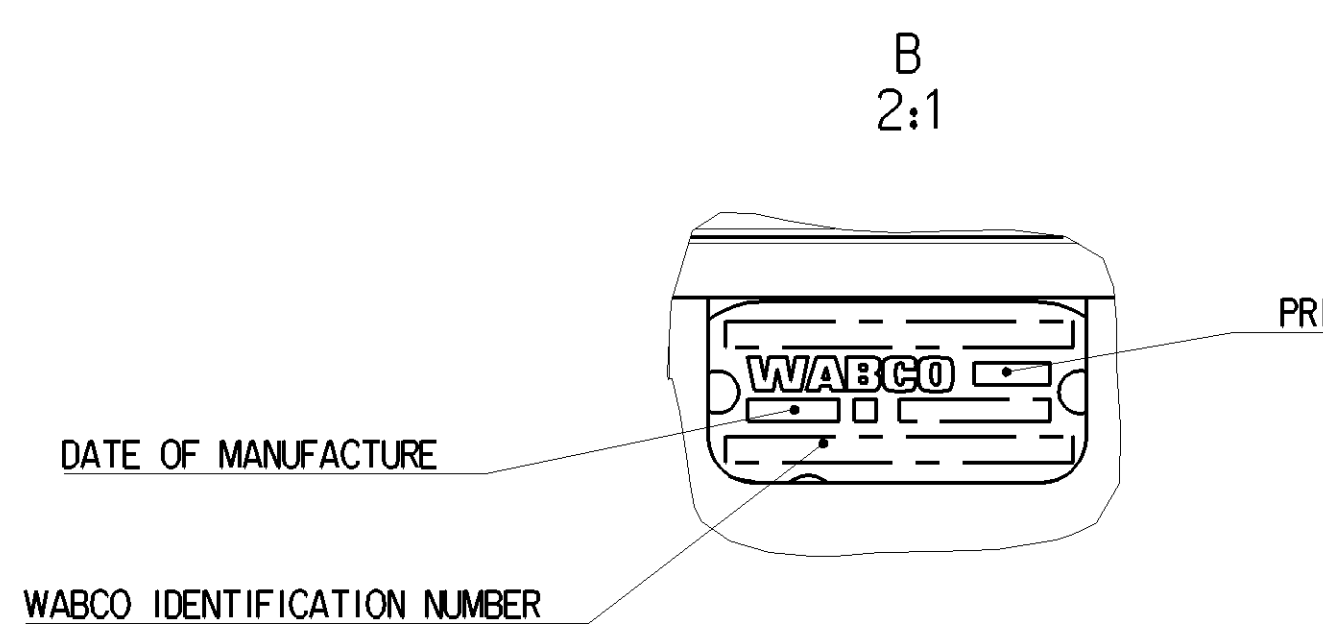
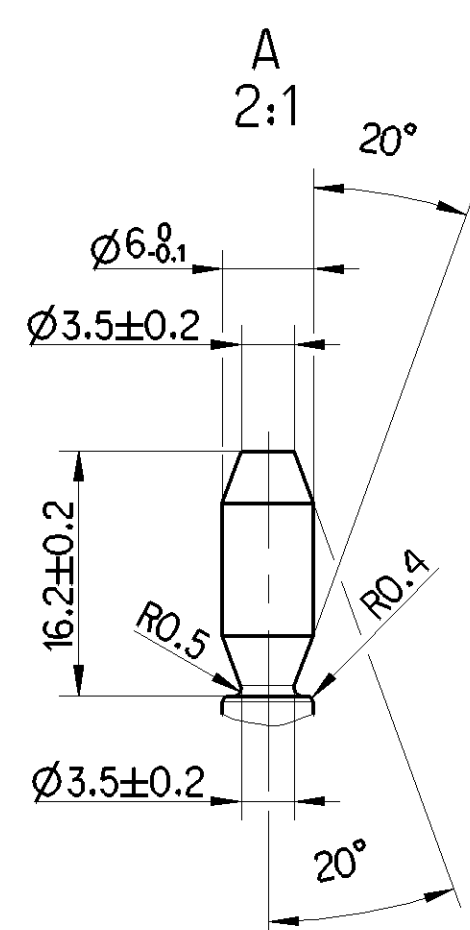


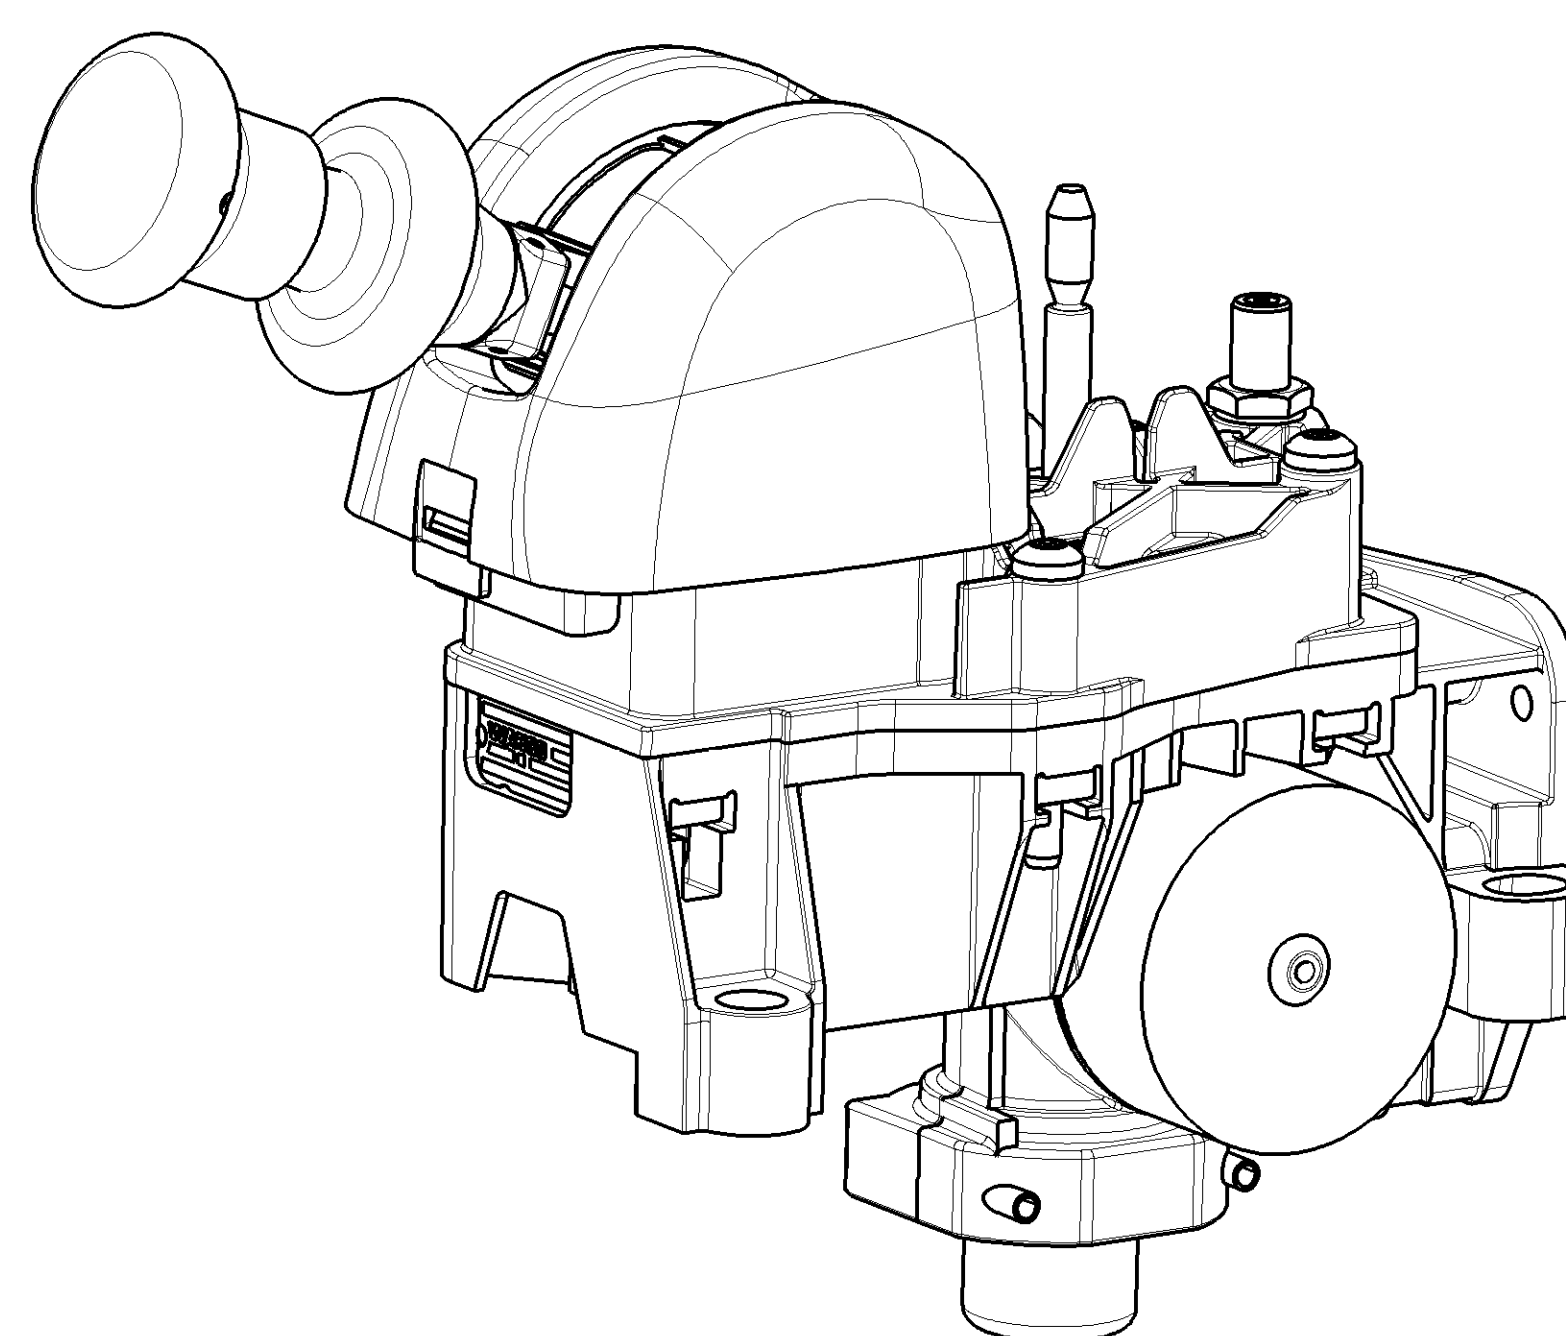

	3/2 DIRECTIONAL CONTROL VALVE 3/2 WEGEVENTIL DISTRIBUTEUR 3/2 VALVOLA 3/2	MARKING OF PORTS		GENERAL DATA	
FORCE OUTPUT F2 = 70 N MAX (7 bar)		1	SUPPLY	MEDIUM: AIR	
CHANGE-OVER AT PRESSURE DROP BELOW LINE "1" CLOSED LINE "2" EXHAUSTED 4 _{-0,6} ⁰ bar IF THE RESERVOIR PRESSURE IS HIGHER THAN 4 bar OPERATING CONDITION MAY BE RESTORED BY PUSHING THE KNOB		21A	SPRING BRAKE CYLINDER	THERMAL RANGE	-40°C... +80°C
		21B	PRESSURE SWITCH	OPERATING PRESSURE	5.9 - 8.5 bar
		22	TRAILER CONTROL VALVE	DELIVERY PRESSURE	P1-10.5 bar MAX.
		3	EXHAUST: SILENCER	TORQUE 	9 Nm MAX.

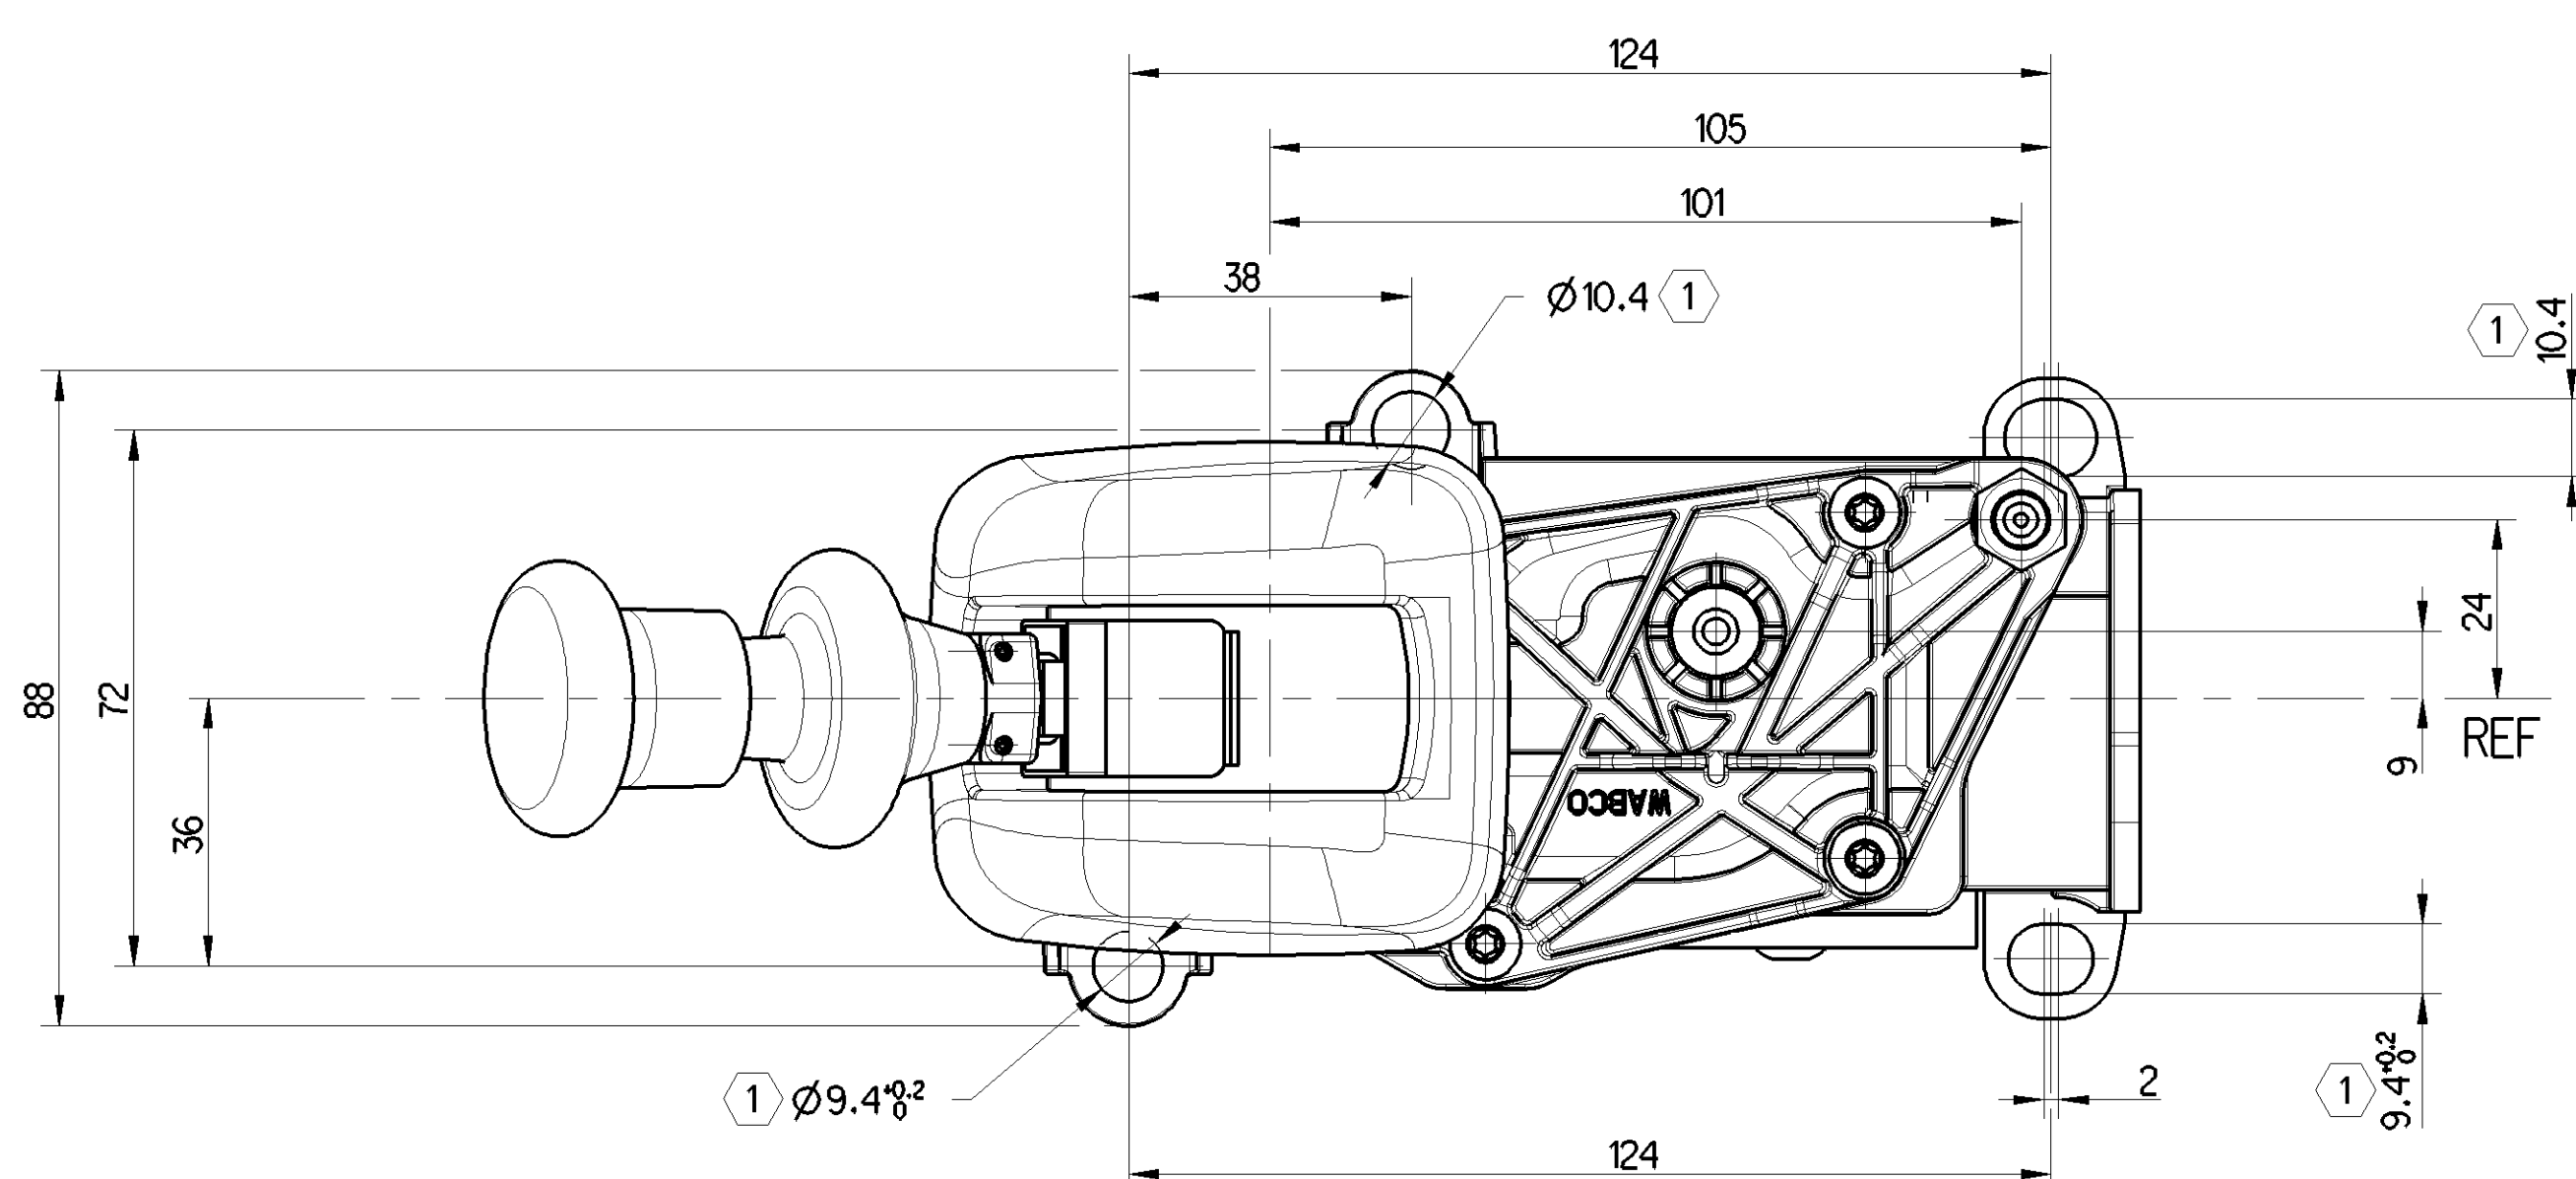

2 THE LOCKING DEVICE MUST AUTOMATICALLY AND SAFELY

General Specifications: ED-354-1, Size 150 14400 LP				WABCO HAND BRAKE UNIT Size: 209-17-02 Doc. Code: 035 Signatures: Piskul Pawlowski		
Further Technical Data: Product Specification						
Doc. Code: 035				Sheets: 1		
General Information: ED-261						
Range of Nominal Dimensions (± mm)						
Class 11	50	80	100	120	140	
Class 19	10	50	80	100	120	
Fine	0,5	1,0	1,5	2,0	± 3%	
Medium	X	1,0	2,0	3,0		4,0
Coarse	2,0	3,5	5,0	6,5		
Tapped holes, size: 11						
11 - Tolerance: Class Applied: Cr20mm						