


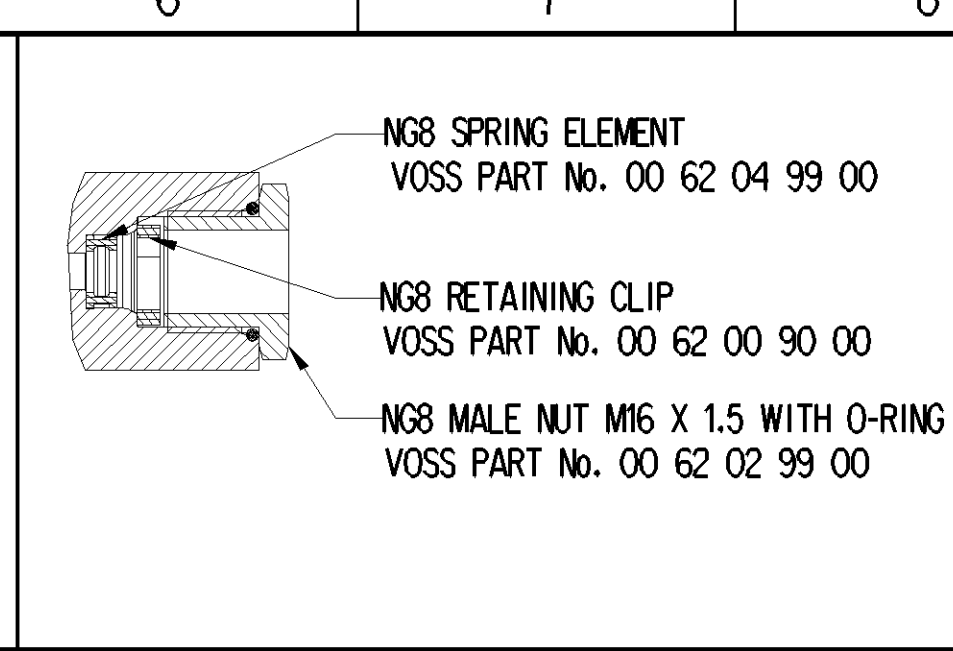
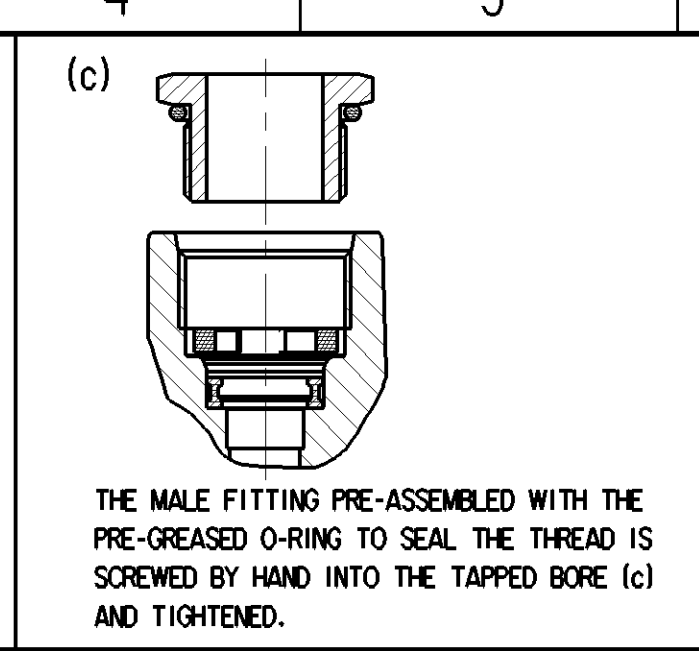
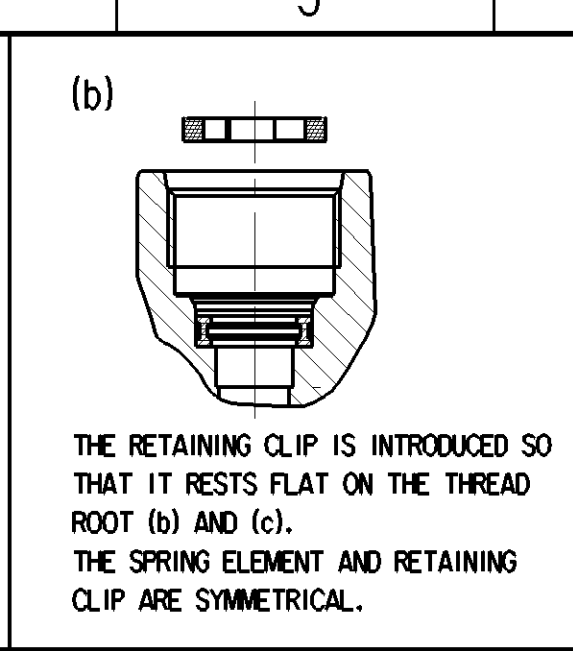


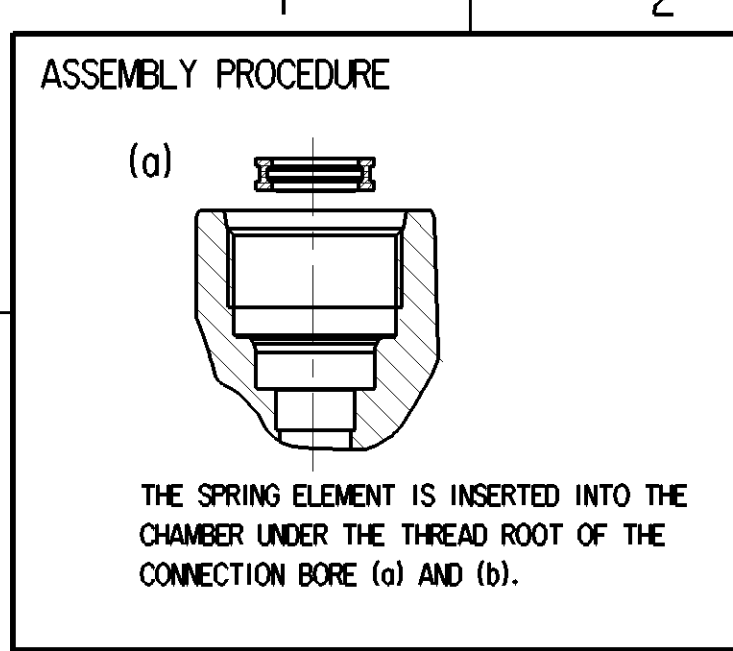



THREAD TYPE	①	②
	INLET CONNECTION M16x1.5, HEX. 19 TO SUIT VOSS PLUG IN SYSTEMS 230	DELIVERY CONNECTION M16x1.5, HEX. 19 TO SUIT VOSS PLUG IN SYSTEMS 230
PERMISSIBLE TORQUE	10±1 Nm	10±1 Nm

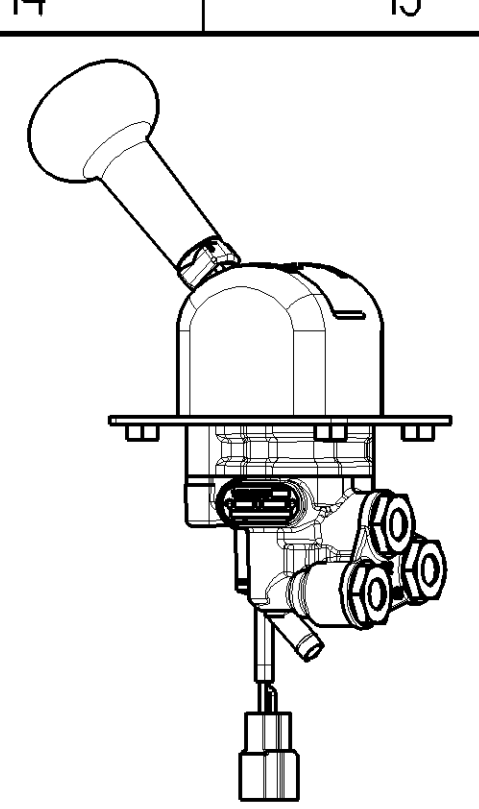




SAFETY CHARACTERISTICS	0
SIGNIFICANT CHARACTERISTICS	0
CUSTOMER INTERFACE	0

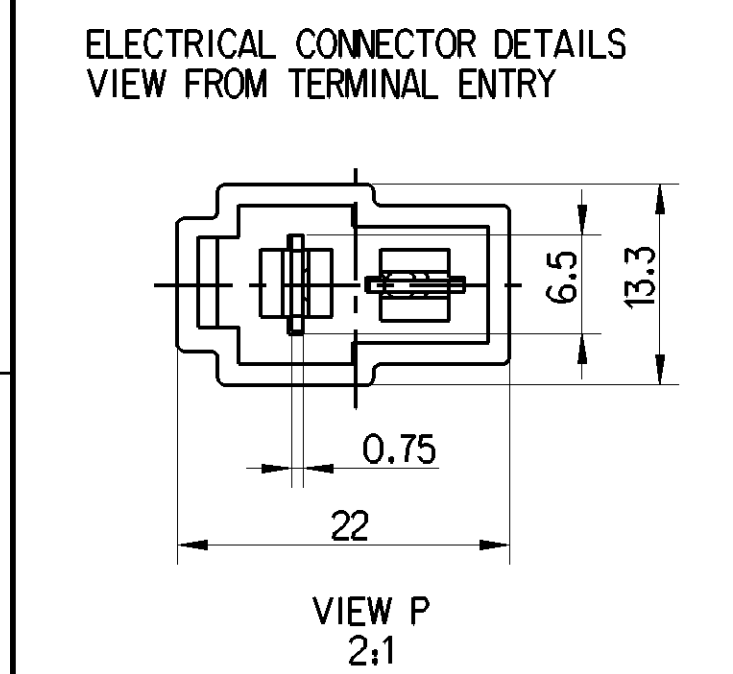


TATA YAZAKI CONNECTOR DETAILS:
250 SERIES 2 POLE MALE CONNECTOR
HOUSING : 7122825 - 1 No.
TERMINAL : 71142630.02 - 2 Nos.
WIRE COLOURS : BLACK, BLACK
WIRE TYPE : FLY 8

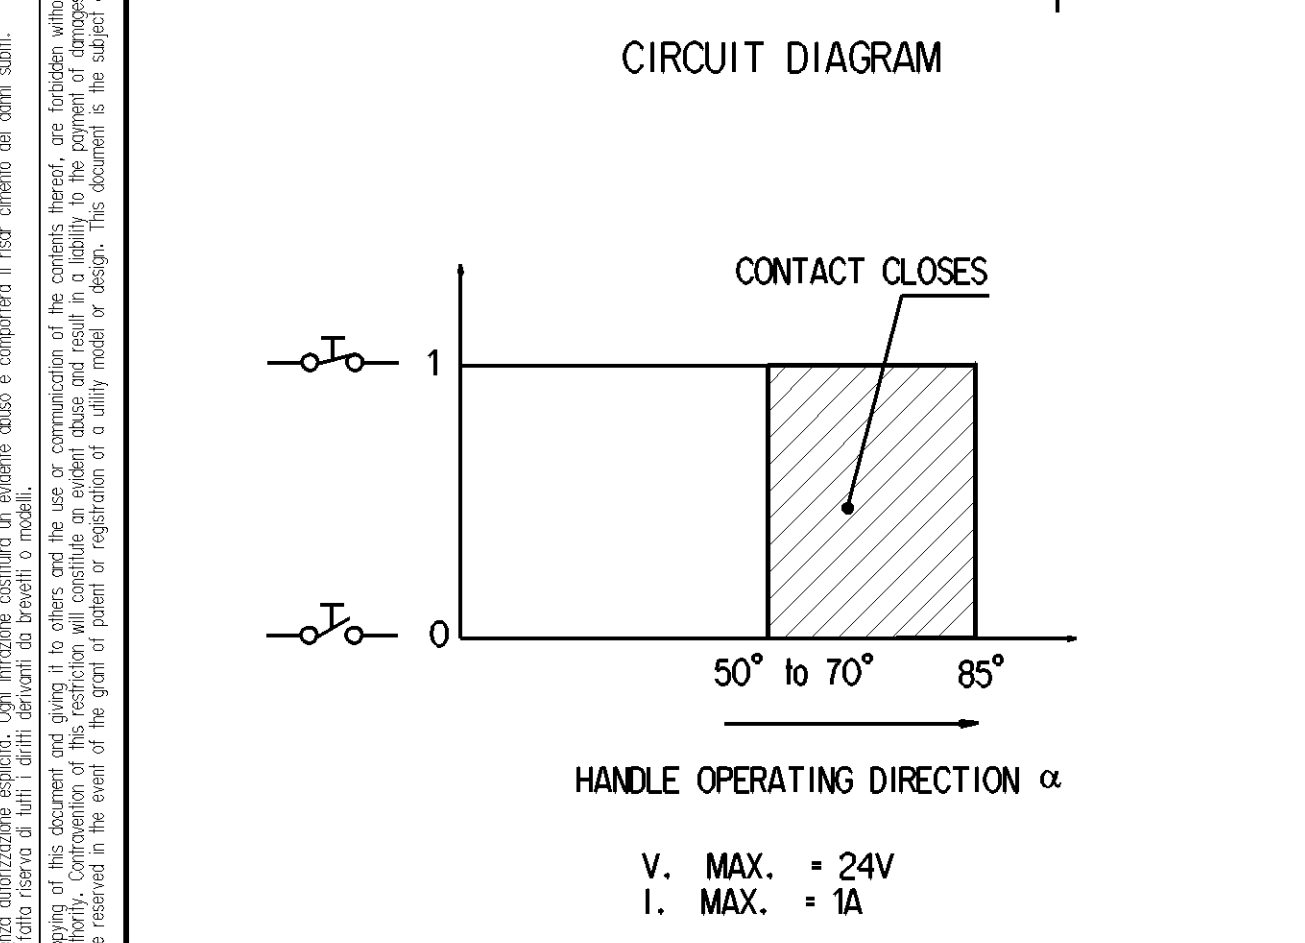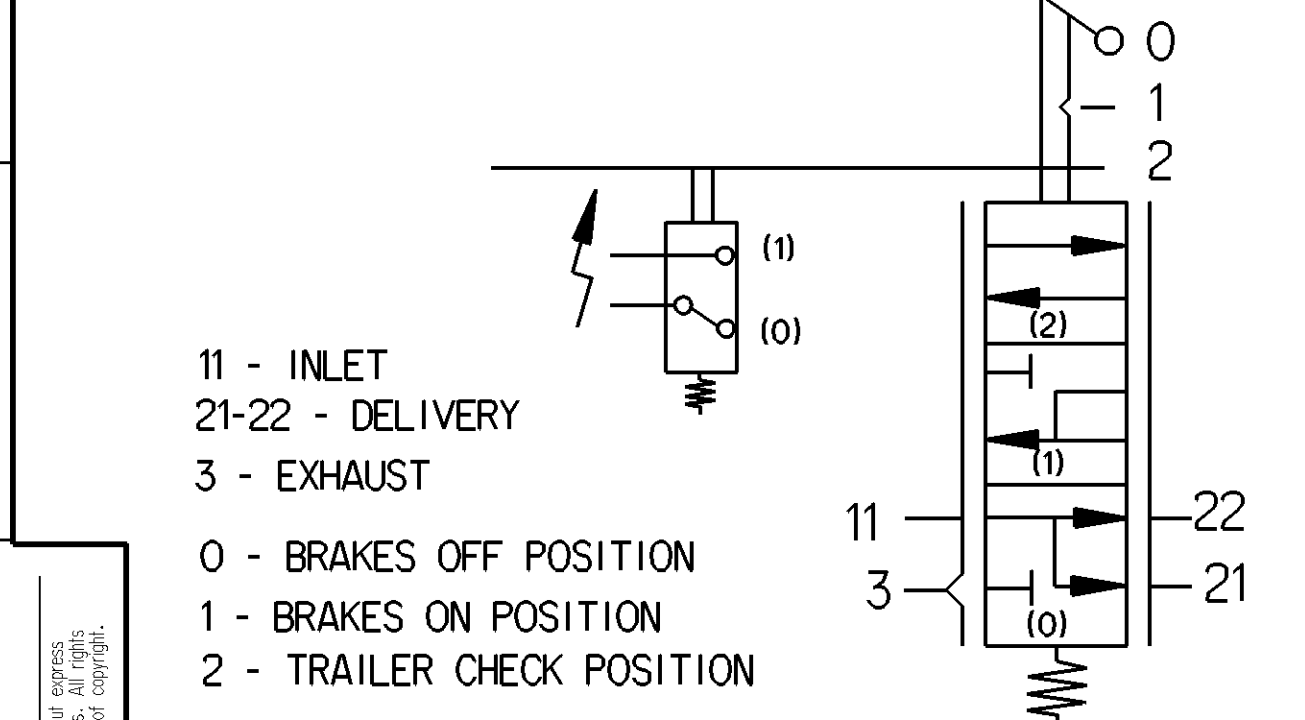

XVIII STEEL	ED COATED
XVII STEEL	ZINC ALUMINIUM INORGANIC COATING
XVI STEEL	NO TREATMENT
XV CAST IRON	PLATED
XIV CAST IRON	NO TREATMENT
XIII ZINC ALLOY	ANODISED
XII PLASTIC	NO TREATMENT
XI RUBBER	NO TREATMENT
X STAINLESS STEEL	NO TREATMENT
IX BRASS	NO TREATMENT
VIII ZINC ALLOY	CHROMATED
VII ALUMINIUM ALLOY	ANODISED
VI ALUMINIUM ALLOY	CHROMATED
V CAST IRON	PAINTED
IV STEEL	POWDER COATED
III STEEL	PAINTED
II STEEL	PHOSPHATED
I STEEL	ZINC OR ZINC IRON PLATED WITH PASSIVATION
PART MATERIAL CODE	SURFACE PROTECTION

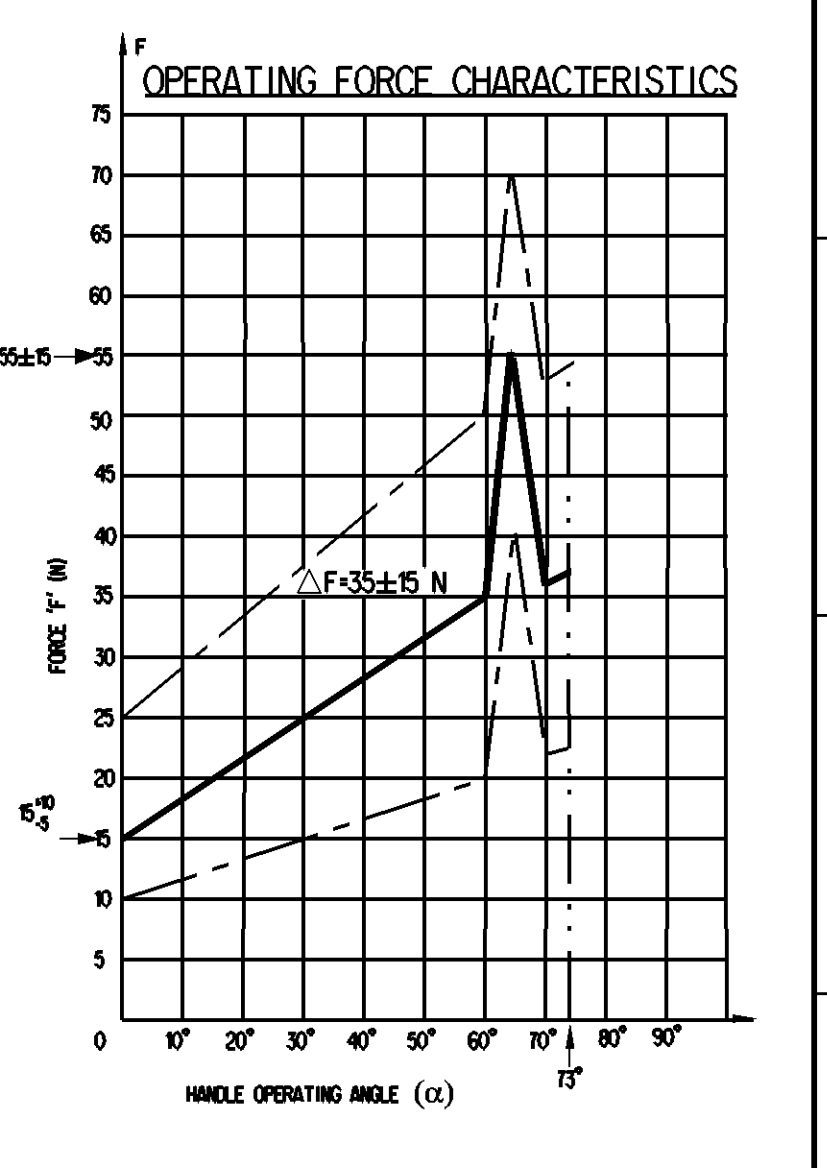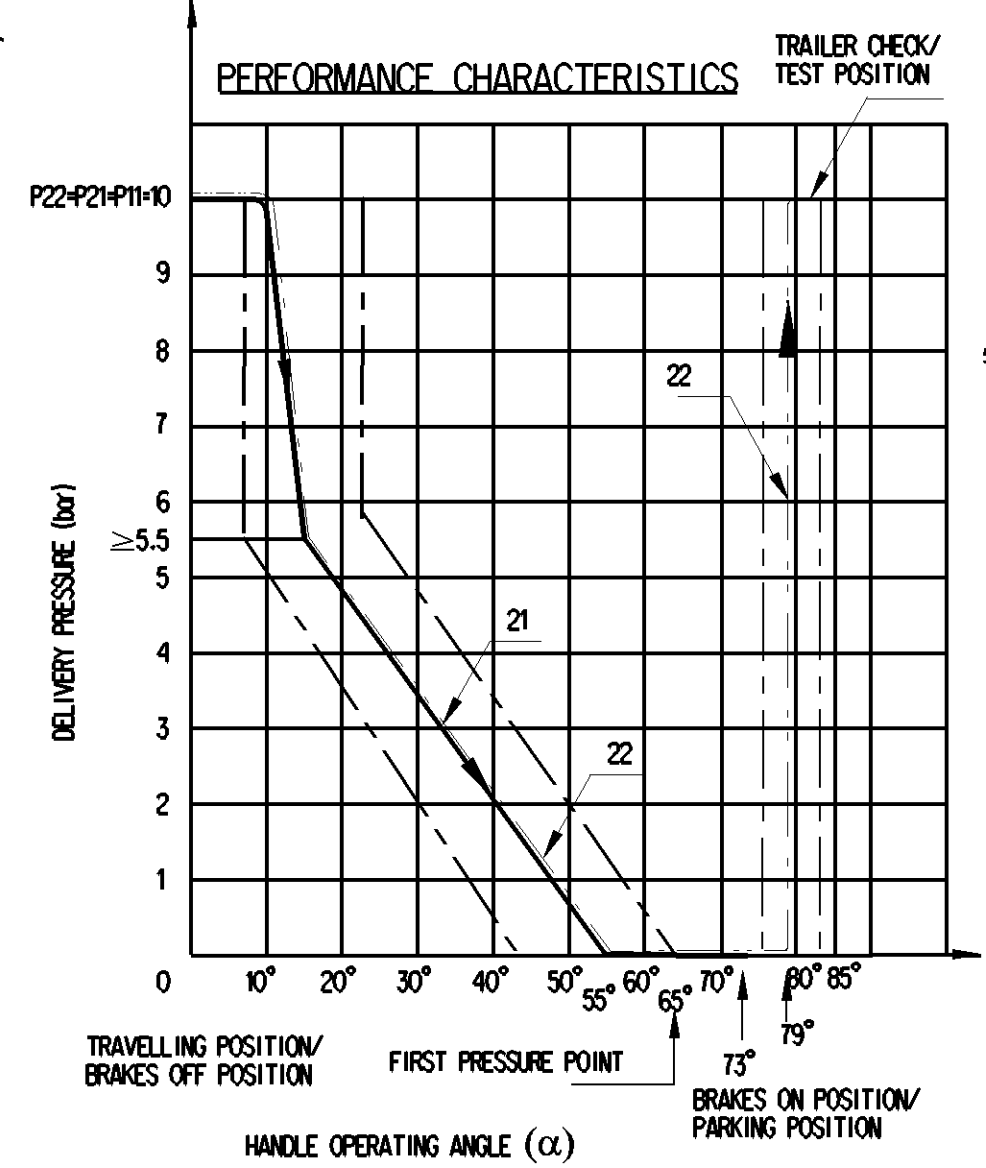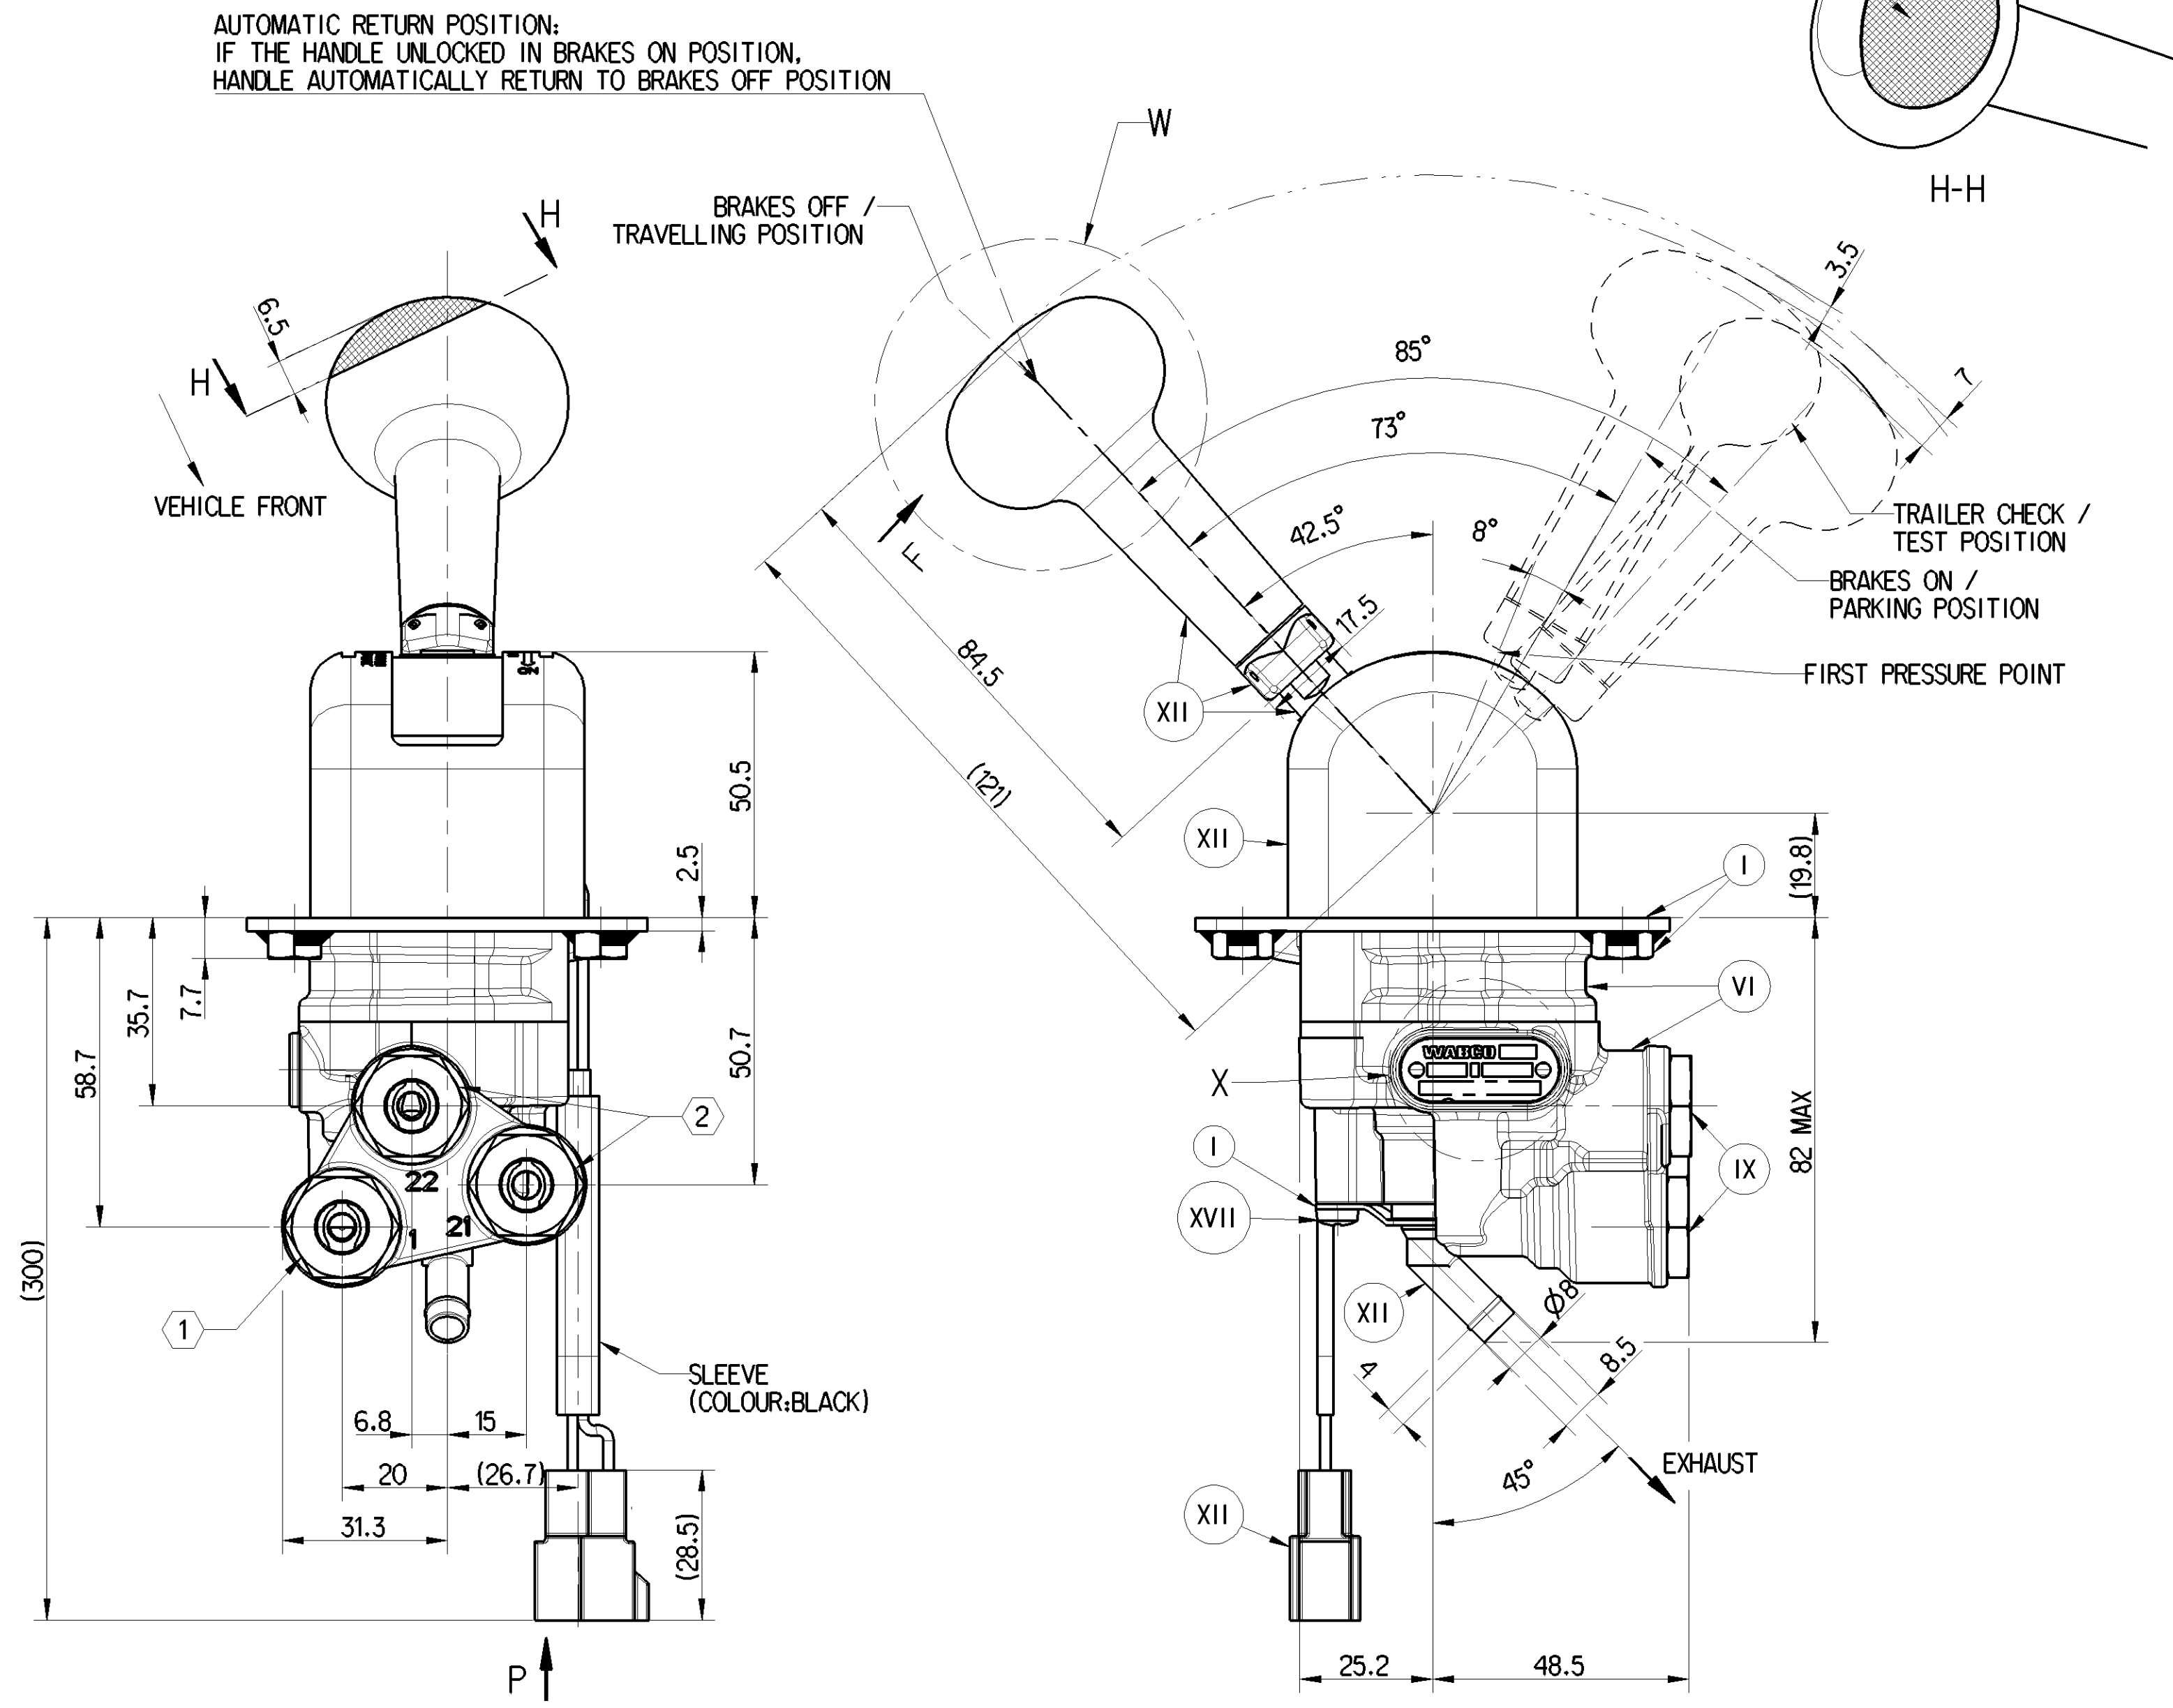

SL.No.	NOTES
1	PRODUCT FUNCTION AND RELIABILITY
1.1	WORKING MEDIUM
1.2	NORMAL WORKING PRESSURE
1.3	MAXIMUM OPERATING PRESSURE
1.4	THERMAL RANGE OF APPLICATION
1.5	CORROSION RESISTANCE
2	SWITCH ASSEMBLY
2.1	TYPE OF SWITCH
2.2	OPERATING VOLTAGE
2.3	CURRENT RATING
2.4	VOLTAGE DROP ACROSS TERMINALS
2.5	INSULATION RESISTANCE (BETWEEN TERMINALS AND ALSO BETWEEN TERMINALS AND BODY)
3	QUALITY COMPLIANCE PLAN TESTS ARE CONDUCTED REGULARLY AS PER CLAUSE No.12 OF PS 9617251000
4	SERVICE LIFE TO FIRST OVERHAUL IF FITTED AS PER RECOMMENDED LAYOUT 5 YEARS/500000 Km WHICHEVER IS EARLIER FOR TRUCK AND INTERCITY BUS APPLICATION 3 YEARS/300000 Km WHICHEVER IS EARLIER FOR CITY BUS APPLICATION.
5	OPEN PORTS ARE FITTED WITH CLOSURE PLUGS FOR STORAGE AND TRANSIT PURPOSES
6	LEVER LOCKING FORCE 30 N (MIN) AFTER 0.1 MILLION CYCLES
7	LEVER UNLOCKING FORCE 53 N MAX
8	HANDLE OPERATING FORCE SHOULD NOT EXCEED 400 N

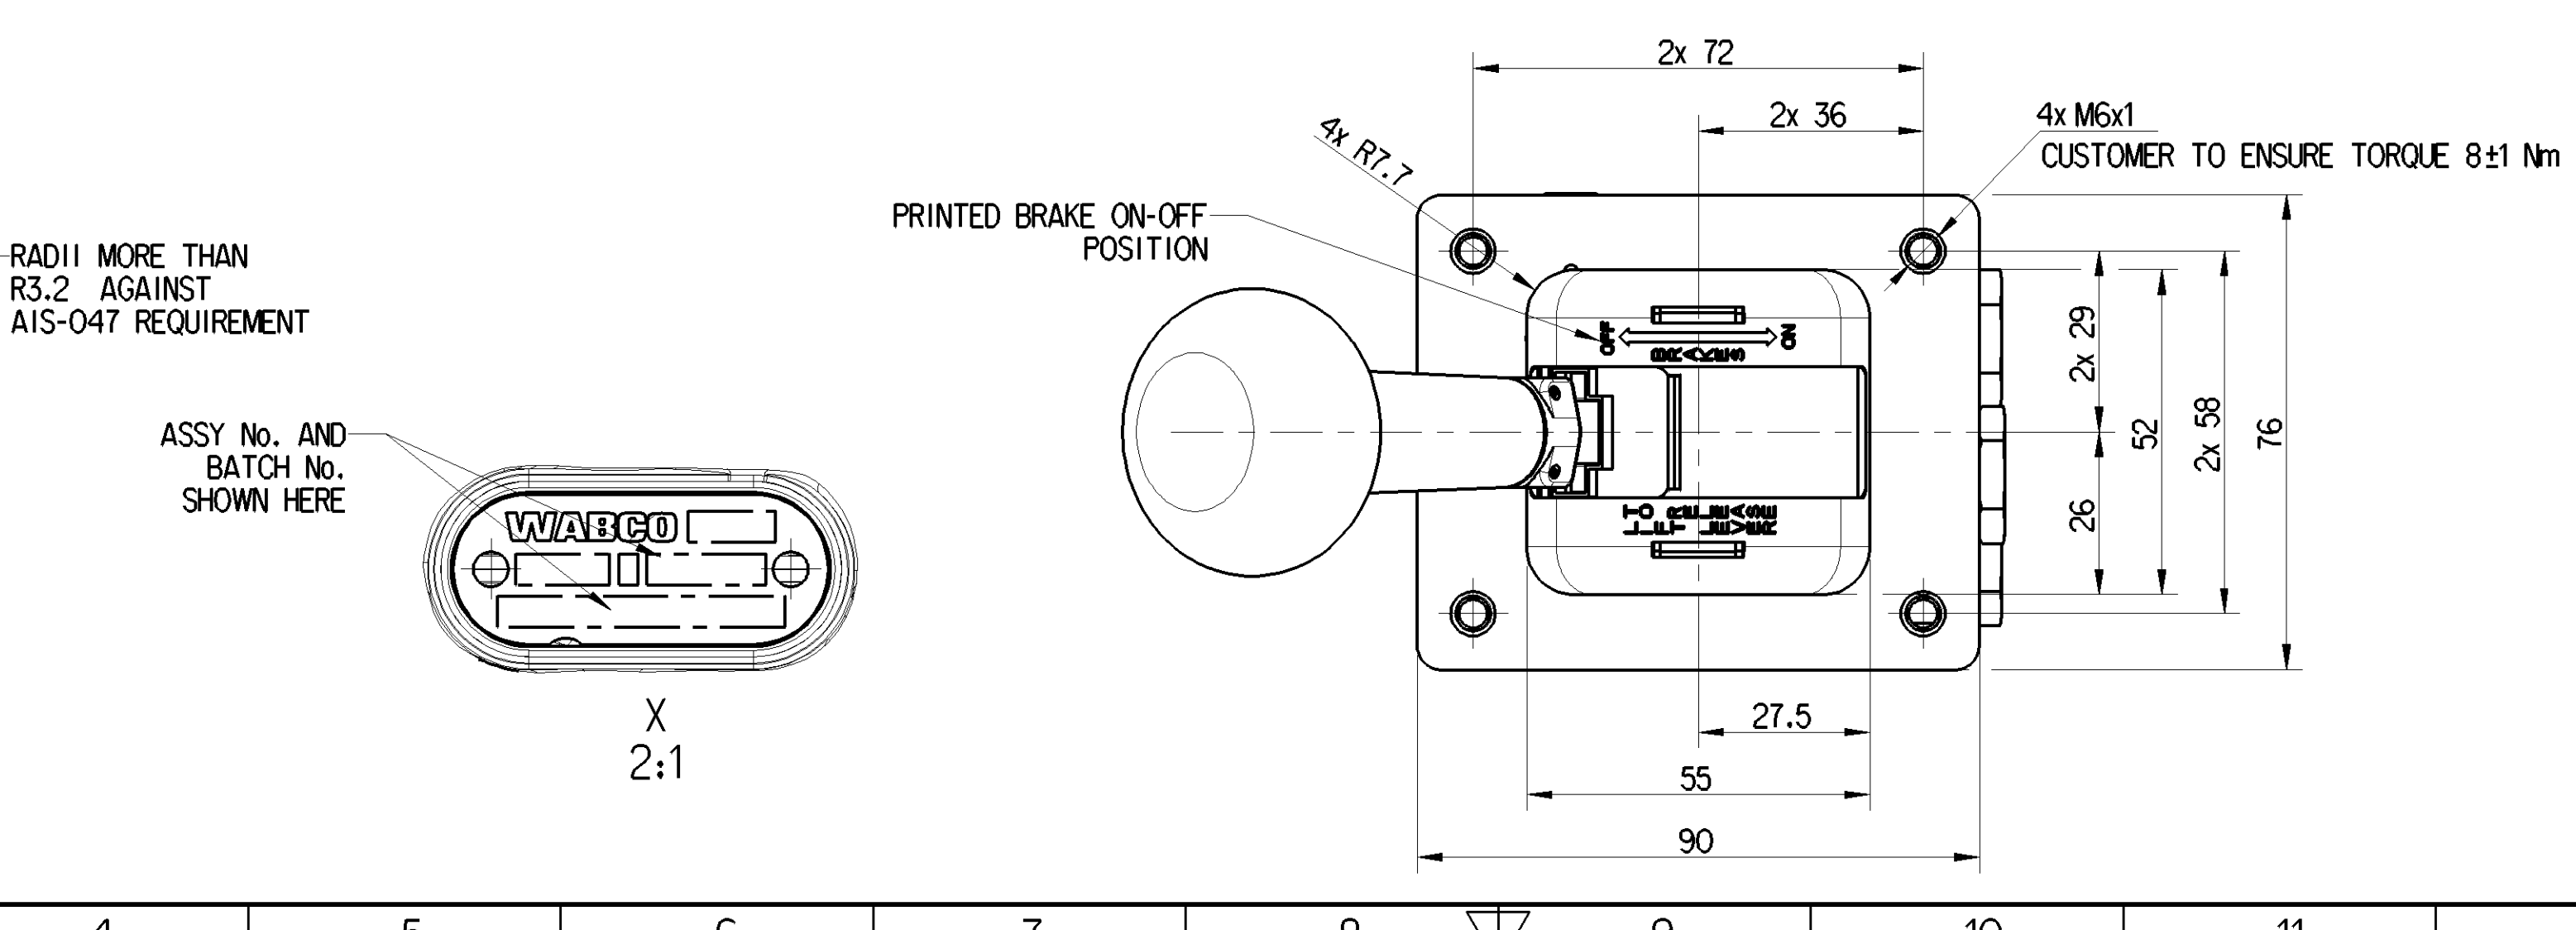

General Specifications: JED-334-1, Size ISO 14405 LP		Copyright WABCO®	
Further Technical Data: 961 725 100 0		Date: 2021-10-06	
Doc. Code: 035		Sheet: 1 To 8	
General Tolerances: JED-261		Checked: Sundaramoorthy	
Range of Nominal Dimensions (± mm)		2021-10-12	
Class 1) ± 50 > 50 > 180 > 180 > 400		Expert: Gokul P	
Fine 0.5 1.0 1.5 2.0		Multinomial K	
Medium 1.0 2.0 3.0 4.0		Material No. 961 725 024 0	
Coarse 2.0 3.5 5.0 6.5		Date of first issue: 2021-10-12	
Tapped Holes acc. JED-388		Doc. Code: 005	
1) Tolerance Class Applied Crossmarked		Language: EN	
A 1 CREO		Revision: 5212_WIN	
100mm		Sheet: 1/1	