




A	
B	
C	
D	
E	
F	
G	
H	
J	
K	
L	
M	




TORQUE FOR CONNECTIONS	1	10±1 Nm
	2	22.5±2.5 Nm



MARKED ACCORDING TO STD 5051,16

1 MET 3.2-30-D15

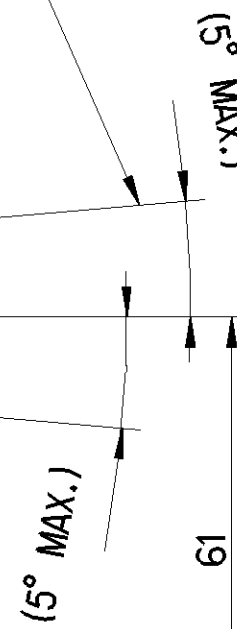

CUSTOMER	CUSTOMER PART NUMBER
VECV	ID314479

Sl No.	NOTES	
1	PRODUCT SPECIFICATION No.	PS 970 051 494 0
2	OIL VOLUME INPUT	$V = (SH \times C) \times K$
	K ABSORPTION AT 90 bar for C=0	$K < 1.5 \text{ cm}^3$
	SH HYDRAULIC SECTIONAL AREA	4.89 cm^2
	C GEAR DISENGAGING STROKE	
3	HYDRAULIC FLUID	BRAKE FLUID SAE J 1703
4	THERMAL RANGE	-40°C..+100°C
5	SUPPLY PRESSURE	10 bar MAX.
6	NO STROKE LIMITER IN THE DEVICE	
7	CAUTION : DO NOT ACTUATE THE DEVICE IF NOT FITTED ON ITS MOUNTING BRACKET	
8	OPEN PORTS ARE FITTED WITH CLOSURE PLUG FOR STORAGE AND TRANSIT PURPOSE	



General Specification: ISO 8015, IED-334-1, Size ISO 14405 LP					Copyright WABCO®		WABCO	
Further Technical Data:					Date		Signature	
Doc. Code		Sheet		To		Drawn		CLUTCH SERVO
						2022-09-13		
						Schachin		
						Checked		
						2022-09-13		A R
General Tolerances IED-261								
Range of nominal dimensions in mm								
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°			
Fine	±0,5	±1	±1,5	±4				
Medium	±1	±2	±3	±4				
Coarse	±2	±3,5	±5	±6,5				
Tapped Holes acc. acc. IS 14962								
1) Tolerance Class Applied Crossmarked								
Mass		Scale		Material No.		Date of first issue: 2005-08-01		
2,3		1:1 1:2		970 051 619 0		Doc. Code Language Sheet		
Size		CAD System		005		EN 1/1		
A 1		CREO		EDH-No. Revision Techn. Resp.		Replacement for		
				509481 tx D 5630		-		

100mm