
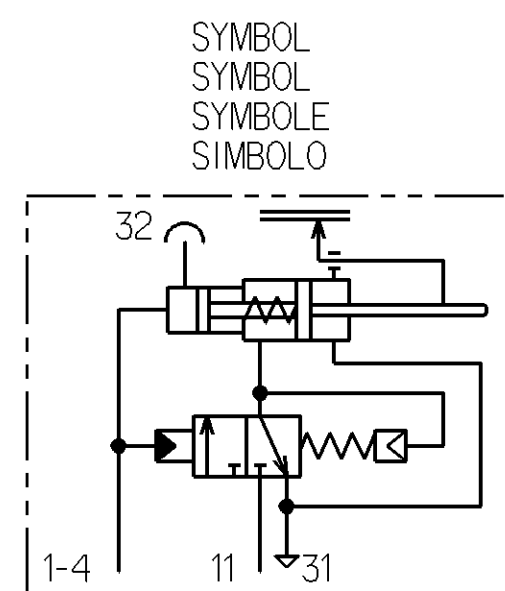
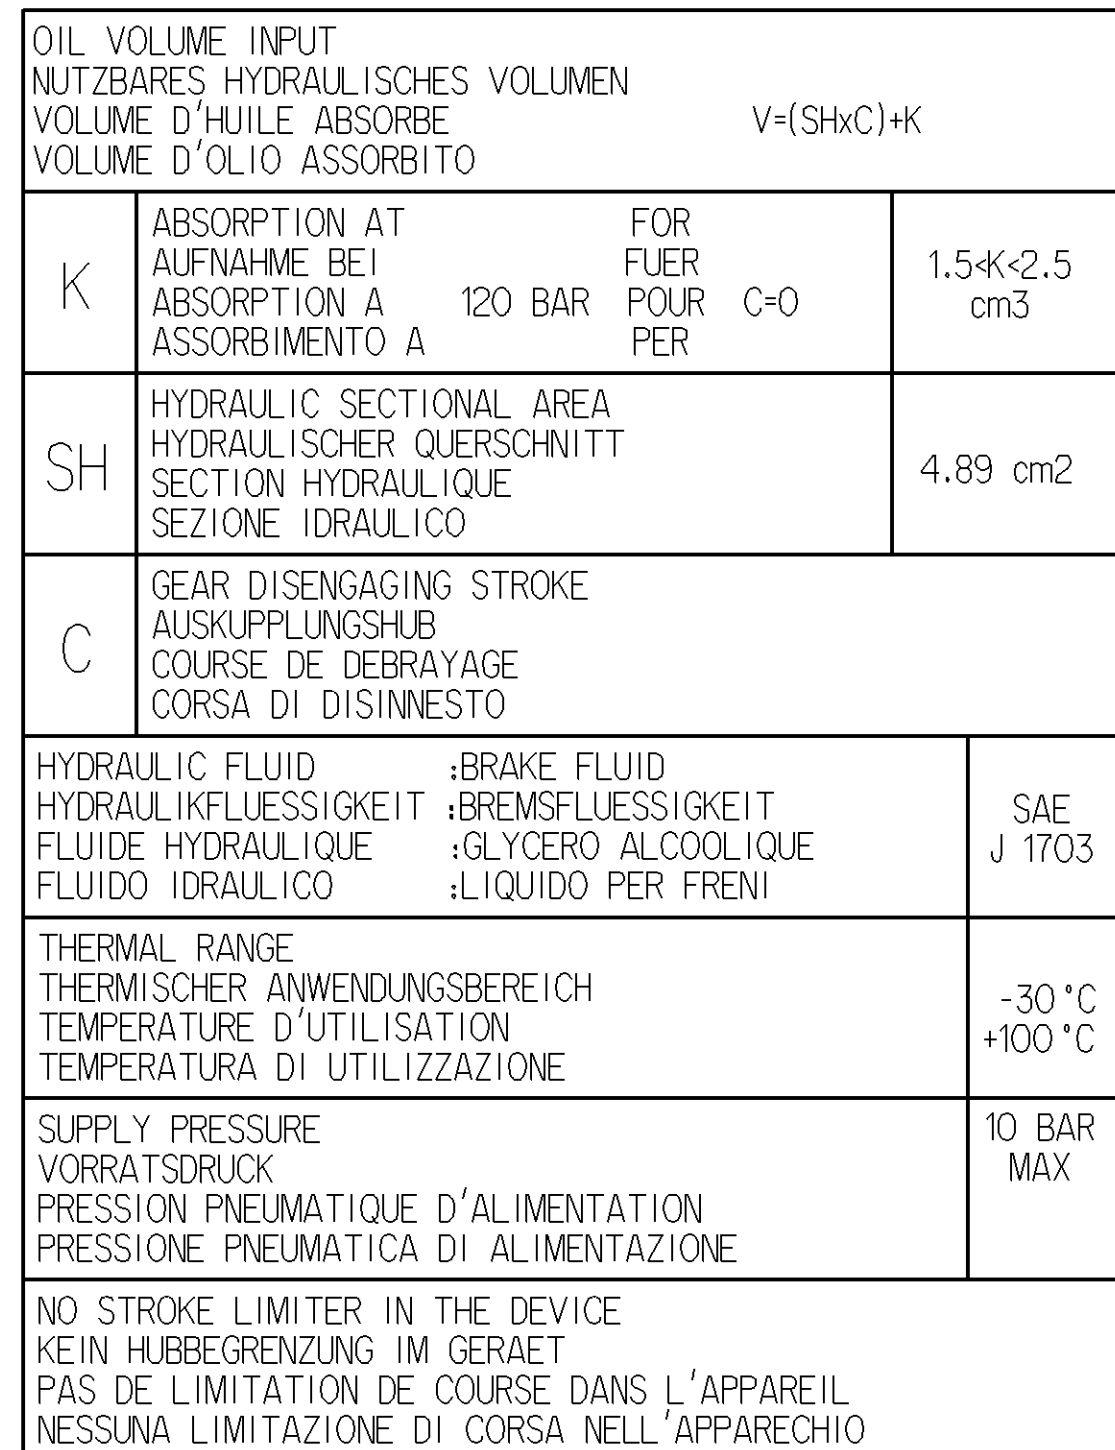


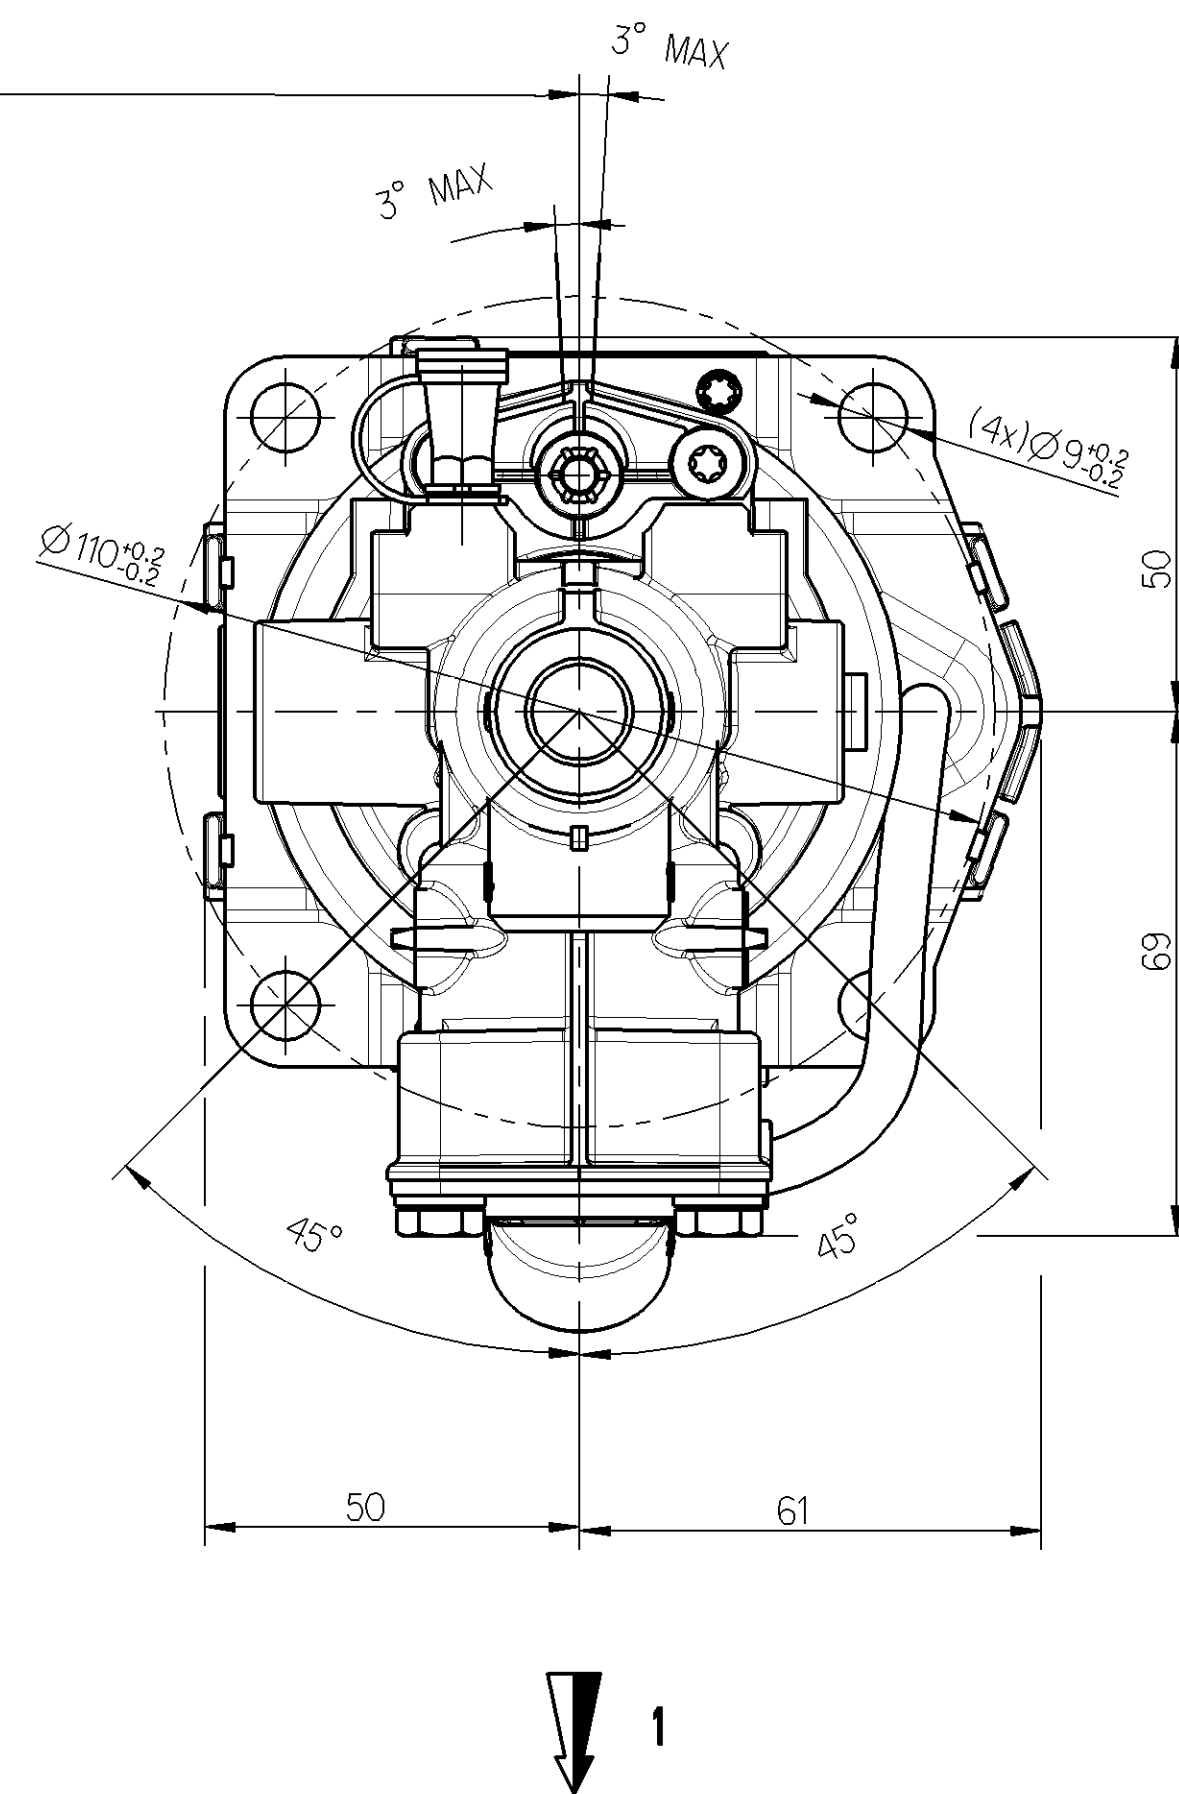

TORQUE FOR CONNECTIONS	* 25 N.m MAX
ANZUGSMOMENT FUER ANSCHLUESSE	** 34 N.m MAX
COUPLE DE SERRAGE DES RACCORDS	*** 53 N.m MAX
COPPIA DI SERRAGGIO DEI RACCORDI	

General Specifications: JED-334-O					Copyright WABCO®		WABCO CLUTCH-SERVO KUPPLUNGSVERSTÄRKER SERVO-DEBRAYAGE SERVO FRIZIONE					
Further Technical Data:					Date _____ Signature _____							
Doc. Code:		Sheet:		To		2010-01-21		VEMEREDDY				
General Tolerances JED-261					Drawn _____							
Range of Nominal Dimensions (± mm)					Checked _____							
Class 11 ≤ 50 ≤ 50 to 180 ≤ 180 to 400 > 400					2010-01-21		AJAY					
					Eman _____							
					DR. OSMAN H.							
					Mass _____		Material No. _____		Date of first issue: 2010-03-06			
Fine		0.5	1.0	1.5	2.0	3-2		Scale		Doc.Code _____		
Medium		☒	2.0	3.0	4.0	KG		1:1		Language _____		
Coarse		2.0	3.0	5.0	6.5	Size _____		CAD System _____		Sheet _____		
Tapped Holes acc.					A 1		Pro/E		ECH-No. _____		Revision _____	
1. Tolerance Class Applied Crossmarked									Techn. Resp. _____		Replacement for _____	
									970 051 811 0		884 058 701 0	

CAUTION :DO NOT ACTUATE THE DEVICE IF NOT FITTED ON ITS MOUNTING BRACKET
VORSICHT :GERÄT DARF NUR IM EINGEBAUTEN ZUSTAND BETRIEBET WERDEN
ATTENTION :NE PAS ACTIONNER L'APPAREIL S'IL N'EST PAS FIXE SUR SON SUPPORT
ATTENZIONE:NON METTERE IN FUNZIONE L'APPARECCHIO SE NON È FISSATO AL SUPPORTO