<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0
<CI> CUSTOMER INTERFACE	10

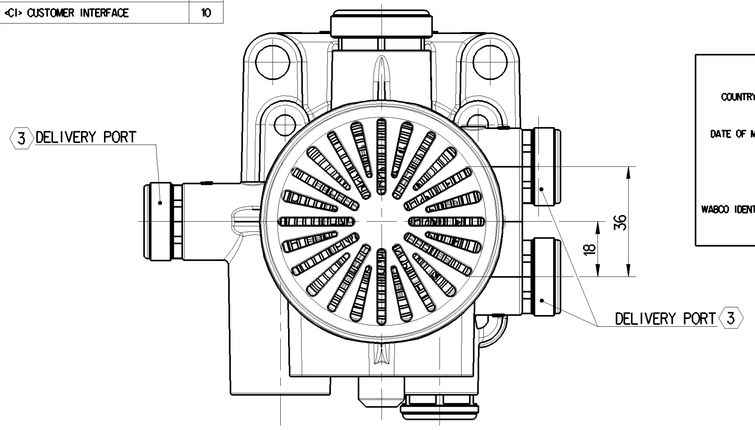

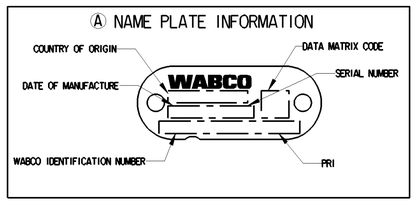

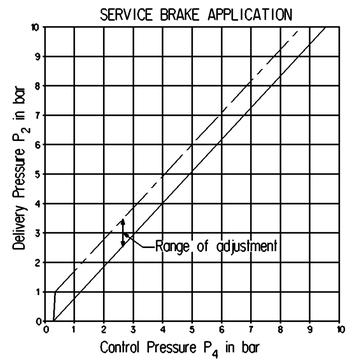

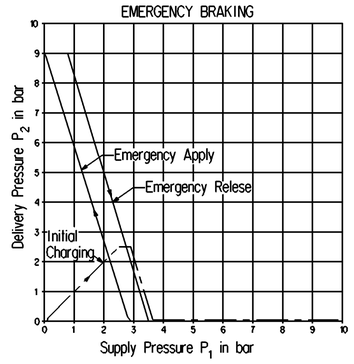

	WORKING MEDIUM	AIR
	THERMAL RANGE OF APPLICATION	-40° TO +65°C
	SHORT TERM RESISTANCE TO HEAT	MAX. 1h AT 110 °C
	NOMINAL WORKING PRESSURE	9 bar
	MAXIMUM WORKING PRESSURE	10 bar
	PREDOMINANCE ADJUSTMENT RANGE PRESSURE	0 TO 0.7 bar
	FILLING CRACK-OFF	0.5 bar MAX.
	RELAY RATIO	>1
	CRACK-OFF PRESSURE (WITHOUT PREDOM)	0.3 bar MAX. (+65°C TO -20°C) 0.35 bar MAX. (-20°C TO -40°C)
	INSTALLATION POSITION	VERTICAL ±60° ALLOWED
PORT DESIGNATION	1	SUPPLY PORT
	1-2	RESERVOIR PORT
	2 (3x)	DELIVERY PORT
	4	CONTROL PORT
	TIGHTENING TORQUE FOR MOUNTING BOLTS	45±2 Nm

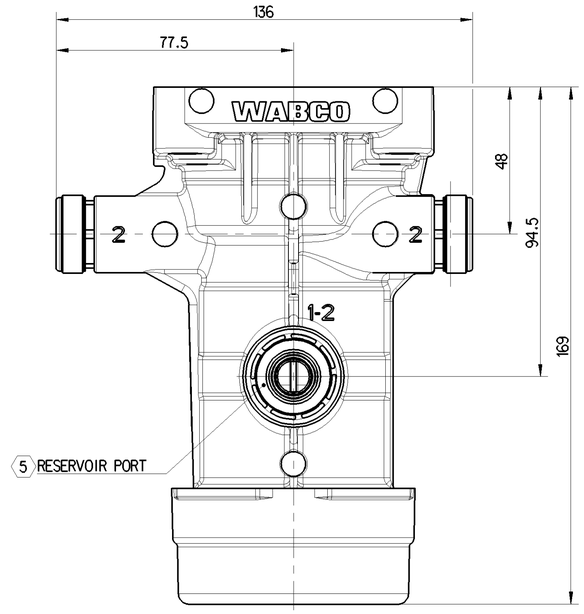

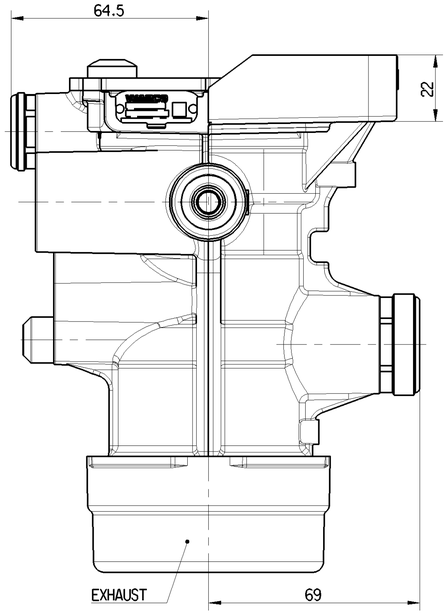

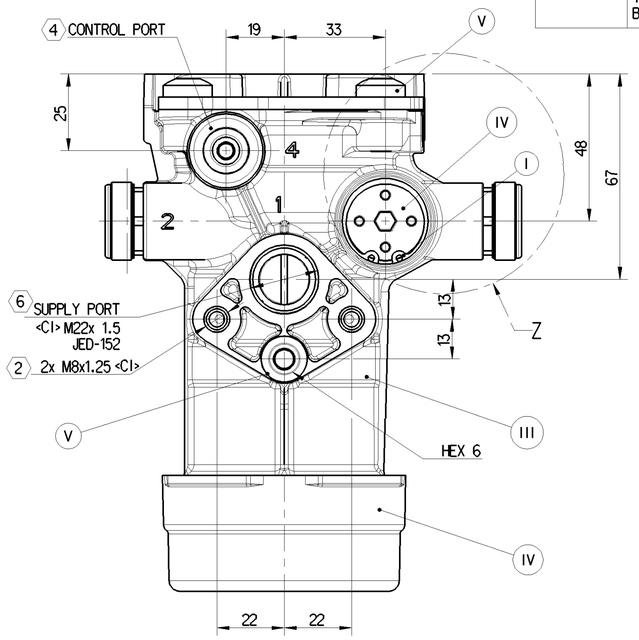

CONDITION	FROM	TO	NOMINAL DIAMETER
FILLING	PORT 1	PORT 1-2	≥10 mm
BRAKING	PORT 1-2	PORT 2	≥11.5 mm
EXHAUSTING	PORT 2	PORT 3	≥10.6 mm

V	STEEL	ZINC NICKEL PLATED
IV	PLASTIC	NO TREATMENT
III	ALUMINIUM ALLOY	CHROMATED
II	STEEL	POWDER COATED
I	STEEL	ZINC PLATED
PART CODE	MATERIAL	SURFACE PROTECTION

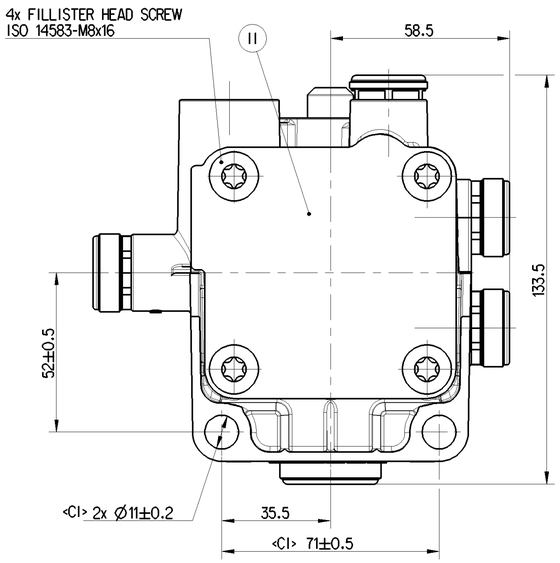

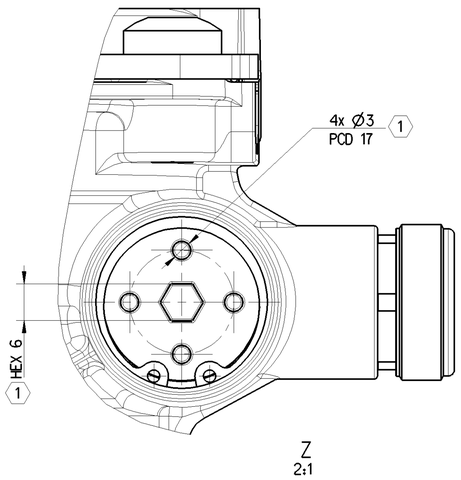



NOTE:

1. PREDOMINANCE ADJUSTMENT
2. ATTACHMENT OF TRAILER RELEASE VALVE RECOMMENDED TORQUE: 18±2 Nm

FITTING DETAILS:

3. TUBE SIZE-10x1 <CI>, PUSH IN LENGTH -24mm <CI>
4. TUBE SIZE-8x1 <CI>, PUSH IN LENGTH -20.5mm <CI>
5. TUBE SIZE-15x1.5 <CI>, PUSH IN LENGTH -27mm <CI>

RECOMMENDED TORQUE FOR FITTINGS:

6. THREAD-M22x1.5, TIGHTENING TORQUE: 34 TO 40 Nm

General Specification: JED-334-1 , Size ISO 14405 LP						
Further Technical Data: 971 002 049 0						
Doc. Code: 035				Sheet: 1 To 56		
General Tolerances JED-261						
		Range of Nominal Dimensions (± mm)				
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine		0.5	1.0	1.5	2.0	±3°
Medium	X	1.0	2.0	3.0	4.0	
Coarse		2.0	3.5	5.0	6.5	
Tapped Holes acc.						
1) Tolerance Class Applied Crossmarked						

Copyright WABCO®

Date	Signature
Drawn 2021-06-01	M S
Checked 2021-07-29	Szyszka
Expert	Ponmurugaraj C

WABCO

RELAY EMERGENCY VALVE
3 PORT
PRESS IN FITTING VARIANT

Mass	Scale	Material No.	Date of first issue: 2019-08-19
1.260 KG	1:1 2:1	971 002 024 0	Doc.Code 005 · Language EN · Sheet 1/1
Size A 1	CAD System CREO	ECN-No. 507805 · Revision 1x A · Techn. Resp. 5250 · Replacement for -	

Tous Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Non è permesso consegnare o terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza nostra autorizzazione scritta. Tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or registration of a utility model or design.

This document is the subject of copyright.