
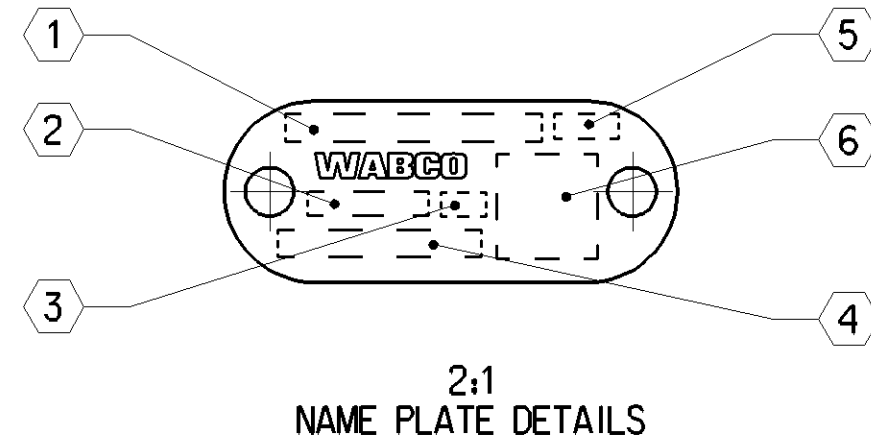
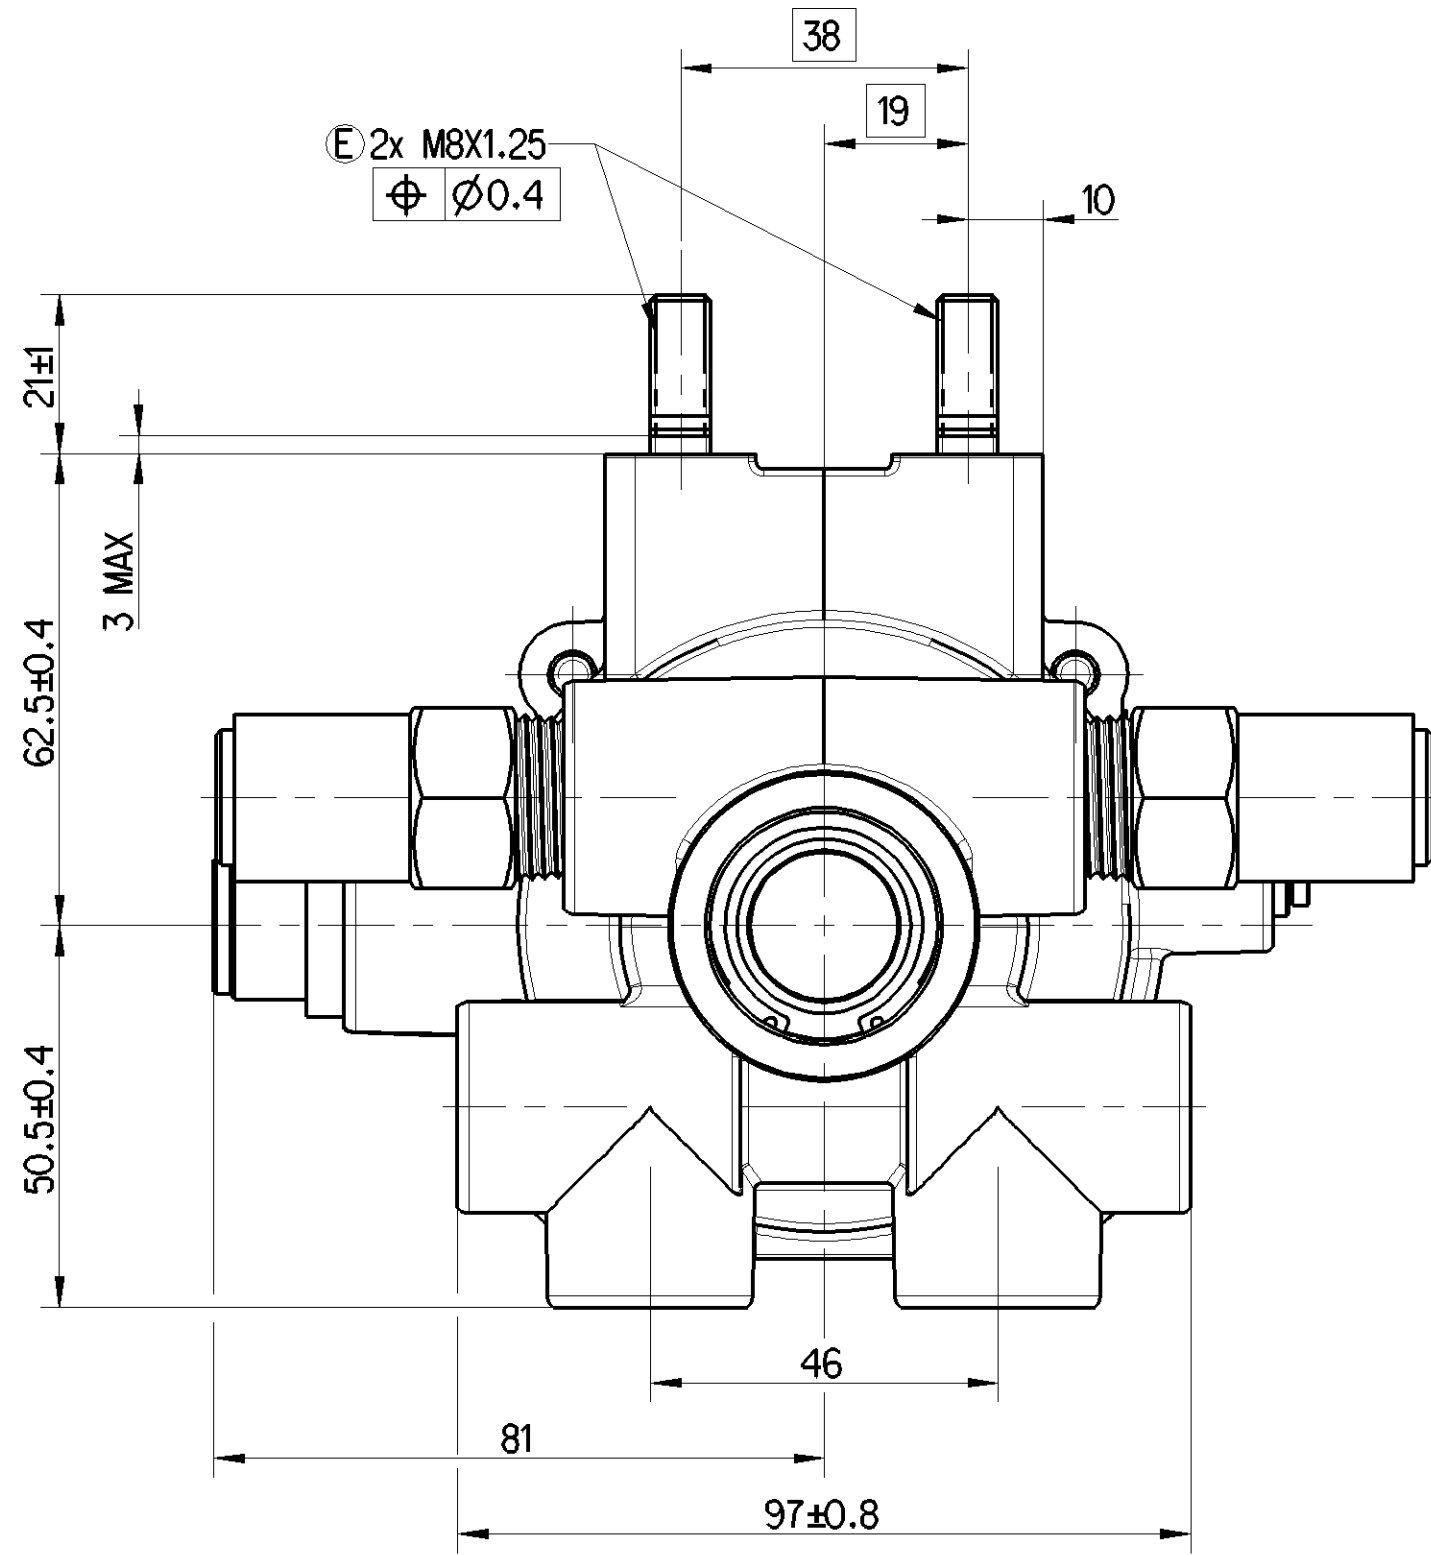


SAFETY CHARACTERISTICS	0
SIGNIFICANT CHARACTERISTICS	0
CUSTOMER INTERFACE	0

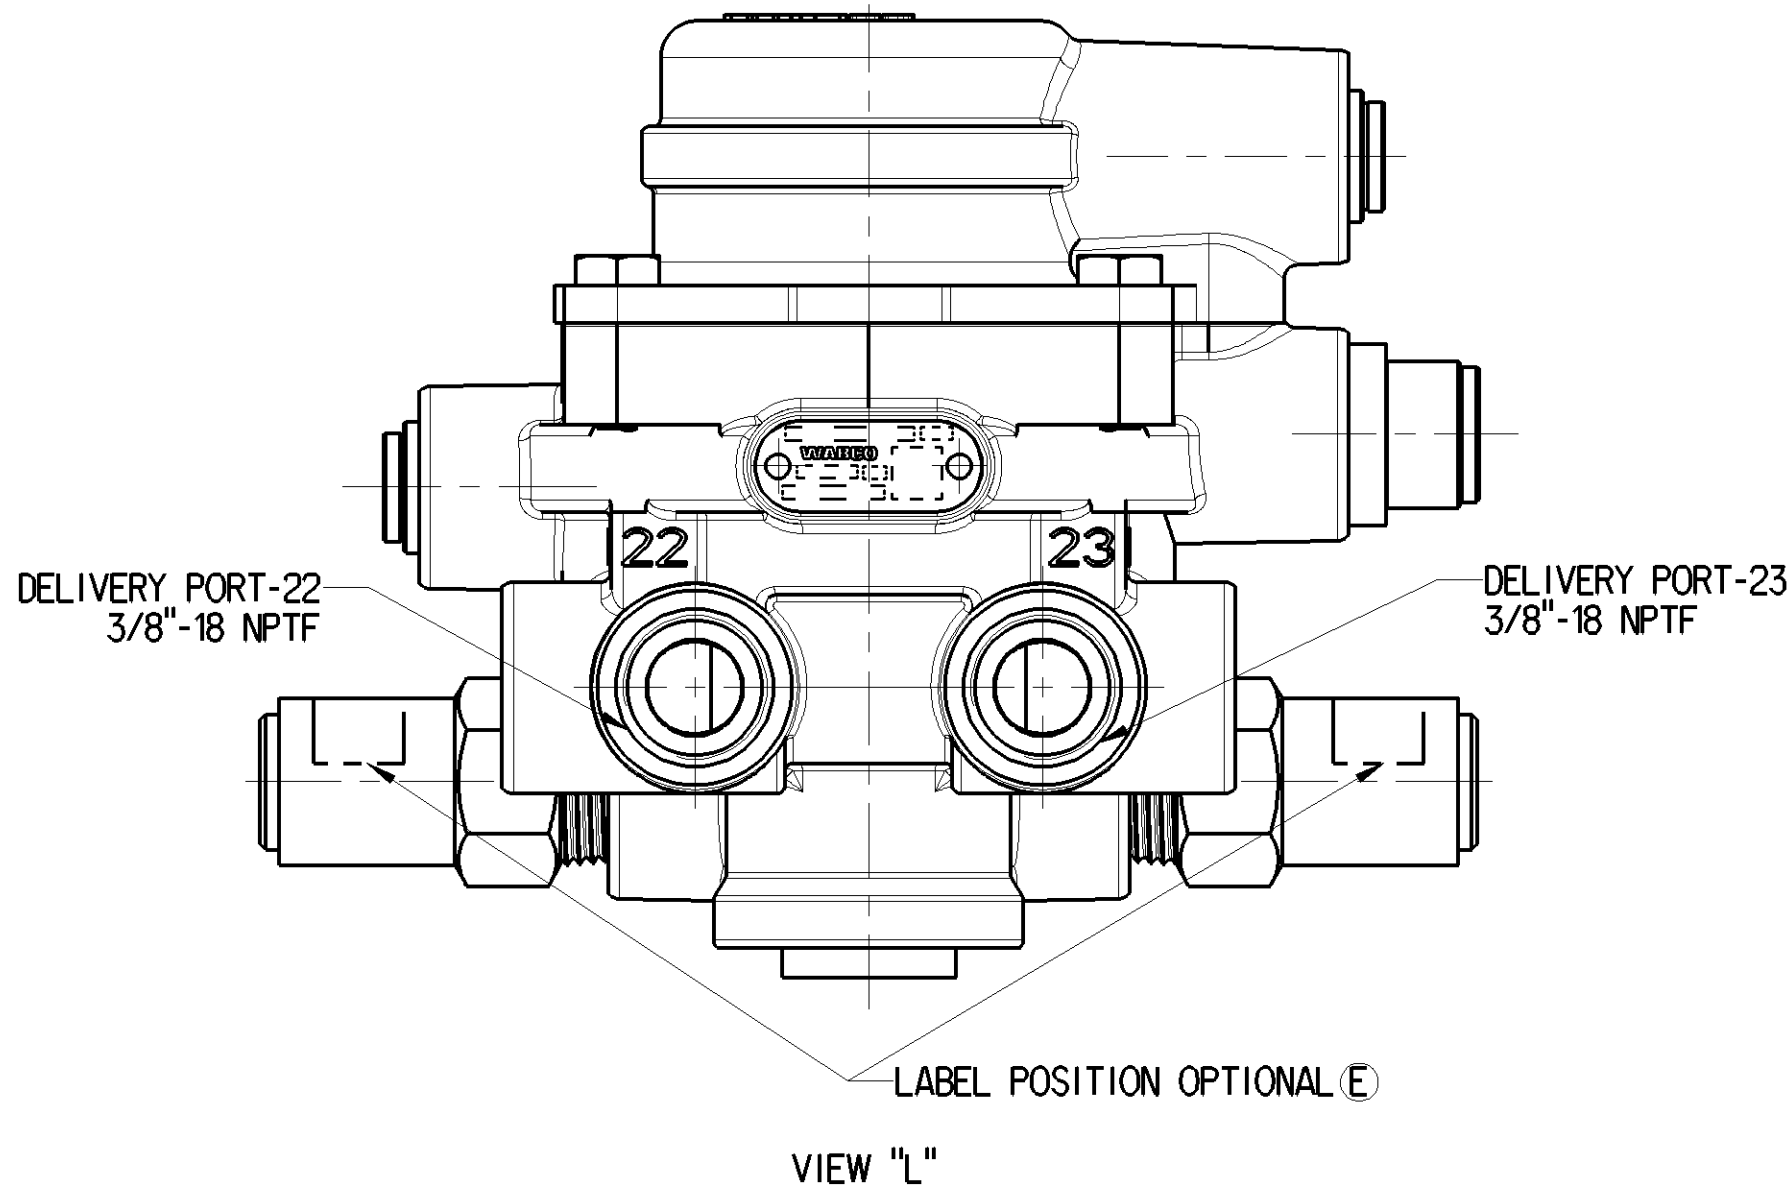

NOTES:

TEMPERATURE RANGE: -40° C TO 88° C





MAXIMUM OPERATING PRESSURE SHALL BE 150 PSI

PORT IDENTIFICATION CHARACTER TO BE 4.0 mm HIGH MINIMUM

PARTS TO BE IDENTIFIED WITH WABCO NAME, PART NUMBER
MANUFACTURE DATE AND COUNTRY OF ORIGIN

DELIVERY PRESSURE (SPRING BRAKE HOLD OFF PRESSURE) SHALL BE
90 TO 105 PSI WHEN SUPPLY PRESSURE IS 100 TO 130 PSI

PARTS TO BE BAGGED TO PROTECT FROM CONTAMINATION

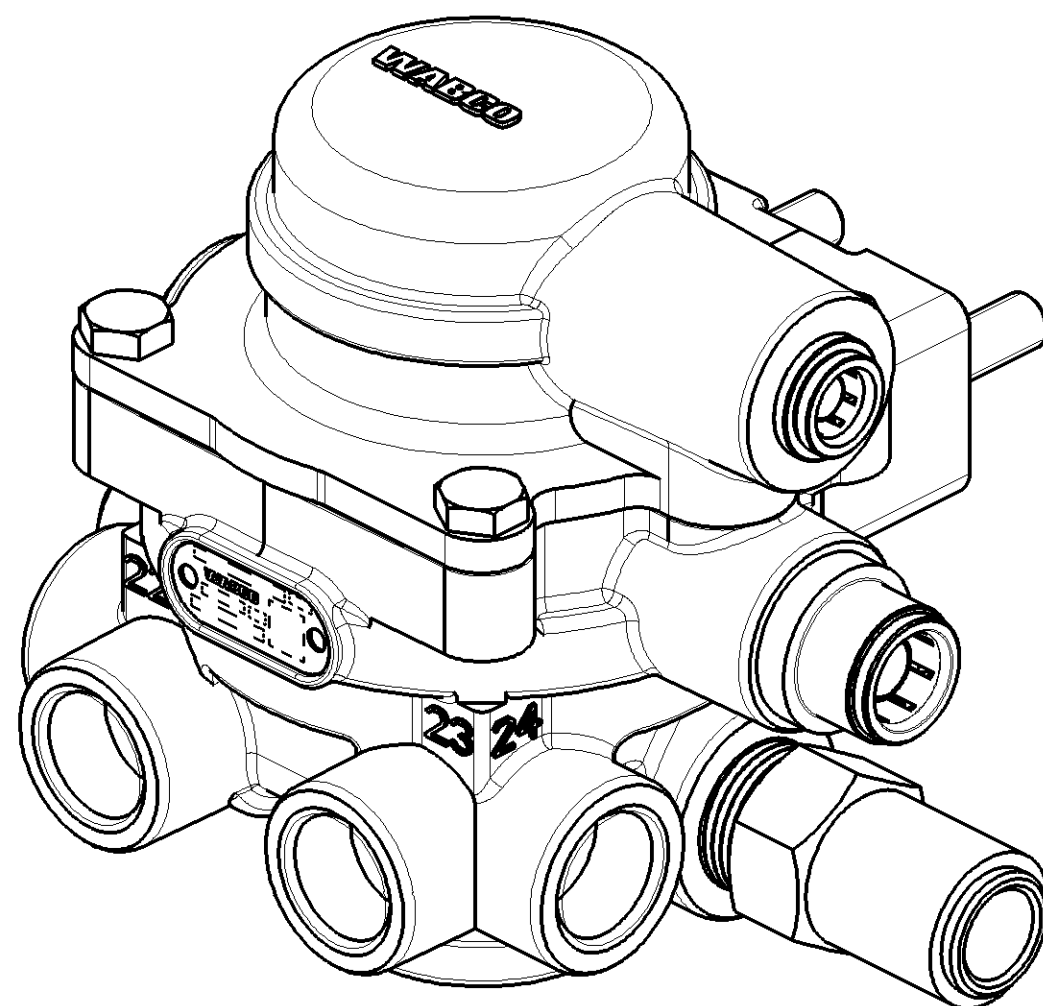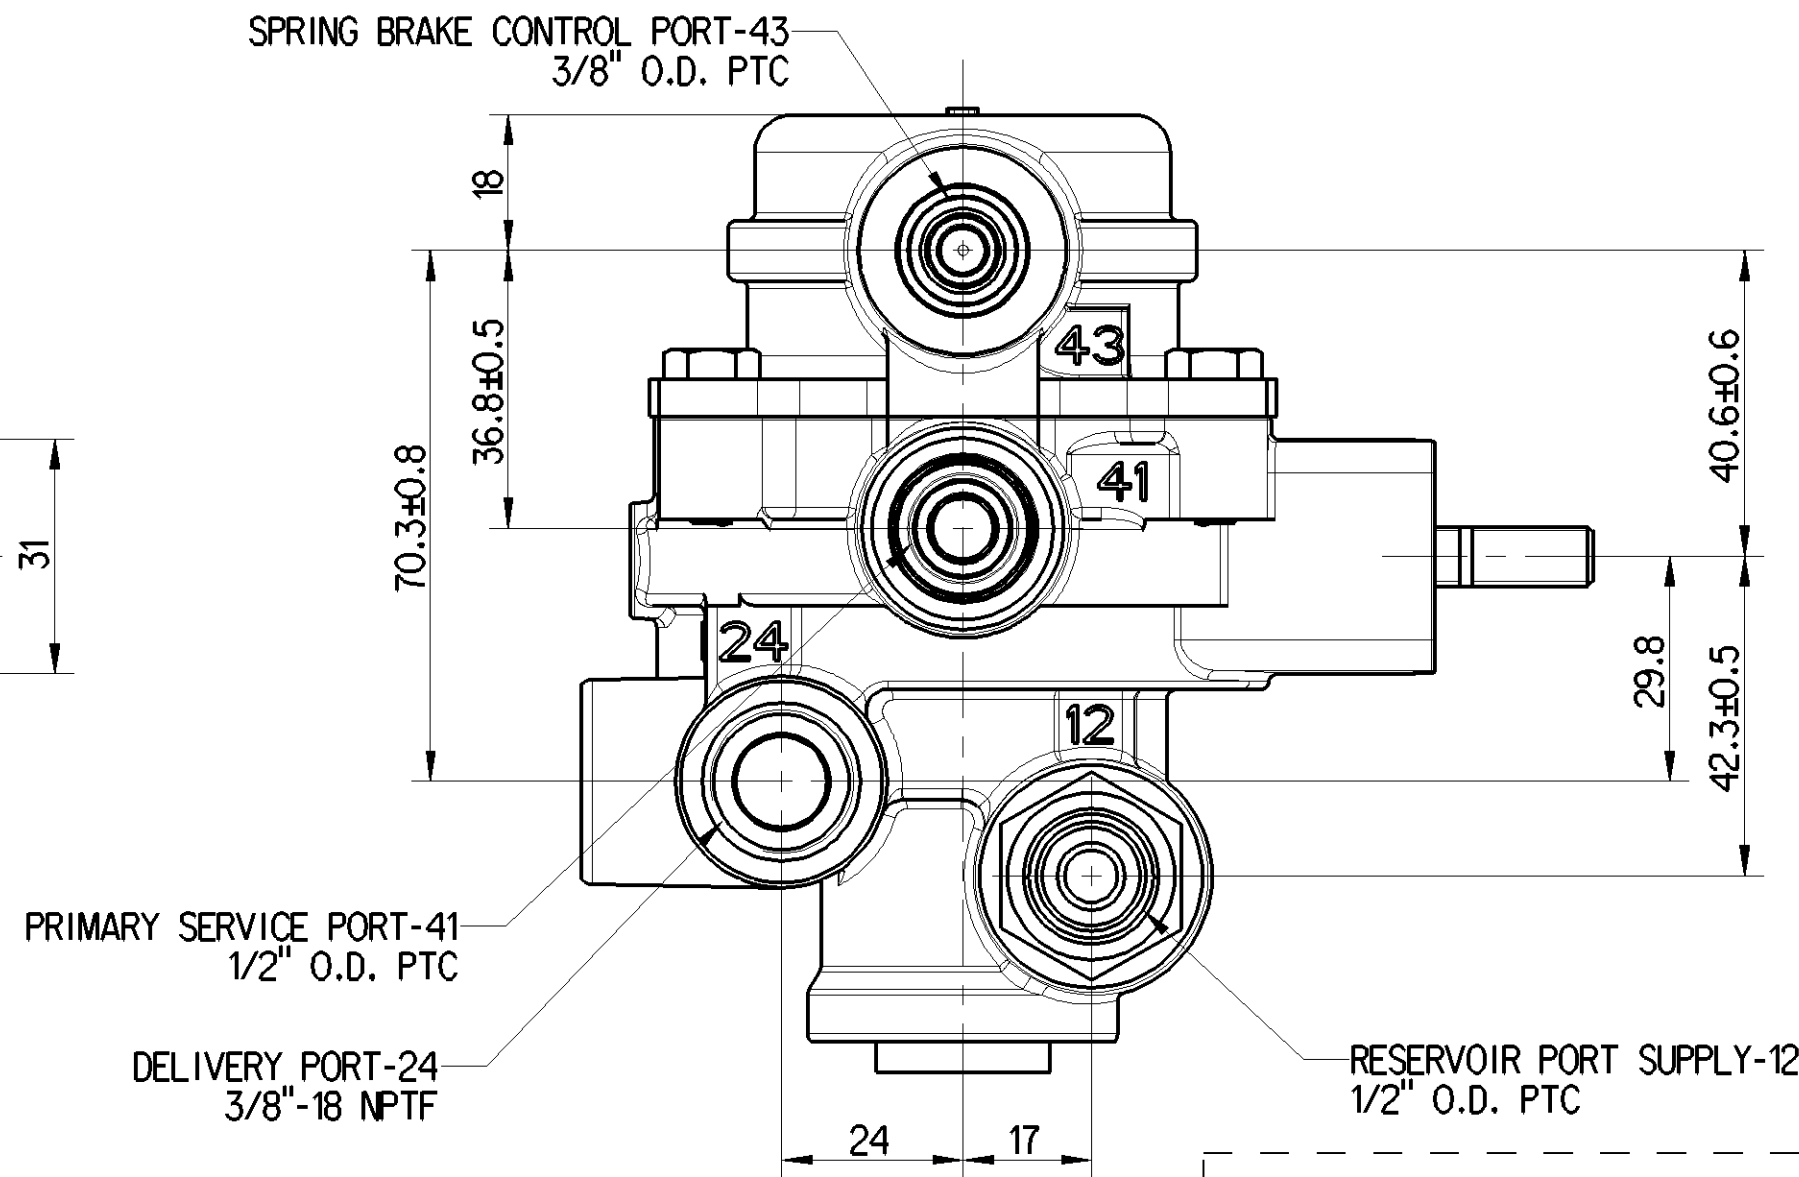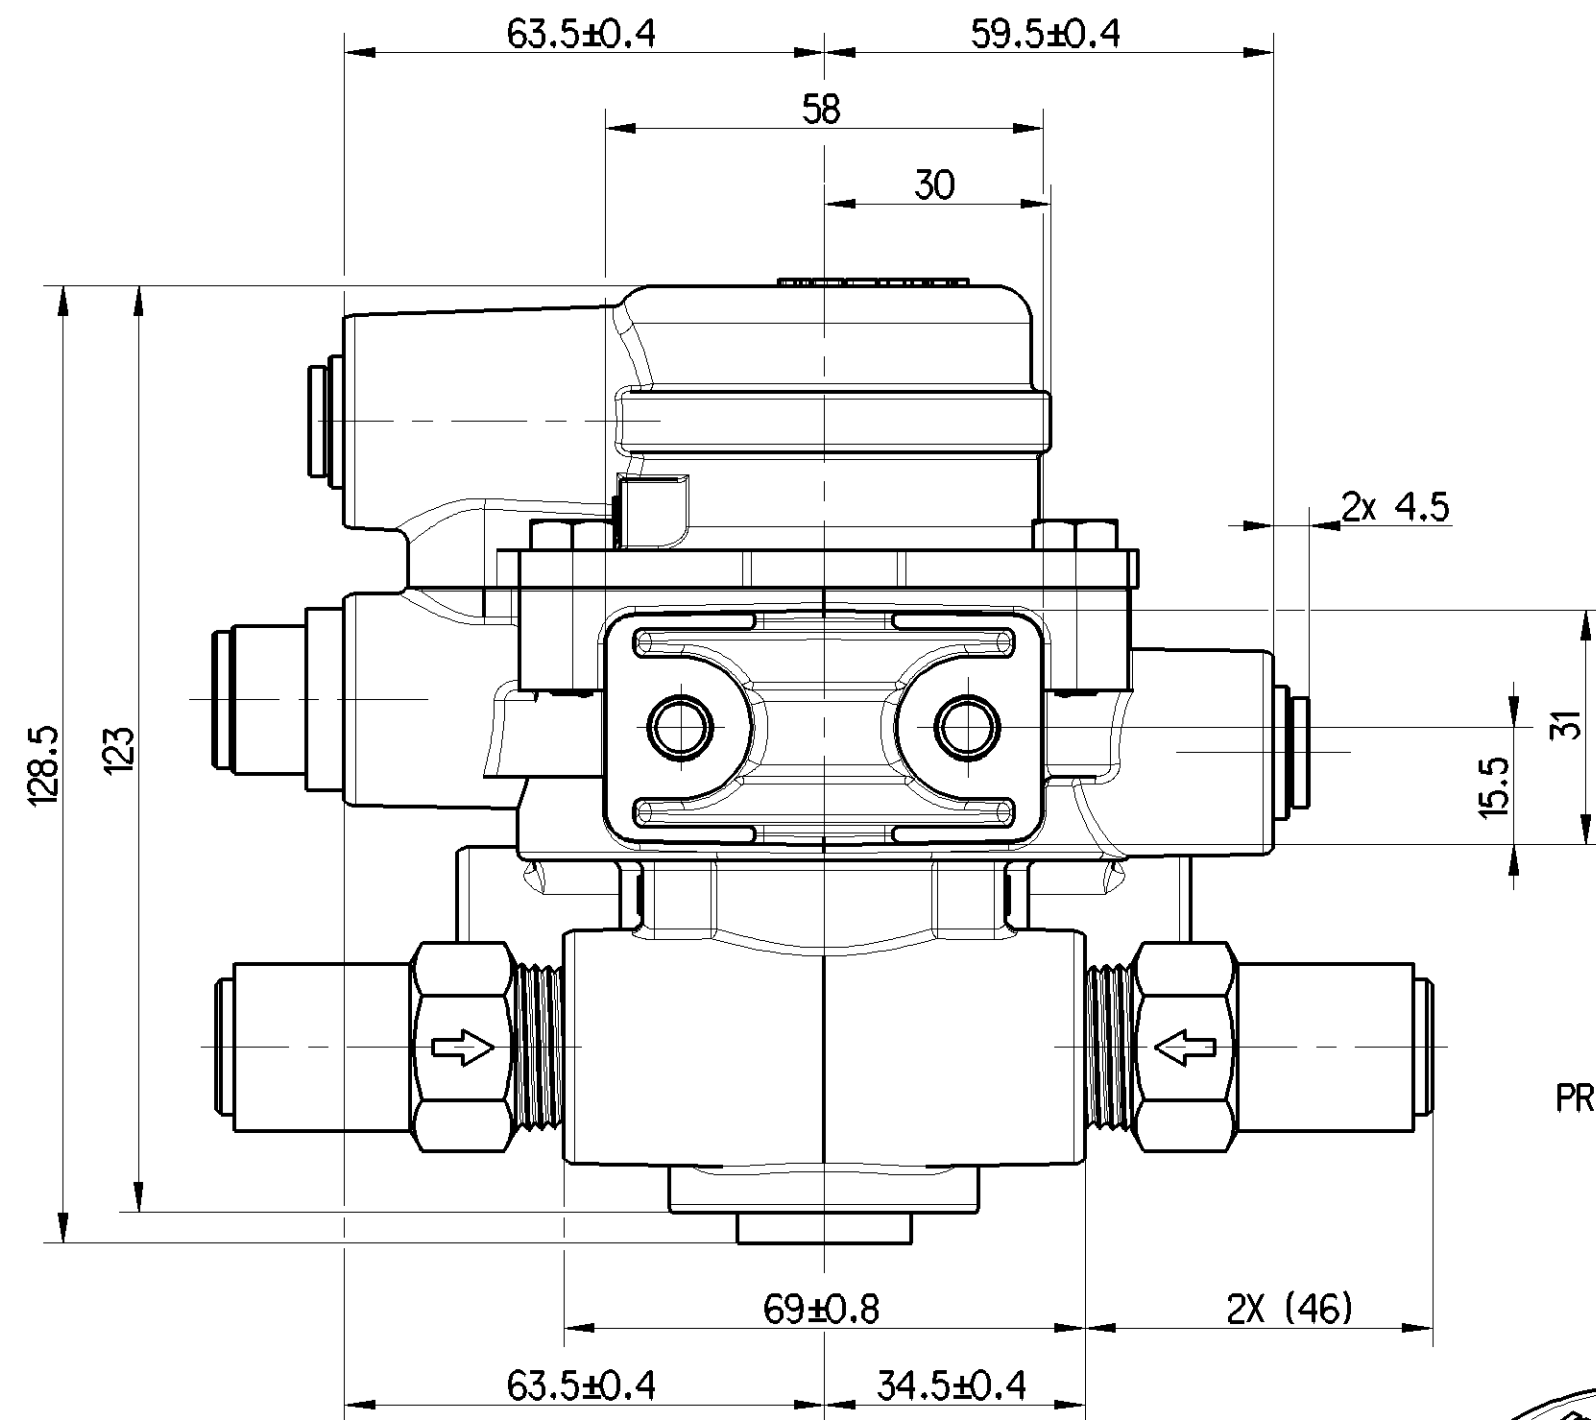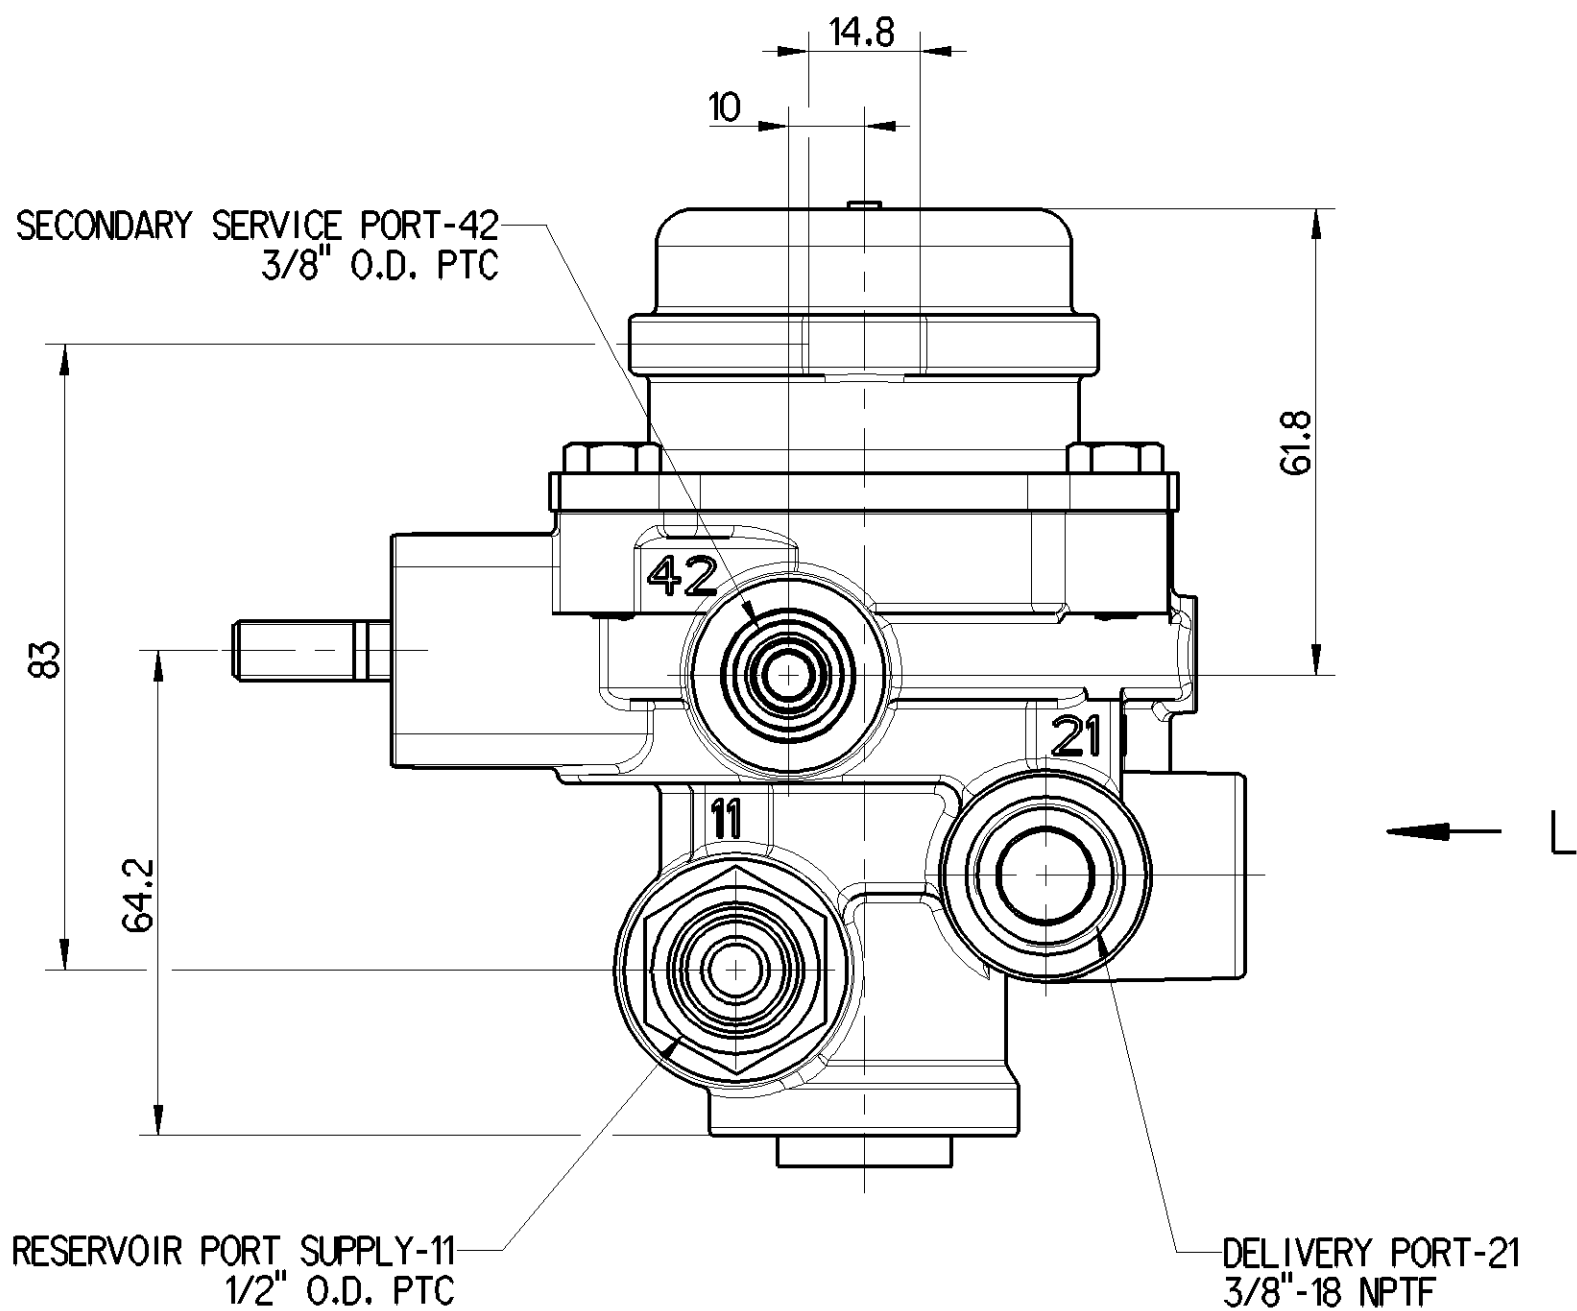

General Specifications: JED-334-1 - Size ISO 14405 LP					Copyright WABCO®		WABCO		
Further Technical Data: PSSC 132C					Date	Signature			
Doc. Code: 035					Drawn		INVERSION RELAY VALVE		
Sheet: 1 To 11					2021-09-22		Sundaramoorthy		
General Tolerances JED-261					Checked				
Range of Nominal Dimensions (± mm)					2021-09-23		Modyaly		
					Expert				
					Monally Patrick				
					Mass		Material No.		Date of first issue
					Scale				
					1.7		971 899 152 0		
					1:1				
					2±1				
					KG				
					Size				
					CAD System				
Tapped Holes acc.					A 1		CREO		
1) Tolerance Class Applied Crossmarked							505948		
					Revision		2		
					Techs. Resp.		5140_US		
							Replacement for		
							-		