


1 = SUPPLY
VORRAT
ALIMENTATION
ALIMENTAZIONE



2 = DELIVERY
AUSGESTEUERTER DRUCK (p2)
PRESSION DELIVREE
MANDATA

4 = CONTROL PRESSURE
STEUERDRUCK
PRESSION DE COMMANDE (p4)
PRESSIONE COMANDO

EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

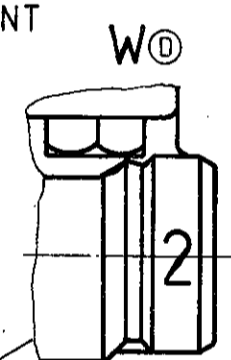

DESIGN PERMISSIBLE
AUSFUEHRUNG ZULAESSIG
EXECUTION ADMISE
ESECUZIONE AMMISSIBILE

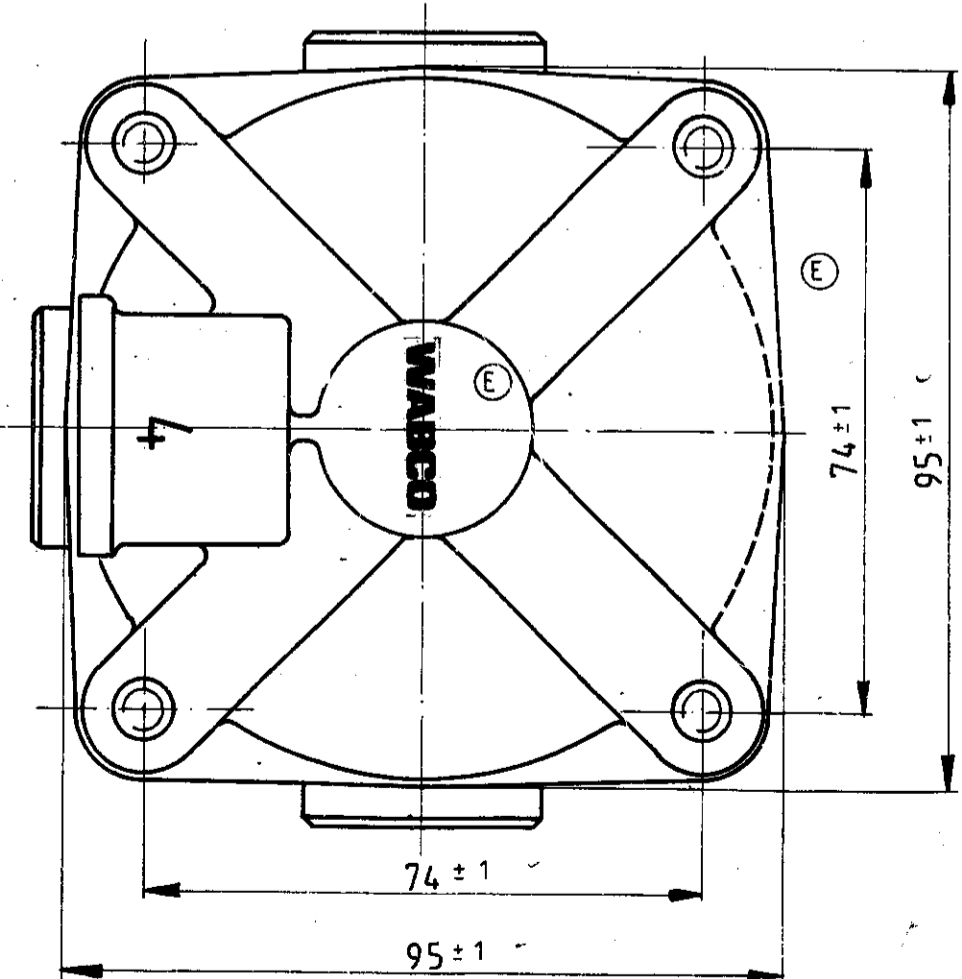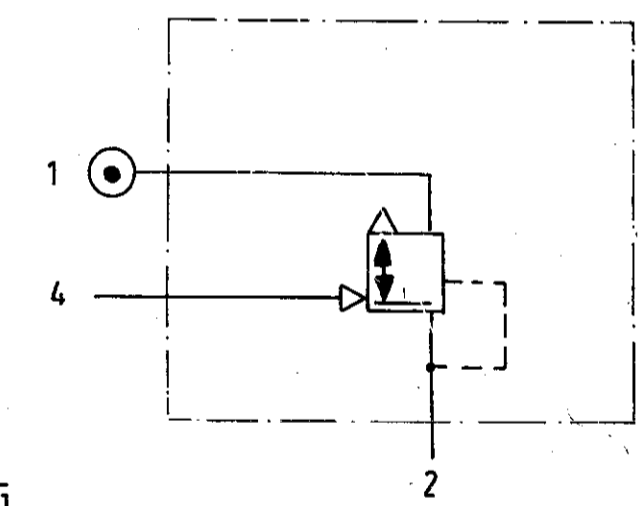

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH -40°C.....+80°C
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE THERMICA

SUPPLY PRESSURE
VORRATSDRUCK
PRESSION D'ALIMENTATION p1=MAX. 22 bar
PRESSIONE DI ALIMENTAZIONE

WORKING PRESSURE
BTRIEBSDRUCK
PRESSION DE SERVICE p2/p4 =MAX. 10 bar
PRESSIONE D'ESERCIZIO

MEDIUM: AIR
MEDIUM: LUFT
MILIEU: AIR
FLUIDO: ARIA

All rights reserved in the event of the grant of a patent or the registration of a utility model or design. Alle Rechte für den Fall der Patentanmeldung oder Gebrauchsmuster-Eintragung vorbehalten.

DATE		SIGNATURE		WABCO
79-04-02		<i>Meinhart</i>		
DRAWN		CHECKED		RELAY VALVE VALVE RELAIS VALVOLA RELE RELAISVENTIL
79-04-03		<i>Winkler</i>		
47379	3x E	91-02-08	STANDARDIZATION	
36217	2x D	87-04-27	79-04-06	
19536	1x C	79-04-02	<i>frum</i>	
REPLACEMENT FOR		MASS	SCALE	IDENTIFICATION CODE
CHANGE NO. LETT. DATE		kg	1:1 (2:1)	973 001 220 0
DRAWING OF		SIZE	T.R.L.	CODE FOR FUNCTION
78-02-17		A2	140	CODE FOR SHAPE
				CODE FOR DOCUMENT
				605