

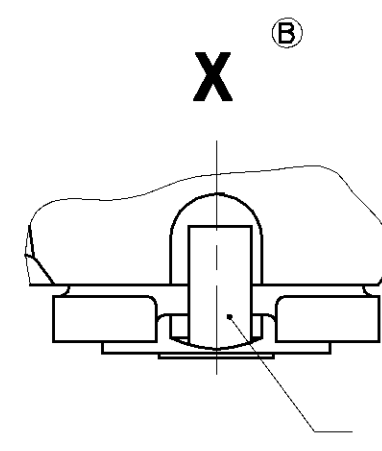
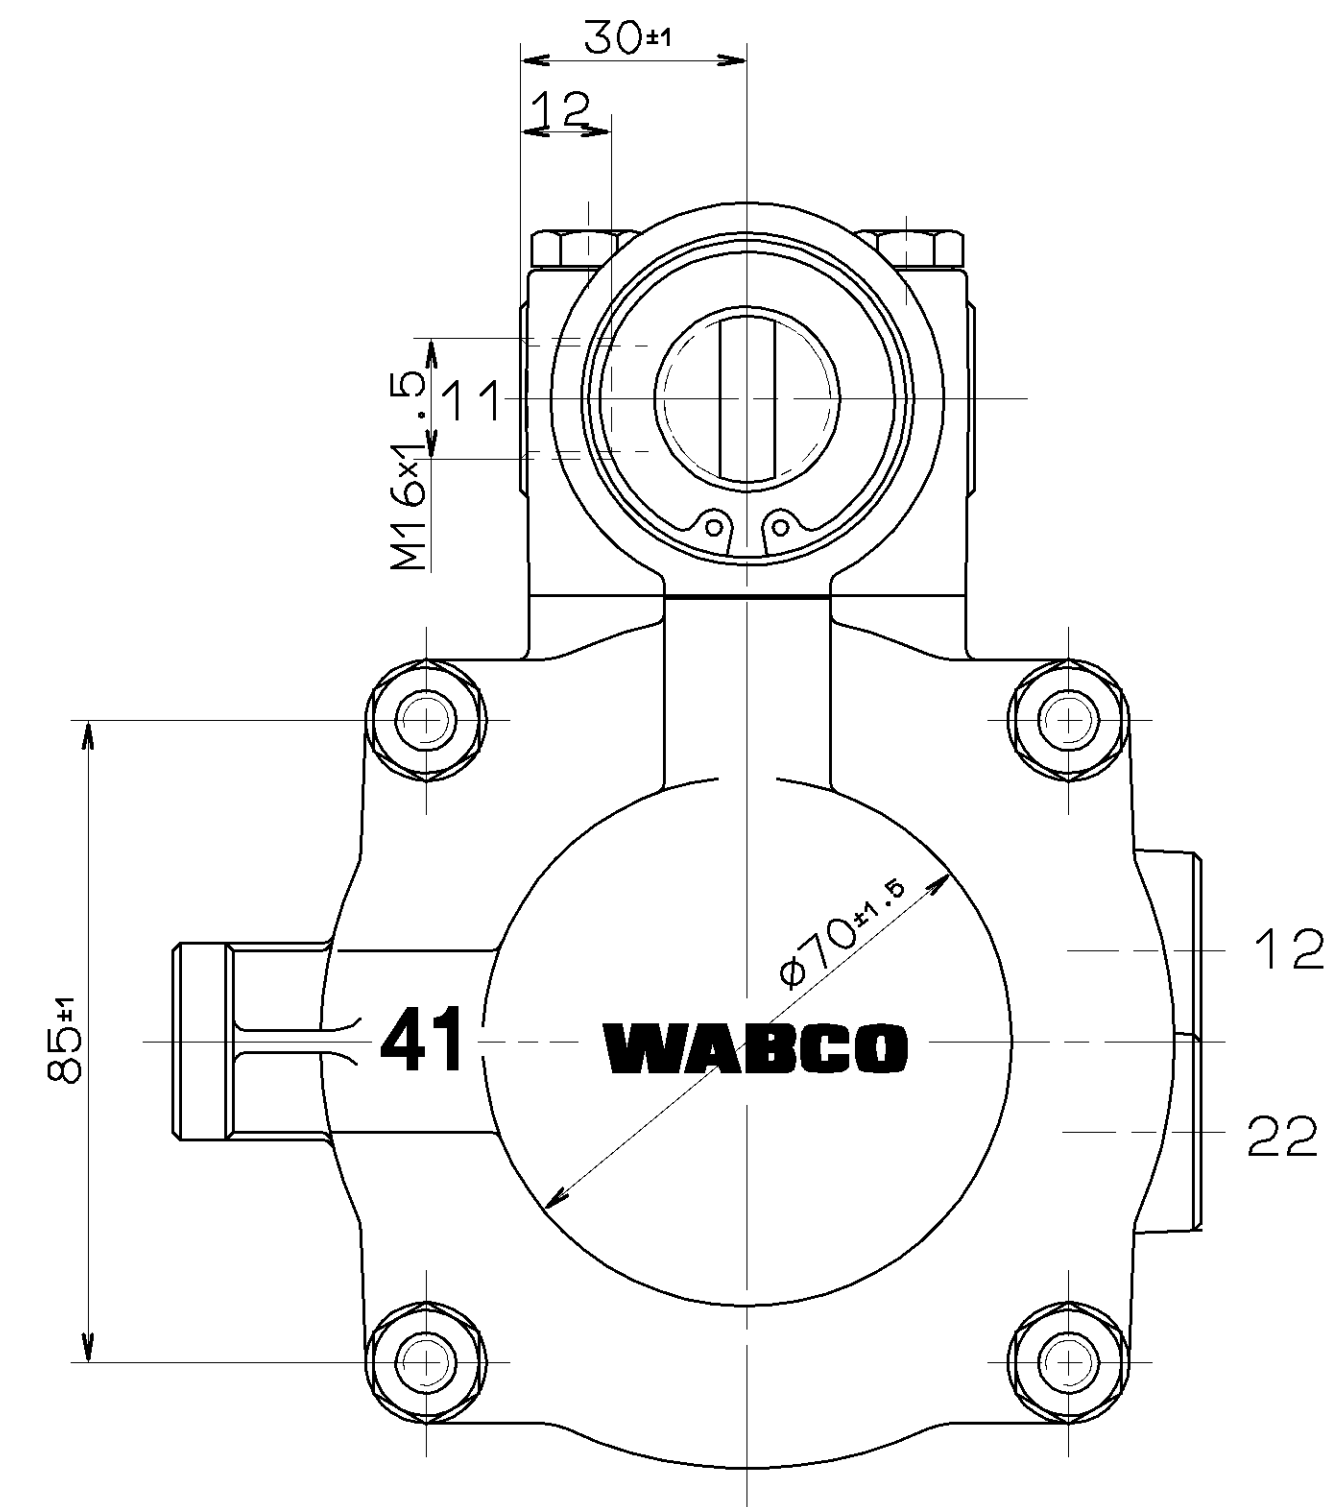


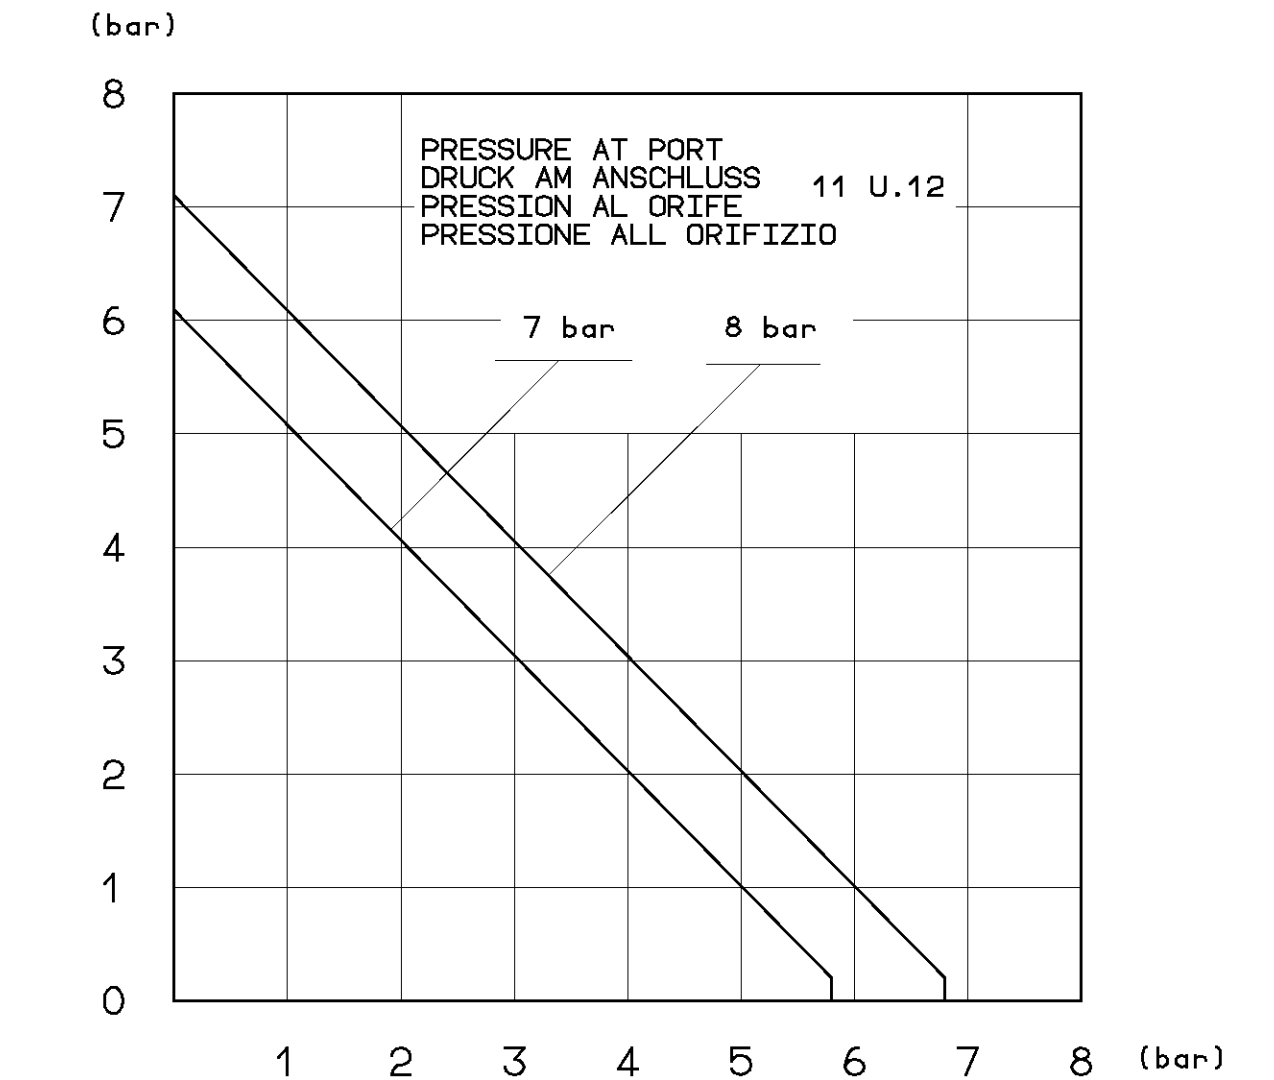

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

POSITION D'INSTALLATION: ECHAPPEMENT VERS LE BAS (ECART DE L'AXE MEDIAN DE L'APPAREIL PAR RAPPORT A LA VERTICALE E: 90° MAX.)
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO (DEVIAZIONE ASSE APPARECCHIO RISPETTO ALLA VERTICALE: MAX. 90°)

® MARKED WITH PAINT
 *** MIT LACK GEKENNZEICHNET
 MARQUE AAVEC VERNIS
 MARCATO CON VERNICE

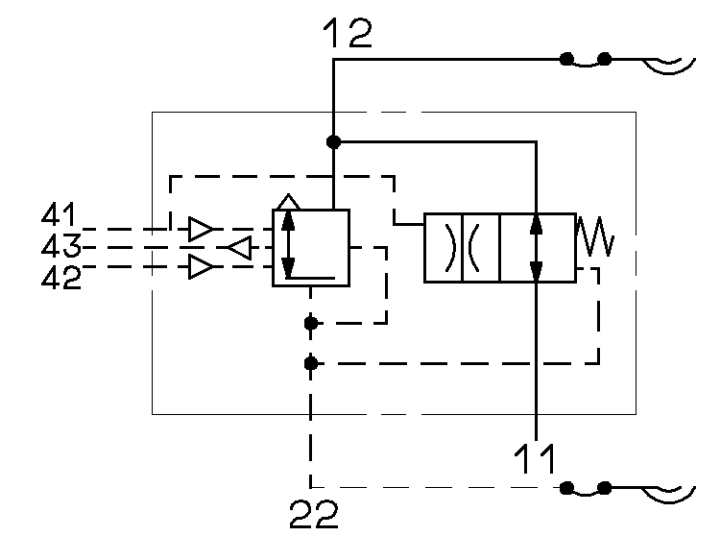

DIFFERENTIAL ACTUATING PRESSURE $\Delta p_e = p_{e41} - p_{e22} = 2,5 \pm 0,3$ bar
DIFFERENZ-SCHALTDRUCK
PRESSION DIFFERETIELLE D'ACTIONNEMENT
PRESSIONE DIFFERENZIALE DI AZIONAMENTO

2/2 DIRECTIONAL CONTROL VALVE:
2/2 WEGEVENTIL:
DISTRIBUTEUR 2/2:
VALVOLA 2/2:

GENERAL SPECIFICATION: JED-354				CADAM-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE: _____ SIGNATURE: _____			
DOC. CODE: _____		SHEET: _____ TO _____		90-10-24 MEINKING		TRAILER CONTROL VALVE VALVE DE COMMANDE DE REM. VALVOLA DI COMANDO FR.RI. ANHAENGER-STEUERVENTIL	
GENERAL TOLERANCES				90-10-24 SCHULZ			
90-10-24 PANTZER				STANDARDIZATION: 90-10-24 PANTZER			
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm)					
		≤50	> 50 ≤180	>180 ≤400	>400		
FINE		0,5	1,0	1,5	2,0		
MEDIUM		1,0	2,0	3,0	4,0		
COARSE		2,0	3,5	5,0	6,5		
TAPPED HOLES ACC. ISO 4039 / JED-192		045781		2x8	91-07-17		
		045742		1x4	90-10-24		
1) TOLERANCE CLASS APPLIED CROSSHATCHED		DOCHD.		REV.	DATE		
9		100ms		EXPERT CODE		739	
				PRODUCT IDENTIFICATION NO.		DOC. CODE SHEET	
		2.5 kg		1:1		973 002 522 0	
		SIZE		T.R.I.		605 1 1	
		A 1		140		REPLACEMENT FOR	
						SHAPE CODE	
						973 002 522 0 OF 78-08-08 (A)	
						PRODUCT TYPE	
						0010	