
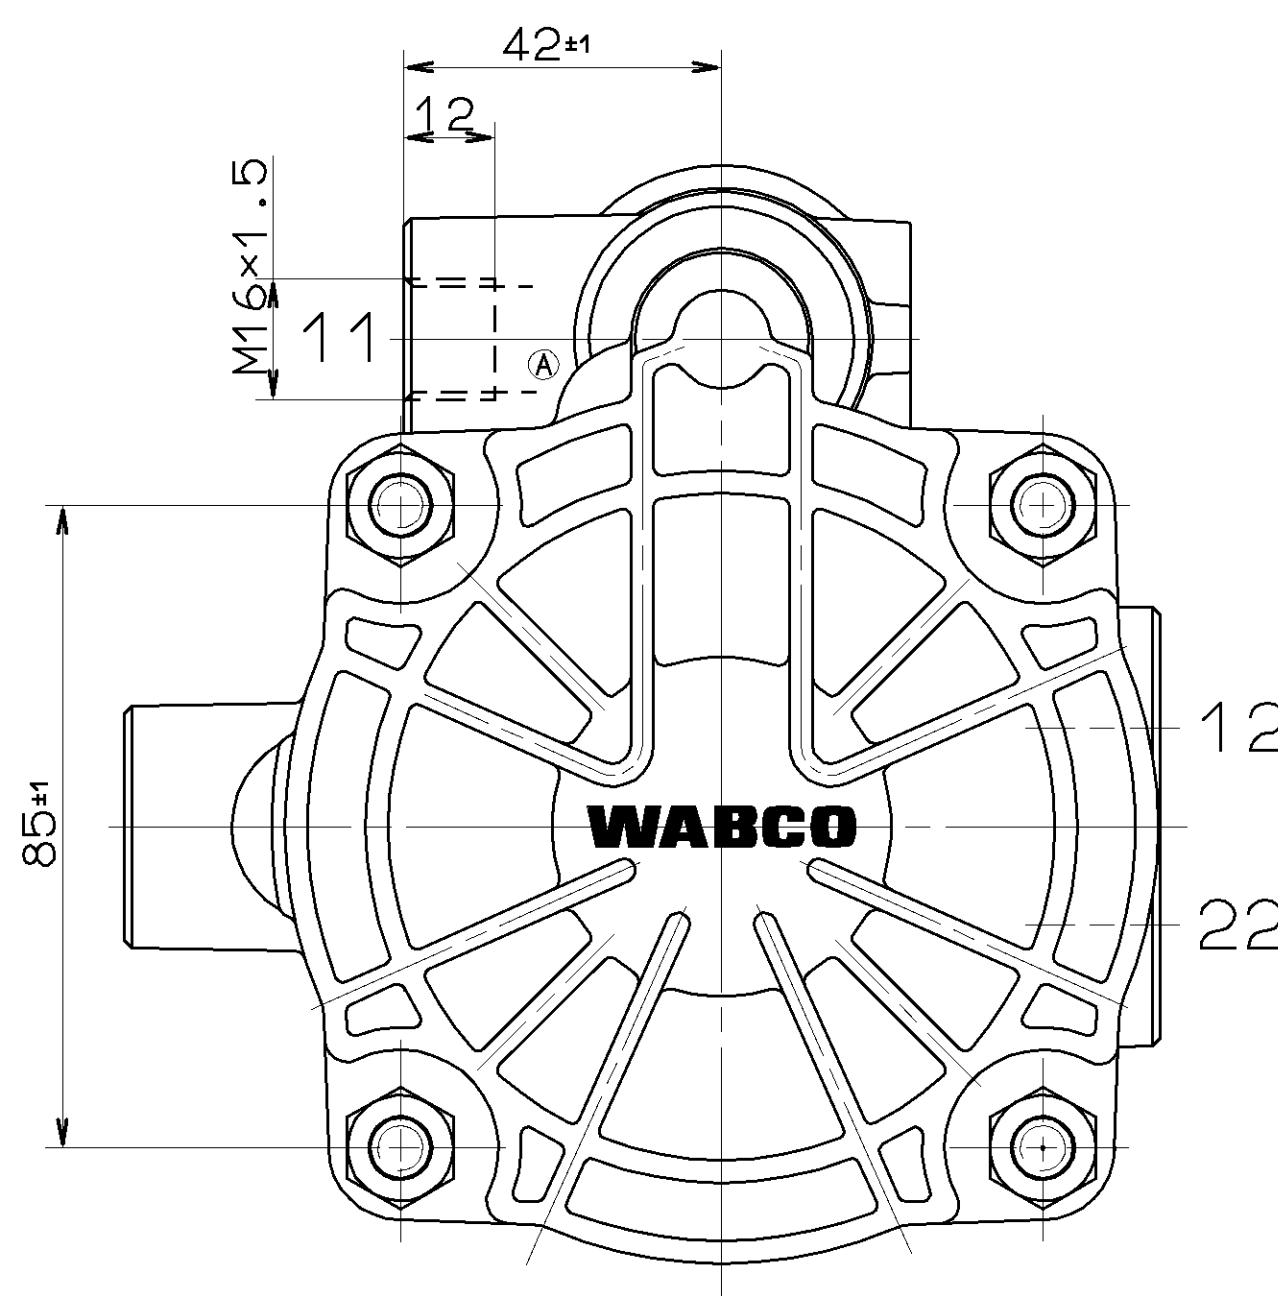
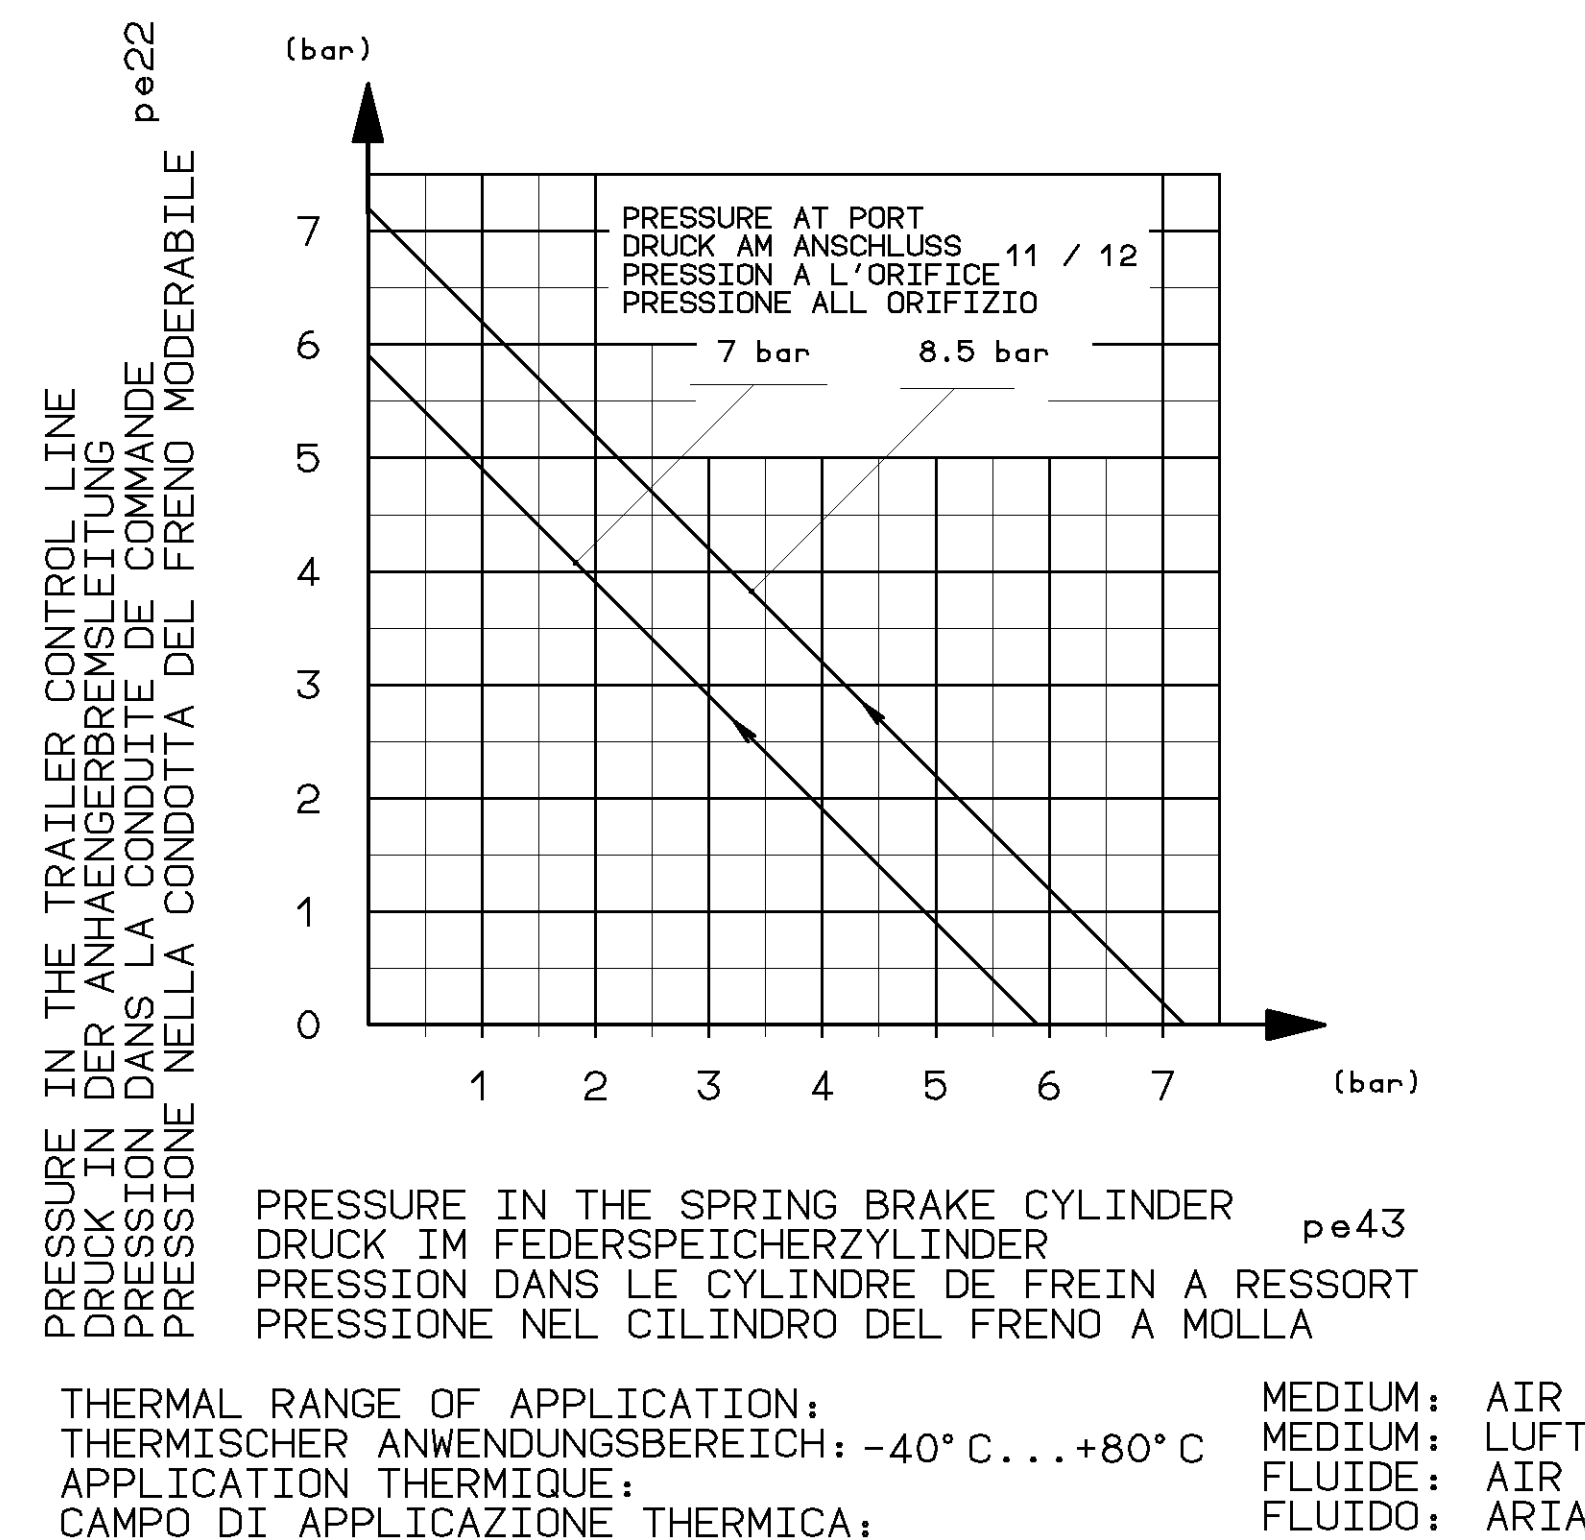
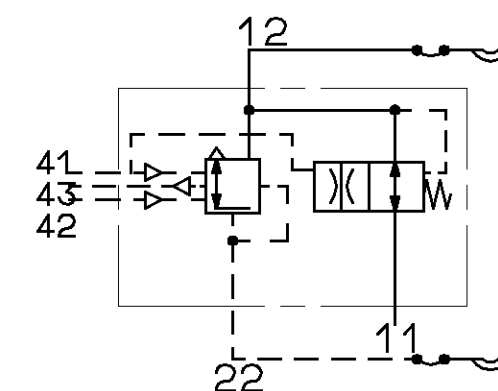




INSTALLATION POSITION: EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE DEVICE
DEVIATES MAX 90° FROM VERTICAL)
EINBAULAGE: ENTLUEFTUNG NACH UNTEN (MITTELACHSE DES GERAETES
MAX 90 ° VON DER SENKRECHTEN ABWEICHEND)
POSITION D'INSTALLATION: ECHAPPEMENT VERS LE BAS (ECART DE L'AXE MEDIAN DE
L'APPAREIL PAR RAPPORT A LA VERTICALE: 90° MAX.)
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO (DEVIAZIONE ASSE APPARECCHIO
RISPETTO ALLA VERTICALE:MAX.90°)

GENERAL SPECIFICATION: JED-334				CADA-DRIVING COPY-RIGHT		WABCO					
FURTHER TECHNICAL DATA:				DATE		SIGNATURE					
DOC. CODE:		SHEET: TO		DRAWN:		TRAILER CONTROL VALVE					
GENERAL TOLERANCES				97-10-15 GROETZ.		ANHAEGER STEUERVENTIL					
RANGE OF NOMINAL DIMENSIONS (± IN)				97-10-15 GROETZ.		VALVE DE COMMANDE DE REM.					
CLASS 1)				STANDARDIZATION:		VALVOLA DI COMANDO FR.RI.					
FINE		0,50		1,0		1,5		2,0		± 3°	
MEDIUM		1,0		2,0		3,0		4,0			
COARSE		2,0		3,5		5,0		6,5			
TAPPED HOLES ACC. ISO 4039 / JED-183		069408		1xA		98-12-01					
1) TOLERANCE CLASS APPLIED CROSS-MARKED		DWG-NO.		REV.		DATE					
9		100mm		1		140		SHAPE CODE		REPLACEMENT FOR	
								7319		01010	

[illegible]