

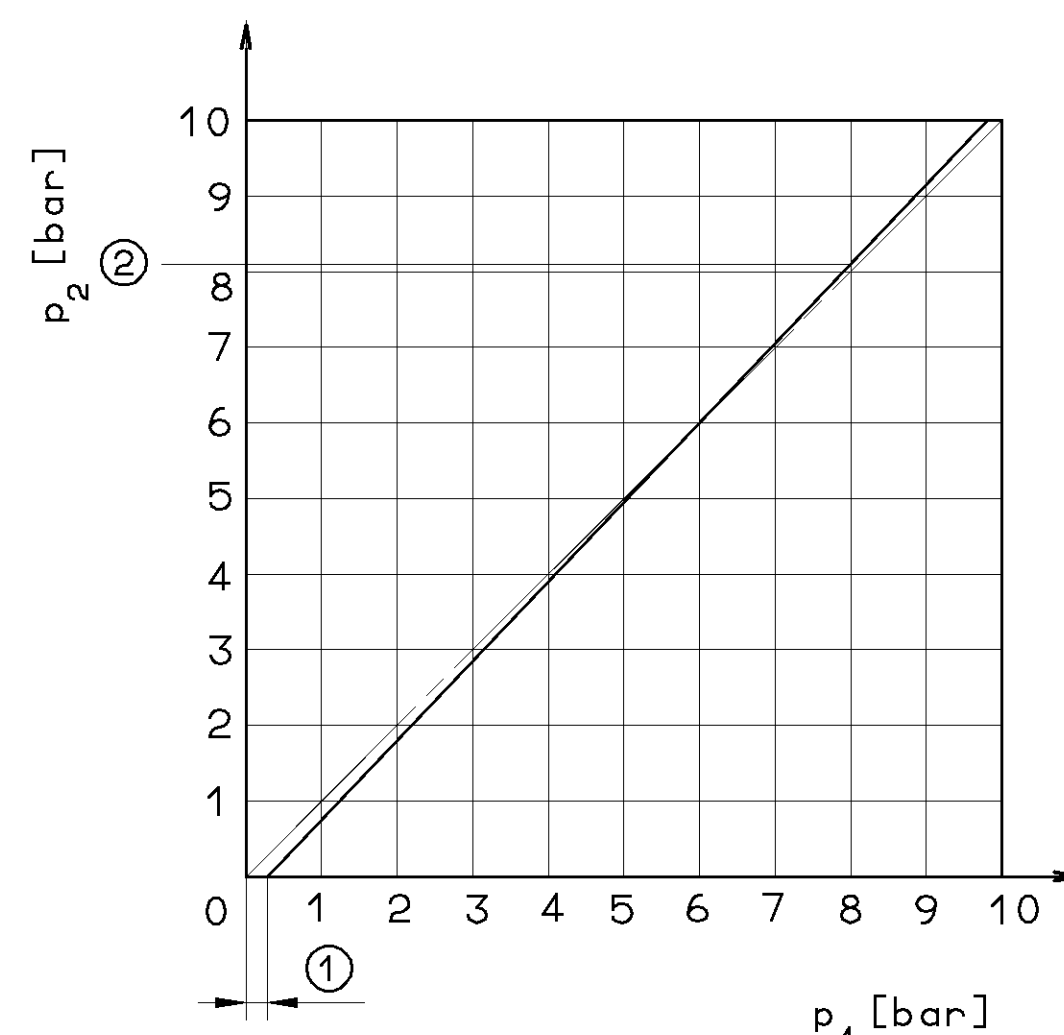
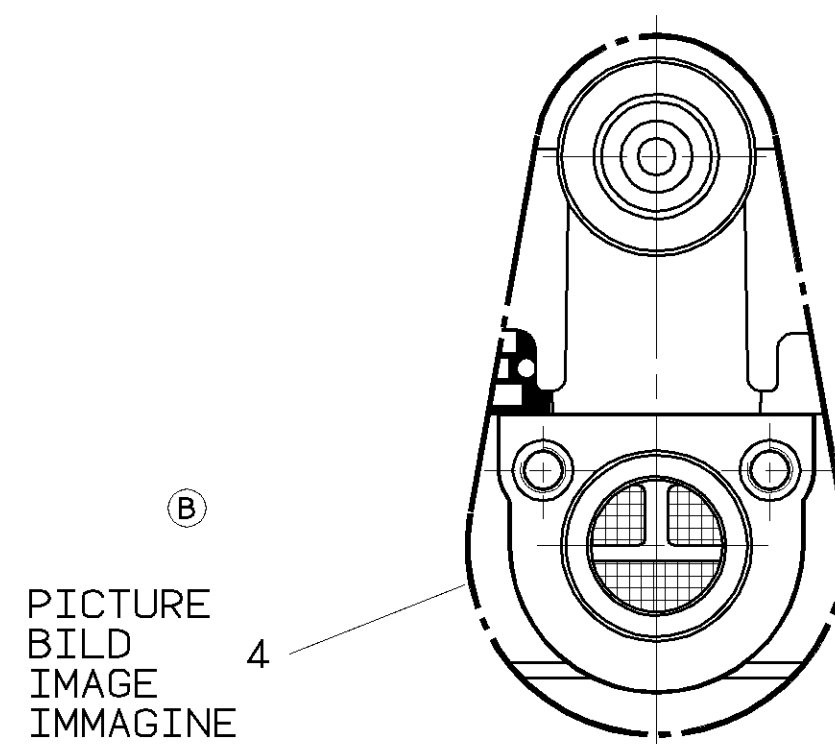
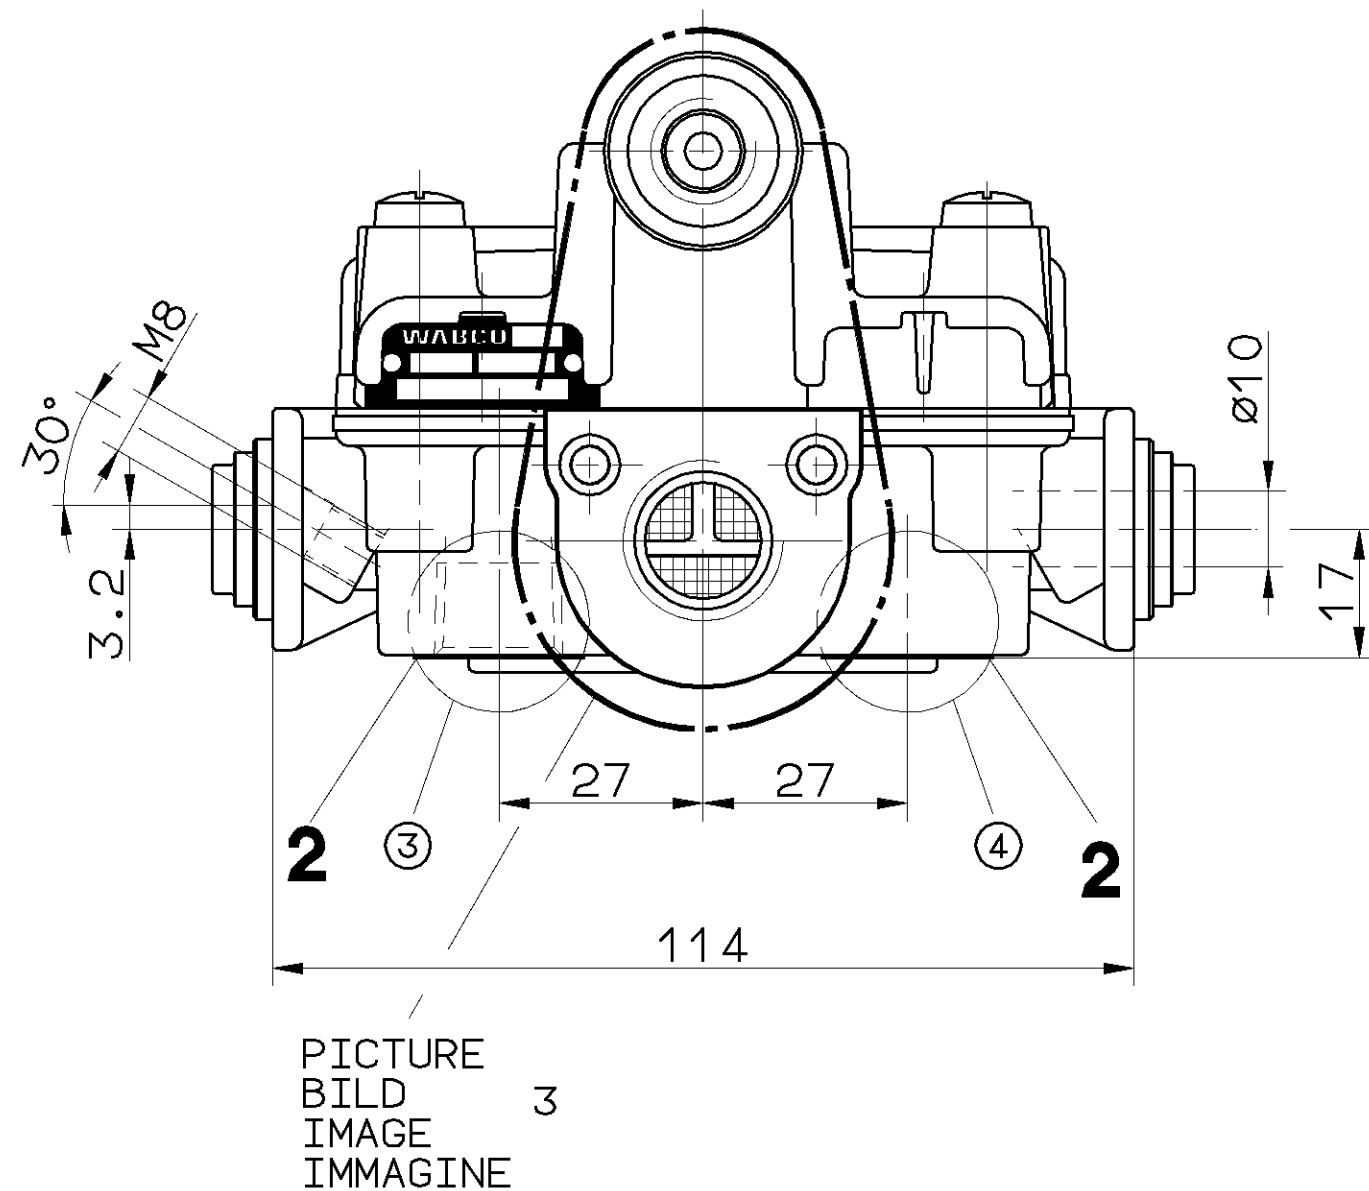
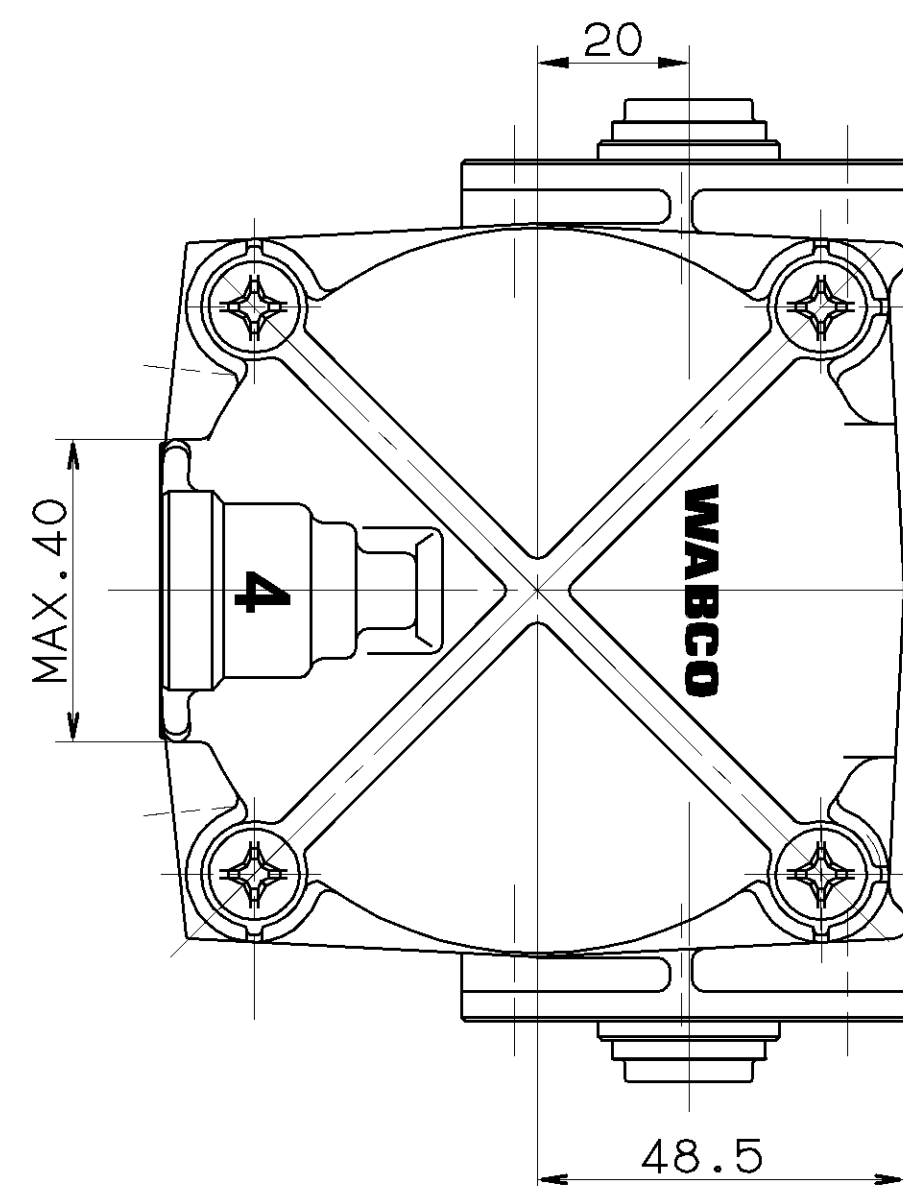
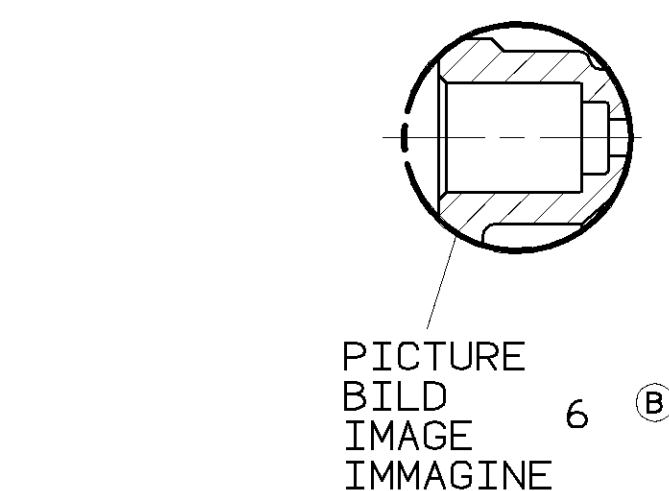
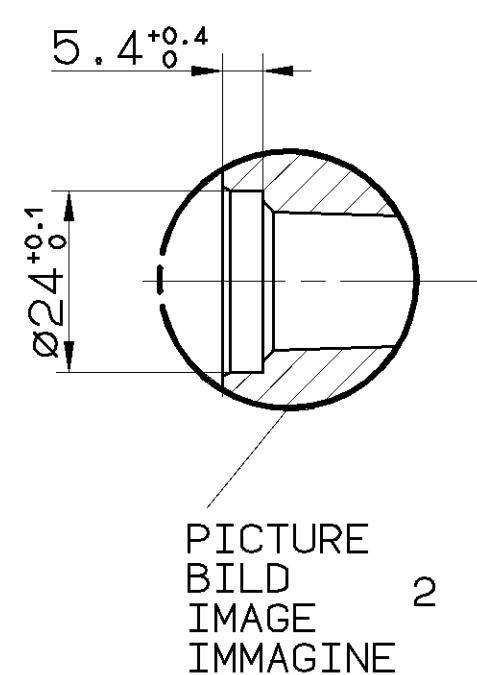


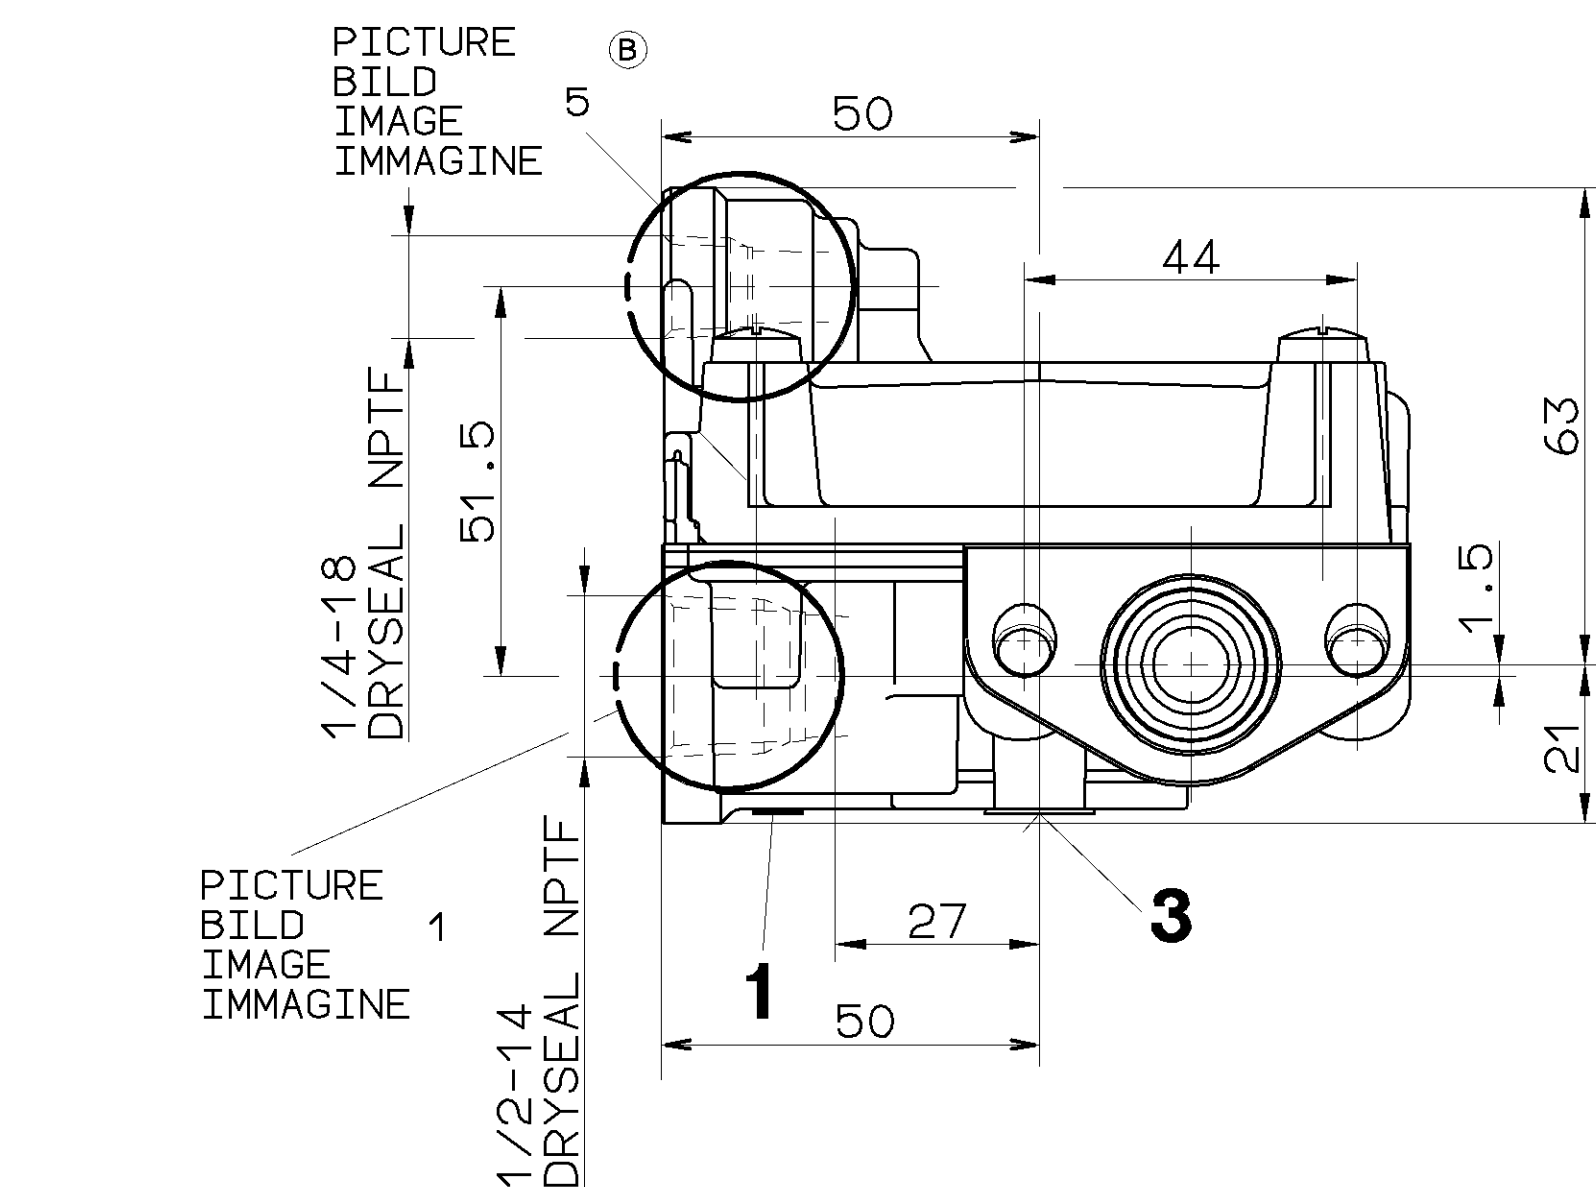

⑨ 973 011 028 0		0.38 ± 5.5	8.0	X	X	PICTURE BILD 2+4+6 IMAGE IMMAGINE
⑨ 973 011 027 0		0.28 ± 4.0	8.1	X	X	
⑨ 973 011 026 0		0.38 ± 5.5	8.0	X		
⑨ 973 011 025 0		0.28 ± 4.0	8.1	X		
973 011 024 0		0.38 ± 5.5	8.0	X	X	PICTURE BILD 1+3+5 IMAGE IMMAGINE
973 011 023 0		0.28 ± 4.0	8.1	X	X	
973 011 022 0		0.38 ± 5.5	8.0	X		
973 011 021 0		0.28 ± 4.0	8.1	X		
WABCO	CUSTOMER'S NO. KUNDEN-NR. NO. CLIENT NO. CLIENTE	① P ₄ [bar ± psi]	② P ₂ [bar]	③ 3/8-18 DRYSEAL NPTF	④ 3/8-18 DRYSEAL NPTF PORT ANSCHLUSS ORIFICE ORIFIZIO 2	PORT ANSCHLUSS ORIFICE ORIFIZIO 1
IDENTIFICATION						

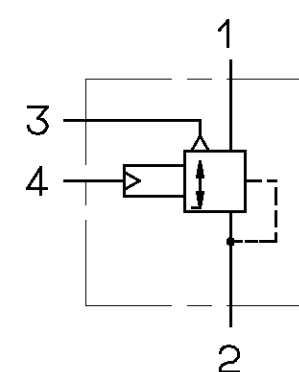

GENERAL SPECIFICATION, JED-354			CADD-DRAWING COPYRIGHT			WABCO					
FURTHER TECHNICAL DATA:			DATE SIGNATURE								
DOC. CODE:			SHEET TO			RELAY VALVE RELAISVENTIL VALVE RELAIS VALVOLA RELE					
GENERAL TOLERANCES											
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm)							3		
		> 0,5 > 1,0 > 1,5 > 2,0 ±0,5 ±1,0 ±1,5 ±2,0									
FINE		0,5 1,0 1,5 2,0									
MEDIUM		1,0 2,0 3,0 4,0									
COARSE		2,0 3,5 5,0 6,5									
TAPPED HOLES ACC. ISO 4039 / JED-182						PRODUCT IDENTIFICATION NO.					
1) TOLERANCE CLASS APPLIED CROSSMARKED						DOC. CODE SHEET					
DON-NO. REV. DATE						REPLACEMENT FOR					
100mm						OF 94-09-22					
9						012					