
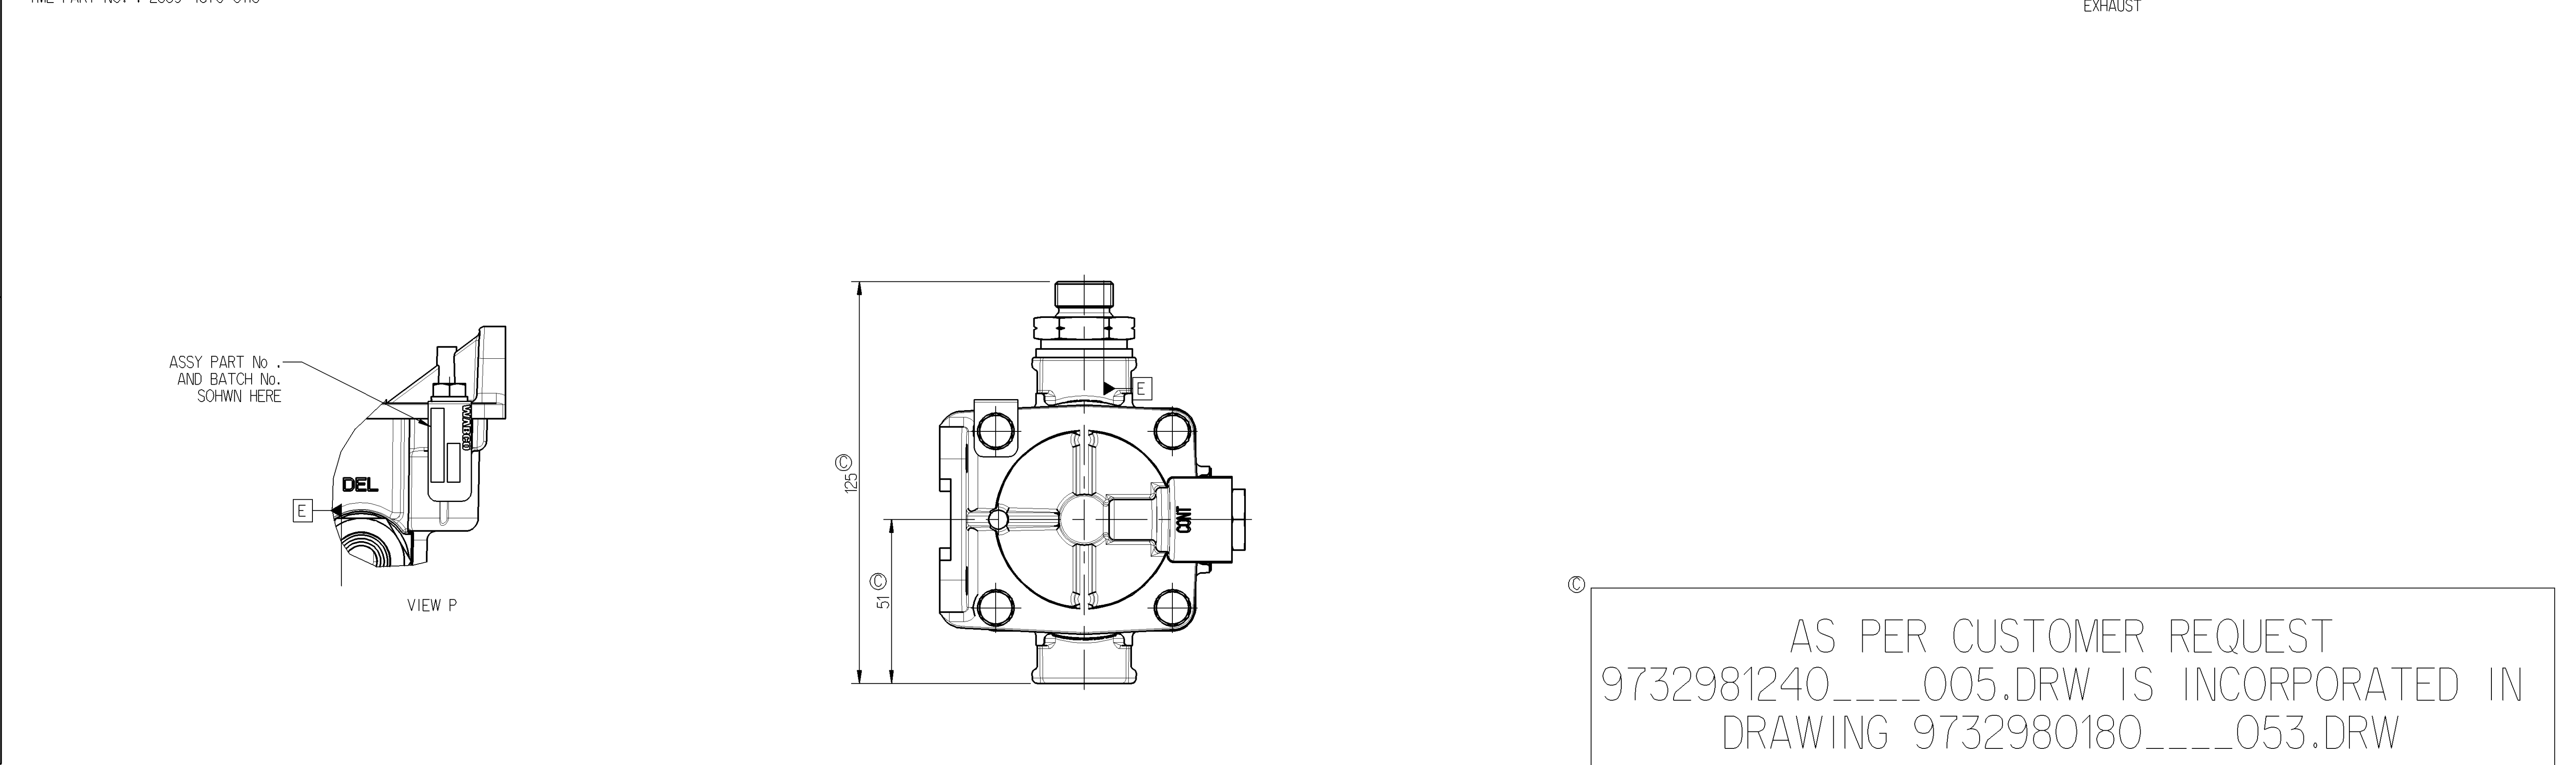
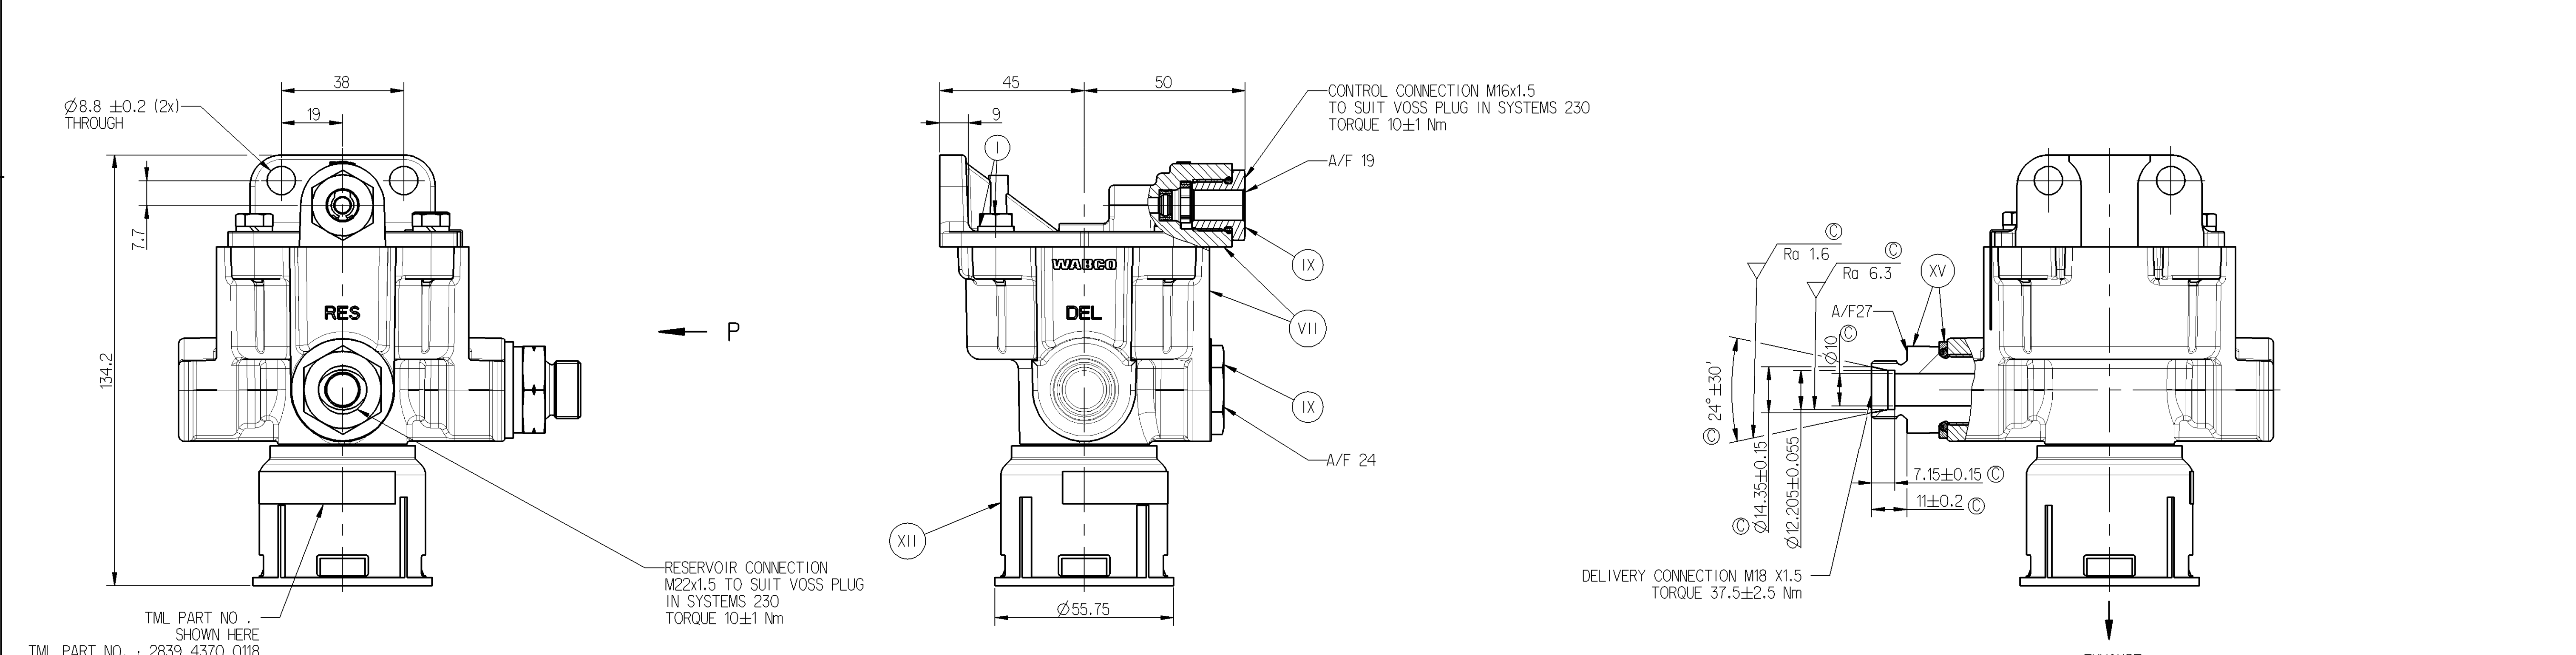
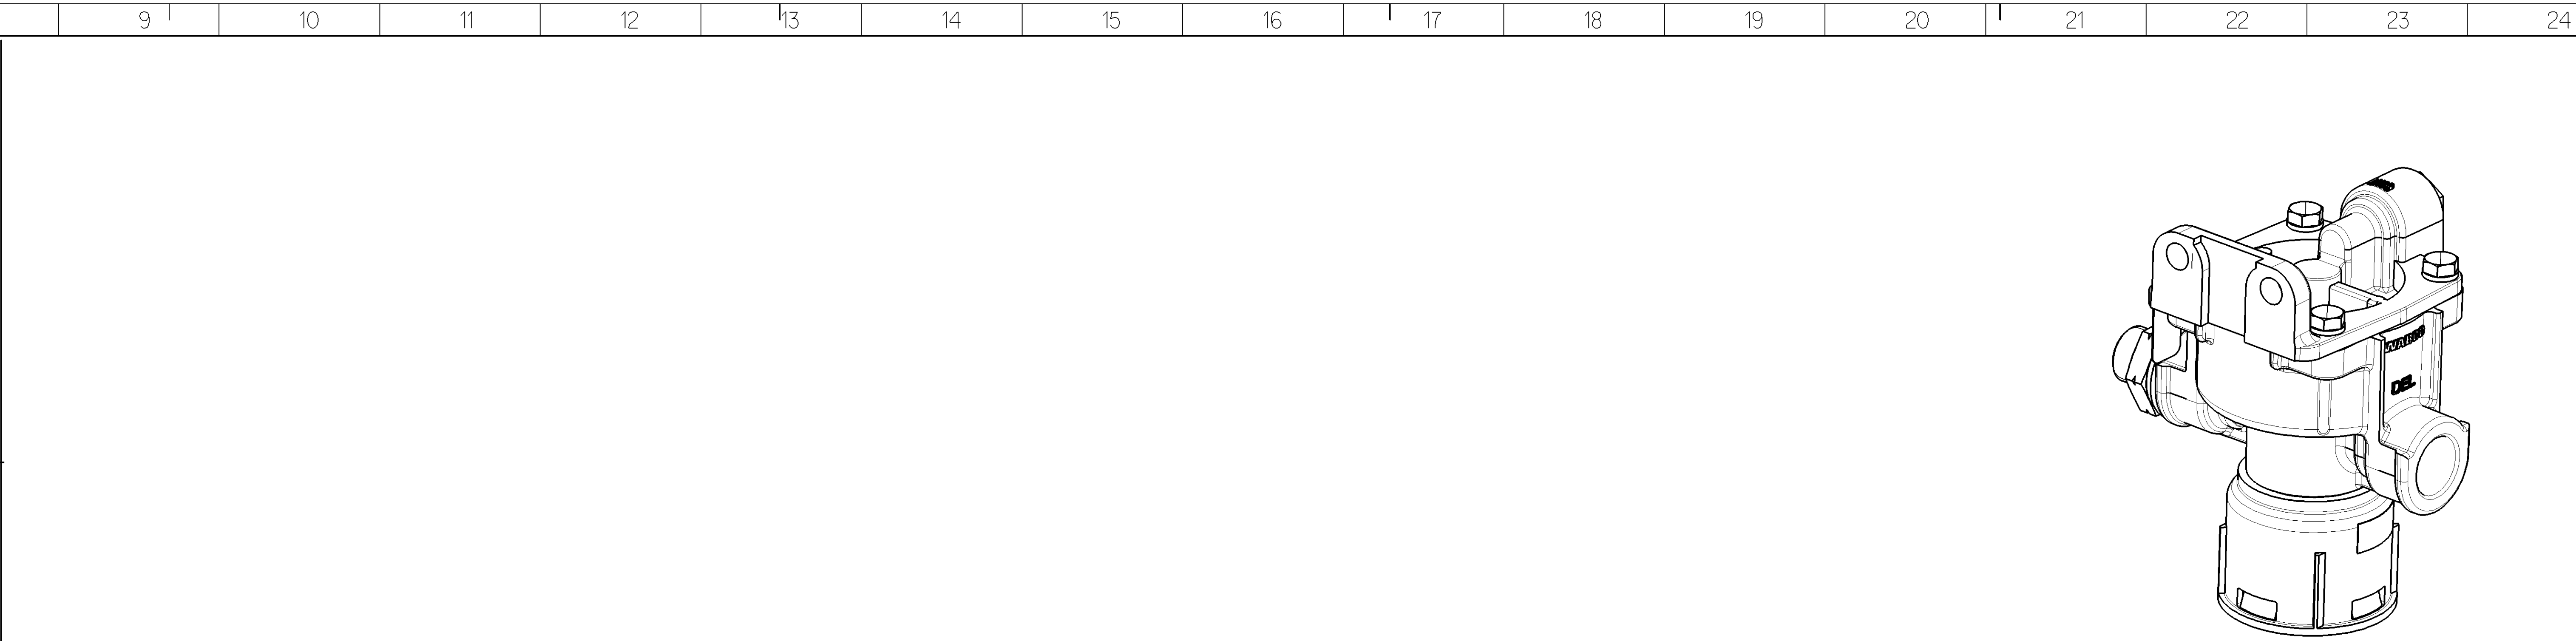
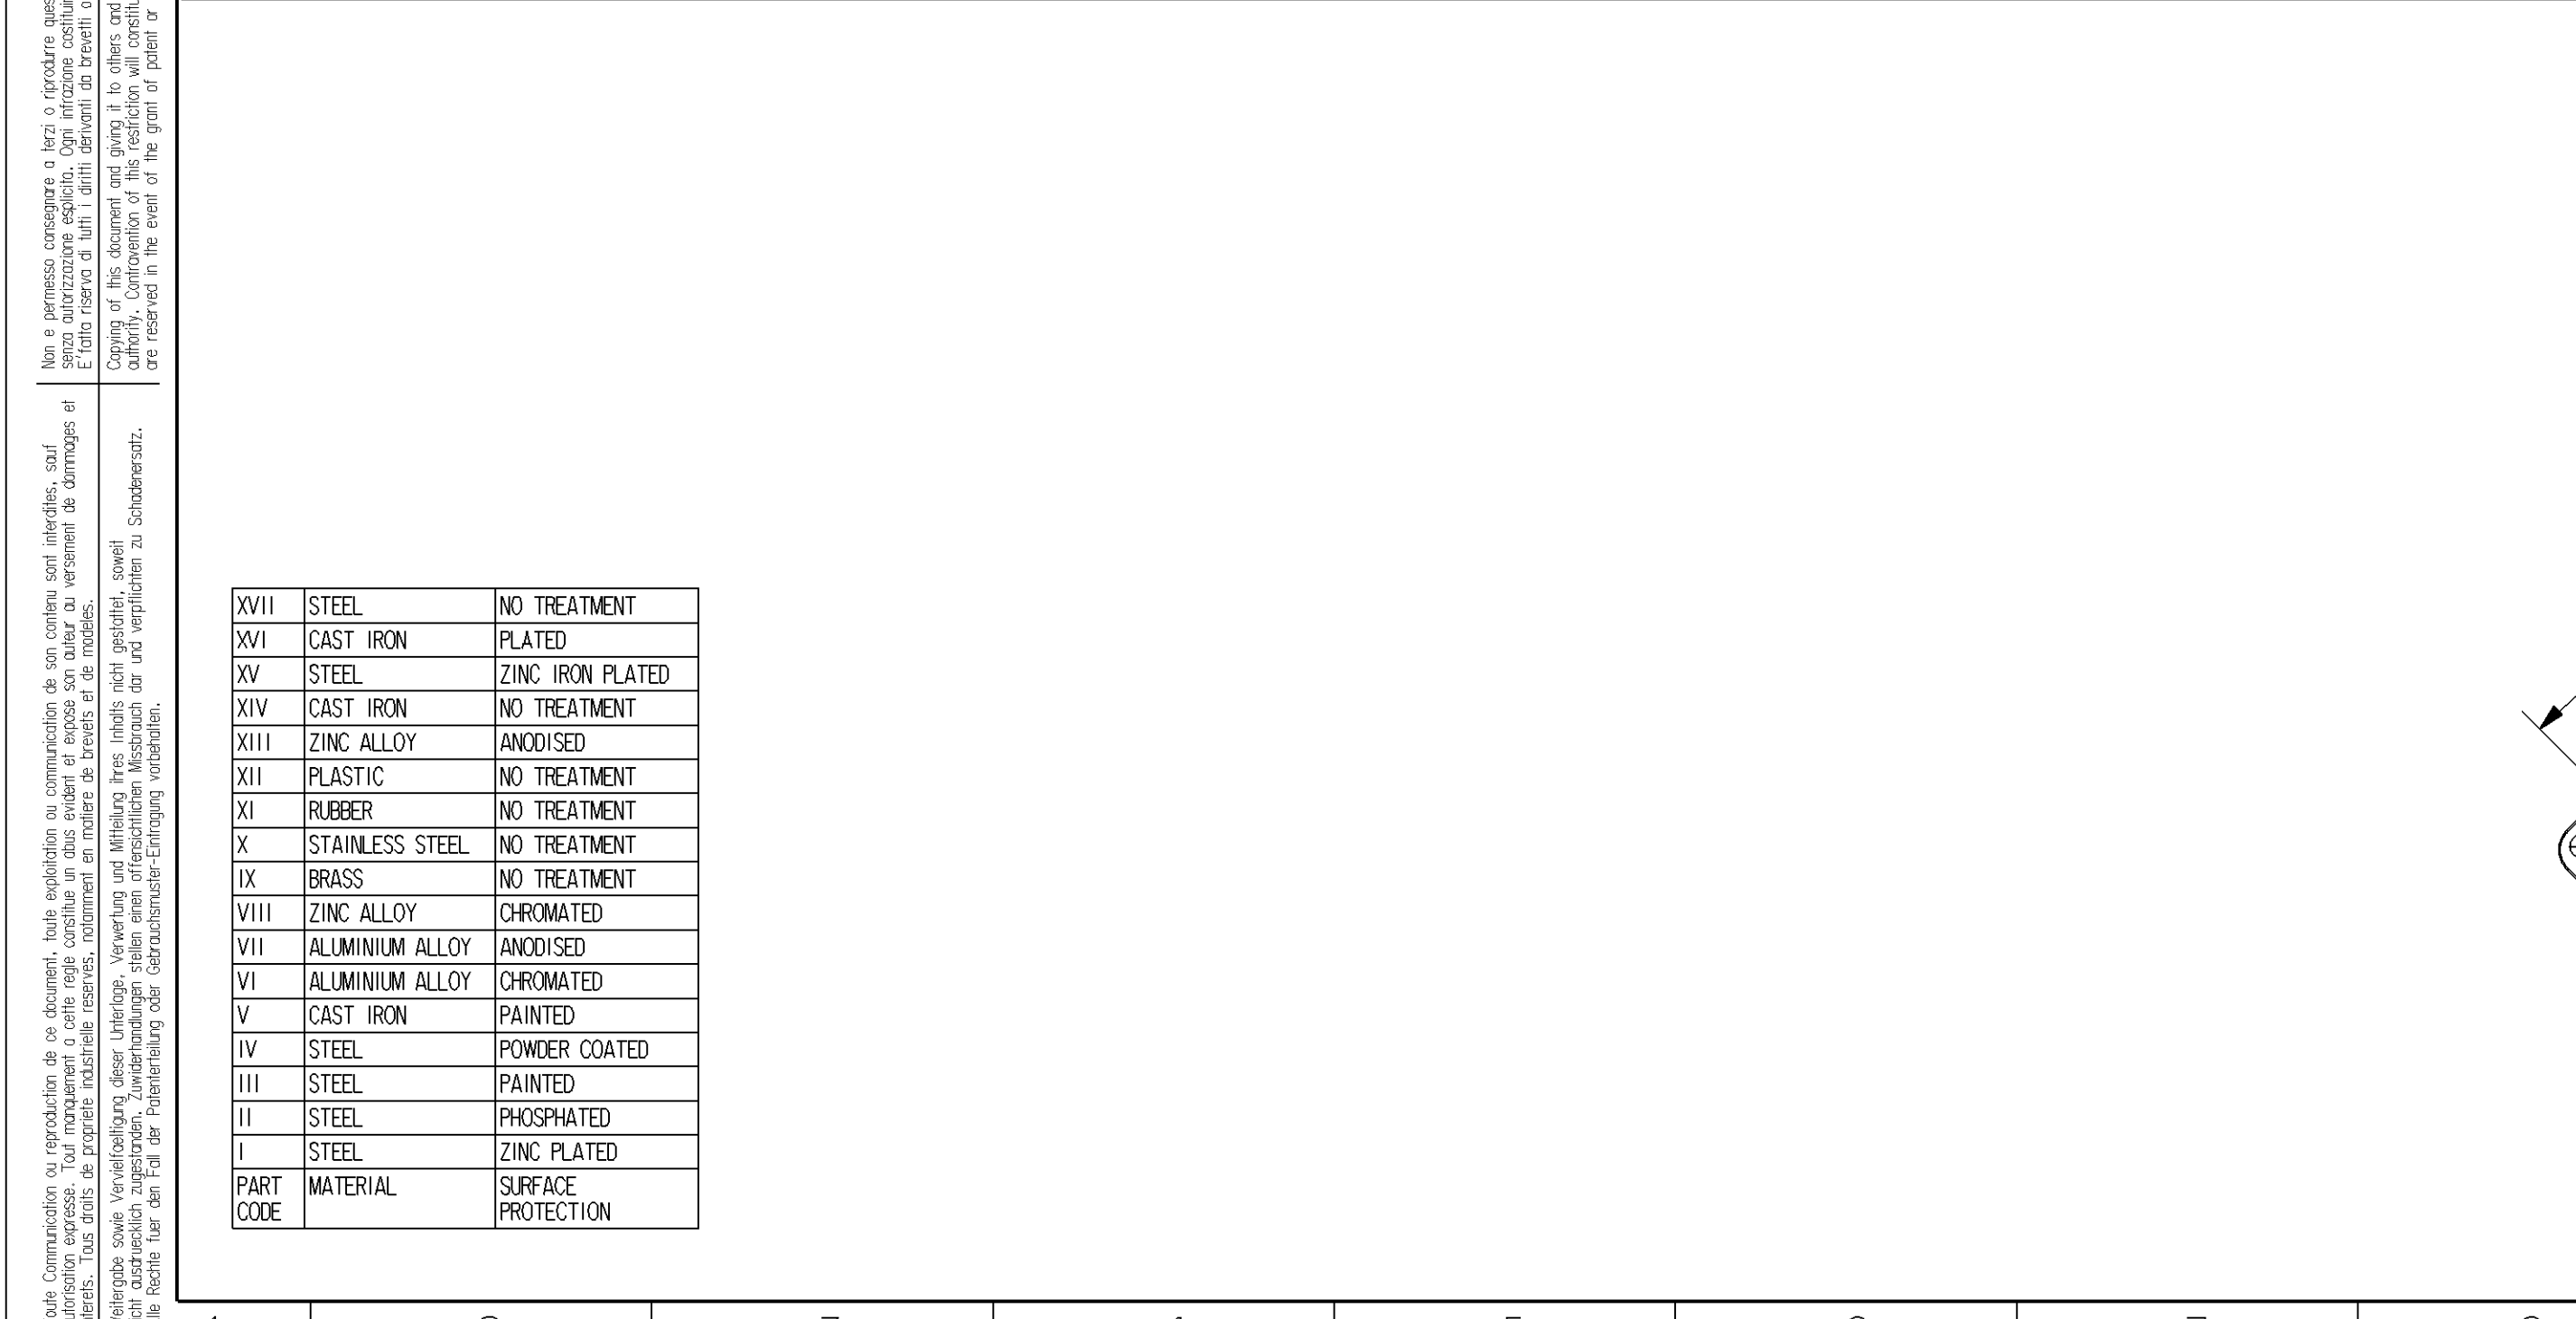
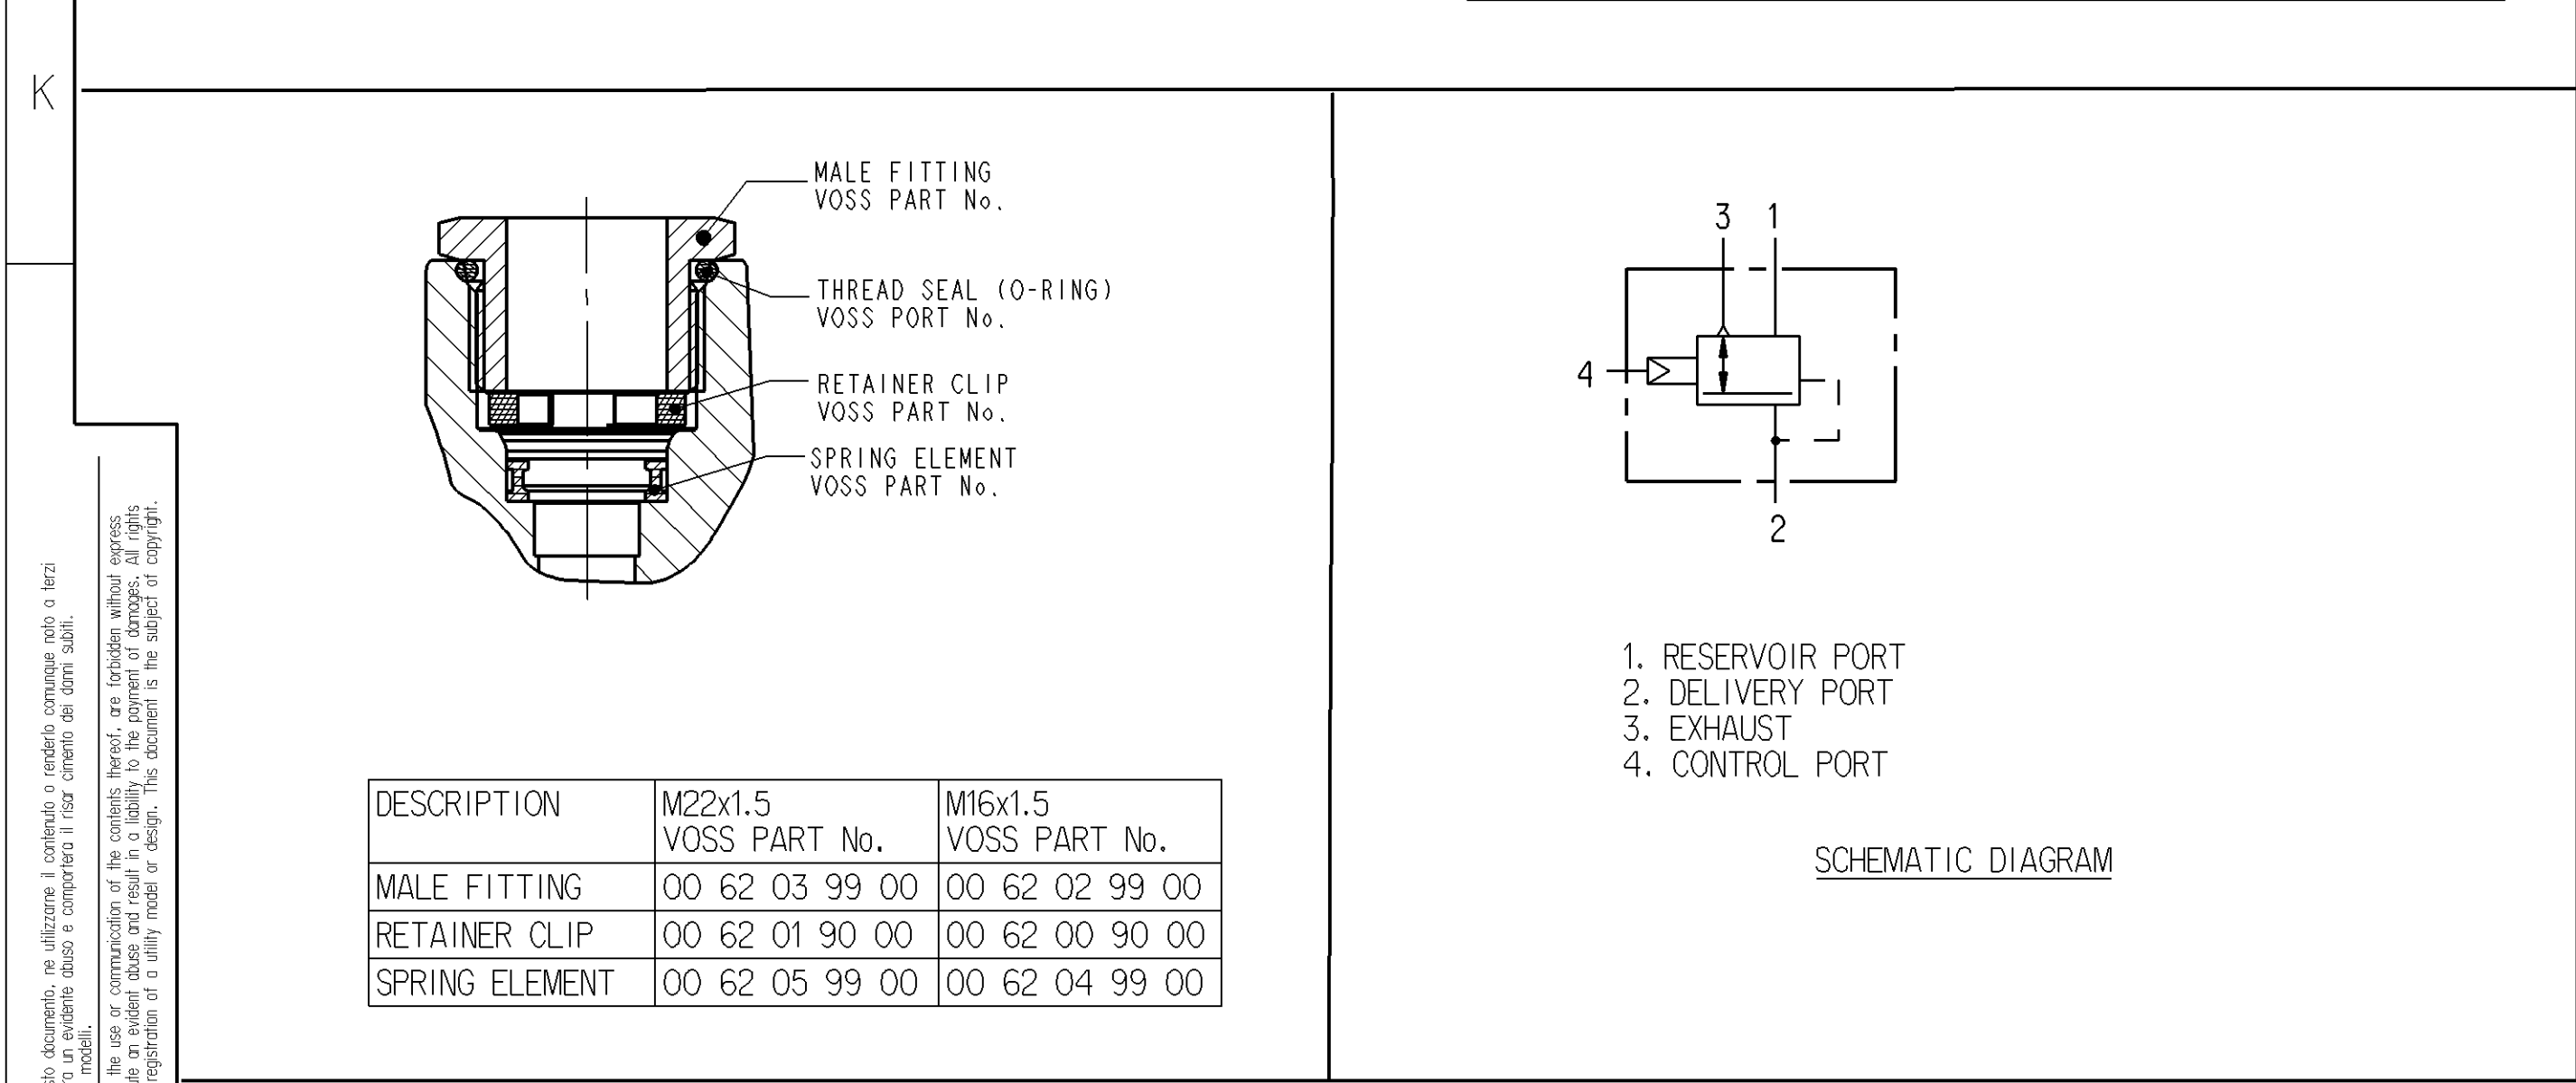
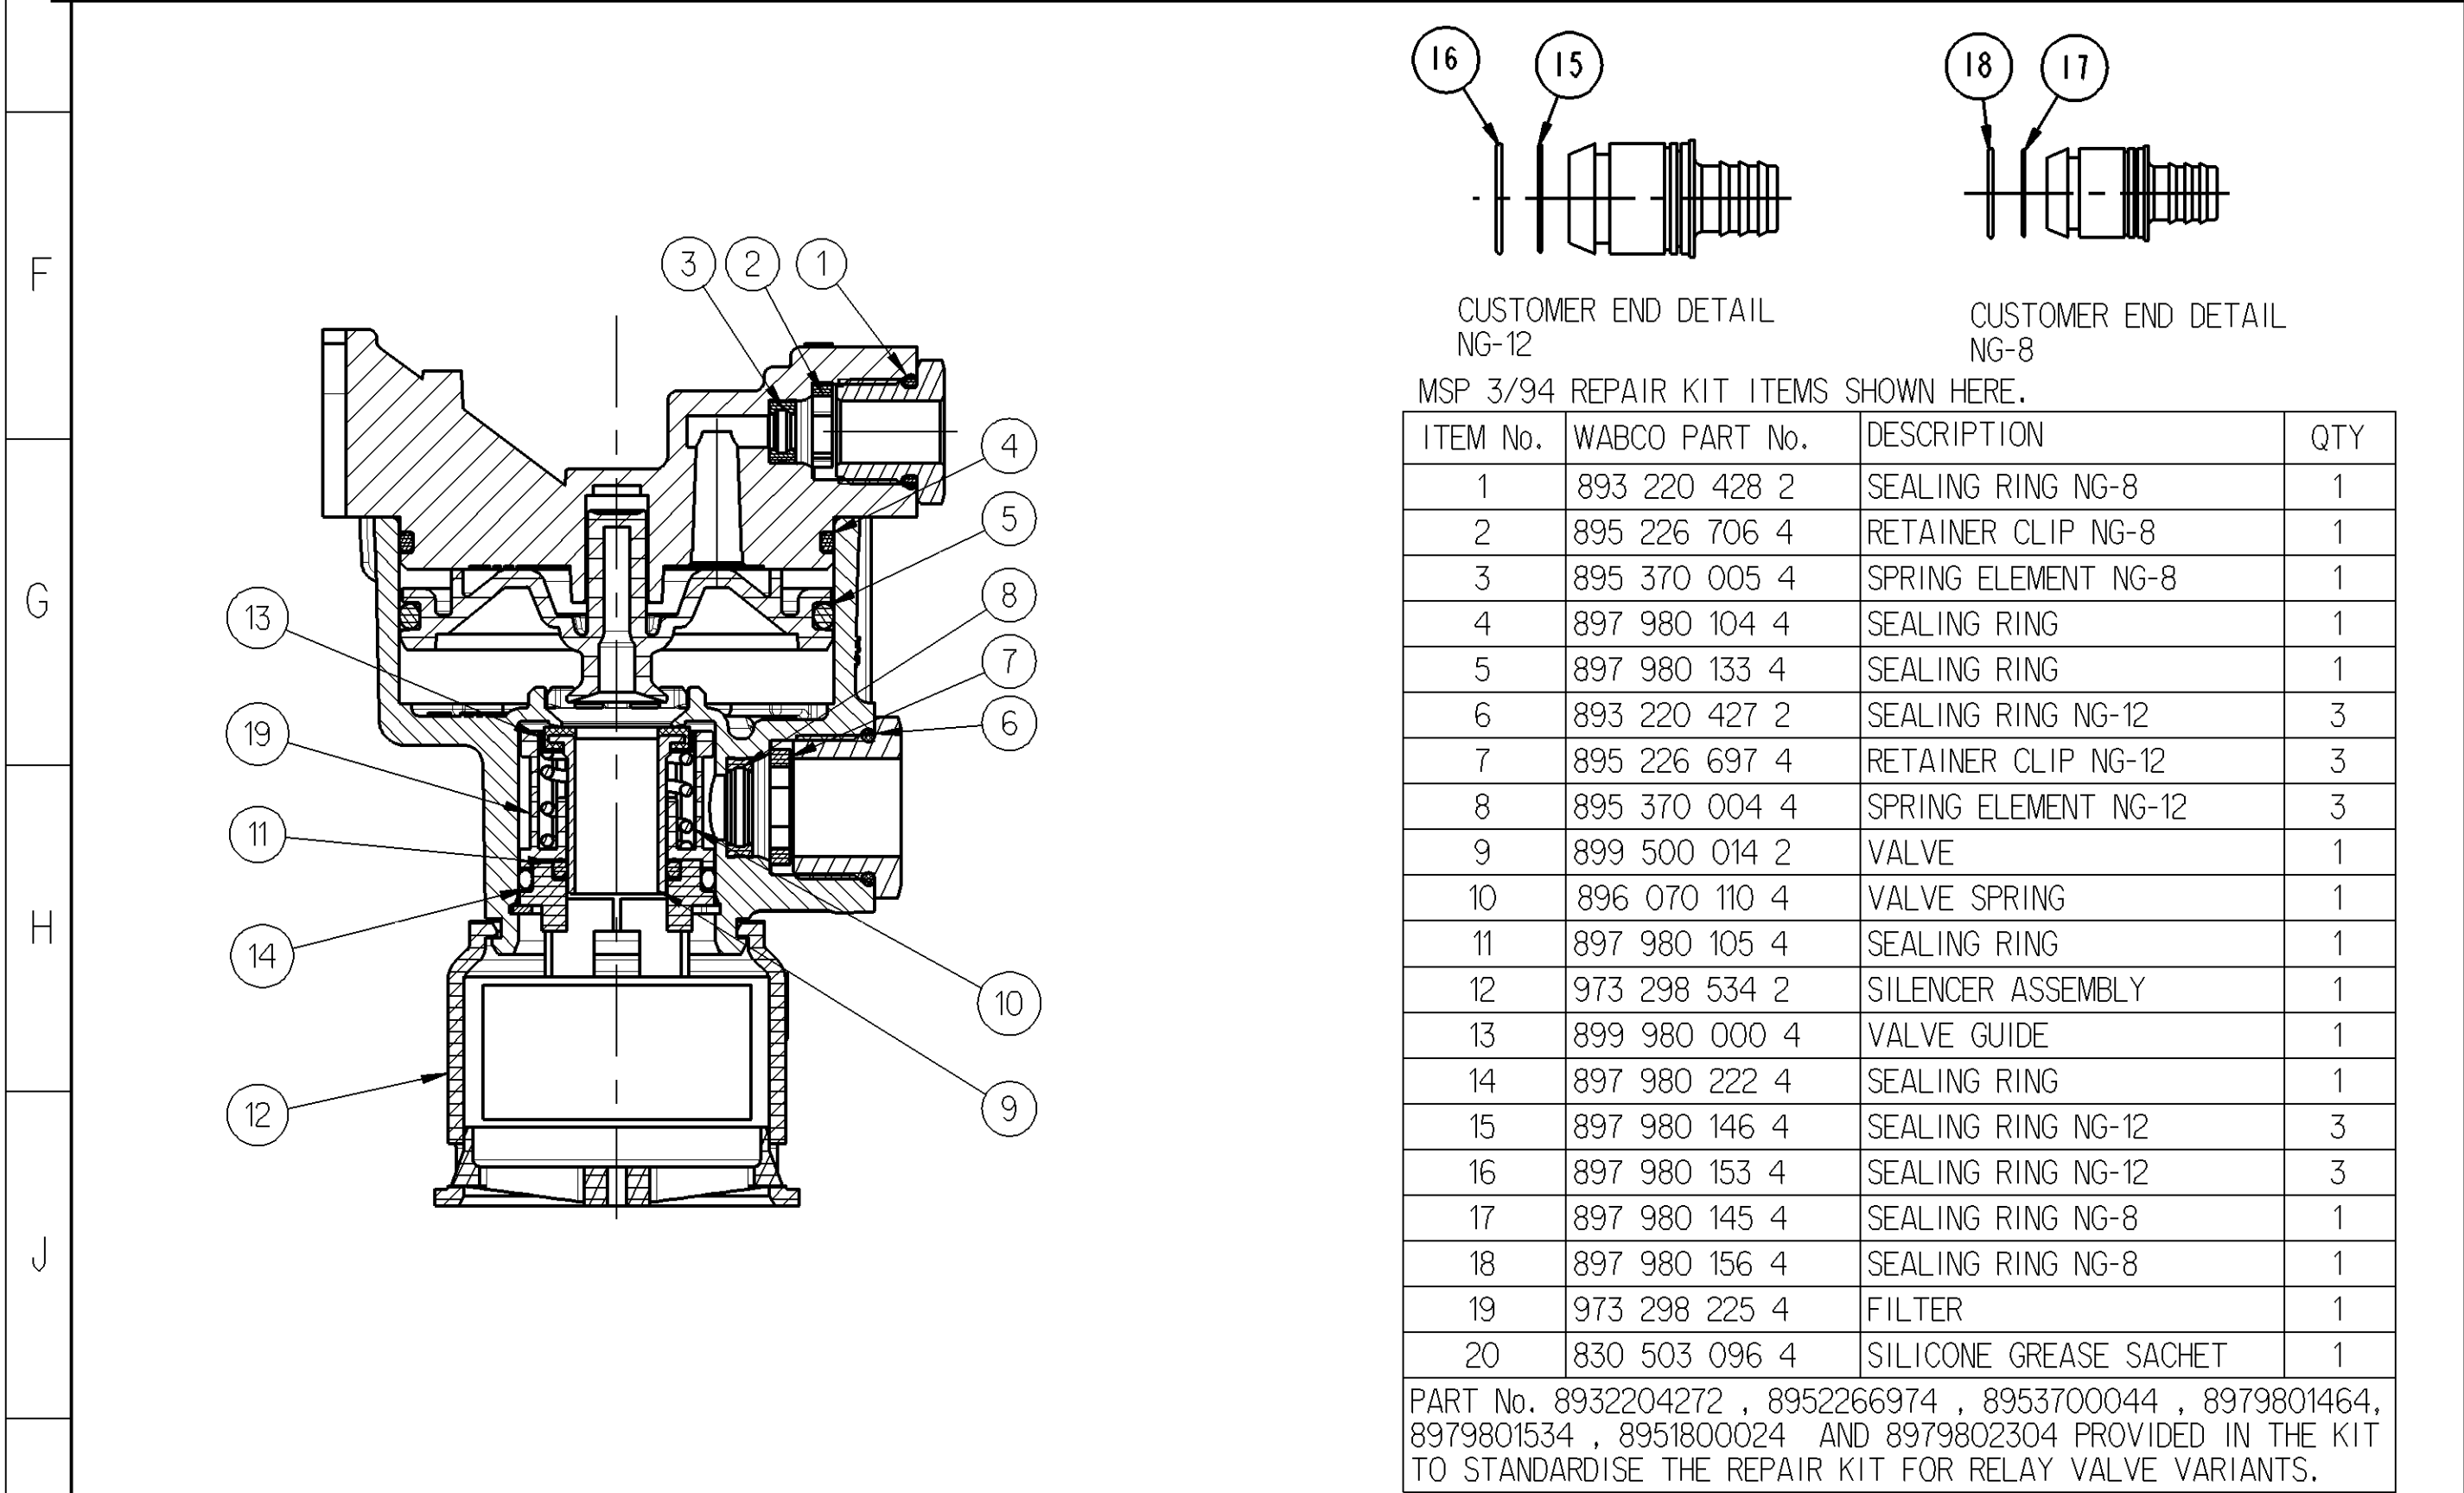
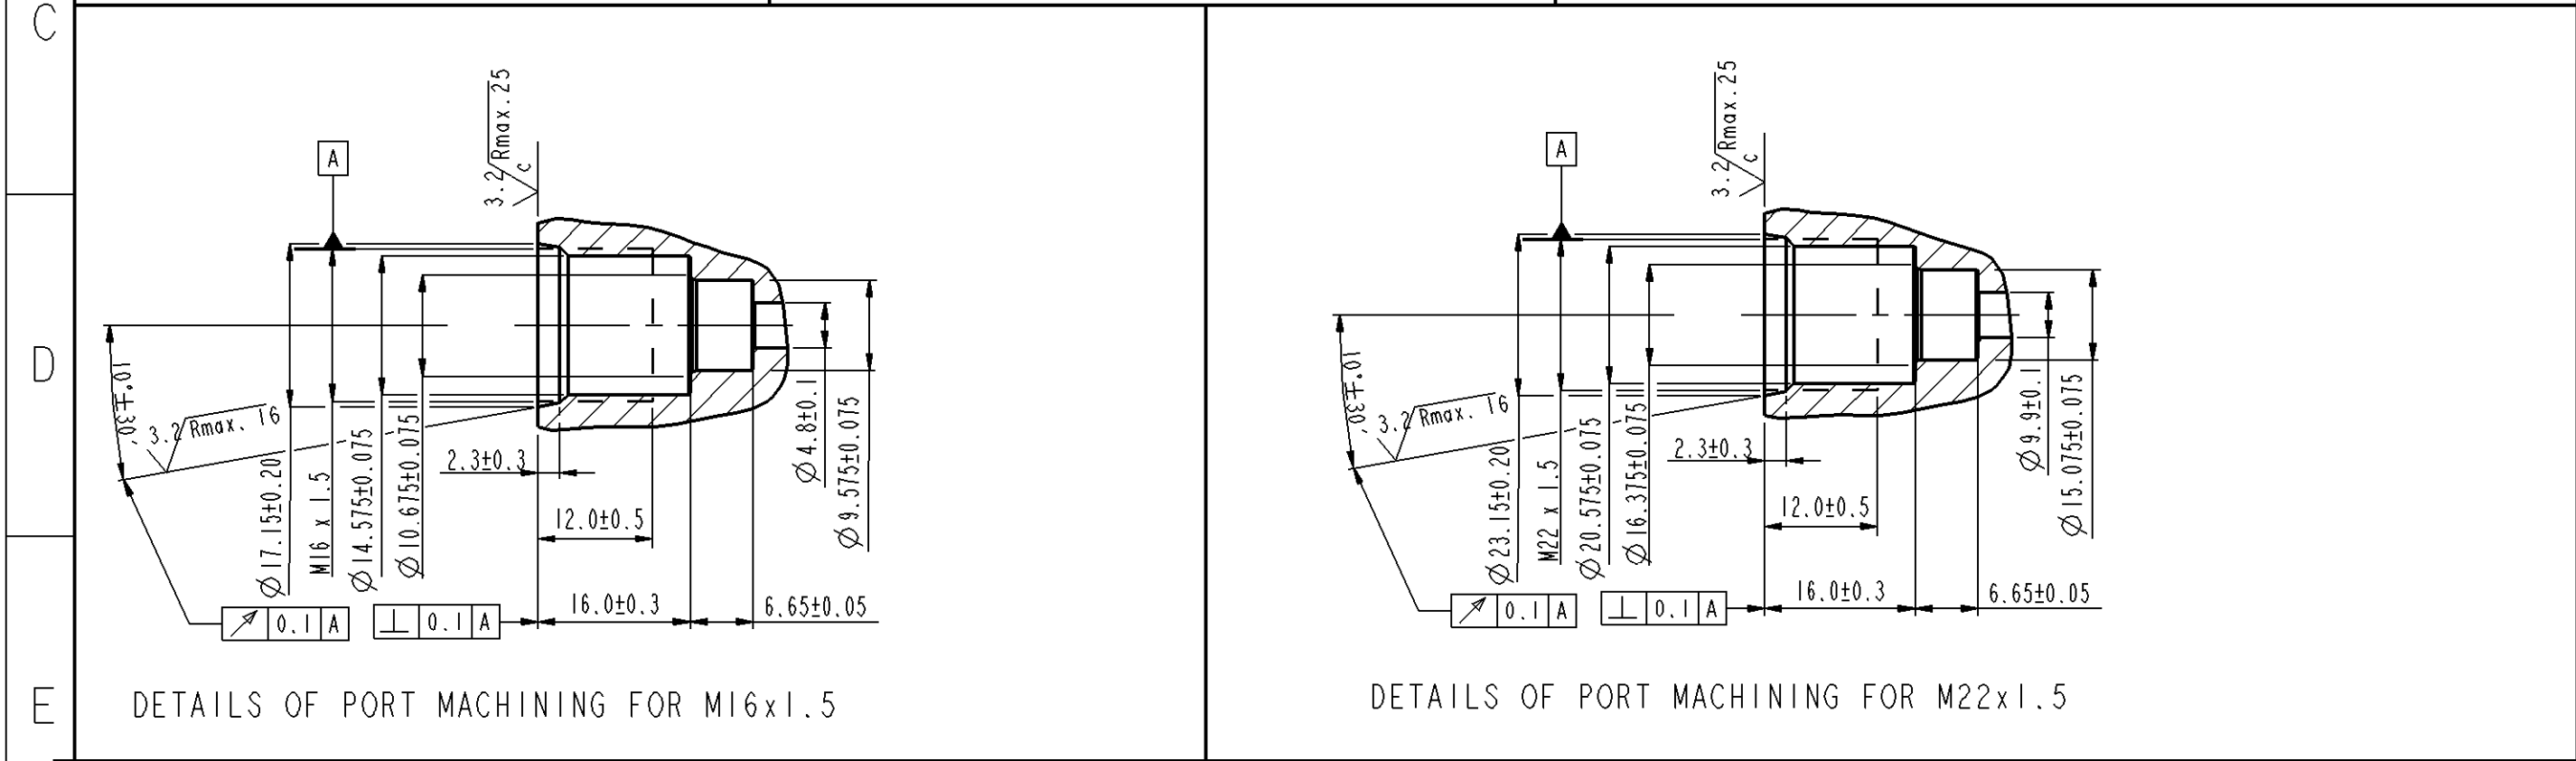


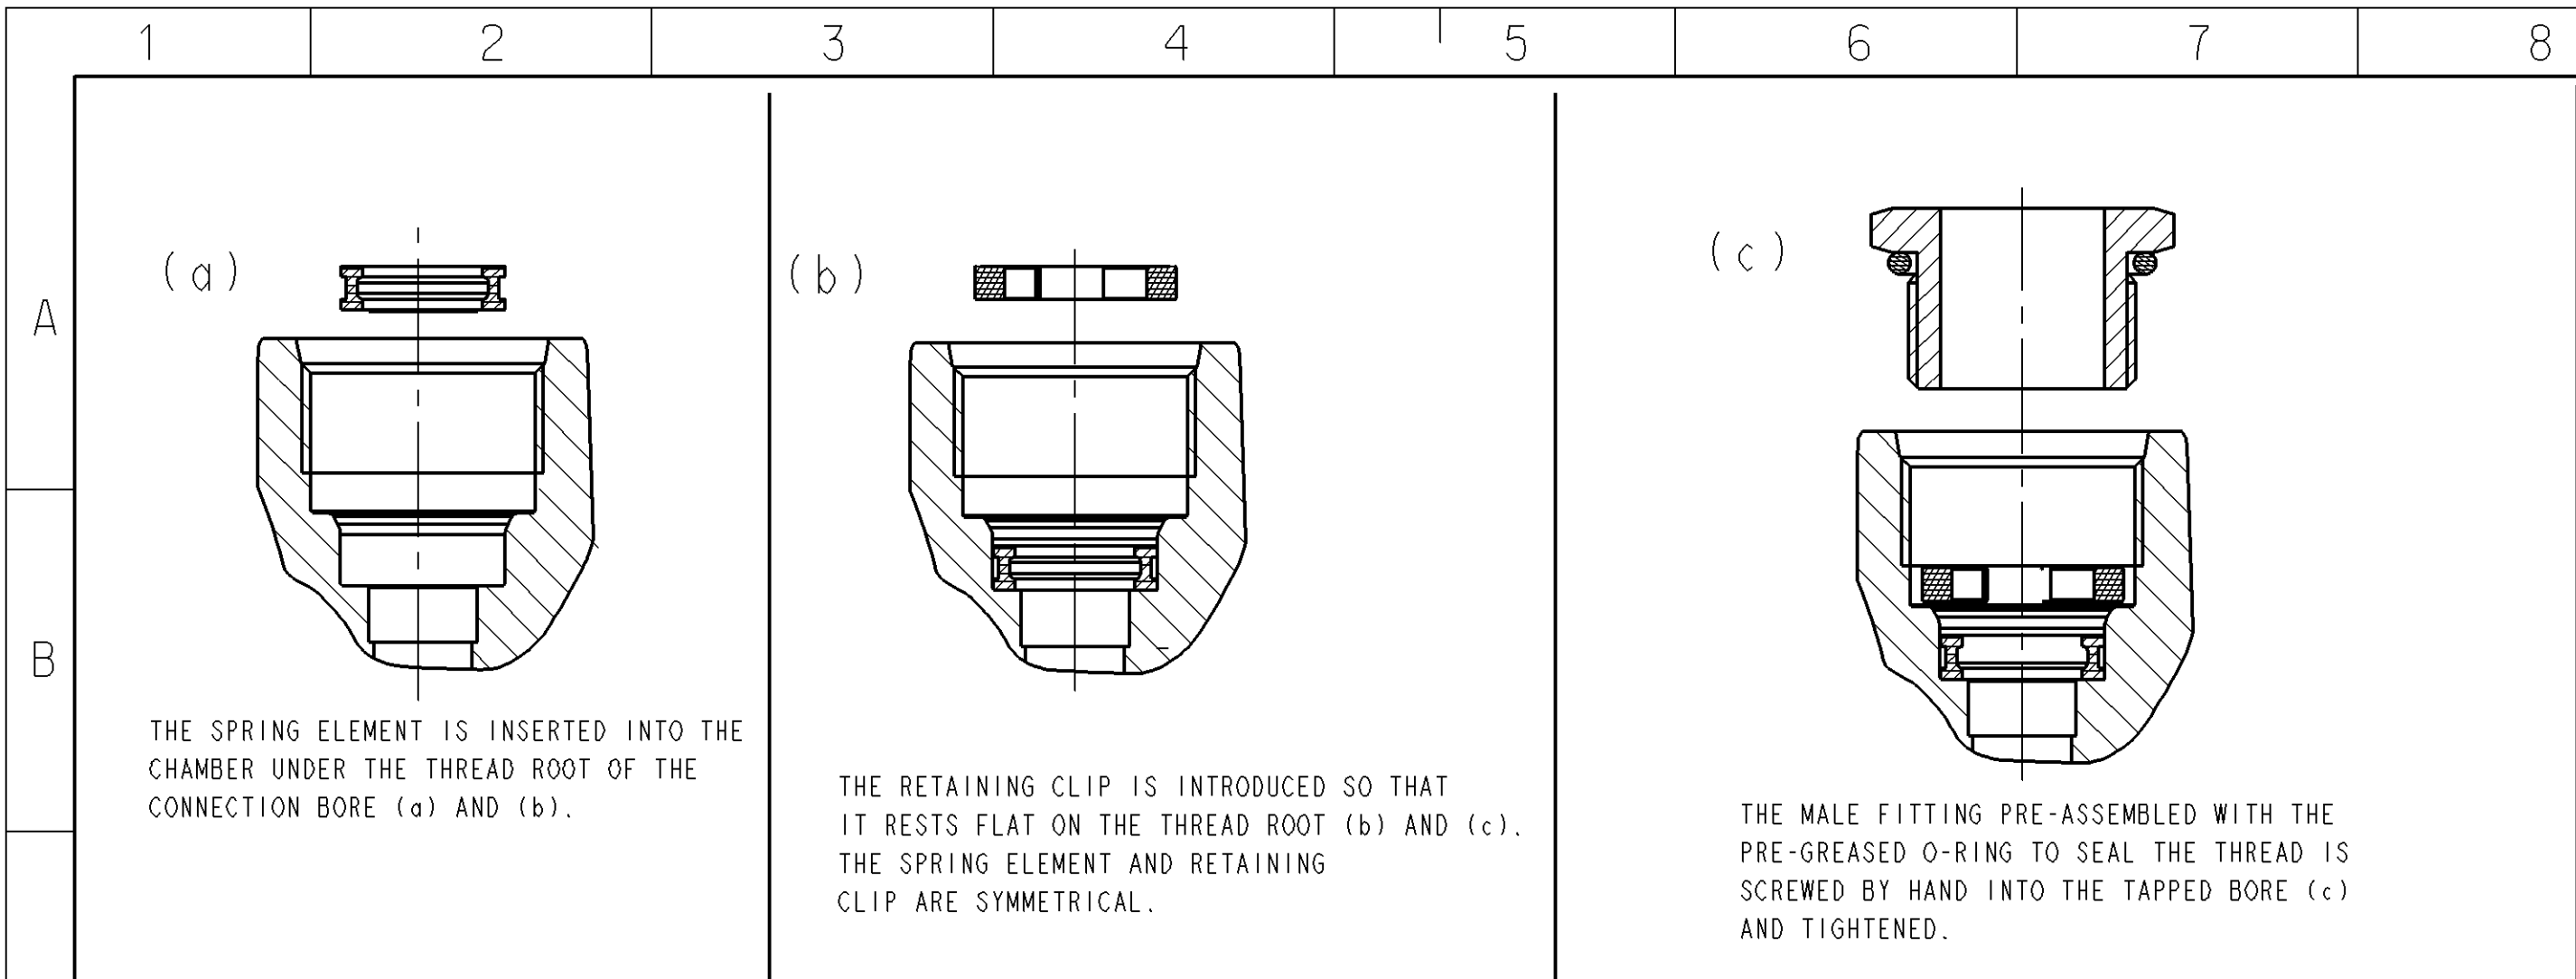

SL No.	TECHNICAL DATA
1	WORKING MEDIUM AIR
2	THERMAL RANGE OF APPLICATION -40°C TO +80°C
3	NORMAL WORKING PRESSURE 8 bar
4	MAXIMUM WORKING PRESSURE 10 bar
5	NOISE LEVEL AT EXHAUST 72 dBA MAXIMUM
6	EQUIVALENT FLOW DIAMETER 10 mm
7	OPEN PORTS ARE FITTED WITH CLOSURE PLUGS FOR STORAGE AND TRANSIT PURPOSES
8	SERVICE LIFE TO FIRST OVERHAUL - 3 YEARS / 300000 KM WHICHEVER IS EARLIER IF FITTED AS PER RECOMMENDED LAYOUT
9	QUALITY COMPLIANCE PLAN ARE CONDUCTED REGULARLY AS PER CLAUSE No. 15 OF PS 973 298 027 0

General Specification: AED-354-01		Copyright WABCO		RELAY VALVE, RG2	
Further Technical Data: 973 298 027 0		Date: 2015-07-05		Sheet: 1 of 6	
Data: 0000-0300		Scale: 1:1		Version: 001	
General Tolerances: AED-201		Date: 2015-07-08		Hommed: 001	
Range of Nominal Dimensions (± mm)		Material No.		Date of 1st issue: 2015-06-29	
Class	0	± 0.05	0.1	0.2	0.5
Size	0.5	1.0	1.5	2.0	2.5
Medium	X	1.0	2.0	3.0	4.0
Coarse	2.0	3.5	5.0	6.5	8.0
Tapped Holes acc. to: AED-102		973 298 124 0		005 EN 1/1	
Tolerance Class: Applied Conventional		A O		Pro/E	